
hansgrohe

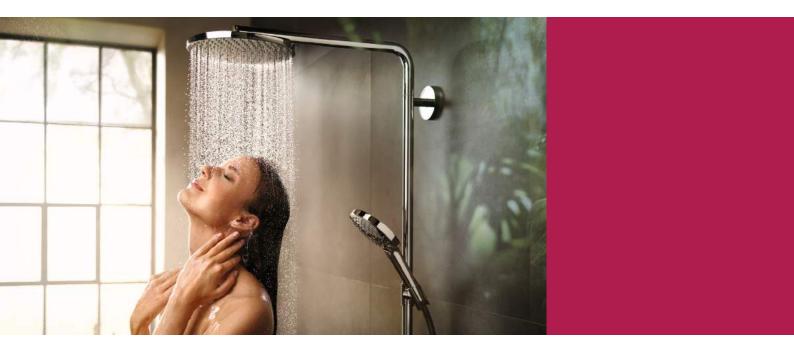

Price Book 2018/2019

hansgrohe Australia assortment bath and kitchen

The prices quoted are recommended retail prices and include 10% GST. Errors and omissions excepted.

This Price List renders all preceding ones void.

Measurements within scale drawings are in mm.

Price List is available for download from www.hansgrohe.com.au

Price Book 2018/2019

hansgrohe Australia assortment bath and kitchen

hansgrohe



Contents

Talis S Talis Focus Logis	14
PuraVida	17
Metropol Metropol Loop Metropol Select	21
Metris Metris S Metris Classic	26
Talis Talis Select S Talis S Talis Select E Talis E	33
Novus Novus Loop	40
Focus	43
Logis Logis Loop	45
Electronic mixers PuraVida Metris Focus	48
Thermostatic mixers / valves ShowerSelect ShowerSelect S Valves Thermostats	50
Showerpipes	57
Hand showers PuraVida Raindance Select Raindance Classic Croma Select Crometta Porters	60
Shower hoses and accessories Isiflex Metaflex Fixfit wall outlets	66
Shower sets / Shower bars Shower sets Shower bars Soap dishes	68
Overhead showers PuraVida Raindance Select Raindance Raindance Classic Croma Crometta Shower arms Ceiling connectors Body showers	79
Basic sets and wastes	85
Accessories PuraVida Logis Logis Classic Logis Universal	87

Quality you can count on

At hansgrohe, we build on German expertise for the highest quality in form and function. We see, and have always seen, "Made in Germany" as a recipe for success: almost

all our products are made in our home. Our own claim is to offer our customers long-lasting solutions that set standards in functionality and quality – and we do everything to ensure that. So hansgrohe offers you quality that you can pass straight on to your customers. And that assures you their permanent satisfaction.



Quality from the Black Forest: Since 1901, people all over the world have been putting their trust in the durable, high-quality products from Germany's Black Forest. And even more than 115 years after hansgrohe was founded, with a production share in Germany of around 80%, Made in Germany is still a firm part of our philosophy. The company has always focused on the benefits and enjoyment of our customers, which is why perfection in form and function has always been, and will always be, our standard. To that end, we still tinker as much as on the first day.




Highest standards: hansgrohe only uses high quality materials that are approved for use with drinking water. They are subjected to long-term tests to assure their compliance with all kitchen requirements. All single parts comply with the relevant standards and are fitted with the optimal precision for safe ease of use and convenience over years to come. The guidelines we ourselves have drawn up for product safety exceed by far most of the specifications usual on this sector. For this reason, a voluntary manufacturer's warranty of fifteen years applies on all of our products. See www.hansgrohe.com.au for terms and conditions.

Design

Design for life: hansgrohe is one of the leading idea generators in the industry. We work with internationally renowned designers to consistently set new standards with modern and timeless products. At hansgrohe, we firmly believe that excellent design will last longer than fast-lived fashion trends and provide investment security. And at the Manufaktur, we can also supply customised hansgrohe products and special solutions.

http://pro.hansgrohe.de/manufaktur

SERVICE





Impulses for the industry: at hansgrohe around 30% of our turnover is achieved with new products that are not more than 3 years old. This high vitality index makes this Black Forest sanitary specialist one of the innovations leaders in this industry. Many of the things that have been thought up, developed and designed by hansgrohe have been extremely well received all over the globe. And as a Black Forest think tank, we can look back on very many innovations. Some of these ideas made sanitary history, not to say even cultural history.



For the sake of the environment: sustainability, environmental and climate protection are key features in everything hansgrohe does. Our worldwide conservation projects and our information work on the preservation of the resource water help to improve the ecology. We use renewable energies, efficient recycling systems and heat recovery in our production department in order to reduce CO₂ emissions. Choosing hansgrohe means choosing long-lasting quality and ecologically responsible production.



Technologies



Switches over to a different shower or spray type in moments, and provides pleasure at the touch of a button.



Reduces the flow rate to save water and energy. For long-lasting pleasure.



Combines water with a generous amount of air. For a soft, splash-free water spray and rich, full shower drops.




Limescale deposits are simply wiped away by rubbing a finger over the flexible silicone jets.



Distributes the water over the large spray face envelops the whole body in drops of well-being.



Defines the useable area between washstand and mixer. Something to suit every customer.



Cold water starts to flow when it is opened in the basic setting. You consume hot water only when you need it.

Spray modes



Rain spray over the entire area of the spray face for largescale showering pleasure.



Perfect for rinsing shampoo out of your hair.



The especially large spray face envelops your whole body with soft drops.



Gentle shower rain with air-enriched drops.



The ultra-soft drops are a delight for the skin and soul.



An intensive water spray that activates and refreshes.



The most powerful of all Rain sprays – for a refreshingly powerful showering experience.



The harmonious combination of gentle shower drops and dynamic spray.



A concentrated massage spray.



Provides fresh energy after a challenging day: The feel good, revitalising massage spray.



Strong, pulsating massage spray.



A flat, targeted jet for partly refreshing shower pleasure.



A powerful surge spray for the feeling of standing alone in a waterfall. Every day.



Parallel jets of large sparkling water drops right down to the fl oor for the same showering experience on all body sizes.



Unique showering experience thanks to the gently enveloping microdroplets.

Technology to thrill your customers





One click is all it takes to change the spray type or start or stop the water. The name of this innovative technology: Select. The Select button has different functions depending on where it is being used: change between shower spray types, select the thermostat function, and start and stop the water on mixers. Depending on the particular product, the Select buttons can even be started with the back of a hand or an elbow. This makes the technology perfect for all ages, and in particular for people with limited mobility.

ComfortZone

The right mixer for every washbasin

Whether you need more freedom of movement when washing your hands or filling large containers; the taller the mixer, the more flexibility you have in your daily dealings with water. We call this area between the mixer and the basin the ComfortZone. Hansgrohe has the perfect portfolio with a range of mixer heights that provide the right solution for every basin - whether free standing, wall-hanging, surface-mounted or built-in.



CoolStart

Cold water on the handle in the middle position

Cold water starts to flow when it is opened in the basic setting. You consume hot water only when you need it. CoolStart is the latest step on the way to maximum sustainability: as the mixer is turned on, only cold water flows. You do not consume hot water or the energy required for it until you actively turn it to the left. You will find this function as an option on our basin mixers and kitchen mixers.



Save water comfortably

Integrated invisibly in the product, the EcoSmart technology reduces the flow of water, thereby saving water and energy. For the sustainable use of water. Today, EcoSmart showers consume only nine or six litres per minute, and save up to 60 % water and energy. EcoSmart can also save a lot of water for everyday routines in the bathroom. Thanks to this technology, we were able to reduce the consumption of our basin mixers to only five litres a minute as standard.





AirPower

More fun from less water

The AirPower technology mixes large quantities of air in the water. For a soft, splash-free water spray and rich, full shower drops. Generous amounts of air are drawn in through the spray face. This quite literally stirs up the in-flowing water. The resulting airenriched drops are fuller, lighter and softer. This not only feels good, but it also means that you are making the most efficient and splash-free use of your precious water. Your AirPower mixer combines the flowing water with air. The water spray therefore splashes less and is very pleasant to use.



QuickClean

Fast anti-limescale function

The practical QuickClean technology lets you quite simply rub away limescale effortlessly with your finger. The aerators in our bathroom and kitchen mixers have been fitted with flexible silicone slats, making it even easier to clean them. All our showers have flexible silicone jets. Any deposits are quickly removed simply by rubbing a finger over them. Well looked-after limescale-free products not only look much nicer, they work better and last longer.









Peak performance followed by deep relaxation

Experience the loveliest moments with water with hansgrohe. Water, that most precious element, is inextricably associated with sports. hansgrohe helps with focusing on the next challenge, and after a tough, challenging day offers relaxation under the shower: motivation and reward when showering are greatly appreciated by top athletes who perform at their very best on a daily basis. hansgrohe is

therefore the official title sponsor for the first-class cycling team BORA-hansgrohe: a sport that is particularly dynamic and innovative, and delights the masses just as much as hansgrohe products do in the bathroom and kitchen. To find out where and when you can see our cyclists in action, go to **www.bora-hansgrohe.com** or follow them on the team app and on social media for daily updates:



BORA-hansgrohe.com hansgrohe-int.com



facebook.com/Borahansgroheofficial facebook.com/hansgrohe facebook.com/PeterSagan



instagram.com/borahansgrohe instagram.com/hansgrohe




Team app: Download it at the Google Play store or at the Apple app store



Left page: Santos Tour Down Under 2018, Stage 4 – 128.2 km from Norwood to Uraidla, stage win Peter Sagan. Right page: Peter Sagan, world champion in cycling 2015/2016/2017.

Talis Select S



Single lever kitchen mixer 300 with pull-out spout

- ComfortZone 300
- swivel range 110° / 150°
- vertical handle position
- normal spray
- Select button for a comfortable start/stop of the water flow
- MagFit magnetic shower support
- connection dimension: DN15
- flow rate 7 l/min
- ceramic cartridge
- connection type: G ½ connections
- integrated non-return valve
- suitable for continuous flow water heaters

72821003 Chrome

finish



code no.






RRP







Single lever kitchen mixer 300

- ComfortZone 300
- swivel range adjustable in 3 steps 110°, 150° or 360°
- vertical handle position
- normal spray
- Select button for a comfortable start/stop of the water flow
- connection dimension: DN15
- flow rate 7 l/min
- ceramic cartridge
- connection type: G ½ connections
- integrated non-return valve
- suitable for continuous flow water heaters

Chrome 72820003














Talis S



Single lever kitchen mixer 200 with Chrome pull-out spray

- ComfortZone 200
- swivel range 110° / 150°
- vertical handle position
- normal and spray jet
- lockable shower spray, spray returns through pressing spray diverter
- MagFit magnetic shower support quick connect shower hose
- connection dimension: DN15
- flow rate 7 l/min
- ceramic cartridge
- connection type: G ½ connections
- integrated non-return valve
- suitable for continuous flow water heaters








899.00





- ComfortZone 260
- swivel range adjustable in 3 steps 110°, 150° or 360°

Chrome 72810003






Technical specifications and units of measure are subject to change.









Single lever kitchen mixer 170 with pull-out spray swivel range 150°

- normal and spray jet
- lockable shower spray, spray returns automatically through handle closing connection dimension: DN15
- flow rate 7 l/min
- ceramic cartridge
- connection type: G $\frac{1}{2}$ connections
- integrated non-return valve
- suitable for continuous flow water heaters

Chrome 32841009

finish



code no.






RRP

799.00



Focus



Single lever kitchen mixer 240 with Chrome pull-out spray swivel range 150° verticle handle position

- laminar spray and shower spray
- lockable shower spray, spray returns
- through pressing spray diverter
- MagFit magnetic shower support
- quick connect shower hose
- connection dimension: DN15
- flow rate 7 l/min
- ceramic cartridge
- connection type: G ½ connections
- integrated non-return valve
- suitable for continuous flow water heaters


31815003











Single lever kitchen mixer 280

- swivel range adjustable in 3 steps 110°, 150° or 360°
- handle can be positioned on the right or
- laminar spray
- connection dimension: DN15
- flow rate 7 l/min
- ceramic cartridge
- connection type: G ½ connections
- suitable for continuous flow water heaters

Chrome


31817003

509.00









Single lever kitchen mixer 260

- ComfortZone 260
- swivel range adjustable in 3 steps 110°, 150° or 360°
- handle can be positioned on the right or
- normal spray
- connection dimension: DN15 flow rate 7 l/min
- ceramic cartridge
- connection type: G 1/2 connections
- suitable for continuous flow water heaters

Chrome


31820003



489.00







Single lever kitchen mixer 160

- swivel range 360°
- connection dimension: DN15
- flow rate 7 l/min
- ceramic cartridge
- connection type: G 1/2 connections

Chrome

31806003








finish code no. Logis -Single lever kitchen mixer 260 Chrome 71835003 ComfortZone 260 swivel range adjustable in 3 steps 110°, 150° or 360° handle can be positioned on the right or





RRP




normal spray connection dimension: DN15 flow rate 7 l/min

ceramic cartridge

connection type: G ½ connections

suitable for continuous flow water heaters





Single lever kitchen mixer 160

ComfortZone 160

swivel range 360°

normal spray

connection dimension: DN15 flow rate 7 l/min

ceramic cartridge

connection type: G ½ connections

suitable for continuous flow water heaters



71832003


299.00











Single lever kitchen mixer 120

ComfortZone 120

swivel range 360°

normal spray connection dimension: DN15

flow rate 7 l/min

ceramic cartridge

connection type: G ½ connections

suitable for continuous flow water heaters

Chrome 71830003







RRP

919.00

919.00

Basin

Single lever basin mixer 110 with push-open waste set

ComfortZone 110

- laminar spray
- swiveling spray former flow rate: 5 l/min
- joystick ceramic cartridge
- suitable for continuous flow water heaters
- push-open waste set G 11/4
- material waste set: metal
- dezincification brass
- connection dimension: DN15

White/Chrome

finish

Chrome


15070003 15070403

code no.









Single lever basin mixer 200 with push-open waste set

- ComfortZone 200
- laminar spray
- swiveling spray former
- flow rate: 5 1/min
- joystick ceramic cartridge
- suitable for continuous flow water heaters
- push-open waste set G 11/4
- material waste set: metal
- dezincification brass
- connection dimension: DN15

Chrome White/Chrome 15081003 15081403













Single lever basin mixer 240 with push-open waste set

- ComfortZone 240
- laminar spray
- swiveling spray former
- flow rate: 5 1/min
- joystick ceramic cartridge
- suitable for continuous flow water heaters
- push-open waste set G 11/4
- material waste set: metal
- dezincification brass
- connection dimension: DN15

Chrome White/Chrome 15072003 15072403

1,249.00 1,249.00









3-hole basin mixer 100 with pushopen waste set ComfortZone 100 projection 102 mm

- laminar spray
- swiveling spray former flow rate: 5 l/min
- ceramic valves hot/cold 90°
- suitable for continuous flow water heaters
- push-open waste set G 11/4
- material waste set: metal
- connection dimension: DN15

Chrome White/Chrome 15073000 15073400








1.989.00


1,989.00



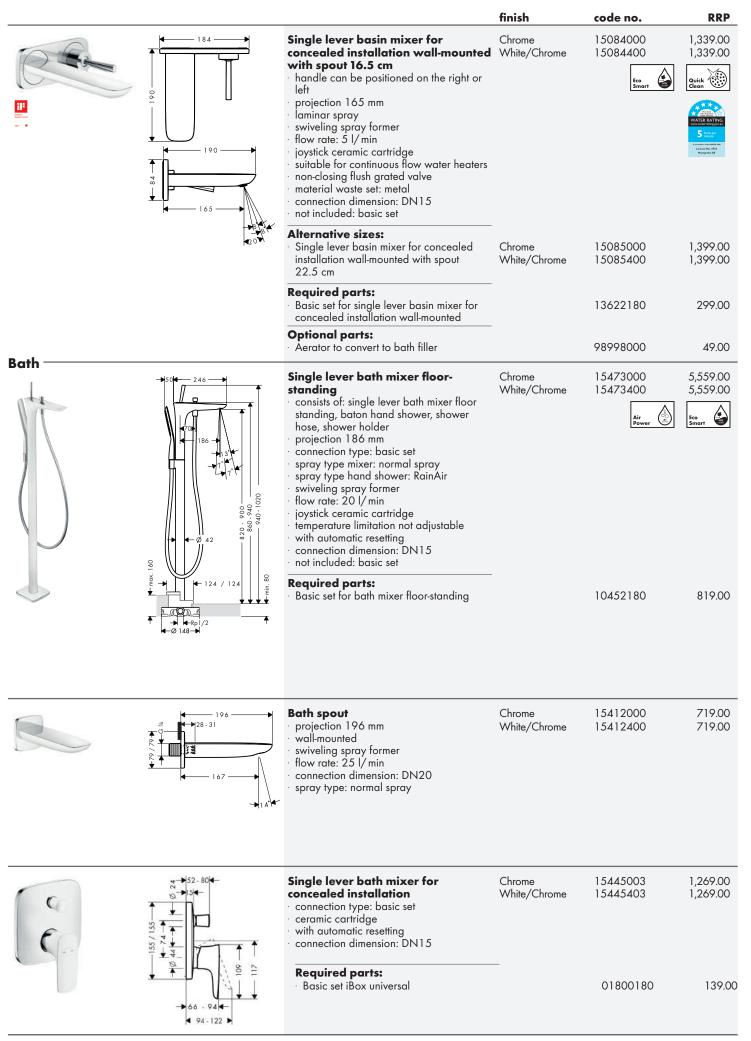

			finish	code no.	RRP
	nas. 830	Bathtub filler and push-open waste set · suitable for standard bath tubs · supply hose water connection left DN20 · with integrated overflow · adjustable direction of water with waterfall spray · push waste · complies with AS3718 & WMTS 040	Chrome	58129003	389.00
Shower ———		Circula Issuer de servicio de la constanta de	Cl	15445002	1,010,00
	155 / 155 155	Single lever shower mixer for concealed installation 1 outlet connection type: basic set ceramic cartridge material dezincification brass connection dimension: DN15 Required parts:	Chrome White/Chrome	15665003 15665403	1,019.00 1,019.00
	66 - 94 4 94 - 125	· Basic set iBox universal		01800180	139.00
Thermostats and	valves 15/152	Thermostat for concealed installation with shut-off valve 1 outlet thermostat cartridge safety lock at 38° C flow rate: 26 l/min temperature limitation adjustable connection type: basic set scope of supply: handles, sleeve, escutcheon, mixing unit, shut-off valve	White/Chrome	15775403	2,899.00
		Required parts: Basic set iBox universal with shut off unit		01850180	299.00
	10	Shut-off valve for concealed	Chrome	15978000	359.00
	68/68	installation connection type: DN15/DN20 scope of supply: escutcheon, sleeve, handle		1377 0000	337.00
	→ 12	Required parts: Basic set 52 / min for shut-off valve for concealed installation spindle		15973180	209.00
		Basic set 40 l/min for shut-off valve for concealed installation ceramic		15974180	219.00
		· Basic set 130 l/min for shut-off valve for concealed installation spindle		15970180	229.00
	G 1/2 - 28 - 66 6			15973180	209.00
		Alternative products: Basic set 40 I/min for shut-off valve for		15974180	219.00
	4-60→	concealed installation ceramic Basic set 130 I/min for shut-off valve for concealed installation spindle		15970180	229.00

finish Hand showers Chrome Hand shower 3jet EcoSmart 9 l/min hand shower with 2-shell construction White/Chrome shower head size: 150 mm



convenient diversion via Select button spray type: RainAir, CaresseAir, Mix

flow rate: 9 I/min with internal water conduction

rinseable dirt filter

connection thread G 1/2

connection dimension: DN15

28567000 28567400

code no.








RRP

419.00









Baton hand shower 150 1jet EcoSmart 9 I/min

hand shower with 2-shell construction

shower head size: 150 mm

spray type: RainAir flow rate: 9 1/min

rinseable dirt filter

connection thread G 1/2 connection dimension: DN15

suitable for continous flow water heaters

Chrome White/Chrome 28568000 28568400


269.00 269.00







Shower set



Shower set EcoSmart with shower bar 90 cm

PuraVida Handshower

spray type: RainAir, CaresseAir, Mix

convenient diversion via Select button

shower head size: 150 mm

pivot connectors prevent hose from tangling

90° position adjustable slider, pivots left and right, up and down

maximum flow rate (at 0.3 MPa): 9 l/min

chrome-plated wall supports of plastic

Isiflex Hose 1600mm

includes FixFit PuraVida

Chrome White/Chrome



27853003 1.049.00 1,049.00








Body shower





PuraVida Body shower 100 1jet

100 mm large side shower

360° range of rotation

spray type: RainAir flow rate RainAir spray (at 0.3 MPa): 4.5 l/min

connection thread: G 1/2

connection dimension: DN15

Chrome

28430000







finish code no. **RRP** Basin Chrome 32500003 709.00 Single lever basin mixer 100 with lever handle for hand washbasins without waste set ComfortZone 100 projection 127 mm normal spray flow rate: 5 1/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set 32505003 709.00 Single lever basin mixer 100 with Chrome lever handle without waste set ComfortZone 100 projection 156 mm normal spray flow rate at: 5 1/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set 32507003 769.00 Single lever basin mixer 110 with Chrome lever handle without waste set ComfortZone 110 projection 135 mm normal spray flow rate: 5 1/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 Single lever basin mixer 260 Chrome 32513003 1,069.00 with lever handle for washbowls without waste set ComfortZone 260 projection 204 mm normal spray flow rate: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set Single lever basin mixer for 32525000 789.00 Chrome concealed installation wall-mounted with lever handle and spout 16.5 cm projection 165 mm normal spray flow rate at: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters non-closing flush grated valve 100 connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation not included: basic set **Alternative sizes:** Single lever basin mixer for concealed 32526000 839.00 Chrome installation wall-mounted with lever handle and spout 22.5 cm Required parts: Basic set for single lever basin mixer for 13622180 299.00 concealed installation wall-mounted **Optional parts:**


Aerator to convert to bath filler

13914000

Metropol					
D and la			finish	code no.	RRP
Bath	52 - 80 4 	Single lever bath mixer for concealed installation with lever handle connection type: basic set ceramic cartridge min. operating pressure: 1 bar temperature limitation adjustable with automatic resetting non-return valve with silencer scope of supply: handle, sleeve, escutcheon, diverter, mixing unit	Chrome	32545003	629.00
		Required parts: Basic set iBox universal	_	01800180	139.00
Shower	56-844 92-120	Single lever shower mixer for concealed installation with lever handle connection type: basic set ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable with silencer scope of supply: escutcheon, handle, sleeve, mixing unit	Chrome	32565003	589.00
		Required parts: Basic set iBox universal		01800180	139.00

Basin





Single lever basin mixer 100 with loop handle for hand washbasins without waste set

- ComfortZone 100
- projection 127 mm
- normal spray flow rate: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set

Chrome 74500003



finish



code no.






RRP

769.00





Single lever basin mixer 100 with loop handle without waste set

- ComfortZone 100
- projection 157 mm
- normal spray flow rate: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set

Chrome

74505003

769.00














Single lever basin mixer 110 with loop handle without waste set

- ComfortZone 110
- projection 135 mm
- normal spray
- flow rate: 5 1/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters connection dimension: DN15
- not included: waste set

Chrome

74507003



839.00



Single lever basin mixer 260 with loop handle for washbowls without waste set ComfortZone 260 projection 204 mm

- normal spray flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable

- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set

Chrome

74513003








1,129.00





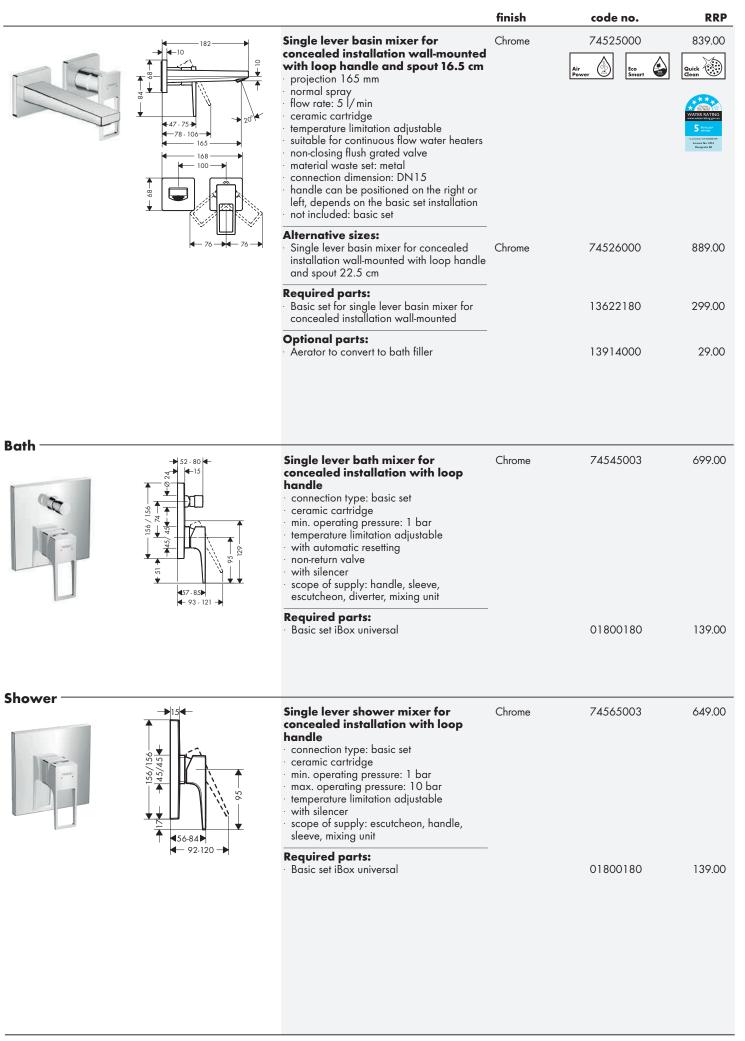

Basin

Basin mixer 100 Select with pushopen waste set

- ComfortZone 100
- projection 159 mm
- normal spray
- flow rate: 5 1/min
- Select cartridge with temperature control
- temperature limitation adjustable
- suitable for continuous flow water heaters
- push-open waste set G 11/4
- material waste set: metal
- connection dimension: DN15

finish code no. 32570003 Chrome










RRP







Basin mixer 110 Select with pushopen waste set

- ComfortZone 110
- projection 136 mm
- normal spray flow rate: 5 l/min
- Select cartridge with temperature control
- temperature limitation adjustable
- suitable for continuous flow water heaters
- push-open waste set G 11/4
- material waste set: metal
- connection dimension: DN15

Chrome

32571003

879.00














Basin mixer 260 Select with pushopen waste set

- ComfortZone 260
- projection 205 mm
- normal spray
- flow rate: 5 1/min
- Select cartridge with temperature control
- temperature limitation adjustable
- suitable for continuous flow water heaters
- push-open waste set G 11/4
- material waste set: metal
- connection dimension: DN15

Chrome

32572003

1,099.00







Metris finish code no. **RRP** Basin Single lever basin mixer 110 without Chrome 31084003 639.00 waste set ComfortZone 110 flow rate: 5 l/min ceramic cartridge connection dimension: DN15 not included: waste set 31185003 Single lever basin mixer 200 Chrome 789.00 without waste set ComfortZone 200 normal spray flow rate at 3 bar: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set Single lever basin mixer 260 for Chrome 31082003 889.00 washbowls without waste set ComfortZone 260 flow rate 5 1/min ceramic cartridge connection dimension: DN15 not included: waste set 31085003 759.00 Single lever basin mixer for Chrome concealed installation wall-mounted with spout 16.5 cm projection 165 mm normal spray flow rater: 5'l/min ceramic cartridge temperature limitation adjustable non-closing flush grated valve material waste set: metal 88 connection dimension: DN15 handle can be positioned on the right or 168 left, depends on the basic set installation 100-Required parts: Basic set for single lever basin mixer for concealed installation wall-mounted 13622180 299.00 **Optional parts:**

Aerator to convert to bath filler

13914000

Single lever both mixer floor- stonding contains of single lever both mixer floor- stonding contains of single lever both mixer floor- stonding stonds of single stonds of	D - ul			finish	code no.	RRP
Bath spout Chrome 31494000 499,00 example of the spout spout of the spout spout of the spout of	Bath	820 · 974 820 · 900 820 · 974 820 · 900 820 · 900	standing consists of: single lever bath mixer floor standing, boton hand shower, shower hose, shower holder projection 209 mm connection type: basic set spray type mixer: normal spray spray type hand shower: RainAir flow rate: 21 I/min ceramic cartridge min. operating pressure: 1 bar temperature limitation adjustable with automatic resetting non-return valve connection dimension: DN15 not included: basic set Consisting of: Baton hand shower 150 1 jet (# 28558XXX)	Chrome	Air	
single lever bath mixer for conceded installation connection type: basic set ceramic cartridge with automatic resetting connection dimension: DN15 material: dezinefication brass Required parts: Single lever bath mixer for conceded installation connection dimension: DN15 material: dezinefication brass Required parts: Single lever bath mixer for conceded installation connection indimension: DN15 material: dezinefication brass Required parts: Single lever bath mixer for conceded installation connection type: basic set ceramic cartridge min. operating pressure: 1 bar temperature limitation adjustable with automatic resetting non-return valve with silencer scope of supply: handle, sleeve, escutcheon, diverter, mixing unit Required parts:			· Basic set for bath mixer floor-standing		10452180	819.00
concealed installation connection type: basic set ceramic cartridge with automatic resetting connection dimension: DN15 material: dezincification brass Required parts: Basic set iBox universal O1800180 139.00 Single lever bath mixer for concealed installation connection type: basic set ceramic cartridge min. operating pressure: 1 bar temperature limitation adjustable with automatic resetting non-return valve with silencer scope of supply: handle, sleeve, escutcheon, diverter, mixing unit Required parts:		20	projection 165 mm wall-mounted flow rate: 20 l/min	Chrome		
concealed installation connection type: basic set ceramic cartridge min. operating pressure: 1 bar temperature limitation adjustable with automatic resetting non-return valve with silencer scope of supply: handle, sleeve, escutcheon, diverter, mixing unit Required parts:		75-103	concealed installation connection type: basic set ceramic cartridge with automatic resetting connection dimension: DN15 material: dezincification brass Required parts:	Chrome		
	NEW	75-103	concealed installation connection type: basic set ceramic cartridge min. operating pressure: 1 bar temperature limitation adjustable with automatic resetting non-return valve with silencer scope of supply: handle, sleeve, escutcheon, diverter, mixing unit Required parts:	Chrome		


			finish	code no.	RRP
	7 - min. 100	Bathtub filler and push-open waste set suitable for standard bath tubs supply hose water connection left DN20 with integrated overflow adjustable direction of water with waterfall spray push waste complies with AS3718 & WMTS 040	Chrome	58129003	389.00
Shower	475-103 4-105 - 133	Single lever shower mixer for concealed installation connection type: basic set ceramic cartridge connection dimension: DN15 scope of supply: finish set with installation unit included Required parts: Basic set iBox universal	Chrome	31685003 01800180	559.00
	65 - 93 + 84 - 112 -	Single lever shower mixer highflow for concealed installation 1 outlet connection type: basic set flow rate: 49 l/min ceramic cartridge (Highflow) temperature limitation adjustable connection dimension: DN15 scope of supply: escutcheon, handle, mixing unit, sleeve not included: basic set Required parts: Basic set iBox universal	Chrome	31652000	489.00 139.00
NEW	68 - 98 4 105 - 133 1	Single lever shower mixer for concealed installation 1 outlet 1 connection type: basic set 2 ceramic cartridge 2 min. operating pressure: 1 bar 3 max. operating pressure: 10 bar 4 temperature limitation adjustable 5 with silencer 6 scope of supply: escutcheon, handle, sleeve, mixing unit Required parts: 6 Basic set iBox universal	Chrome	31456003 01800180	559.00

RRP finish code no. Basin Single lever basin mixer 90 without Chrome 31060003 419.00 waste set ComfortZone 90 flow rate: 5 l/min ceramic cartridge connection dimension: DN15 31026003 Single lever basin mixer 190 Chrome 839.00 without waste set ComfortZone 190 projection 158 mm normal spray flow rate: 5 1/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set 31162000 809.00 Single lever basin mixer for Chrome concealed installation wall-mounted with spout 16.5 cm consists of: Single lever basin mixer for concealed installation wall-mounted, waste set projection 165 mm -57 - 85 → normal spray flow rate: 5 l/min -87 - 115 165 ceramic cartridge 184 168 temperature limitation adjustable suitable for continuous flow water heaters 100 non-closing flush grated valve material waste set: metal connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation **4** 63 **→** 63 **→** not included: basic set Required parts: Basic set for single lever basin mixer for 13622180 299.00 concealed installation wall-mounted Bath 14420000 429.00 **Bath spout** Chrome projection 161 mm . wall-mounted flow rate: 20 l/min spray type: normal spray scope of supply: bath spout, escutcheon, assembly instruction 31465003 579.00 Single lever bath mixer for Chrome concealed installation connection type: basic set ceramic cartridge

with automatic resetting connection dimension: DN15

Required parts:
Basic set iBox universal

463-91**▶ ←** 93-121 **▶** 01800180



Bathtub filler and push-open waste

Chrome

finish

Chrome

code no. 58129003


389.00

RRP

- suitable for standard bath tubs supply hose water connection left DN20
- with integrated overflow adjustable direction of water with waterfall spray
- push waste
- complies with AS3718 & WMTS 040

Shower





Single lever shower mixer for concealed installation

- 1 outlet
- connection type: basic set
- ceramic cartridge
- material: dezincification brass connection dimension: DN15

Required parts:

Basic set iBox universal

31665003


01800180

499.00

139.00

Measurements within scale drawings are in mm. All recommended prices include 10% GST.

Basin



Single lever basin mixer 100 without waste set

- ComfortZone 100 flow rate 5 l/min
- ceramic cartridge
- connection dimension: DN15

finish Chrome





code no.



RRP





- ComfortZone 250
- flow rate: 5 l/min
- ceramic cartridge
- connection dimension: DN15

Chrome

31078003














3-hole basin mixer 100 with pop-up waste set

- consists of: 3-hole basin mixer, waste set
- ComfortZone 100
- projection 115 mm
- normal spray flow rate: 5 l/min
- ceramic valves hot/cold 90°
- temperature limitation adjustable
- suitable for continuous flow water heaters
- pop-up waste set G 11/4
- material waste set: metal
- connection dimension: DN15

Chrome

31073000






929.00







52/52

Bath spout

- projection 165 mm
- wall-mounted
- flow rate: 20 I/min
- spray type: normal spray

Chrome


13413000

429.00










Bathtub filler and push-open waste

- suitable for standard bath tubs
- supply hose water connection left DN20
- with integrated overflow
- adjustable direction of water with waterfall spray
- push waste
- complies with AS3718 & WMTS 040


Chrome

58129003

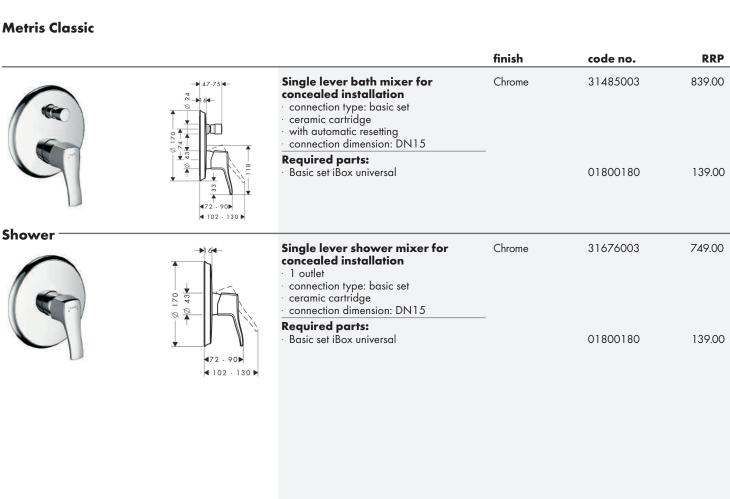


Talis Select S / Talis S finish code no. **RRP** Basin 489.00 Basin mixer 80 without waste set Chrome 72041003 ComfortZone 80 projection 108 mm normal spray flow rate: 4.5 l/min Select valve for cold water connection connection dimension: DN15 not included: waste set







- ComfortZone 100
- projection 108 mm
- normal spray flow rate: 4.5 l/min
- Select valve
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set












599.00







Basin mixer 180 without waste set

- ComfortZone 180
- projection 108 mm
- normal spray
- flow rate: 4.5 l/min
- Select valve
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set

Chrome

72045003

759.00
















Single lever basin mixer 80 without Chrome waste set

- ComfortZone 80
- projection 108 mm
- normal spray flow rate: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set





72012003






329.00







Single lever basin mixer 100 without waste set

- ComfortZone 100
- projection 108 mm
- normal spray
- flow rate: 5 1/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set


Chrome

72021003









Single lever basin mixer 190 without waste set

- ComfortZone 190
- projection 131 mm
- normal spray
- flow rate : 5 l/min ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set

Chrome 72032003



code no.








RRP

669.00





Single lever basin mixer 140 without waste set

- ComfortZone 140
- projection 152 mm
- normal spray
- flow rate: 5 1/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set

Chrome

finish

72114003

1,169.00














Single lever basin mixer 250 without waste set

- ComfortZone 250
- projection 201 mm
- normal spray flow rate: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- connection dimension: DN15
- not included: waste set

Chrome

72116003


1,439.00











3-hole basin mixer with pop-up

- consists of: 3-hole basin mixer, waste set
- ComfortZone 150
- projection 128 mm
- flow rate: 5 l/min
- ceramic valves hot/ cold 90°
- suitable for continuous flow water heaters
- pop-up waste set G 11/4
- material waste set: metal
- connection dimension: DN15
- scope of supply: basic and finish set


Chrome

72130000








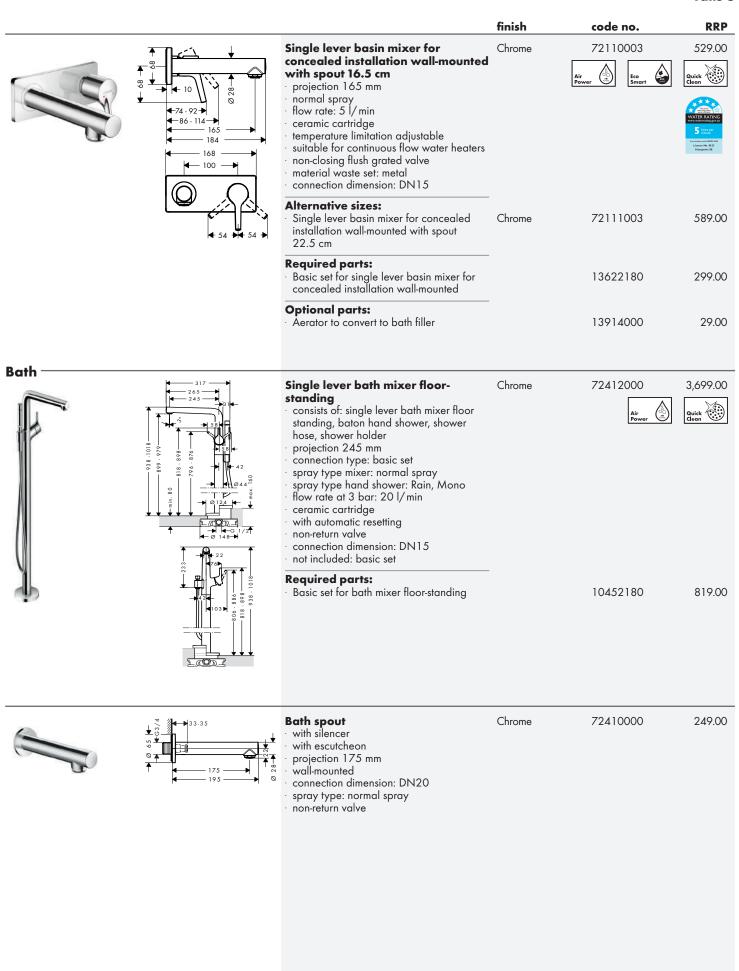

			finish	code no.	RRP
	27 4 4 4 4 4 4 15 5 5 5 80 4 15 6 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8 8	Single lever bath mixer for concealed installation connection type: basic set ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable scope of supply: escutcheon, handle, sleeve, mixing unit	Chrome	72405003	459.00
	69 - 97	Required parts: Basic set iBox universal		01800180	139.00
	max. 830 = 8274	Bathtub filler and push-open waste set suitable for standard bath tubs supply hose water connection left DN20 with integrated overflow adjustable direction of water with waterfall spray push waste complies with AS3718 & WMTS 040	Chrome	58129003	389.00
Shower	150 P P P P P P P P P P P P P P P P P P P	Single lever shower mixer for concealed installation connection type: basic set ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable scope of supply: escutcheon, handle, sleeve, mixing unit Required parts:	Chrome	72605003	409.00
	→ 69 - 97 ← ← 92 - 120 →	· Basic set iBox universal		01800180	139.00
	150	Single lever shower mixer for concealed installation connection type: basic set scope of supply: handle, sleeve, escutcheon not included: basic set Required parts: Basic set for single lever shower mixer for concealed installation	Chrome	72606000 13620180	119.00
	→ 69·97 → 92·120 →				

finish code no. Basin Basin mixer 110 without waste set Chrome 71751003 ComfortZone 110 projection 112 mm normal spray flow rate 4.5 l/min Select cartridge with temperature control temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set 71753003 Basin mixer 240 without waste set Chrome ComfortZone 240 projection 183 mm normal spray flow rate : 4.5 l/min Select cartridge with temperature control temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set Single lever basin mixer 80 without Chrome 71702003 waste set ComfortZone 80 projection 107 mm normal spray flow rate: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set Single lever basin mixer 110 without Chrome 71712003 waste set ComfortZone 110 projection 108 mm flow rate: 5 l/min ceramic cartridge temperature limitation adjustable





suitable for continuous flow water heaters

connection dimension: DN15

not included: waste set







RRP

449.00





269.00



329.00





Single lever basin mixer 240 without waste set

ComfortZone 190

projection 166 mm

normal spray

flow rate: 5 1/min

ceramic cartridge

temperature limitation adjustable

suitable for continuous flow water heaters

connection dimension: DN15

not included: waste set

Chrome


71717003
















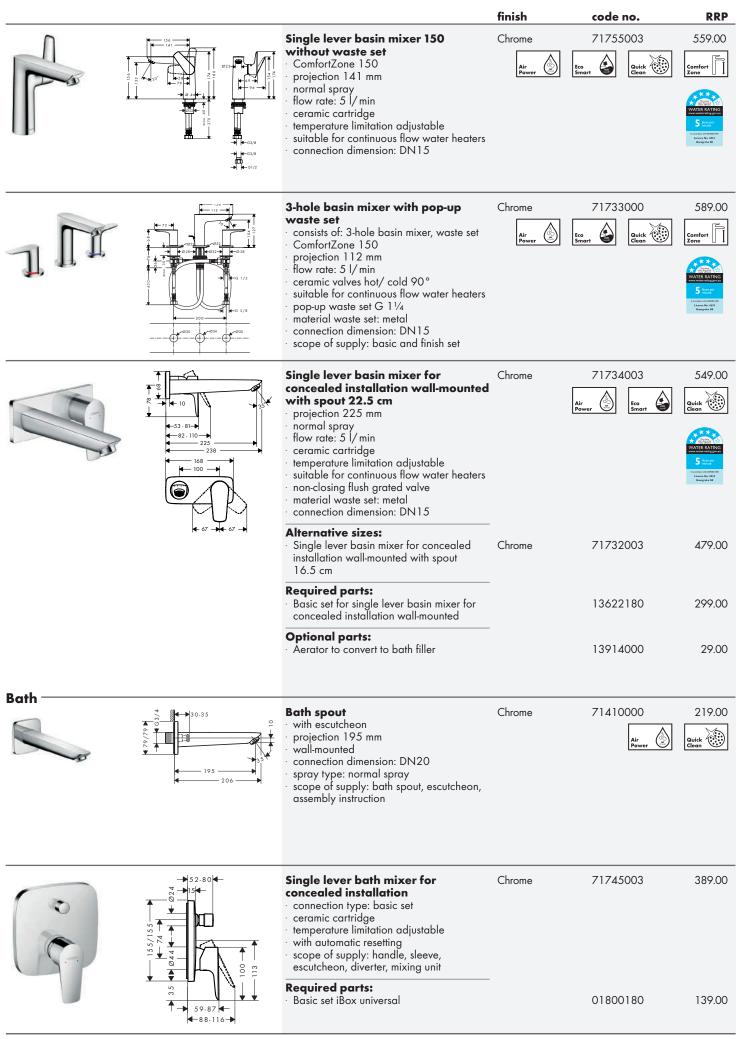

		finish	code no	RRP
7 min.100	Bathtub filler and push-open waste set · suitable for standard bath tubs · supply hose water connection left DN20 · with integrated overflow · adjustable direction of water with waterfall spray · push waste · complies with AS3718 & WMTS 040	Chrome	58129003	389.00
59.87 -88.116	Single lever shower mixer for concealed installation connection type: s-shaped connections spray type mixer: normal spray flow rate: 22 l/min ceramic cartridge temperature limitation adjustable with automatic resetting non-return valve with silencer suitable for continous flow water heaters connection dimension: DN15	Chrome	71765003	339.00 Quick Clean
	Required parts: · Basic set iBox universal		01800180	139.00
\$\frac{1}{8}\$	Single lever shower mixer for concealed installation connection type: basic set scope of supply: handle, sleeve, escutcheon not included: basic set Required parts: Basic set for single lever shower mixer for concealed installation	Chrome	71766000 13620180	119.00
465-93▶	Single lever shower mixer for concealed installation 1 outlet connection type: basic set min. operating pressure: 1 bar max. operating pressure: 10 bar scope of supply: handle, sleeve, escutcheon Ø 117 mm	Chrome		119.00 lable from uary 2019
10	Required parts: Basic set for single lever shower mixer for concealed installation		13620180	139.00
	\$59.87 -88-116-	set suitable for standard bath tubs supply hose water connection left DN20 with integrated overflow adjustable direction of water with waterfall spray push waste complies with AS3718 & WMTS 040 Single lever shower mixer for concealed installation connection type: s-shaped connections spray type mixer: normal spray flow rate: 22 l/min ceramic cartridge temperature limitation adjustable with automatic resetting non-return valve with silencer suitable for continous flow water heaters connection dimension: DN15 Required parts: Basic set iBox universal Single lever shower mixer for concealed installation connection type: basic set scope of supply: handle, sleeve, escutcheon not included: basic set Required parts: Basic set for single lever shower mixer for concealed installation 1 outlet connection type: basic set min. operating pressure: 1 bar max. operating pressure: 1 bar max. operating pressure: 10 bar scope of supply: handle, sleeve, escutcheon Ø 117 mm Required parts: Basic set for single lever shower mixer for	suitable for standard bath tubs supply hose water connection left DN20 with integrated overflow adjustable direction of water with waterfall spray push waste complies with AS3718 & WMTS 040 Single lever shower mixer for concealed installation connection type: s-shaped connections spray type mixer: normal spray flow rate: 22 1/ min ceramic cartridge emperature limitation adjustable with automatic resetting non-return valve with silencer suitable for continous flow water heaters connection dimension: DN15 Required parts: Basic set iBox universal Single lever shower mixer for concealed installation connection type: basic set scope of supply: handle, sleeve, escutcheon not included: basic set Required parts: Basic set for single lever shower mixer for concealed installation 1 outlet connection type: basic set min. operating pressure: 1 bar max. operating pressure: 1 bar max. operating pressure: 10 bar scope of supply: handle, sleeve, escutcheon @ 117 mm Required parts: Basic set for single lever shower mixer for	Bathtub filler and push-open waste subject to the set of suitable for standard bath tubs and supply hose water connection left DN20 with integrated overflow adjustable direction of water with water or connection type: shaped connections approy push waste complete with a subject of connection type: shaped connections approy to ceramic cartridge and overflow with a submaria cartridge and overflow with submaria cartridge. Single lever shower mixer for connection dimension: DN15 Required parts: Basic set iBox universal Single lever shower mixer for connected installation and included: basic set accorded installation and included: basic set accorded installation. Single lever shower mixer for connection type: basic set and overflow provided installation. Single lever shower mixer for connection type: basic set and overflow provided installation. Julie connection type: basic set and overflow provided installation. I outlet and overflow provided install

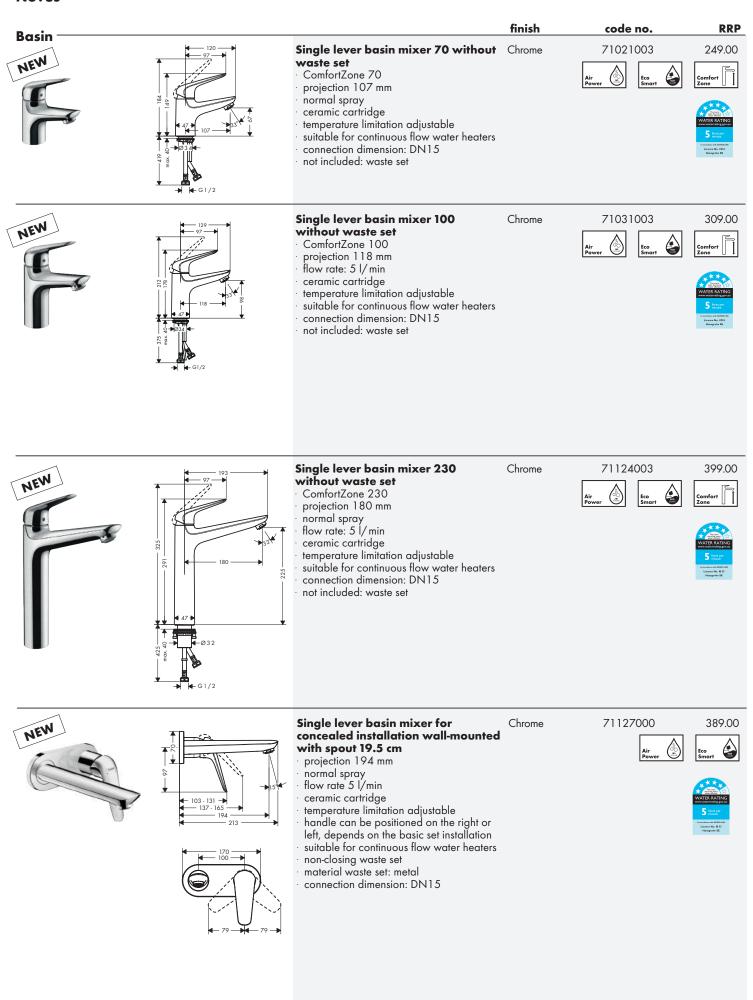

					Novus
D auth			finish	code no.	RRP
NEW	99 116 - 144	Single lever bath mixer for concealed installation connection type: basic set ceramic cartridge min. operating pressure: 1 bar temperature limitation adjustable with automatic resetting with silencer scope of supply: handle, sleeve, escutcheon, diverter, mixing unit Required parts: Basic set iBox universal	Chrome	71045003 01800180	339.00
NEW	15 051 044 044 044 051 051 051 051 051 051 051 051	Single lever shower mixer for concealed installation 1 outlet connection type: basic set ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable scope of supply: escutcheon, handle, sleeve, mixing unit Required parts:	Chrome	71065003	309.00
	82 - 110 116 - 144 -	· Basic set iBox universal		01800180	139.00
NEW	0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Single lever shower mixer for concealed installation 1 outlet connection type: basic set ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable scope of supply: escutcheon, handle, sleeve, mixing unit escutcheon Ø 110 mm	Chrome	71063000	89.00
		Required parts: Basic set for single lever shower mixer for concealed installation		13260180	139.00

finish code no. **RRP Basin** Single lever basin mixer 70 71084003 269.00 Chrome NEW CoolStart ComfortZone 70 projection 107 mm normal spray flow rate: 5 1/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set cold water in middle position Single lever basin mixer 100 Chrome 71085003 329.00 CoolStart ComfortZone 100 projection 118 mm normal spray flow rate: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set cold water in middle position **Shower** Single lever shower mixer for Chrome 71365003 309.00 concealed installation 1 outlet connection type: basic set Ø 150 Ø 44 ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable scope of supply: escutcheon, handle, sleeve, mixing unit Required parts: 114 Basic set iBox universal 01800180 139.00 71361000 89.00 -64-92- Single lever shower mixer for Chrome concealed installation 1 outlet connection type: basic set ceramic cartridge min. operating pressure: 1 bar max. operating pressure: 10 bar temperature limitation adjustable scope of supply: escutcheon, handle, sleeve, mixing unit escutcheon Ø 110 mm Required parts: 13620180 139.00 Basic set for single lever shower mixer for

concealed installation

80 - 108

← 108 - 136 →

unit included

Required parts:

Basic set iBox universal

01800180

			finish	code no.	RRP
	na. 100	Bathtub filler and push-open waste set suitable for standard bath tubs supply hose water connection left DN20 with integrated overflow adjustable direction of water with waterfall spray push waste complies with AS3718 & WMTS 040	Chrome	58129003	389.00
hower ———	> ∤1.5 4	Single lever shower mixer for	Chrome	31965003	359.00
	Ø 150	concealed installation 1 outlet connection type: basic set flow rate: 22 l/ min ceramic cartridge material; dezincification brass connection dimension: DN15	Cilionic	01703000	037.00
	→ 80 - 108 ← ◀ 112 - 140 ▶	Required parts: Basic set iBox universal		01800180	139.00
80 - 108 1	Single lever shower mixer highflow for concealed installation 1 outlet connection type: basic set flow rate: 49 l/min ceramic cartridge (Highflow) temperature limitation adjustable connection dimension: DN15 scope of supply: escutcheon, handle, mixing unit, sleeve not included: basic set	Chrome	31964000	309.00	
	4 - 107 · 135 -▶	Required parts: Basic set iBox universal		01800180	139.00
	4 80·108 ▶	Single lever shower mixer for concealed installation 1 outlet connection type: basic set min. operating pressure: 1 bar max. operating pressure: 10 bar scope of supply: handle, sleeve, escutcheon not included: basic set	Chrome	31967000	109.00
	<u>↓</u>	Required parts: Basic set for single lever shower mixer for concealed installation		13620180	139.00
NEW	 66-94 →	Single lever shower mixer for concealed installation 110mm	Chrome	31961000	109.00
		concedied installation 110mm 1 outlet connection type: basic set min. operating pressure: 1 bar max. operating pressure: 10 bar scope of supply: handle, sleeve, escutcheon Ø 110 mm			ilable from nuary 2019
	10	Required parts: Basic set for single lever shower mixer for concealed installation		13620180	139.00

finish code no. **RRP** Basin Single lever basin mixer 70 without Chrome 71071003 209.00 waste set ComfortZone 70 projection 107 mm normal spray flow rate: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 material: dezincification brass not included: waste set 71101003 279.00 Single lever basin mixer 100 Chrome without waste set ComfortZone 100 projection 108 mm normal spray flow rate: 5 1/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 material: dezincification brass not included: waste set 71091003 359.00 Single lever basin mixer 190 Chrome without waste set ComfortZone 190 projection 166 mm normal spray flow rate: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 material: dezincification brass not included: waste set Single lever basin mixer for Chrome 71220003 399.00 concealed installation wall-mounted with spout 19.5 cm consists of: Single lever basin mixer for concealed installation wall-mounted, 195 projection 195 mm 208 normal spray flow rate: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters non-closing flush grated valve material waste set: metal connection dimension: DN15 handle can be positioned on the right or left, depends on the basic set installation not included: basic set Required parts: Basic set for single lever basin mixer for concealed installation wall-mounted 13622180 299.00

Optional parts:

Aerator to convert to bath filler


13914000

D and a			finish	code no.	RRP
Bath	195 206	Bath spout with escutcheon projection 195 mm wall-mounted connection dimension: DN20 spray type: normal spray scope of supply: bath spout, escutcheon, assembly instruction	Chrome	71410000 Air Power	219.00
	155/155 74 74 74 74 74 75 75 75 75 75 75 75 75 75 75	Single lever bath mixer for concealed installation connection type: basic set ceramic cartridge temperature limitation adjustable with automatic resetting scope of supply: handle, sleeve, escutcheon, diverter, mixing unit	Chrome	71405003	339.00
	→ 70-98 ← ←93-121→	· Basic set iBox universal		01800180	139.00
	max. 830	Bathtub filler and push-open waste set · suitable for standard bath tubs · supply hose water connection left DN20 · with integrated overflow · adjustable direction of water with waterfall spray · push waste · complies with AS3718 & WMTS 040	Chrome	58129003	389.00
Shower ———	.1.1.			71.405000	000.00
	155 / 155	Single lever shower mixer for concealed installation 1 outlet connection type: basic set ceramic cartridge temperature limitation adjustable scope of supply: escutcheon, handle, sleeve, mixing unit Required parts:	Chrome	71605003	289.00
	4 70-98 ▶ 4 -93-121 -▶	· Basic set iBox universal		01800180	139.00
NEW	4 -56-84 →	Single lever shower mixer for concealed installation 100mm 1 outlet connection type: basic set	Chrome	71604000	89.00
		min. operating pressure: 1 bar max. operating pressure: 10 bar scope of supply: handle, sleeve, escutcheon Ø 117 mm			uary 2019
	10	Required parts: Basic set for single lever shower mixer for concealed installation		13620180	139.00
	₹79-107 ★	Single lever shower mixer for concealed installation 1 outlet connection type: basic set scope of supply: handle, sleeve, escutcheon not included: basic set	Chrome	71606000	89.00
	12	Required parts: Basic set for single lever shower mixer for concealed installation		13620180	139.00

D			finish	code no.	RRP
NEW NEW	0 3 4 0 0 4 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Single lever basin mixer 70 without waste set ComfortZone 70 projection 107 mm normal spray flow rate 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters connection dimension: DN15 not included: waste set	Chrome	71150003 Air Eco Smart	229.00 Comfort Tone Comfort Tone WATER RATING WATER RA
NEW	9 34 108 9 34 0 34 0 34 0 34 0 34	Single lever basin mixer 100 without waste set ComfortZone 100 projection 108 mm normal spray flow rate: 5 l/min ceramic cartridge temperature limitation adjustable suitable for continuous flow water heaters material waste set: synthetic connection dimension: DN15	Chrome	71151003 Air Power	289.00 Comfort Tone WATER RAINING S Holder Long And 111 Long and 15
NEW NEW	52-80 71-99 102-130	Single lever bath mixer for concealed installation connection type: basic set ceramic cartridge temperature limitation adjustable with automatic resetting scope of supply: handle, sleeve, escutcheon, diverter, mixing unit Required parts: Basic set iBox universal	Chrome	71264003	339.00
NEW	71.99	Single lever shower mixer for concealed installation 1 outlet connection type: basic set ceramic cartridge temperature limitation adjustable scope of supply: escutcheon, handle, sleeve, mixing unit Required parts: Basic set iBox universal	Chrome	71267003 01800180	289.00
NEW	4-57-85 1 0	Single lever shower mixer for concealed installation 1 outlet 1 connection type: basic set 1 ceramic cartridge 1 temperature limitation adjustable 1 scope of supply: escutcheon, handle, sleeve, mixing unit 1 escutcheon Ø 117 mm Required parts: 1 Basic set for single lever shower mixer for concealed installation	Chrome	71612000 13620180	89.00 139.00

finish code no. **RRP Metris**





Electronic basin mixer with temperature control mains connection 230 V

- ComfortZone 130
- projection 129 mm
- flow rate:5 I/min
- theft-proof aerator
- temperature limitation adjustable temperature adjustable via mixer lever on the side
- suitable for continous flow water heaters
- infrared sensor technology automatic environmental adjustment of infrared sensor
- adjustable optical range of infrared sensor (2 settings)
- 230 V / 50 Hz mains connection
- hygiene rinse activatable (automatic water flow for 10 seconds every 24 hours following the last operation)
- permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection)
- manual water stop for washbasin cleaning performance may be impaired if the sensor is obscured by the design of the wash basin, or when the wash basin is oversized and the distance between sensor and the wash basin edge is larger than 75 mm
- functional restriction due to too large
- connection dimension: DN15
- TÜV certified
- scope of supply: with two filter units with fine filter to protect from incoming dirt, for assembly on existing angle valves. Filter element can be removed and cleaned, non-return valve
- dirt filters in the connection hoses

Chrome














Electronic basin mixer with temperature pre-adjustment mains connection 230 V

- ComfortZone 150
- projection 128 mm
- flow rate: 5 l/min
- theft-proof aerator
- temperature limitation adjustable
- temperature pre-adjustable
- suitable for continous flow water heaters
- infrared sensor technology
- automatic environmental adjustment of infrared sensor
- adjustable optical range of infrared
- sensor (2 settings) 230 V / 50 Hz mains connection
- hygiene rinse activatable (automatic water flow for 10 seconds every 24 hours following the last operation)
- permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection)
- manual water stop for washbasin cleaning performance may be impaired if the sensor is obscured by the design of the wash basin, or when the wash basin is oversized and the distance between sensor and the wash basin edge is larger than 75 mm
- functional restriction due to too large distance
- connection dimension: DN15
- TÜV certified
- scope of supply: with two filter units with fine filter to protect from incoming dirt, for assembly on existing angle valves. Filter element can be removed and cleaned, non-return valve
- dirt filters in the connection hoses

31103000 Chrome











RRP finish code no. **Focus** Chrome 1,149.00





Electronic basin mixer with temperature pre-adjustment mains connection 230 V

- ComfortZone 130
- projection 127 mm
- flow rate: 5 l/min
- theft-proof aerator
- temperature limitation adjustable
- temperature pre-adjustable
- suitable for continous flow water heaters
- infrared sensor technology automatic environmental adjustment of infrared sensor
- adjustable optical range of infrared sensor (2 settings)
 230 V / 50 Hz mains connection
- hygiene rinse activatable (automatic water flow for 10 seconds every 24 hours following the last operation)
- permanent rinse activatable (single water flow for 180 seconds, suitable for thermal disinfection)
- manual water stop for washbasin cleaning
- functional restriction due to too large
- performance may be impaired if the sensor is obscured by the design of the wash basin, or when the wash basin is oversized and the distance between sensor and the wash basin edge is larger than 75 mm
- connection dimension: DN15
- TÜV certified
- scope of supply: with two filter units with fine filter to protect from incoming dirt, for assembly on existing angle valves. Filter element can be removed and cleaned, non-return valve
- dirt filters in the connection hoses












			finish	code no.	RRP
ShowerSelect	20 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4 4	Thermostat for concealed installation for 1 function 1 outlet Select push-button on/off control for 1 outlet thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C flow rate: 26 l/min temperature limitation adjustable scope of supply: handle, sleeve, escutcheon, mixing unit, buttons Required parts:	Chrome	15762003	1,449.00
		· Basic set iBox universal with shut off unit		01850180	299.00
	20 4 25 4 25 54-82	Thermostat for concealed installation for 2 functions 2 outlets simultaneous use of several outlets Select push-button on/off control for 2 outlets thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C flow rate: 26 l/min temperature limitation adjustable scope of supply: handle, sleeve, escutcheon, mixing unit, buttons	Chrome	15763003	1,569.00 Select
		Required parts: Basic set iBox universal with shut off unit		01850180	299.00
E.	- 155/155 - 155/155 - 20 -	Thermostat highflow for concealed installation thermostat cartridge safety lock at 40° C flow rate: 59 l/min temperature limitation adjustable scope of supply: handle, sleeve, escutcheon, mixing unit	Chrome	15760003	1,049.00
	4 69 -97 ▶	Required parts: · Basic set iBox universal with shut off unit		01850180	299.00
⊘ ⊕⊙	155	Valve for concealed installation for 3 functions 3 outlets simultaneous use of several outlets Select valve flow rate: 43 l/min scope of supply: escutcheon, mixing unit, buttons	Chrome	15764003	1,049.00
	\$\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\\	Required parts: · Basic set iBox universal		01800180	139.00

			finish	code no.	RRP
ShowerSelect S	051 0 150 0	Thermostat for concealed installation for 1 function 1 outlet Select push-button on/off control for 1 outlet thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C flow rate: 26 l/min temperature limitation adjustable scope of supply: handle, sleeve, escutcheon, mixing unit, button	Chrome	15744003	1,449.00 Select
		Required parts: Basic set iBox universal with shut off unit		01850180	299.00
	20 - 20 - 20 - 20 - 20 - 20 - 20 - 20 -	Thermostat for concealed installation for 2 functions 2 outlets simultaneous use of several outlets Select push-button on/off control for 2 outlets thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C flow rate: 26 l/min temperature limitation adjustable scope of supply: handle, sleeve, mixing unit, escutcheon, buttons	Chrome	15743003	1,569.00 Select
		Required parts: Basic set iBox universal with shut off unit		01850180	299.00
	0 150 4 8 4 8 7 7 3 4 8 7 7 3 4 8 7 7 3 4 8 7 8 7 8 7 8 7 8 7 8 7 8 7 8 7 8 7 8	Thermostat highflow for concealed installation thermostat cartridge safety lock at 40° C flow rate: 59 l/min material: dezincification brass temperature limitation adjustable scope of supply: handle, sleeve, escutcheon, mixing unit	Chrome	1 <i>574</i> 1003	1,049.00
	4 68-96▶	Required parts: Basic set iBox universal with shut off unit		01850180	299.00
(T) (T)		max. operating pressure: 10 bar flow rate: 43 l/min scope of supply: escutcheon, mixing unit, buttons	Chrome	15745003	1,049.00 Select
		Required parts: Basic set iBox universal		01800180	139.00

		finish	code no.	RRP
48 4 8 4 8 4 8 6 6 6 6 6 6 6 6 6 6 6 6 6	Thermostat for concealed installation with shut-off valve 1 outlet thermostat cartridge safety lock at 38° C temperature limitation adjustable flow rate: 26 l/min connection type: basic set scope of supply: handles, sleeve, escutcheon, mixing unit, shut-off valve	White/Chrome	1 <i>57754</i> 03	2,899.00
100	Required parts: Basic set iBox universal with shut off unit		01850180	299.00
68/68/	Shut-off valve for concealed installation connection type: DN15/DN20 scope of supply: escutcheon, sleeve, handle	Chrome	15978000	359.00
→ 12	Required parts: Basic set 52 I/min for shut-off valve for		15973180	209.00
	concealed installation spindle		15974180	219.00
	concealed installation ceramic		15970180	229.00
	concealed installation spindle			
76	Shut-off/ diverter valve S Trio/ Quattro for concealed installation scope of supply: handle, sleeve, escutcheon	Chrome	15932000	309.00
	· Basic set for Duo diverter valve valve for		15984180	389.00
→ 14	· Basic set for Trio shut-off/ diverter valve		15981180	409.00
	Basic set for Quattro four-way diverter valve for concealed installation for 3 users		15930180	639.00
4 −63 −▶	Shut-off valve S for concealed installation scope of supply: handle, sleeve, escutcheon	Chrome	15972000	229.00
\$ 80 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Required parts:			
	concealed installation spindle		15973180	209.00
(10 C) (1	concealed installation ceramic			219.00
0 - 45	Basic set 130 l/min for shut-off valve for concealed installation spindle		15970180	229.00
	\$\frac{1}{5}\frac{1}{5	installation with shut-off valve 1 outlet 1 outlet 1 outlet 1 outlet 1 outlet 1 outlet 1 o	Thermostat for concealed installation with shut-off valve 1 outlet thermostat cartridge safety lock at 38° C temperature limitation adjustable flow rate: 26 l/min connection type: basic set scope of supply: handles, sleeve, escutcheon, mixing unit, shut-off valve Required parts: - Basic set iBox universal with shut off unit Shut-off valve for concealed installation - connection type: DN15/DN20 - scope of supply: escutcheon, sleeve, handle Required parts: - Basic set 40 l/min for shut-off valve for concealed installation spindle - Basic set 130 l/min for shut-off valve for concealed installation - scope of supply: handle, sleeve, escutcheon Required parts: - Basic set for Tio shut-off valve for concealed installation or 2 users - Basic set for Tio shut-off valve valve for concealed installation for 1 users - Basic set for Tio shut-off valve valve for concealed installation for 3 users - Basic set 52 l/min for shut-off valve valve for concealed installation for 3 users - Basic set 52 l/min for shut-off valve for concealed installation - scope of supply: handle, sleeve, escutcheon Required parts: - Basic set 52 l/min for shut-off valve for concealed installation - scope of supply: handle, sleeve, escutcheon Required parts: - Basic set 52 l/min for shut-off valve for concealed installation - scope of supply: handle, sleeve, escutcheon Required parts: - Basic set 52 l/min for shut-off valve for concealed installation - scope of supply: handle, sleeve, escutcheon Required parts: - Basic set 52 l/min for shut-off valve for concealed installation - scope of supply: handle, sleeve, escutcheon Required parts: - Basic set 52 l/min for shut-off valve for concealed installation - scope of supply: handle, sleeve, escutcheon - Secutive for shut-off valve for concealed installation - scope of supply: handle, sleeve, escutcheon - Secutive for shut-off valve for concealed installation - scope of supply: handle, sleeve, escutcheon - Secutive for shut-off valve for concealed installation - scop	Thermostat for concealed installation with shut-off valve 1 outlet 1 hermostat carridge safely lock at 38 ° C temperature limitation adjustable 16w rate: 26 / min connection type: basic set scope of supply: handles, sleeve, escutcheon, mixing unit, shut-off valve Required parts: Basic set ibox universal with shut off unit 8 Pasic set 52 / min for shut-off valve for concealed installation connection type: DN15/DN20 scope of supply: escutcheon, sleeve, handle Required parts: Basic set 52 / min for shut-off valve for concealed installation spindle 8 Pasic set 52 / min for shut-off valve for concealed installation spindle 9 Pasic set 130 / min for shut-off valve for concealed installation spindle 15973180 Chrome 15973180 Chrome 15932000 Shut-off / diverter valve 5 Trio/ Quattro for concealed installation scope of supply: handle, sleeve, scutcheon Required parts: Basic set for Dua diverter valve valve for concealed installation for 1 users for concealed installation for 1 users because for Countro footwayer diverter source of country footwayer diverter source of country footwayer diverter source of country footwayer diverter valve for concealed installation for 3 users Shut-off valve 5 for concealed installation scope of supply: handle, sleeve, scutcheon Required parts: Basic set 52 / min for shut-off valve for concealed installation for 3 users Shut-off valve 5 for concealed installation scope of supply: handle, sleeve, scutcheon Required parts: Basic set 52 / min for shut-off valve for concealed installation spindle Basic set 40 / Win for shut-off valve for concealed installation spindle Basic set 40 / Win for shut-off valve for concealed installation caremic

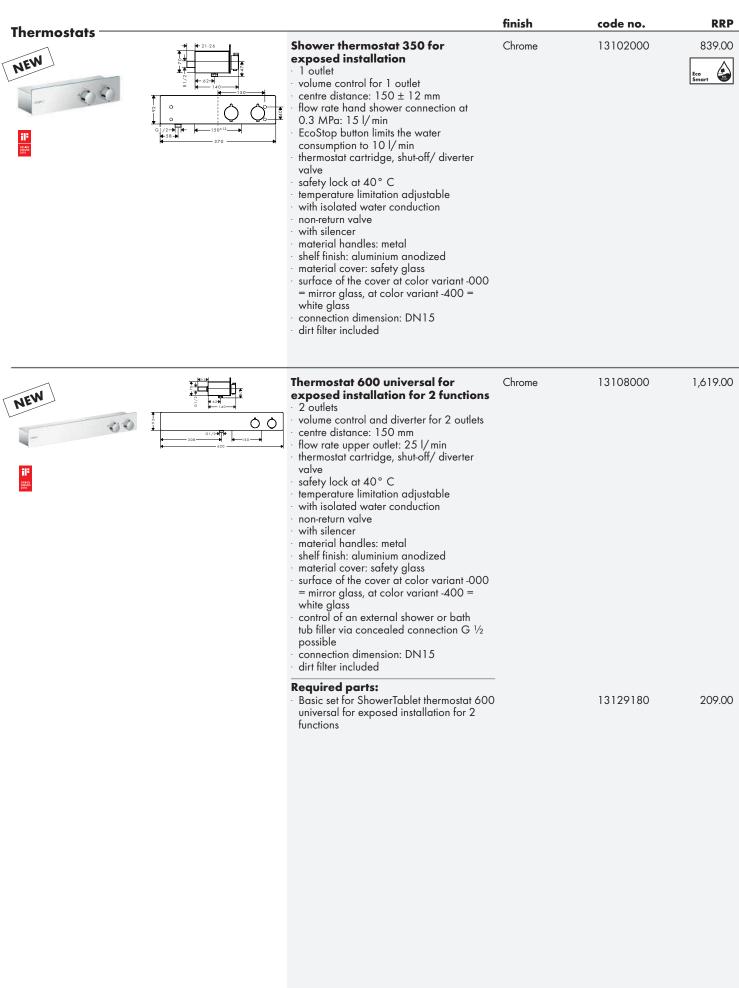

			finish	code no.	RRP
NEW 156-11-70-11-70-11-12 231-11-11-12 231-12 231-12 231-12 231-12 231-12 231-12 231-12 231-12 231-12 231-12 231-12 2	456 228 376 376 376 376 376 376 376 376 376 376	Thermostat for concealed installation for 2 functions with shower support Thermostat is delivered with buttons Rain large and hand shower consists of: Thermostat, shower holder depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 2 outlets simultaneous use of several outlets Select push-button on/off control for 2 outlets thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve hose nut: for shower hoses with conical nut on both sides	Chrome	15355000	2,869.00 Select
		Required parts: Basic set for 2 functions		15310180	1,529.00
NEW		Basic set for 2 functions 2 outlets connection thread Rp 3/4 installation depth: 87 - 122 mm horizontal installation sound-decoupled installation connection dimension: DN15/DN20		15310180	1,529.00
NEW	234	Thermostat for concealed installation for 3 functions with shower support Thermostat is delivered with buttons hand shower, Waterfall, Rain large consists of: Thermostat, shower holder depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 3 outlets simultaneous use of several outlets Select push-button on/off control for 3 outlets thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve hose nut: for shower hoses with conical or cylindrical nut on both sides	Chrome	15356000	3,399.00 Select
		· Basic set for 3 functions		15311180	1,779.00
NEW		Basic set for 3 functions 3 outlets connection thread Rp 3/4 installation depth: 87 - 122 mm horizontal installation sound-decoupled installation connection dimension: DN15/DN20		15311180	1,779.00

Thermostatic mixers / valves

		finish	code no.	RRP
NEW	Thermostat for concealed installation for 4 functions with shower support Thermostat is delivered with buttons hand shower, Waterfall, Rain large, Mono consists of: Thermostat, shower holder depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 4 outlets simultaneous use of several outlets Select push-button on/off control for 4 outlets thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve hose nut: for shower hoses with conical nut on both sides	Chrome	15357000	3,919.00 Solect
	Required parts: Basic set for 4 functions		15312180	2,029.00
NEW	Basic set for 4 functions 4 outlets connection thread Rp 3/4 installation depth: 87 - 122 mm horizontal installation sound-decoupled installation connection dimension: DN15/DN20		15312180	2,029.00
NEW	Thermostat for concealed installation for 5 functions with shower support Thermostat is delivered with buttons hand shower, Waterfall, Rain large, Mono, body shower consists of: Thermostat, shower holder depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 5 outlets simultaneous use of several outlets Select push-button on/off control for 5 outlets thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve hose nut: for shower hoses with conical nut on both sides	Chrome	15358000	4,439.00 Select
	· Basic set for 5 functions		15313180	2,289.00

- 1 .4 -4 .1			
Basic set for 5 functions 5 outlets connection thread Rp 3/4 installation depth: 87 - 122 mm horizontal installation sound-decoupled installation connection dimension: DN15/DN20		15313180	2,289.00
Thermostat for concealed installation for 2 functions bath tub. Thermostat is delivered with buttons hand shower and bath tub. consists of: Thermostat, shower holder depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function. 2 outlets. Select push-button on/off control for 2 outlets. thermostat cartridge, Select valve. min. operating pressure: 1 bar. max. operating pressure: 10 bar. safety lock at 40° C. temperature limitation adjustable. non-return valve. hose nut: for shower hoses with conical. nut on both sides.	Chrome	15359000	3,399.00 Solect
Required parts: Basic set for 2 functions bath tub		15314180	2,029.00
Basic set for 2 functions bath tub connection thread Rp ¾ suitable for all shower, bath tub and thermostat finish sets for concealed installation installation depth: 87 - 122 mm sound-decoupled installation connection dimension: DN15/DN20		15314180	2,029.00
	connection thread Rp ¾4 installation depth: 87 - 122 mm horizontal installation sound-decoupled installation connection dimension: DN15/DN20 Thermostat for concealed installation for 2 functions bath tub Thermostat is delivered with buttons hand shower and bath tub consists of: Thermostat, shower holder depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 2 outlets simultaneous use of several outlets Select push-button on/off control for 2 outlets thermostat cartridge, Select valve min. operating pressure: 1 bar max. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve hose nut: for shower hoses with conical nut on both sides Required parts: Basic set for 2 functions bath tub connection thread Rp ¾4 suitable for all shower, bath tub and thermostat finish sets for concealed installation installation depth: 87 - 122 mm sound-decoupled installation	connection thread Rp ¾4 installation depth: 87 - 122 mm horizontal installation sound-decoupled installation connection dimension: DN15/DN20 Thermostat for concealed installation for 2 functions bath tub Thermostat is delivered with buttons hand shower and bath tub consists of: Thermostat, shower holder depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 2 outlets simultaneous use of several outlets Select push-button on/off control for 2 outlets thermostat cartridge, Select valve min. operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve hose nut: for shower hoses with conical nut on both sides Required parts: Basic set for 2 functions bath tub connection thread Rp ¾4 suitable for all shower, bath tub and thermostat finish sets for concealed installation installation depth: 87 - 122 mm sound-decoupled installation	connection thread Rp ¾4 installation depth: 87 - 122 mm horizontal installation sound-decoupled installation connection dimension: DN15/DN20 Thermostat for concealed installation for 2 functions bath tub Thermostat is delivered with buttons hand shower and bath tub consists of: Thermostat, shower holder depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function 2 outlets simultaneous use of several outlets Select push-button on/off control for 2 outlets simultaneous resure: 1 bar max operating pressure: 1 bar max operating pressure: 10 bar safety lock at 40° C temperature limitation adjustable non-return valve hose nut: for shower hoses with conical nut on both sides Required parts: Basic set for 2 functions bath tub connection thread Rp ¾4 suitable for all shower, bath tub and thermostat finish sets for concealed installation depth: 87 - 122 mm sound-decoupled installation

Raindance Select E

Showerpipe 300 2jet EcoSmart 9 I/min with ShowerTablet Select 300

- consists of: overhead shower, hand shower, shower thermostat, shower hose, shower holder
- overhead shower Raindance Select E 300 2jet
- shower head size: 300 x 160 mm
- overhead shower angle adjustable
- shelf made of safety glass
- spray type: RainAir, Rain
- convenient diversion via Select button
- flow rate RainAir spray (at 0.3 MPa): 9 1/ min
- flow rate Rain spray (at 0.3 MPa): 9 1/ min
- operating pressure: min. 0.15 MPa/max. 1.0 MPa
- shower arm length: 380 mm
- thermostat ShowerTablet Select 300
- shelf finish: chrome or white
- isolated water conduction safety lock at 40° C
- adjustable hot water limitation
- convenient diversion via Select button
- installation type: exposed installation connection dimension DN15
- connection thread R 1/2
- centre distance 150 ± 12 mm
- in case of installation on existing R $^{3}\!/_{4}$ connections, adaptor # 02026000 must be used

Consisting of:

- Shower holder Porter S (# 28331000)
- Shower hose 160 cm (# 28276000)
- Hand shower 120 3jet EcoSmart 9 I/min (# 26521XXX)

Chrome

finish











RRP





Raindance



Raindance Connect Eco Showerpipe

- Overhead shower Raindance S 180 Air
- shower head size: 180 mm
- spray type: RainAir
- flow rate RainAir spray (at 0.3 MPa): 9 I/min
- outlet: hand shower, overhead shower
- Baton handshower with QuickConnect
- Easy retrofit or new installation
- Fixfit S included
 - connection dimension: DN15





27166003






1,469.00



Croma Select E



Croma Select E Showerpipe Reno **EcoSmart**

- consists of: overhead shower, hand shower, shower hose, slider
- maximium flow rate at 0.3 MPa: 9 l/min
- convenient diversion between showers by the Select button
- shower arm length: 390 mm
- slide inclination angle can be adjusted by $45\,^\circ$
- chrome-plated wall supports of metal
- type: exposed installation
- overhead Shower: Croma Select E 180
- shower head size 180 x 180mm
- overhead shower angle adjustable
- Select button on overhead shower
- spray type: Rain, IntenseRain hand shower Croma Select E Vario **EcoSmart**
- shower head size: 110mm
- convenient diversion via Select button to change hand shower spray
- spray type: Rain, TurboRain, IntenseRain
- Isiflex hose 160cm

finish code no.

Chrome










RRP



Croma Select S



Showerpipe Reno EcoSmart

- consists of: overhead shower, hand
- shower, shower hose, slider maximum flow rate: 9 l/min
- convenient diversion between showers by the Select button
- shower arm length: 390 mm
- chrome-plated wall supports of metal
- type: exposed installation slide inclination angle can be adjusted by 45°
- overhead Shower: Croma Select S 180 2 jet
- shower head size 180 mm
- overhead shower angle adjustable
- Select button on overhead shower
- spray type: Rain, IntenseRain
- hand shower Croma Select S Vario EcoSmart
- shower head size: 110mm
- convenient diversion via Select button to change hand shower spray
- spray type: Rain, TurboRain, IntenseRain
- Isiflex hose 160cm

Chrome

26744003

1,149.00












Crometta S



Showerpipe 240 EcoSmart 9 l/min

- consists of: overhead shower, hand shower, shower hose, slider
- maximum flow rate: 9 1/min
- installation type: exposed installation convenient diversion between showers by the Select button
- shower arm length: 390 mm
- slide inclination angle can be adjusted by 45°
- overhead Shower: Crometta S 240 1 jet
- shower head size 240 mm
- overhead shower angle adjustable
- spray type: Rain
- hand shower Crometta Vario EcoSmart shower head size: 100 mm
- spray type adjustment by turning spray
- spray type: Rain, IntenseRain
- Isiflex hose 160cm

Chrome











Showerpipe Reno EcoSmart without Chrome

shower components
maximum flow rate at 0.3 MPa: 9 l/min installation type: exposed installation

installation type: exposed installation convenient diversion between showers by the Select button

shower arm length: 390 mm

slide inclination angle can be adjusted by 45°

Isiflex hose 160cm

finish

929.00

RRP



code no. 27732003



PuraVida

Hand shower 3jet EcoSmart 9 I/min
hand shower with 2-shell construction
shower head size: 150 mm
convenient diversion via Select button
spray type: RainAir, CaresseAir, Mix
flow rate at 3 bar:: 9 I/min
with internal water conduction

finish

Chrome
28567000
White/Chrome
28567400

rinseable dirt filter connection thread G ½ XXL — Performance




RRP

419.00

419.00

scope of supply: hand shower, filter seal, assembly instruction





Baton hand shower 150 1jet EcoSmart 9 I/min

- hand shower with 2-shell construction
 shower head size: 150 mm
- spray type: RainAir flow rate at 3 bar: 9 l/min
- · with internal water conduction
- rinseable dirt filter
- · connection thread G 1/2
- · suitable for continous flow water heaters
- · scope of supply: hand shower, filter seal, assembly instruction

Chrome
White/Chrome

28568000 28568400

269.00 269.00












Raindance Select E





Hand shower 150 3jet EcoSmart 9 l/min

- hand shower with 2-shell construction
 shower head size: 150 mm
 convenient diversion via Select button
 spray type: RainAir, CaresseAir, Mix
- fflow rate at 3 bar:9 l/min
- with internal water conduction
- · rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction

Chrome
White/ Chrome

26551003 26551403

289.00 289.00


















Hand shower 120 3jet EcoSmart 9 l/min

- · shower head size: 120 mm
- convenient diversion via Select button spray type: Rain, RainAir, WhirlAir
- flow rate at 3 bar: 9 l/min
- with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction

Chrome White/Chrome














Raindance Select S





Hand shower 150 3jet EcoSmart 9 I/min

hand shower with 2-shell construction

- shower head size: 150 mm
- convenient diversion via Select button
- spray type: RainAir, CaresseAir, Mix
- flow rate at 3 bar: 9 l/min
- with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction

Chrome White/Chrome

finish

28588003 28588400

code no.




RRP

289.00









Hand shower 120 3jet EcoSmart 9 I/min

- shower head size: 125 mm convenient diversion via Select button
- spray type: Rain, RainAir, WhirlAir
- flow rate at 3 bar: 9 l/min
- with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction

Chrome White/Chrome

26531003 26531400 229.00

219.00








Raindance Classic





Hand shower 100 3jet

- shower head size: 119 mm
- spray type adjustment by turning spray disc
- spray type: RainAir, WhirlAir, BalanceAir
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction

Chrome

28548000








Croma Select E





Hand shower Multi EcoSmart 9 l/

- shower head size: 110 mm
- convenient diversion via Select button
- spray type: SoftRain, IntenseRain, Massage
- spray flow rate at 3 bar: 9 l/min
- with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- connection dimension: DN15
- suitable for continous flow water heaters

White/Chrome

finish





code no.

26811400






RRP







Hand shower Vario EcoSmart 9 I/min

- shower head size: 110 mm
- convenient diversion via Select button spray type: Rain, TurboRain, IntenseRain
- flow rate at 3 bar: 9 1/min
- with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction

White/Chrome

26813400

119.00
















Hand shower 1 jet EcoSmart 9 I/min White/Chrome

- shower head size: 110 mm
- convenient diversion via Select button
- spray type: Rain flow rate at 3 bar: 9 l/min
- with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction





26815400








RRP finish code no. **Croma Select S** 149.00 Hand shower Multi EcoSmart





9 I/min

- shower head size: 110 mm
- convenient diversion via Select button
- spray type: SoftRain, IntenseRain, Massage
- spray flow rate at 3 bar: 9 l/min with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- connection dimension: DN15 $\,$
- suitable for continous flow water heaters

White/Chrome 26801400














Hand shower Vario EcoSmart 9 I/min

shower head size: 110 mm

- convenient diversion via Select button
- spray type: Rain, TurboRain, IntenseRain
- flow rate at 3 bar: 9 1/min
- with internal water conduction
- rinseable dirt filter
- connection thread G 1/2
- suitable for continous flow water heaters scope of supply: hand shower, filter seal, assembly instruction

White/Chrome
















Hand shower 1jet EcoSmart 9 I/min White/Chrome

- shower head size: 110 mm
- spray type: Rain
- flow rate at 3 bar: 9 1/min
- with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction



26805400








finish code no. **RRP** Crometta 100





Hand shower Multi EcoSmart 9 I/min

shower head size: 100 mm spray type adjustment by turning spray

spray type: Rain, Massage spray,

- TurboRain flow rate at 3 bar: 9 l/min
- with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction

White/Chrome 26826400














Hand shower Vario EcoSmart 9 l/min

shower head size: 100 mm

spray type adjustment by turning spray disc

spray type: Rain, Shampoo spray, normal spray, Massage spray

- flow rate at 3 bar: 9 1/min
- with internal water conduction
- rinseable dirt filter
- connection thread G $\frac{1}{2}$
- suitable for continous flow water heaters
- scope of supply: hand shower, filter seal, assembly instruction

White/Chrome

26827400














Hand shower 1 jet EcoSmart 9 I/min White/Chrome

shower head size: 100 mm

spray type: Rain

flow rate at 3 bar: 9 1/min

with internal water conduction

rinseable dirt filter

connection thread G 1/2

suitable for continous flow water heaters

scope of supply: hand shower, filter seal, assembly instruction


26828400







				папс	d showers
			finish	code no.	RRP
Porter	G 1/2	Shower holder rim mounted · 30° angle of handshower · 2000mm metal hose · 32mmØ cut out for tiled surface or bath · maintenance opening/access preferred	Chrome	28307000	249.00
	8 8 9 90 90 90 90 90 90 90 90 90 90 90 90 9	Wall outlet E with shower holder fixed holding position for hoses with conical nut with non-return valve metal housing with internal water supply made of plastic male 1/2" fitting scope of supply: wall outlet, mounting material, assembly instruction	Chrome	26485000	199.00
	∑ 8 →	Wall outlet S with shower holder fixed holding position for hoses with conical nut with non-return valve metal housing with internal water supply made of plastic male 1/2" fitting scope of supply: wall outlet, mounting material, assembly instruction	Chrome	26487000	199.00
	51	Shower holder Porter Classic fixed holding position for hoses with conical nut scope of supply: shower holder, mounting material, assembly instruction	Chrome	28324000	69.00
	16° 37	Shower holder Porter S • fixed holding position • for hoses with conical nut • scope of supply: shower holder, mounting material, assembly instruction	Chrome	28331000	59.00

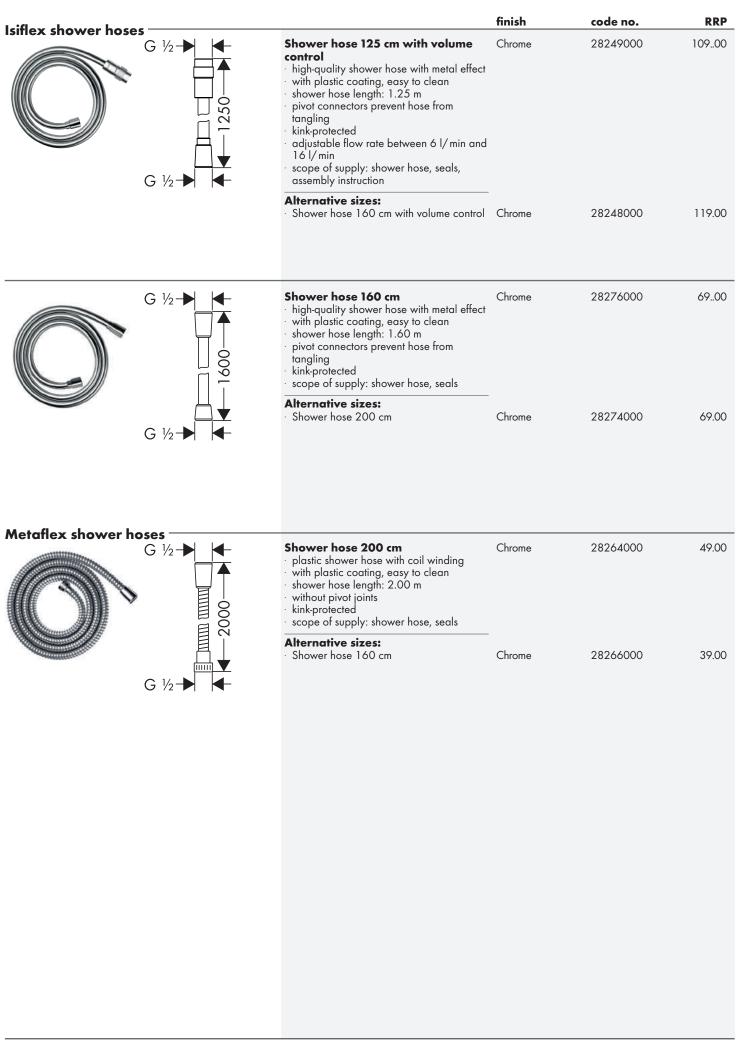


Technical specifications and units of measure are subject to change.

Shower hoses and accessories

RRP finish code no. FixFit wall outlets 27414003 109.00 FixFit PuraVida Chrome






with non return valve connection dimension DN15

1/2" male/female elbow






FixFit S

- 1/2" male/female elbow with non return valve
- connection dimension DN15

27453003 Chrome

79.00






FixFit E

- 1/2" male/female elbow
- with non return valve material: brass

Chrome 27459000 69.00

PuraVida shower set



Shower set EcoSmart with shower bar 90 cm

- PuraVida Handshower
- spray type: RainAir, CaresseAir, Mix
- convenient diversion via Select button
- shower head size: 150 mm
- pivot connectors prevent hose from tangling
- 90° position adjustable slider, pivots left and right, up and down
- maximum flow rate (at 0.3 MPa): 9 l/min
- chrome-plated wall supports of plastic
- Isiflex Hose 1600mm
- includes FixFit PuraVida

Chrome White/Chrome

finish

27853003 27853403

code no.






1,049.00

RRP





Raindance Select E shower sets



Shower set 150 3jet with shower bar 65 cm and soap dish

- Raindance E150 Handshower
- hand shower with 2-shell construction
- shower head size: 150 mm
- convenient diversion via Select button
- spray type: RainAir, CaresseAir, Mix
- with internal water conduction
- connection thread G 1/2
- Unica S Puro wallbar 65cm
- Isiflex hose 1600mm
- Cassetta E soap dish
- includes FixFit S

Chrome White/Chrome 26635003 26635403

549.00 549.00













Shower set 120 3jet EcoSmart 9 I/min with shower bar 65 cm and soap dish Raindance E120 Handshower

- hand shower with 2-shell construction
- shower head size: 120 mm
- convenient diversion via Select button
- spray type: RainAir, Rain, Massage
- with internal water conduction
- connection thread G 1/2
- Unica S Puro wallbar 65cm
- Isiflex hose 1600mm
- Cassetta E soap dish
- includes FixFit S

Chrome White/Chrome






26622003






469.00





max. 344

Raindance Select S shower sets



Shower set 150 3jet with shower bar 65 cm and soap dish

- · Raindance S150 Handshower
- · hand shower with 2-shell construction
- · shower head size: 150 mm
- · convenient diversion via Select button
- · spray type: RainAir, Rain, Massage
- with internal water conduction
- · connection thread G 1/2
- · Unica S Puro wallbar 65cm
- · Isiflex hose 1600mm
- · Cassetta S Puro soap dish
- · includes FixFit S

finish Chrome

26634003

code no.








RRP







Shower set 120 3jet EcoSmart 9 l/min with shower bar 65 cm and soap dish

- · Raindance S120 Handshower
- · hand shower with 2-shell construction
- · shower head size: 120 mm
- convenient diversion via Select button
- spray type: RainAir, Rain, Massage
- with internal water conduction
- · connection thread G ½
- · Unica S Puro wallbar 65cm
- · Isiflex hose 1600mm
- · Cassetta E soap dish
- · includes FixFit S


Chrome White/Chrome 26632003 26632403 469.00 469.00







Raindance Classic shower sets



Shower set 100 3jet with shower bar 65 cm

- · spray type: BalanceAir, RainAir, WhirlAir
- spray type adjustment by turning spray disc
- pivot connectors prevent hose from
- tangling 90° position adjustable slider, pivots left and right, up and down
- maximum flow rate (at 0.3 MPa): 17 l/
- · chrome-plated wall supports of plastic
- includes FixFit Classic

Chrome


27843003

Quick Clean





Croma Select E shower sets



Shower set Multi EcoSmart 9 I/min with shower bar 65 cm

- spray type: IntenseRain, Massage spray, SoftRain
- convenient diversion via Select button
- pivot connectors prevent hose from tangling
- 90° position adjustable slider,
- pivots left and right, up and down maximum flow rate at 0.3 MPa: 9 l/min
- chrome-plated wall supports of plastic
- Unica Croma wallbar 65cm
- Isiflex hose 1600mm
- includes FixFit S

White/Chrome

finish






code no.

26581403



RRP





304

201

Shower set Vario EcoSmart 9 I/min with shower bar 65 cm

- Croma Select E Vario Handshower
- spray type: Rain, TurboRain, IntenseRain
- convenient diversion via Select button pivot connectors prevent hose from
- tangling
- slide inclination angle can be adjusted by 45°
- maximum flow rate (at 0.3 MPa): 9 1/min
- chrome-plated wall supports of plastic
- Unica Croma wallbar 65cm
- Isiflex hose 1600mm
- includes FixFit S

White/Chrome





269.00





Shower set 1jet EcoSmart 9 l/min with shower bar 65 cm

- Croma Select E 1Jet Handshower spray type: Rain
- convenient diversion via Select button
- pivot connectors prevent hose from tangling
- slide inclination angle can be adjusted
- maximum flow rate (at 0.3 MPa): 9 l/min
- chrome-plated wall supports of plastic
- Unica Croma wallbar 65cm

White/Chrome



26585403





239.00








699 625

Croma Select S shower sets



Shower set Multi EcoSmart 9 I/min with shower bar 65 cm

- spray type: Massage spray, SoftRain, IntenseRain
- convenient diversion via Select buttonshower
- head size: 110 mm
- pivot connectors prevent hose from tangling 90° position adjustable slider,
- pivots left and right, up and down
- maximum flow rate at 0.3 MPa: 9 l/min
- chrome-plated wall supports of plastic
- Unica Croma wallbar 65cm
- Isiflex hose 1600mm
- includes FixFit S

White/Chrome

finish



code no.








RRP

329.00





Shower set Vario EcoSmart 9 I/min with shower bar 65 cm

- Croma Select S Vario Handshower
- spray type: Rain, TurboRain, IntenseRain
- convenient diversion via Select button
- shower head size: 110 mm
- pivot connectors prevent hose from tangling
- slide inclination angle can be adjusted
- maximum flow rate (at 0.3 MPa): 9 1/min
- chrome-plated wall supports of plastic
- Unica Croma wallbar 65cm
- Isiflex hose 1600mm
- ncludes FixFit S

White/Chrome





26563403





269.00



Shower set 1jet EcoSmart 9 l/min with shower bar 65 cm

- Croma Select S 1Jet Handshower
- spray type: Rain
- shower head size: 110 mm
- pivot connectors prevent hose from tangling
- slide inclination angle can be adjusted by 45°
- maximum flow rate (at 0.3 MPa): 9 l/min
- chrome-plated wall supports of plastic
- Unica Croma wallbar 65cm
- Isiflex hose 1600mm
- includes FixFit S

White/Chrome

26565403





239.00




304

Ø 22

201

Croma 100 shower sets



Shower set Multi with shower bar 65 cm and soap dish

spray type: Rain, Mono, Massage spray spray type adjustment by turning spray disc

shower head size: 100 mm pivot connectors prevent hose from

90° position adjustable slider, pivots left and right, up and down maximum flow rate at 0.3 MPa: 9 l/min

chrome-plated wall supports of plastic

Unica Croma wallbar 65cm

Isiflex hose 1600mm Cassetta C soap dish

includes FixFit S

finish Chrome code no. 27775003


329.00

RRP









Shower set Vario with shower bar 65 cm and soap dish

spray type: Rain, Shampoo spray, normal spray, massage spray

spray type adjustment by turning spray

pivot connectors prevent hose from

tangling 90° position adjustable slider, pivots left and right, up and down

shower head size: 100 mm

maximum flow rate at 0.3 MPa: 9 l/min

chrome-plated wall supports of plastic

Unica Croma wallbar 65cm

Isiflex hose 1600mm

Cassetta C soap dish

includes FixFit S

Chrome

27772003

259.00







Measurements within scale drawings are in mm. All recommended prices include 10% GST.

Crometta 100 shower sets



Shower set Multi EcoSmart 9 I/min with shower bar 65 cm

Crometta 100 Vario EcoSmart Handshower

- spray type: Rain, TurboRain, SoftRain
- 45° position adjustable slider, pivots left and right, up and down maximum flow rate (at 0.3 MPa): 9 l/min chrome-plated wall supports of plastic

- Unica Croma wallbar 65cm
- Metaflex hose 1600mm
- includes FixFit S

White/Chrome

finish

26653403

code no.








RRP

229.00



Shower set Vario EcoSmart 9 l/min with shower bar 65 cm

- Crometta 100 Vario Handshower
- spray type: Rain, TurboRain, SoftRain
- convenient diversion via Select button
- without pivot joints
- 90° position adjustable slider, pivots left and right, up and down
- maximum flow rate (at 0.3 MPa): 9 l/min
- chrome-plated wall supports of plastic
- Unica Croma wallbar 65cm
- Metaflex hose 1600mm
- includes FixFit S

White/Chrome



26654403





199.00



Shower set 1jet EcoSmart 9 l/min with shower bar 65 cm Crometta 100 1Jet EcoSmart

- Handshower
- spray type: Rain
- without pivot joints
- 45° position adjustable slider, pivots left and right, up and down maximum flow rate (at 0.3 MPa): 9 1/min
- chrome-plated wall supports of plastic
- Unica Croma wallbar 65cm
- Metaflex hose 1600mm
- includes FixFit S

White/Chrome

26655403








179.00










			finish	code no.	RRP
Unica E shower	203 - 203 - 28 - 28 - 28 - 28 - 28 - 28 - 28 - 2	Shower bar E 150 cm with shower hose · pivot connectors prevent hose from tangling · 90° position adjustable slider, pivots left and right, up and down · shelf: shelf made of safety glass · wall bar type: flat aluminium profile with safety glass finish · 41 mm · fully chrome-plated shower slide · self-locking slide · slide inclination angle steplessly adjustable · wall supports of plastic · 2x Casetta' E soap dish · finish: chrome, white or black	Chrome	27645000	999.00
		Alternative sizes: Shower bar E 90 cm with shower hose	Chrome	27640000	739.00
	85.	Optional parts: Soap dish E	Chrome	26511000	159.00
	203 — 203 —	Shower bar E 90 cm with shower hose pivot connectors prevent hose from tangling 90° position adjustable slider, pivots left and right, up and down shelf: shelf made of safety glass wall bar type: flat aluminium profile with safety glass finish 41 mm fully chrome-plated shower slide self-locking slide slide inclination angle steplessly adjustable chrome-plated wall supports of plastic 1x Casetta' E soap dish finish: chrome, white or black Consisting of: Shower hose 160 cm (# 28276000) Soap dish E (# 26511000)	Chrome	27640000	739.00
		Alternative sizes: Shower bar E 150 cm with shower hose	- Chrome	27645000	999.00
		Optional parts: · Soap dish E	Chrome	26511000	159.00

Unica E Comfort she	anna a bau		finish	code no.	RRP
Unica E Comfort she	35 — 17 — 17 — 25 — 17 — 25 — 25 — 25 — 25 — 25 — 25 — 25 — 2	Shower bar Comfort 90 cm consists of: shower bar, slider TÜV certifiedwallbar could be also used as grab bar 90° position adjustable slider, pivots left and right, up and down Fully chrome-plated metal shower slide bar width: 25 mm material: solid brass chrome-plated wall supports of metal	Chrome	26402000	459.00
	5 1	Alternative sizes: Shower bar Comfort 65 cm	Chrome	26401000	439.00
		Optional parts: Grab handle Comfort with shelf and shower holder	White/Chrome	26328400	329.00
6	T 4 93▶	Foot support Comfort	Chrome	26329000	359.00
	35 — 17	Shower bar Comfort 65 cm consists of: shower bar, slider TÜV certified wallbar could be also used as grap bar 90° position adjustable slider, pivots left and right, up and down fully chrome-plated metal shower slide bar width: 25 mm material: solid brass chrome-plated wall supports of metal	Chrome	26401000	439.00
	1.88-	Alternative sizes: Shower bar Comfort 90 cm	Chrome	26402000	459.00
6		Optional parts: Grab handle Comfort with shelf and shower holder	White/Chrome	26328400	329.00
	T ◄ 9 3 ▶	· Foot support Comfort	Chrome	26329000	359.00
	335 335 335 335 335 335 335 335	Grab handle Comfort with shelf and shower holder consists of: grab bar, shelf, shower holder TÜV certified shower holder can be installed on both sides shower holder can be removed shelf made of plastic, finish white shelf can be removed for cleaning fixed holding position for hoses with conical nut bar width: 25 mm brass scope of supply: grab bar, escutcheons, mounting material, assembly instruction	White/Chrome	26328400	329.00
		Optional parts: · Foot support Comfort	Chrome	26329000	359.00

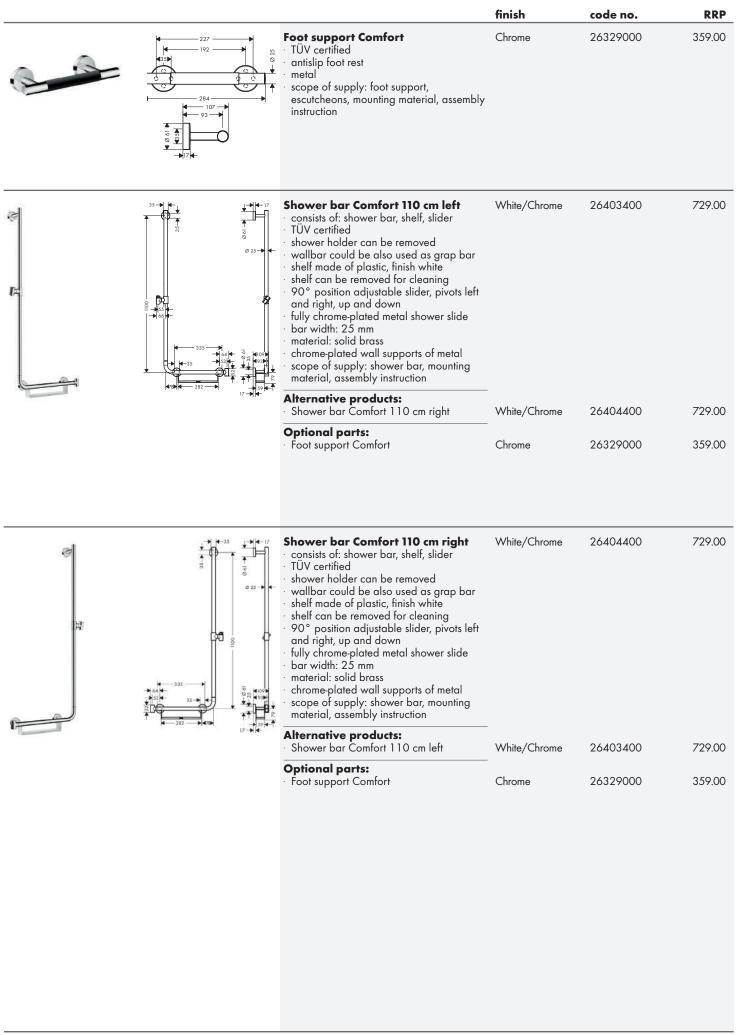

Technical specifications and units of measurements are subject to change.

		finish	code no.	RRP
\$ 50 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Shower bar PuraVida 90 cm with shower hose consists of: shower bar, shower hose, slider wall bar type: flat and slim aluminium profile fully chrome-plated metal shower slide self-locking slide slide inclination angle steplessly adjustable silent inclination angle adjustment scope of supply: shower bar, mounting material, assembly instruction Consisting of: Shower hose 160 cm (# 28276000)	Chrome	27844000	679.00
₹ 115-142 → ₹ 23 ₹	Shower bar Raindance 90 cm with shower hose consists of: shower bar, shower hose, slider wall bar type: flat and slim aluminium profile bar width: 45 mm fully chrome-plated metal shower slide self-locking slide slide inclination angle steplessly adjustable silent inclination angle adjustment scope of supply: shower bar, mounting material, assembly instruction Consisting of: Shower hose 160 cm (# 28276000)	Chrome	27636000	669.00
Ø 22+ 22+ 22+ 22+ 22+ 22+ 23+ 24+ 25- 25- 25- 25- 25- 25- 25- 25- 25- 25-	Shower bar S Puro 65 cm with shower hose consists of: shower bar, shower hose, slider wall bar type: chrome-plated brass pipe bar width: 22 mm fully chrome-plated shower slide slide inclination angle steplessly adjustable scope of supply: shower bar, mounting material, assembly instruction Consisting of: Shower hose 160 cm (# 28276000) Optional parts: Soap dish S Puro	Chrome	28632000	279.00
7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7 7	Shower bar Reno 72 cm consists of: shower bar, slider wall bar type: chrome-plated brass pipe bar width: 22 mm variable drilling hole distance: 400 - 670 mm slide inclination angle adjustable in 2 steps silent inclination angle adjustment chrome-plated shower slide of plastic chrome-plated wall supports of plastic chrome-plated wall supports variable wall support scope of supply: shower bar, mounting material, assembly instruction	Chrome	27704000	169.00

			finish	code no.	RRP
Soap dishes	200	Cassetta Soap dish E Unica E length 200 mm material: flat aluminium profile with safety glass finish shelf finish: chrome, white or black	Chrome	26511000	159.00
	140 80 127	Cassetta Soap dish E • purpose of use: for shower bars with Ø 22 mm • material: plastic • removable	Chrome	26519000	49.00
	0 130 0 238 0 288 0 0 288 0 0 288 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Cassetta Soap dish S Puro • purpose of use: for shower bars with Ø 22 mm • material: plastic • removable • self-draining soap dish for Unica S and C wallbars	Chrome	28679000	89.00
	140	Cassetta Soap dish C · purpose of use: for shower bars with Ø 22 mm · removable	Chrome	28678000	39.00

Rainmaker Select

NEW

Overhead shower 580 3jet **EcoSmart 9 I/min**

- shower head size: 560 x 260 mm
- spray type: Rain, RainFlow, MonoRain
- flow rate Rain spray (at 0.3 MPa): 9 l/min
- flow rate Mono spray (at 0.3 MPa): 9 1/
- flow rate RainFlow spray (at 0.3 MPa): 9.5 l/min
- easy cleanable glass spray disc

- installation: wall-mounted for installation on iBox
- connection dimension: DN15

Chrome

finish



code no.








6,159.00

RRP





Overhead shower 460 ljet EcoSmart 9 I/min with shower arm

- shower head size: 460 x 270 mm
- shower arm length: 460 mm
- spray type: Rain
- flow rate Rain spray (at 0.3 MPa): 9 l/min
- easy cleanable glass spray disc
- material spray disc: safety glass
- spray disc removable for cleaning
- overhead shower for cleaning removable
- installation: wall connection thread G ½connection
 - dimension: DN15

24013400 Chrome







3,919.00





Overhead shower 460 ljet EcoSmart 9 I/min with ceiling connector

- shower head size: 460 x 270 mm
- spray type: Rain
- flow rate Rain spray (at 0.3 MPa): 9 1/min
- easy cleanable glass spray disc
- material spray disc: safety glass
- spray disc removable for cleaning
- overhead shower for cleaning removable
- brass ceilling connector
- ceiling connection length: 100 mm
- installation: ceiling connection thread G ½connection
- dimension: DN15

Chrome

24012400








3.689.00



PuraVida



Overhead shower 400 1jet with shower arm

- shower head size: 400 x 260 mm
- shower arm length: 380 mm
- maximum flow rate at 0.3 MPa: 9 l/min
- installation: wall
- connection dimension: DN15

Chrome White/Chrome









2,759.00



Raindance Select E



Overhead shower 300 2jet 2.5 GPM

- shower head size: 300 mm
- spray type: RainAir, Rain
- maximum flow rate at 0.3 MPa: 9.5 I/min
- Select button on overhead shower
- fully chrome-plated spray disc
- material spray disc: metal
- spray disc removeable for cleaning
- installation: ceiling or wall
- connection thread G 1/2
- suitable for continuous flow water heaters with an output of 18 kW

Chrome White/Chrome





27387001

27387401




1,199.00

1,199.00



finish code no. **RRP Raindance Select S**





Overhead shower 240 2jet 2.5 GPM Chrome

- shower head size: 240 mm
- spray type: RainAir, Rain
- maximum flow rate at 0.3 MPa: 9.5 l/min
- Select button on overhead shower
- fully chrome-plated spray disc
- spray disc removeable for cleaning
- installation: ceiling or wall connection thread G 1/2





26469001








Raindance 260 x 260 mm





Overhead shower 260/260 ljet EcoSmart 9 I/min

- shower head size: 240 mm
- spray type: RainAir
- flow rate RainAir spray (at 0.3 MPa): 9 1/ min
- fully chrome-plated spray disc
- material spray disc: metal
- spray disc removeable for cleaning
- installation: flush with the ceiling
- connection thread G 1/2
- connection dimension: DN15
- scope of supply: overhead shower, mounting material, assembly instruction
- not included: basic set

Basic set for overhead shower 260/260

Chrome

26481000

1,019.00












Required parts:

26471180

239.00






Basic set for overhead shower 260/260 ljet


26471180

239.00



Raindance E





Overhead shower 360 1jet 2.5 GPM Chrome

- shower head size: 360 x 190 mm
- spray type: RainAir
- maximum flow rate at 0.3 MPa: 9.5 l/min
- fully chrome-plated spray disc
- material spray disc: metal
- installation: ceiling or wall connection thread G ½
- suitable for continuous flow water heaters
- with an output of 18 kW

27381001








1,079.00







Overhead shower 240 ljet 2.5 GPM Chrome

- shower head size: 240 x 160 mm
- spray type: RainAir
- maximum flow rate at 0.3 MPa: 9.5 I/min
- flow rate RainAir spray (at 0.3 MPa):
- 9.5 l/min fully chrome-plated spray disc
- material spray disc: metal
- installation: ceiling or wall connection thread G 1/2

27380001

959.00







Measurements within scale drawings are in mm. All recommended prices include 10% GST.

Raindance Classic

Overhead shower 240 ljet with Chrome ceiling connector

finish

27405003


code no.





RRP





shower head size: 240 mm

spray type: RainAir

- flow rate RainAir spray (at 0.3 MPa): 19 |/ min
- fully chrome-plated spray disc
- material spray disc: metal
- ceiling connection length: 100 mm
- installation: ceiling
- connection thread G ½ connection
- dimension: DN15
- connection thread G 1/2
- scope of supply: overhead shower, ceiling connector, connecting thread, assembly instruction



Raindance



Overhead shower 300 1jet

- shower head size: 300 mm
- spray type: RainAir XL
- flow rate RainAir XL (at 0.3 MPa): 9 1/min
- installation: ceiling or wall
- connection dimension: DN15

Chrome

27494003

1,289.00
















Overhead shower 240 ljet

- shower head size: 240 mm
- spray type: RainAir XL
- flow rate RainAir spray (at 0.3 MPa): 9 1/ min
- installation: wall
- connection dimension: DN15

Chrome

27461003






749.00







Overhead shower 180 ljet EcoSmart Chrome 9 l/min

- shower head size: 180 mm
- spray type: RainAir XL
- flow rate RainAir XL (at 0.3 MPa): 9 1/min
- installation: ceiling or wall

27464003








589.00



Croma





Overhead shower 280 ljet EcoSmart 9 I/min

- shower head size: 280 mm
- spray type: RainAir
- flow rate RainAir spray (at 0.3 MPa): 9 1/ min
- fully chrome-plated spray disc
- material spray disc: metal
- spray disc removeable for cleaning
- installation: ceiling or wall connection thread G ½
- connection dimension: DN15
- scope of supply: overhead shower, filter seal, assembly instruction

Chrome





26221000






789.00



finish code no. **RRP Croma Select E** 569.00





Overhead shower 180 2jet **EcoSmart 9 I/min**

- shower head size: 180 x 180 mm
- overhead shower angle adjustable
- spray type: Rain, IntenseRain
- flow rate Rain spray (at 0.3 MPa): 9 l/min
- flow rate IntenseRain spray (at 0.3 MPa):
- Select button on overhead shower
- spray disc
- connection thread G 1/2
- connection dimension: DN15

White/Chrome 26528400










Croma Select S





Overhead shower 180 2jet **EcoSmart 9 I/min**

- shower head size: 180 mm
- spray type: Rain, IntenseRain
- flow rate Rain spray (at 0.3 MPa): 9 l/min
- flow rate IntenseRain spray (at 0.3 MPa): 9 I/min
- Select button on overhead shower
- material spray disc: plastic
- installation: ceiling or wall connection thread G ½connection
- dimension: DN15

White/Chrome

26523400












Crometta S





Overhead shower 240 ljet EcoSmart 9 I/min

- shower head size: 240 mm
- spray type: Rain
- flow rate Rain spray (at 0.3 MPa): 9 |/ min
- fully chrome-plated spray disc
- material spray disc: plastic installation: ceiling or wall
- connection thread G 1/2
- scope of supply: overhead shower, filter seal, assembly instruction

Chrome

26724000

499.00








Crometta E





Overhead shower 240 ljet EcoSmart 9 I/min

- shower head size: 240 x 240 mm
- spray type: Rain
- flow rate Rain spray (at 0.3 MPa): 9 1/ min
- fully chrome-plated spray disc
- material spray disc: plastic
- installation: ceiling or wall
- connection thread G ½
- scope of supply: overhead shower, filter seal, assembly instruction

Chrome

26727000

499.00








Crometta





Overhead shower 160 ljet EcoSmart Chrome 9 I/min

- shower head size: 180 mm
- spray type: Rain
- flow rate Rain spray (at 0.3 MPa):
- spray disc surface in two variants: chrome or white
- material spray disc: plastic
- installation: ceiling or wall
- connection thread G ½
- scope of supply: overhead shower, filter seal, assembly instruction

White/Chrome

26578003 26578400 309.00 299.00








RRP finish code no. Shower arms for overhead showers 27409003 149.00 Shower arm DN15 241mm Chrome projection escutcheon, wall connector plate wall-mounted version: 90° angle connection thread G ½ Shower arm 38.9 cm Chrome 27413003 209.00 escutcheon, wall connector plate wall-mounted version: 90° angle connection thread G ½ Ceiling connectors for overhead showers Ceiling connector 10 cm 27479000 139.00 Chrome escutcheon length 100 mm purpose of use: also usable as an extension installation type: exposed installation material: brass shaft Ø 27 mm connection thread G $\frac{1}{2}$ connection dimension G 1/2 Ceiling connector \$ 30 cm length 300 mm Chrome 27389000 189.00 material: brass connection thread G $\frac{1}{2}$ connection dimension DN15 Ceiling connector E 30 cm length 300 mm Chrome 27388000 189.00 material: brass connection thread G 1/2 connection dimension DN15

Body showers





PuraVida Body shower 100 1jet

- 100 mm large side shower 360° range of rotation
- spray type: RainAir
- flow rate RainAir spray (at 0.3 MPa): $4.5 \mid / \min$

connection thread: G $\frac{1}{2}$ male

White/Chrome 28430400

finish



code no.






RRP

349.00





- Body shower liet
 side shower angle adjustable
 spray type: normal spray
 flow rate normal spray (at 0.3 MPa):
- grey spray disc
- connection thread: G ½ male
- scope of supply: body shower, escutcheon, assembly instruction

Alternative products:

Body shower 1 jet stop

Chrome

Chrome


28466000

249.00




28467000 289.00

Basic sets ——			finish	code no.	RRP
e de la constant de l	151 114 31/41/51 128 28 100 100 100 100 100 100 100 10	Basic set iBox universal adjustable clamping collar seal connection thread Rp 3/4 suitable for all shower, bath tub and thermostat finish sets for concealed installation rotationally-symmetric installation sound-decoupled installation connection dimension: DN15/DN20		01800180	139.00
	154 80 43/53 28 4 60 43/53 28 4 60 60 60 60 60 60 60 60 60 60 60 60 60	Basic set iBox universal with shutoff unit seal adjustable clamping collar connection thread Rp ³ / ₄ suitable for all shower, bath tub and thermostat finish sets for concealed installation sound-decoupled installation connection dimension: DN15/DN20		01850180	299.00
	Ø 101 → Ø 94 →	Basic set for bath mixer floor- standing for mounting on unfinished floor suitable for all finish sets for free-standing bath faucets connection dimension: DN15		10452180	819.00
	Rp1/2 70	Basic set for single lever shower mixer for concealed installation ceramic cartridge connection dimension: DN15		13620180	139.00
	130 Rp 1/2- 130 Rp 1/2- 130 130 130 130 130 130 130 130	Basic set for single lever basin mixer for concealed installation wall-mounted scope of supply: with flush valve variable positioning of the mixer system, can be left or right of the spout connection dimension: DN15		13622180	299.00
	Rp 3/4 1 28 1 20 1 20 1 20 1 20 1 20 1 20 1 20	Basic set for Quattro four-way diverter valve for concealed installation requires volume control scope of supply: ceramic cartridge, seal 3 outlets simultaneous utilization by 2 outlets suitable for all Quattro finish sets flow rate: 65 l/min connection dimension: DN20		15930180	639.00

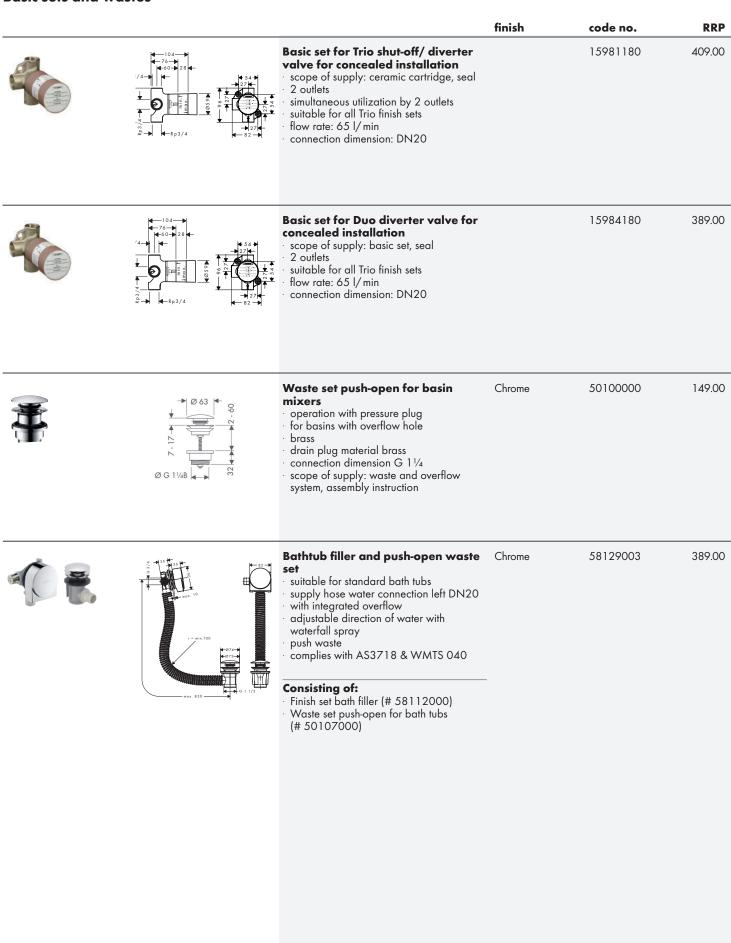


PuraVida ——			finish	code no.	RRP
NEW	∞ √ √ √ √ √ √ √ √ √ √ √ √ √	Towel hook · material: brass · wall-mounted	Chrome	41501000	49.00
NEW	15	Soap dish · material: brass, ceramic · material holder: metal · wall-mounted	Chrome	41502000	249.00
NEW	128 59 125 ml 82, 59 102	Liquid soap dispenser material: brass, ceramic material holder: metal filling capacity 125 ml dosage 1.5 ml wall-mounted	Chrome	41503000	339.00
NEW	102 Ø 66 Ø 48 15	Toothbrush tumbler material: brass, ceramic material holder: metal wall-mounted	Chrome	41504000	249.00
NEW	15 × 120 × 15	Toilet brush with tumbler wall-mounted scope of supply: brush material: brass, ceramic material holder: metal wall-mounted	Chrome	41505000	409.00
NEW	100 - 100 -	Roll holder with cover material: brass material holder: metal wall-mounted	Chrome	41508000	319.00

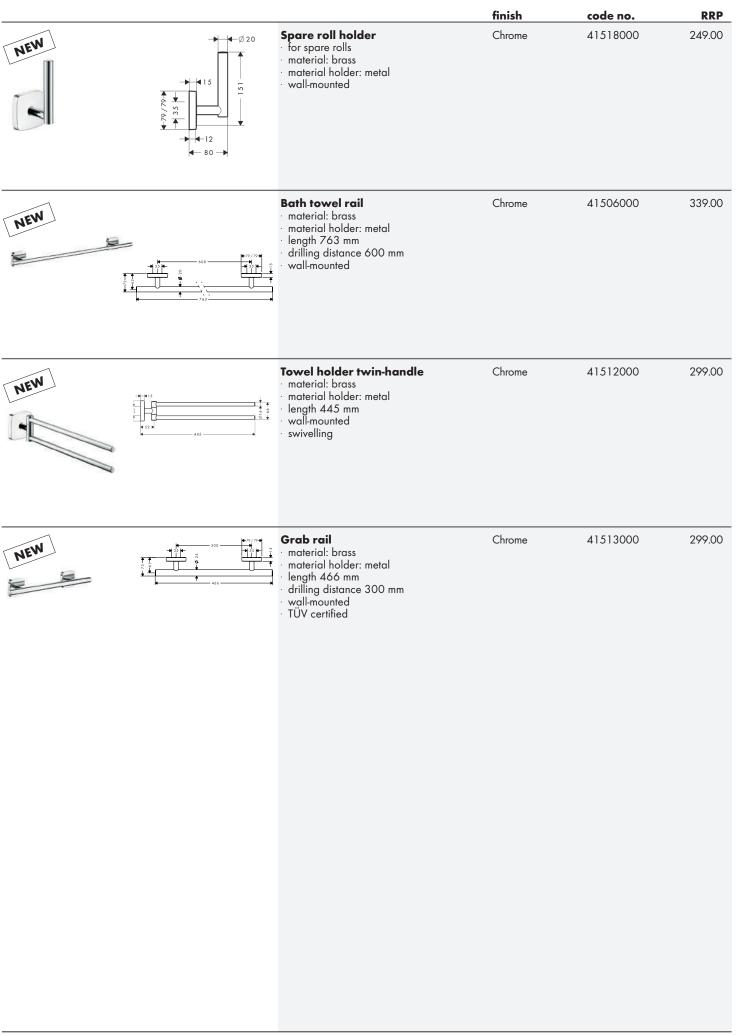


Technical specifications and units of measurements are subject to change.

Logis ———			finish	code no.	RRP
Logis	442	Towel hook · material: brass · material holder: metal · wall-mounted	Chrome Brushed Nickel	40511000 40511820	49.00 69.00
	120 — 120 —	Soap dish · material: brass, crystal glass · material holder: metal · wall-mounted	Chrome Brushed Nickel	40515000 40515820	179.00 269.00
	128 59 125 ml 125 ml 08 102	Liquid soap dispenser material: brass, crystal glass material holder: metal filling capacity 125 ml dosage 1.5 ml wall-mounted	Chrome Brushed Nickel	40514000 40514820	279.00 419.00
	102	Toothbrush tumbler · material: brass, crystal glass · material holder: metal · wall-mounted	Chrome Brushed Nickel	40518000 40518820	179.00 269.00
	\$16 \$16 \$12 \$12 \$120	Toilet brush with tumbler wall-mounted scope of supply: brush material: brass, crystal glass material holder: metal wall-mounted Optional parts: Replacement toilet brush without stick	Chrome Brushed Nickel White	40522000 40522820 40088000	319.00 479.00 39.00

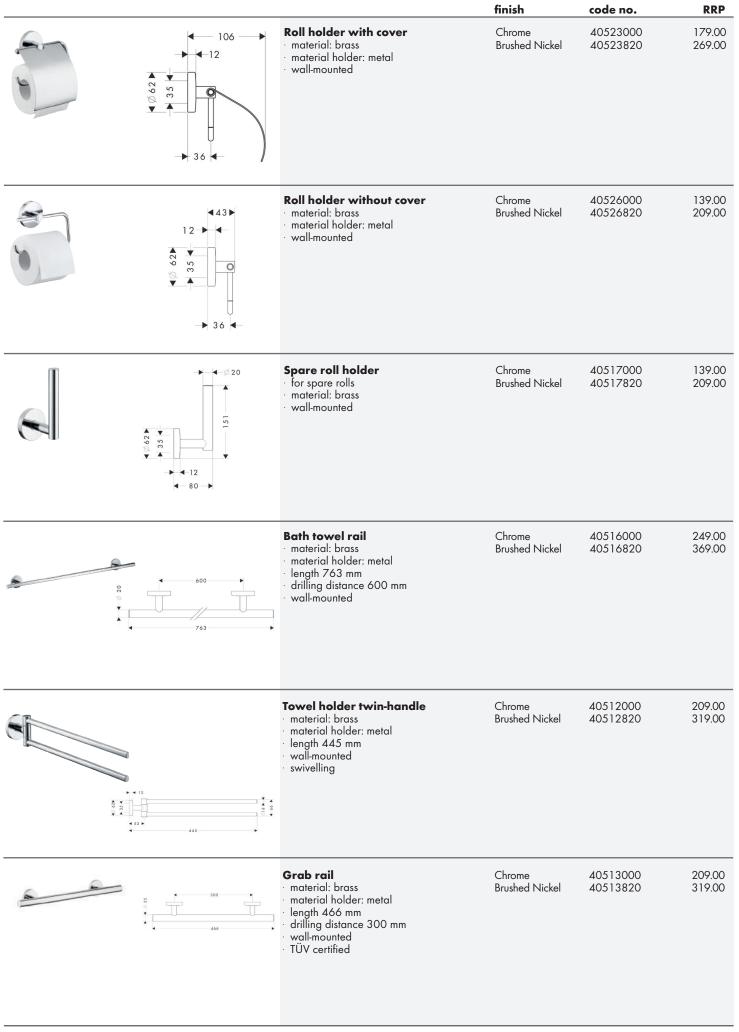

Logis Classic —			finish	code no.	RRP
Logis Classic	© —	Towel hook material: brass wall-mounted	Chrome	41611000	59.00
	2 120 120 120 120 120 120 120 120 120 12	Soap dish · material: brass, ceramic · material holder: metal · wall-mounted	Chrome	41615000	229.00
	128 - 128 - 125 ml	Liquid soap dispenser material: brass, ceramic material holder: metal filling capacity 125 ml dosage 1.5 ml wall-mounted	Chrome	41614000	349.00
	103	Toothbrush tumbler · material: brass, ceramic · material holder: metal · wall-mounted	Chrome	41618000	229.00
	\$ 55 h	Toilet brush with tumbler wall-mounted scope of supply: brush material: brass, ceramic material holder: metal wall-mounted Optional parts: Replacement toilet brush without stick	Chrome White	41632000 40088000	409.00 39.00

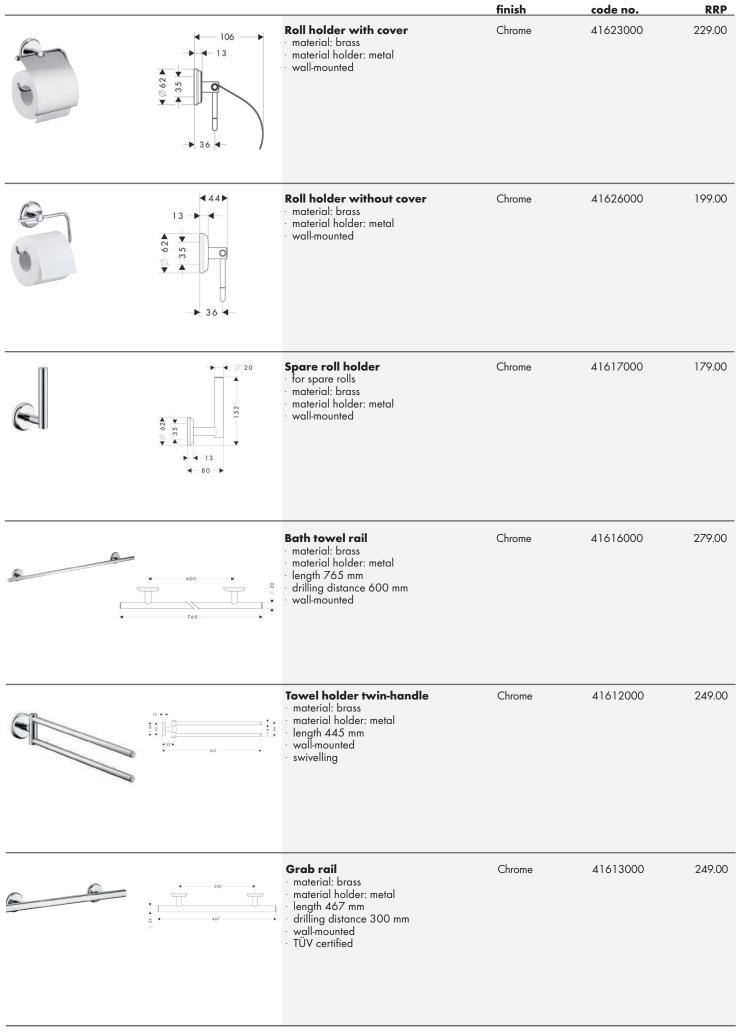

			finish	code no.	RRP
Logis Universal —	Ø 19-	Towel hook · scope of supply: mounting material · material: brass · material holder: metal · wall-mounted	Chrome	41711000	19.00
	106 S 27 -	Double towel hook · scope of supply: mounting material · material: brass · material holder: metal · wall-mounted	Chrome	41725000	39.00
	115 115 189 189	Towel ring · scope of supply: mounting material · material: brass · material holder: metal · wall-mounted	Chrome	41724000	69.00
	226	Corner basket scope of supply: mounting material material: brass material holder: metal wall-mounted can be used additional as a shelf	Chrome	41710000	69.00
	Ø108→ Ø 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0	Soap dish scope of supply: mounting material material: brass, glass material holder: metal wall-mounted	Chrome	41715000	69.00
	200ml -200ml -200ml -200ml -67	Liquid soap dispenser scope of supply: mounting material material: brass, glass material holder: metal filling capacity 200 ml dosage 2 ml wall-mounted	Chrome	41714000	89.00

			finish	code no.	RRP
	26 - 100	Toothbrush tumbler · scope of supply: mounting material · material: brass, glass · material holder: metal · wall-mounted	Chrome	41718000	69.00
	3 5 2 4 1 2 8 4 1 2 8 4 1 2 8 4 1 2 8 4 1 2 8 4 1 2 8	Toilet brush with tumbler wall-mounted scope of supply: mounting material material: brass, glass material holder: metal wall-mounted	Chrome	41722000	89.00
	112 138	Roll holder with cover · scope of supply: mounting material · material: brass · material holder: metal · wall-mounted	Chrome	41723000	89.00
3	148 777	Roll holder without cover · scope of supply: mounting material · material: brass · material holder: metal · wall-mounted	Chrome	41726000	69.00
	296	Spare roll holder · scope of supply: mounting material · for 2 paper rolls · material: brass · wall-mounted	Chrome	41717000	69.00
	-41:	Bath towel rail scope of supply: mounting material material: brass material holder: metal length 600 mm wall-mounted	Chrome	41716000	109.00

		finish	code no.	RRP
	Double bath towel rail scope of supply: mounting material material: brass material holder: metal length 600 mm wall-mounted	Chrome	41712000	129.00
	Towel rack with towel holder scope of supply: mounting material material: brass material holder: metal length 600 mm wall-mounted	Chrome	41720000	179.00
346	Grab rail scope of supply: mounting material material: brass material holder: metal length 345 mm drilling distance 300 mm wall-mounted TÜV certified	Chrome	41713000	109.00
3 2 3 1 1 1 2 1 1 2 1 1 1 1 1 1 1 1 1 1	Shaving mirror · scope of supply: mounting material · inclinable / · material: metal · wall-mounted · enlargement: 3 x magnification · swivelling	Chrome	73561000	149.00
	Shaving mirror with LED light scope of supply: transformer, mounting material inclinable material: metal wall-mounted enlargement: 3 x magnification swivelling illuminant: max. 2 W (21 x 0.08 W / LED) input voltage: 100 - 240 V AC / 50 / 60 Hz output voltage: 12 V - DC	Chrome	73560000	299.00

		finish	code no.	RRP
NEW	Bath-accessory set 3 in 1 consists of: double bath towel rail, roll holder, toilet brush Consisting of: Double bath towel rail (# 41712000) Roll holder with cover (# 41723000) Toilet brush with tumbler wall-mounted (# 41722000)	Chrome	41727000	279.00
NEW	Bath-accessory set 5 in 1 consists of: towel rack with towel holder, roll holder, toilet brush, double towel hook Consisting of: Towel rack with towel holder (# 41720000) Bath towel rail (# 41716000) Double towel hook (# 41725000) Toilet brush with tumbler wall-mounted (# 41722000) Roll holder with cover (# 41723000)	Chrome	41728000	459.00
Z= 14	Replacement toilet brush without stick	White	40088000	39.00
₹ Ø 66 ★	Replacement toilet brush with handle	Chrome	40089000	129.00

Notes	

hansgrohe

Hansgrohe

pro.hansgrohe-int.com

Hansgrohe ComfortZone test

pro.hansgrohe-int.com/comfortzone-test

Spare parts shop

spares.hansgrohe.com

Planning-Data

pro.hansgrohe-int.com/planning-data

Find out more about the Hansgrohe world at http://pro.hansgrohe-int.com



Experience Hansgrohe products interactively

The iPad version of the end customer catalogue can be found at http://appstore.com/hansgroheshowroom



Project planning made easy

The iSpecify online platform makes bathroom planning effortless, with all the necessary product specifications, and provides inspiration with international references. http://ispecify.hansgrohe.com



Savings with Hansgrohe

All you need to know about how Hansgrohe helps to save water and energy can be found at www.hansgrohe-int.com/savings-calculator or, on mobile devices, at http://m.pro.savings.hansgrohe-int.com





