




# iBox universal 2/new finish sets RainDrain/XtraStoris

Technical manual

# iBox universal 2

---

- 4 The future is here.
- 6 The evolution of a revolution
- 8 iBox universal 2 and new finish sets
- 10 The key innovations
- 12 Fast and flexible to install
- 14 Installation options
- 16 Installation types
- 30 Planning and installation information
- 32 Product overview

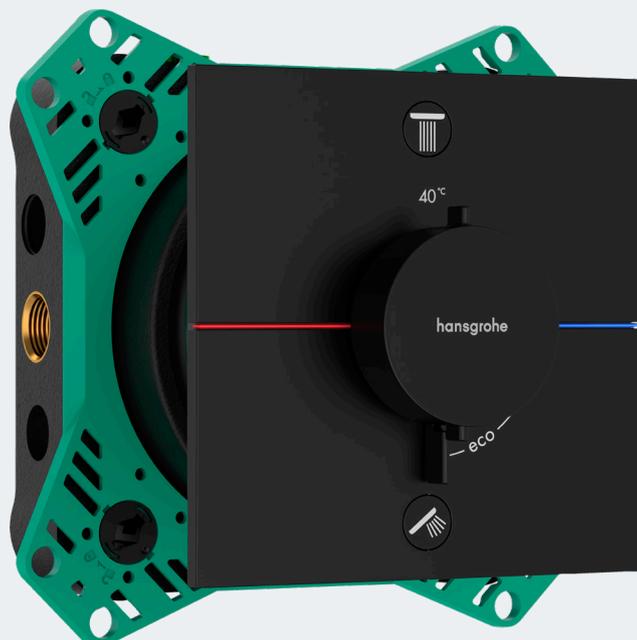

# RainDrain

---

39	uBox universal
40	Overview
42	Technology
44	Components to be ordered
46	RainDrain Flex
48	RainDrain Match
50	RainDrain Rock
52	RainDrain Original
54	RainDrain Compact
56	RainDrain Allround
58	RainDrain Match Plus
60	RainDrain Minimalistic
62	RainTurn
64	RainDrain Spot
66	RainDrain Brilliance
68	RainDrain Point



# XtraStoris

---

70	Storage space for the dream bathroom
72	Overview
74	XtraStoris Original
76	XtraStoris Minimalistic
78	XtraStoris Individual
80	XtraStoris Rock
82	XtraStoris Rock
84	XtraStoris Original
86	XtraStoris Safe
88	Product overview – RainDrain
92	Product overview – XtraStoris



# The future is here.


The iBox universal 2:  
faster, smarter, more flexible

This is the new standard in concealed bathroom installation: The iBox universal 2 offers reduced complexity and enables an even faster, safer, and more flexible installation. This is ensured by intelligent features such as the practical sliding sleeve, a pre-mounted seal and the pre-assembled function block. Installation is now even faster with the new iBox universal 2 and new finish sets than it was with the previous model.

**Thermostat** ShowerSelect Comfort E




**DuoTurn S tap**

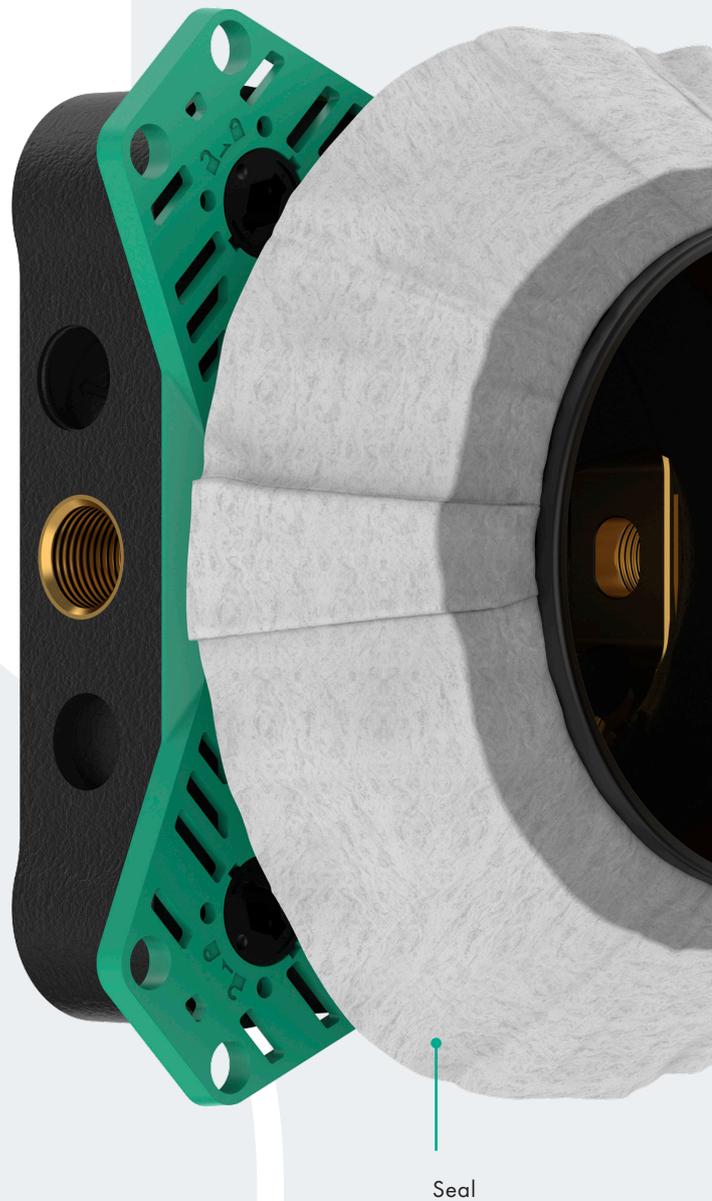

## The iBox universal 2 at a glance:

- More mounting options with the new mounting ring
- New sliding sleeve, so no more cutting necessary
- Nothing is lost or forgotten thanks to the pre-assembled seal
- EPP (expanded polypropylene) foam sheathing ensures excellent noise and thermal insulation
- Acoustic decoupling means all new finish sets fall under acoustic group 1
- Easy alignment through protective cap with sturdy supports for spirit level
- Rotational symmetry (all connections are the same), so it can be used universally with fewer errors and less complexity
- Suitable for standard pipe dimensions thanks to 4 Rp 1/2 connections
- ETAG-compliant damp proofing for the masonry
- More safety through compliance with the EN1717 standard

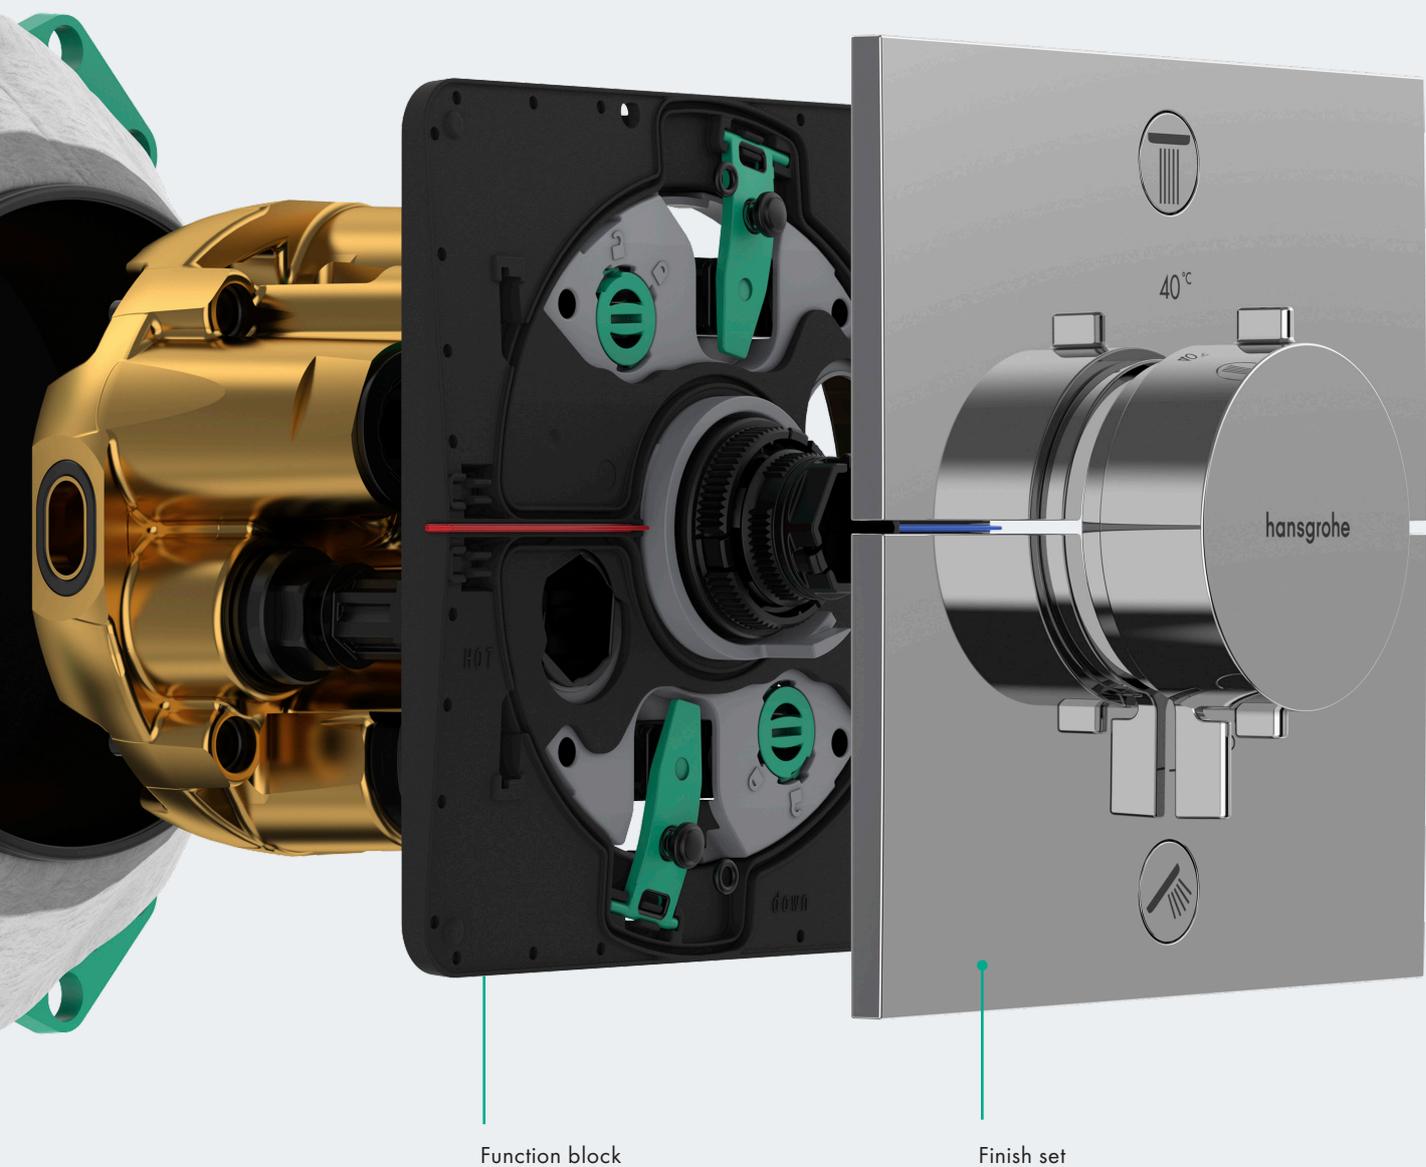

# The evolution of a revolution

With the launch of the iBox universal – a base set for concealed installations – in 2001, hansgrohe revolutionised bathroom installation and design. And now it's time for the new generation of this successful model: the iBox universal 2, which offers you more safety, speed, and convenience than its predecessor. You will be ideally equipped for future installations with the new iBox universal 2.

The latest evolution of the iBox universal draws on years of experience with over 11 million installed products and continuous feedback from specialists, from planners, and from you. The result: The new iBox universal 2 reduces complexity, is suitable for universal use, and enables fast and error-free installation. It combines the proven advantages of its predecessor with plenty of new features and benefits. It can also be used with all existing and future hansgrohe and AXOR finish sets (existing set-ups require an adapter, sold separately).

The iBox universal 2 is therefore a core component of our all-in-one shower area by hansgrohe – from the base set for concealed installation to finish sets, taps, and RainDrain shower channels right through to XtraStoris wall alcoves. Welcome to the shower zone where everything is technically and visually coordinated.

Installation is **now** twice as fast with the new iBox universal 2 and new finish sets as it was with the previous model.





Time-saving installation,  
more mounting options,  
fewer installation steps –  
all this makes the new  
generation of the iBox  
even safer, more efficient,  
and more flexible.

# The perfect fit: iBox universal 2 and new finish sets


The iBox universal 2 offers numerous new and impressive features for added simplicity, safety, and comfort, both during installation and beyond. Installing the new ShowerSelect Comfort and DuoTurn finish sets is also even faster and more convenient with the iBox universal 2.



## ShowerSelect Comfort – intuitive control at the touch of a button

The new ShowerSelect Comfort thermostatic mixer impresses users with its high-quality design and convenient operation:


- Control up to four outlets thanks to Select
- Convenient operation via full-width metal Select buttons
- Targeted water flow control including EcoStop function via central handle
- Easy to clean as buttons are installed flush with the surface
- Variety of shapes: square, SoftCube, and round
- Variety of finishes: Chrome, Matt Black, Matt White, Brushed Black Chrome, and Brushed Bronze

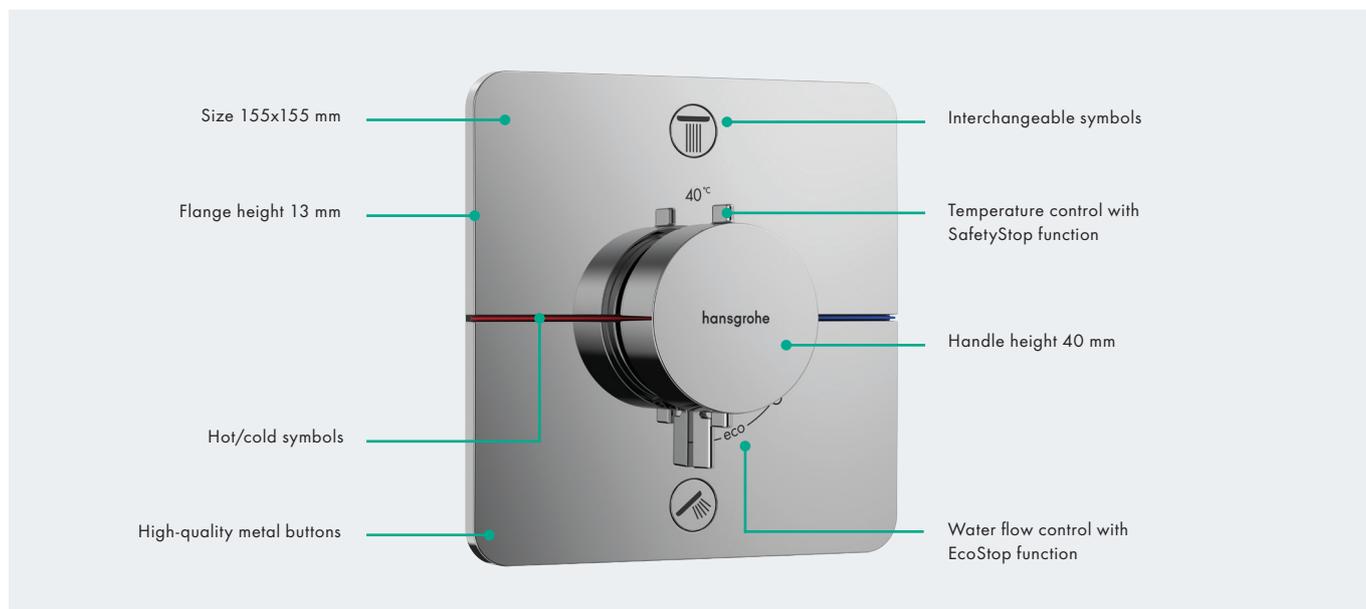

## DuoTurn – turn it up!


The new DuoTurn concealed manual valves offer top-quality showering with their:

- Convenient temperature setting
- User-friendly control of the functions and water flow for up to two outlets via a lever
- Easy to clean thanks to the flat, built-in surface
- Variety of shapes: square, SoftCube, and round
- Variety of finishes: Chrome, Matt Black, Matt White, and Brushed Bronze

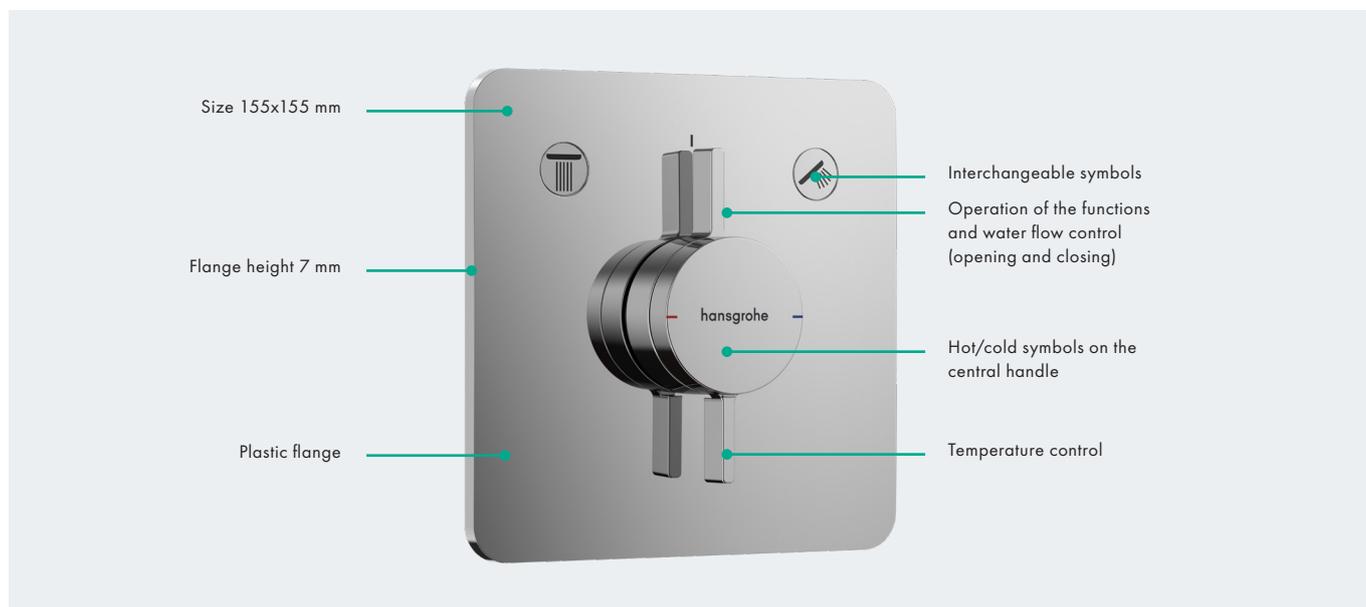

# Convenient and compatible: the key innovations

When we develop new products, we always make sure they make work easier for you, offer the best possible safety, and enable faster installation times. Numerous innovative product features in the iBox universal 2 ensure this. The new iBox universal 2 is compatible with all current hansgrohe and AXOR overhead showers and finish sets (adapter can be ordered by quoting article number 13588000). The iBox universal 2 also ensures you are ideally equipped for the future today, as it features four pipe slots ready for any future finish sets.

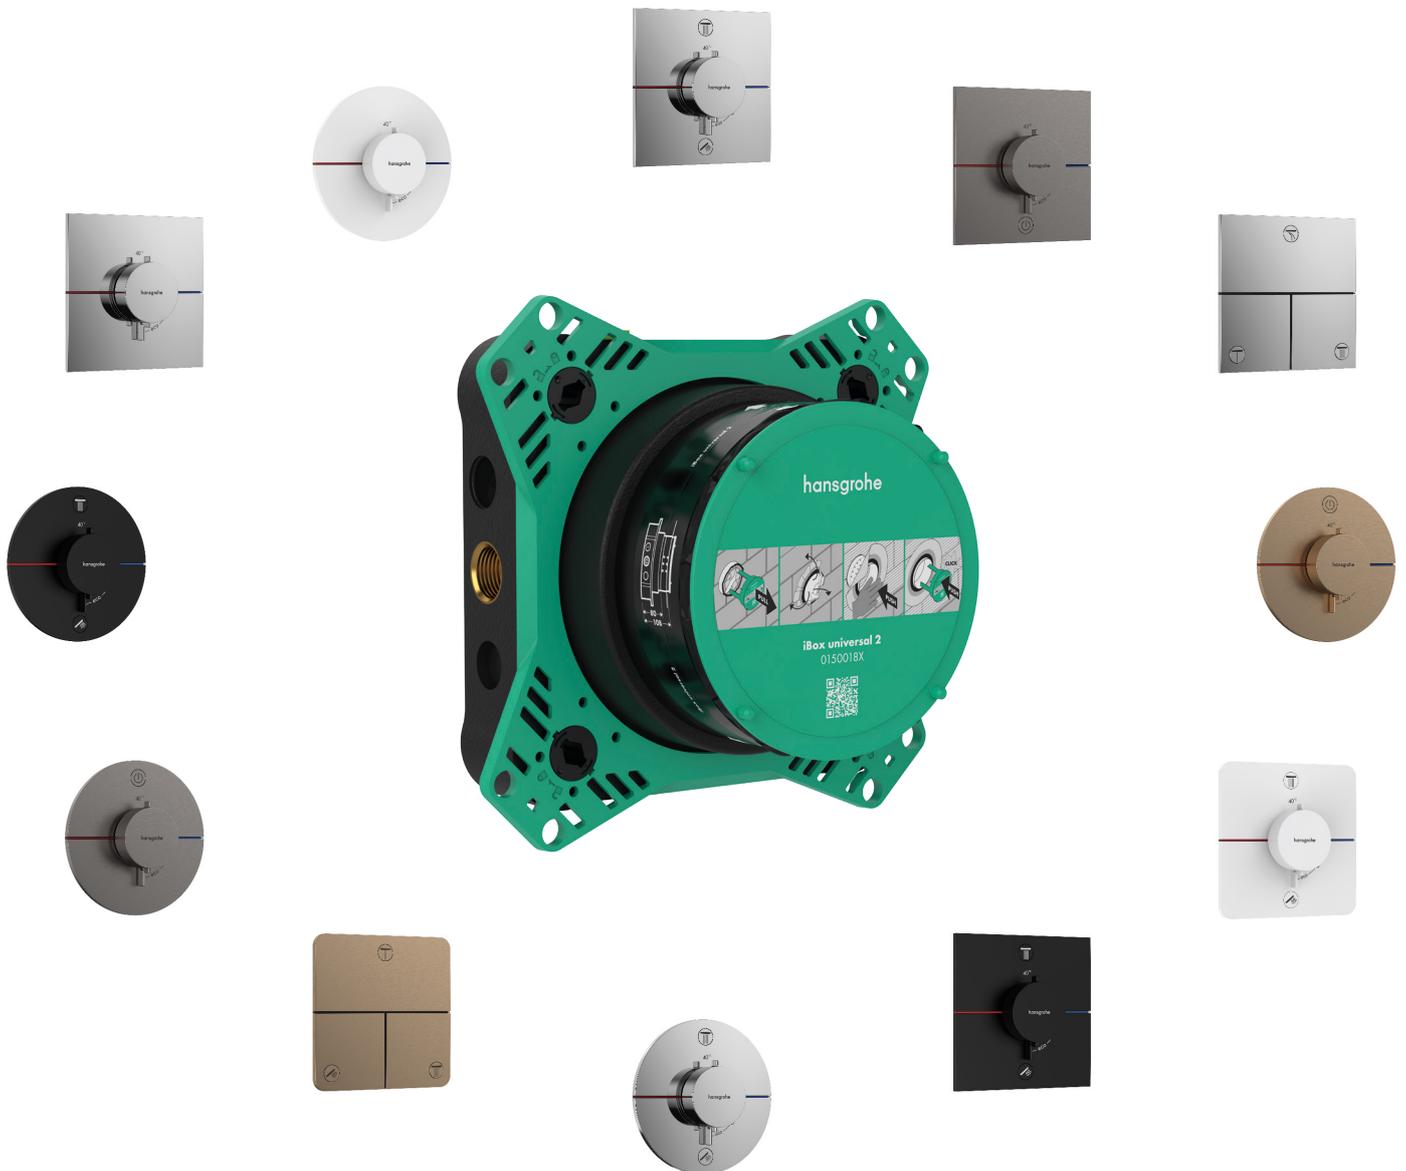



## Mounting ring for all installation types

Whether installing the iBox universal 2 in or on the wall, the integrated mounting ring can be attached to the front or back of it to make fitting extremely easy in all installation scenarios.

## Sliding sleeve for installation without cutting

The sliding sleeve is very easy to slide in, no matter how deep the concealed basic set is installed. This makes the waterproof box even easier, faster, and safer to install.



## Pre-assembled seal – no more going without

Something you can no longer forget: The pre-assembled seal is an integral component of the sliding sleeve, so it is always within reach to simplify installation. It is also continuously elastic and waterproof.

## EPP foam insulates sound and heat

Made of expanded polypropylene (EPP foam), the iBox universal 2 is great at absorbing sound and insulating heat. The sustainable material is lightweight, waterproof, and easy to recycle.



## Pre-assembled function block – a fab innovation

With the pre-assembled function block for the finish sets, you need fewer tools, save time during installation, and are always on the safe side. It is made of high-quality metal and is therefore extremely durable. Good to know: Plastic screws now no longer need to be cut off.

# Fast and flexible to install


The individual installation steps are now even easier and faster to complete with the iBox universal 2: Be more flexible with the installation and on the safe side when it comes to waterproofing and avoiding errors.

## Installing the iBox universal 2



1

Undo the set screws and remove the mounting ring.

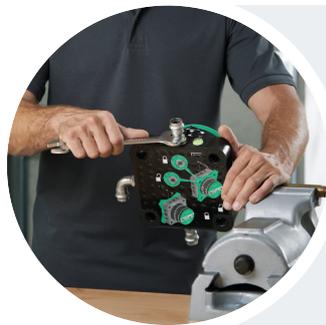

2

Install the connection fittings. Pro tip: Clamp the pipe nipple for a secure fit.



3

Affix the mounting ring and then fit the iBox universal 2.



4

Adjust the depth, align and fix the iBox universal 2 in place.



5

After covering, fit the sliding sleeve to size and attach the maintenance joint.



6

Unfold and adhere the seal. Apply the protective cap.

Download the  
installation manual from  
[pro.hansgrohe.com](http://pro.hansgrohe.com).



**Please use/create your local  
QR Code directing our b2b  
partners to the iBox universal 2  
section on country HPS!**

## Installing the finish set



**1**

Remove the protective  
cap and take out the  
flushing block.



**2**

Install and fit the  
function block.



**3**

Loosen the locking  
mechanism, align and set  
the carrier escutcheon.

Press on the carrier  
escutcheon and lock back  
in place.



**4**

Set the depth and actuate  
the Select valves.



**5**

Attach seal profiles.




**6**


Fit the buttons, volume  
control, and thermostatic  
mixer handle.

# Installation options

The rotation-symmetrical base set of the iBox universal 2 can be used universally – horizontally or vertically. It can be installed in front of, on or in the wall, and on carrier systems or installation plates to suit the structural conditions. The iBox universal 2 is suitable for installing baths and showers. Here are a few installation examples:

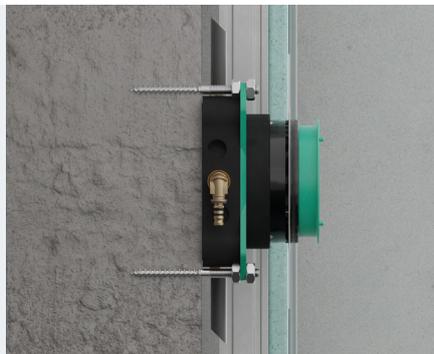


Installation on the wall

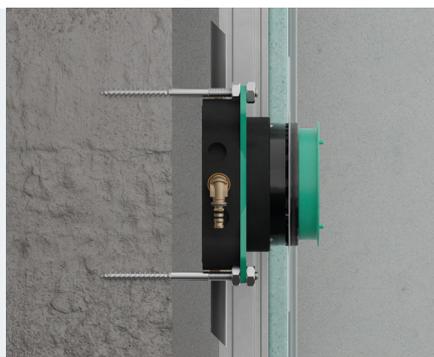

Installation in front of the wall

(Here using variable spacers with M 10 hanger bolts)

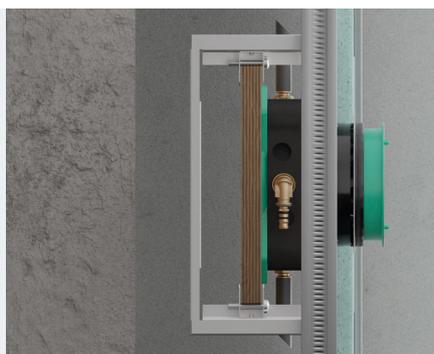

Installation on a carrier system



Installation directly  
in the wall




Installation with a set of  
mounting rails



### Rotation-symmetrical installation

The symmetrical design ensures all connections are the same. It is important that cold water is connected on the right and hot water on the left. Either the upper or lower outlet can be connected for use as a shower tap.

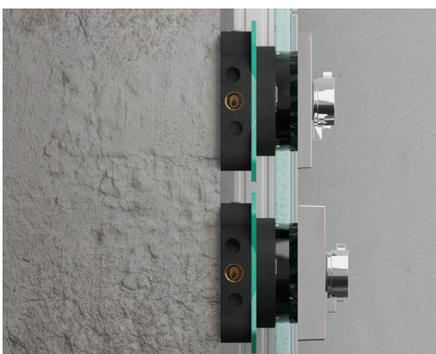


### Wall flange extension

The extension ensures that even shallow installation depths are no longer a problem. The extension wall flange enables the iBox universal 2 to be installed even in shallow walls.

# Installation types

## Concealed installation ShowerSelect Comfort Q, 1 function


- (A) Raindance Select E**  Shower set 120 3jet EcoSmart 9 l/min with shower bar 90 cm and soap dish # 26623XXX
- (B) ShowerSelect Comfort Q** Thermostat for concealed installation for 1 function # 15581XXX  
Basic set iBox universal 2 (not shown) # 01500180
- (C) FixFit** Wall outlet Q with non-return valve # 26457XXX
- (D) RainDrain Flex** Finish set shower drain 700 cuttable # 56043XXX  
Base set for finish sets for standard installation (not shown) # 01001180

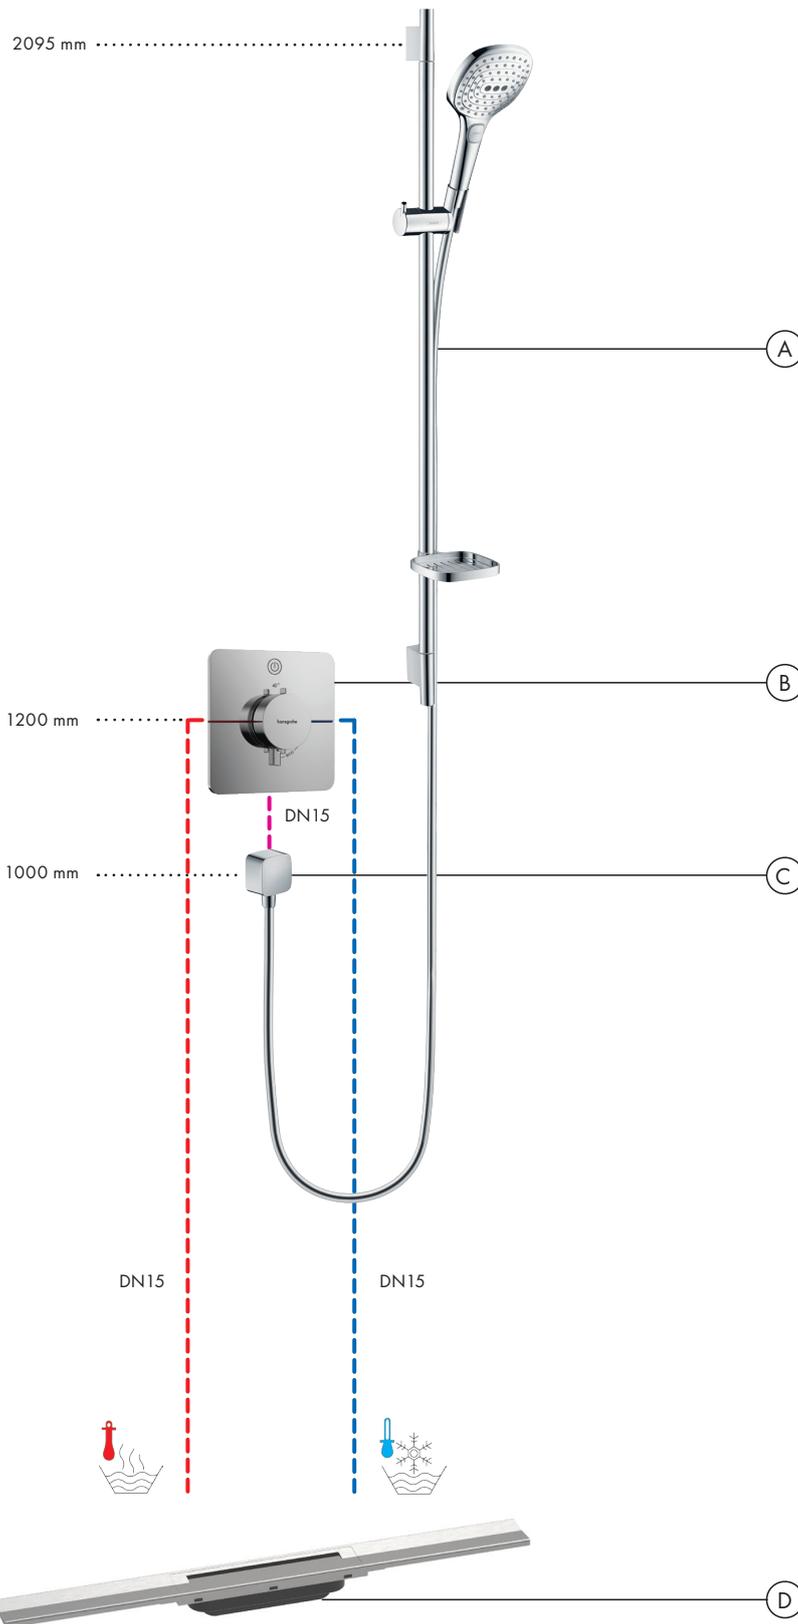

### Flow diagram

#### Raindance Select E

Hand shower 120 3jet EcoSmart 9 l/min # 26521XXX

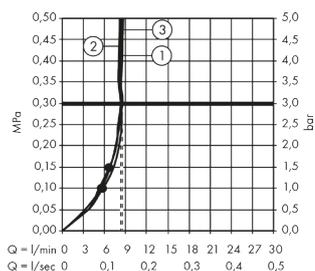


- Legend**
- ① RainAir
  - ② Rain
  - ③ Whirl

• denotes minimum operating pressure.


# Concealed installation ShowerSelect Comfort S, 1 function

- (A) Rainfinity**  
Shower set 130 3jet  
with shower bar 90 cm and shelf  
# 27671XXX
- (B) ShowerSelect Comfort S**  
Thermostat for concealed installation  
for 1 function  
# 15553XXX  
Basic set iBox universal 2  
(not shown)  
# 01500180
- (C) FixFit**  
Wall outlet S with non-return valve  
# 27456XXX
- (D) RainDrain Flex**  
Finish set shower drain 700 cuttable  
# 56043XXX  
Base set for finish sets  
for standard installation (not shown)  
# 01001180

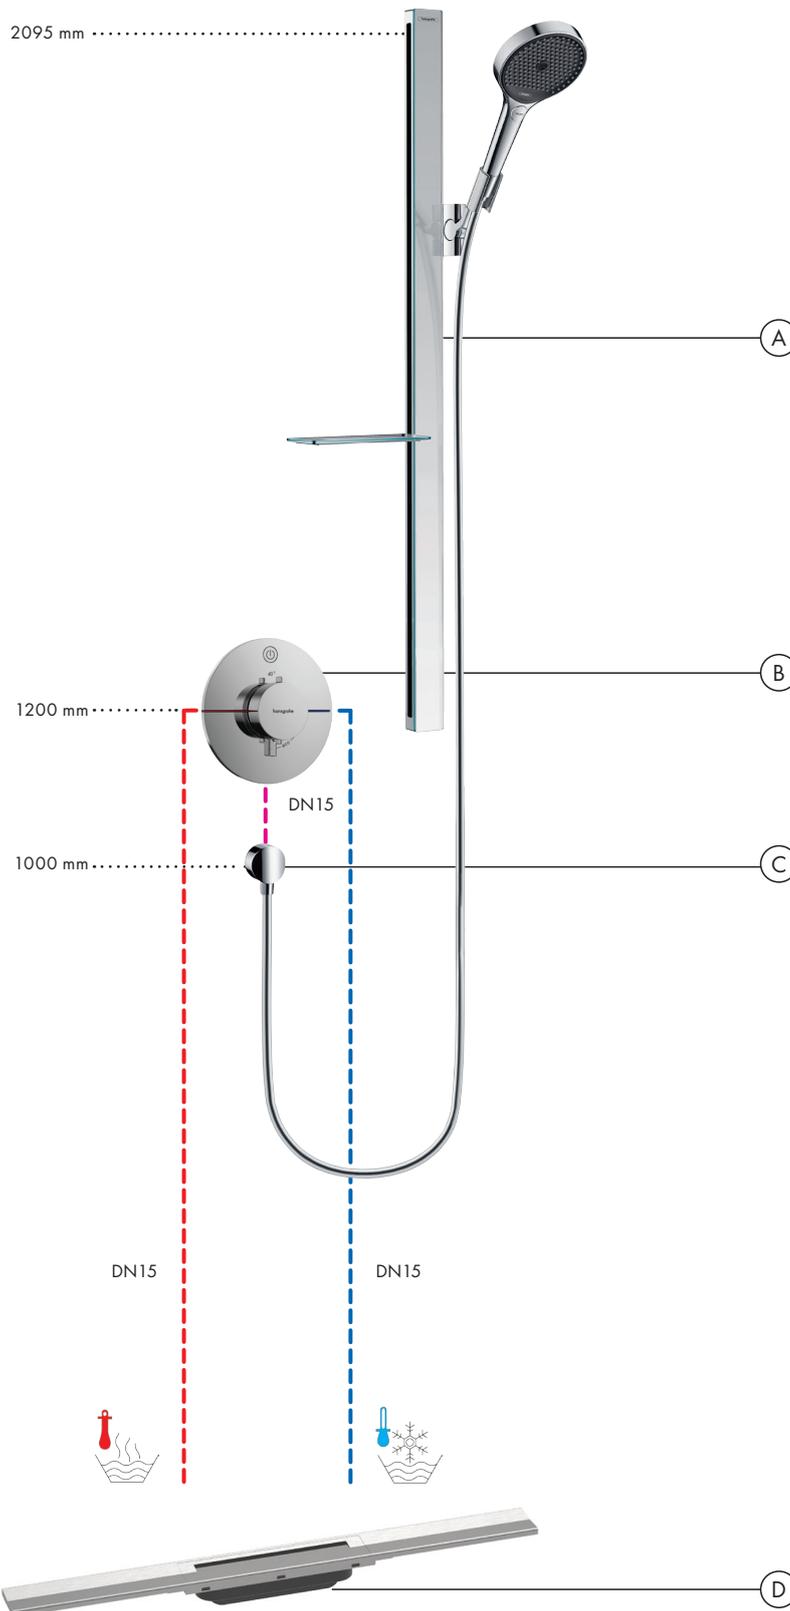

## Flow diagram

**Rainfinity**  
Hand shower 130 3jet  
# 26864XXX

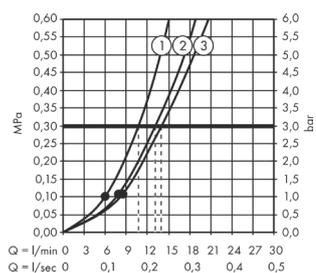

## Legend

- ① Mono
- ② Intense PowderRain
- ③ PowderRain

• denotes minimum operating pressure.

# Installation types


## Concealed installation ShowerSelect Comfort E, 2 functions

- (A) Raindance E**   
Overhead shower 300 1jet EcoSmart  
9 l/min with shower arm  
# 26239XXX
- (B) Raindance Select S**  
Hand shower 120 3jet EcoSmart 9 l/min  
# 26531XXX  
Shower holder Porter E  
# 28387XXX  
Shower hose Isiflex 160 cm  
# 28276XXX
- (C) ShowerSelect Comfort E**  
Thermostat for concealed installation  
for 2 functions  
# 15572XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- (D) FixFit**  
Wall outlet Square with non-return valve  
# 26455XXX
- (E) RainDrain Flex**  
Finish set shower drain 700 cuttable  
# 56043XXX  
Base set for finish sets  
for standard installation (not shown)  
# 01001180

### Flow diagrams


#### Raindance E

Overhead shower 300 1jet EcoSmart 9 l/min with shower arm  
# 26239XXX

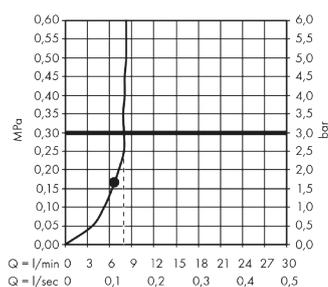


#### Raindance Select S

Hand shower 120 3jet EcoSmart 9 l/min  
# 26531XXX

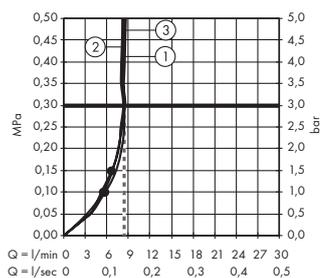

### Legend


- ① RainAir
- ② Rain
- ③ Whirl

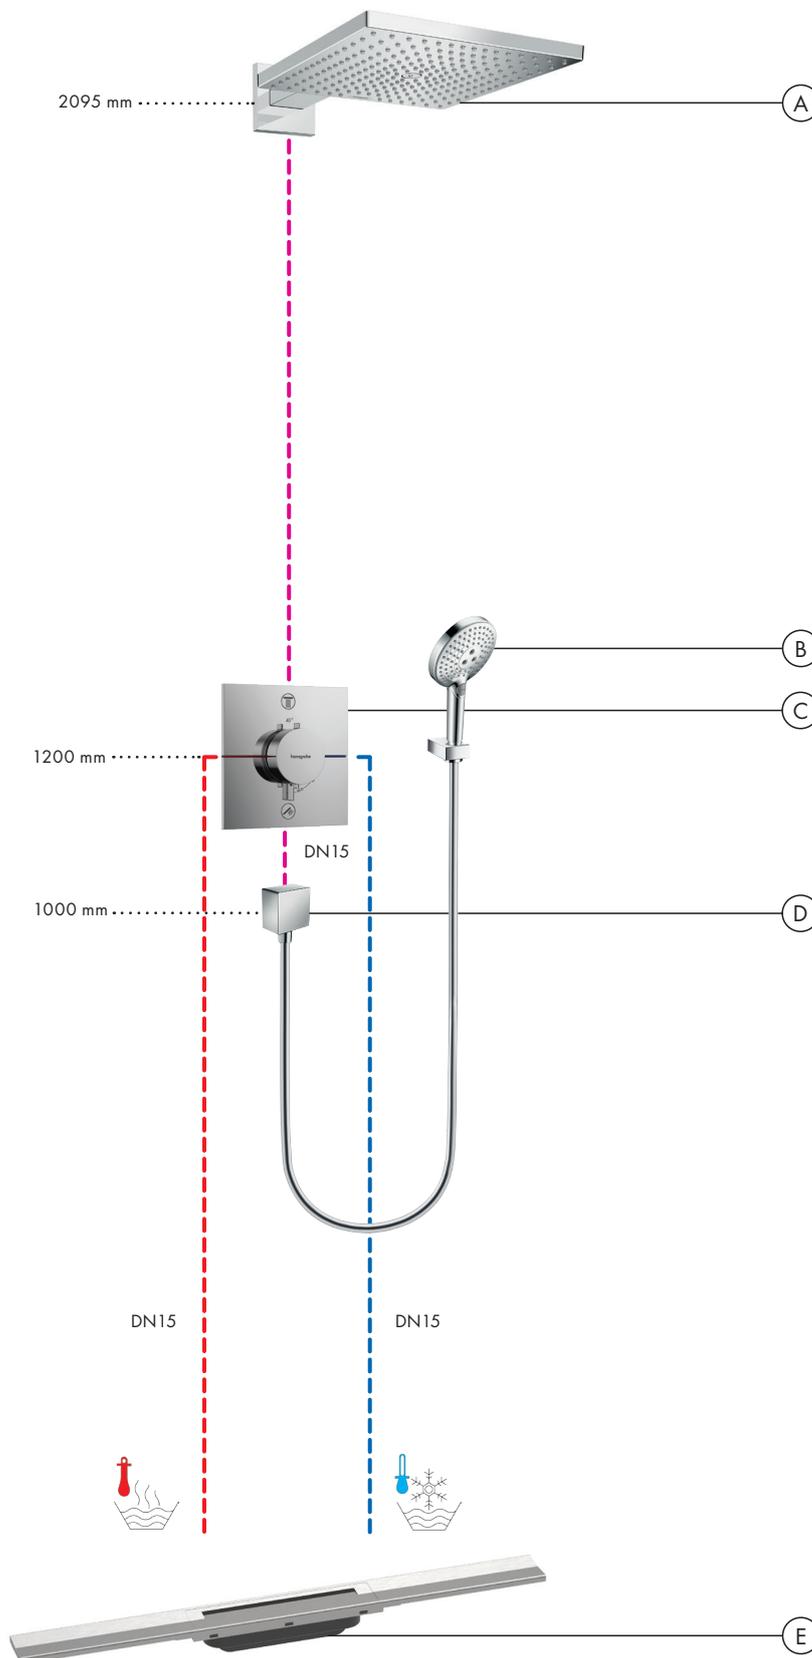

• denotes minimum operating pressure.

# Concealed installation ShowerSelect Comfort Q, 2 functions


- (A) Pulsify S**  
Overhead shower 105 1jet  
# 24130XXX  
Wall connector for Pulsify overhead shower 105  
# 24139XXX
- (B) Pulsify Select S**  
Hand shower 105 3jet Activation  
# 24100XXX  
Shower hose Isiflex 160 cm  
# 28276XXX
- (C) ShowerSelect Comfort Q**  
Thermostat for concealed installation for 2 functions  
# 15583XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- (D) FixFit Porter Q**  
Wall outlet with shower holder  
# 26887XXX
- (E) RainDrain Flex**  
Finish set shower drain 700 cuttable  
# 56043XXX  
Base set for finish sets for standard installation (not shown)  
# 01001180

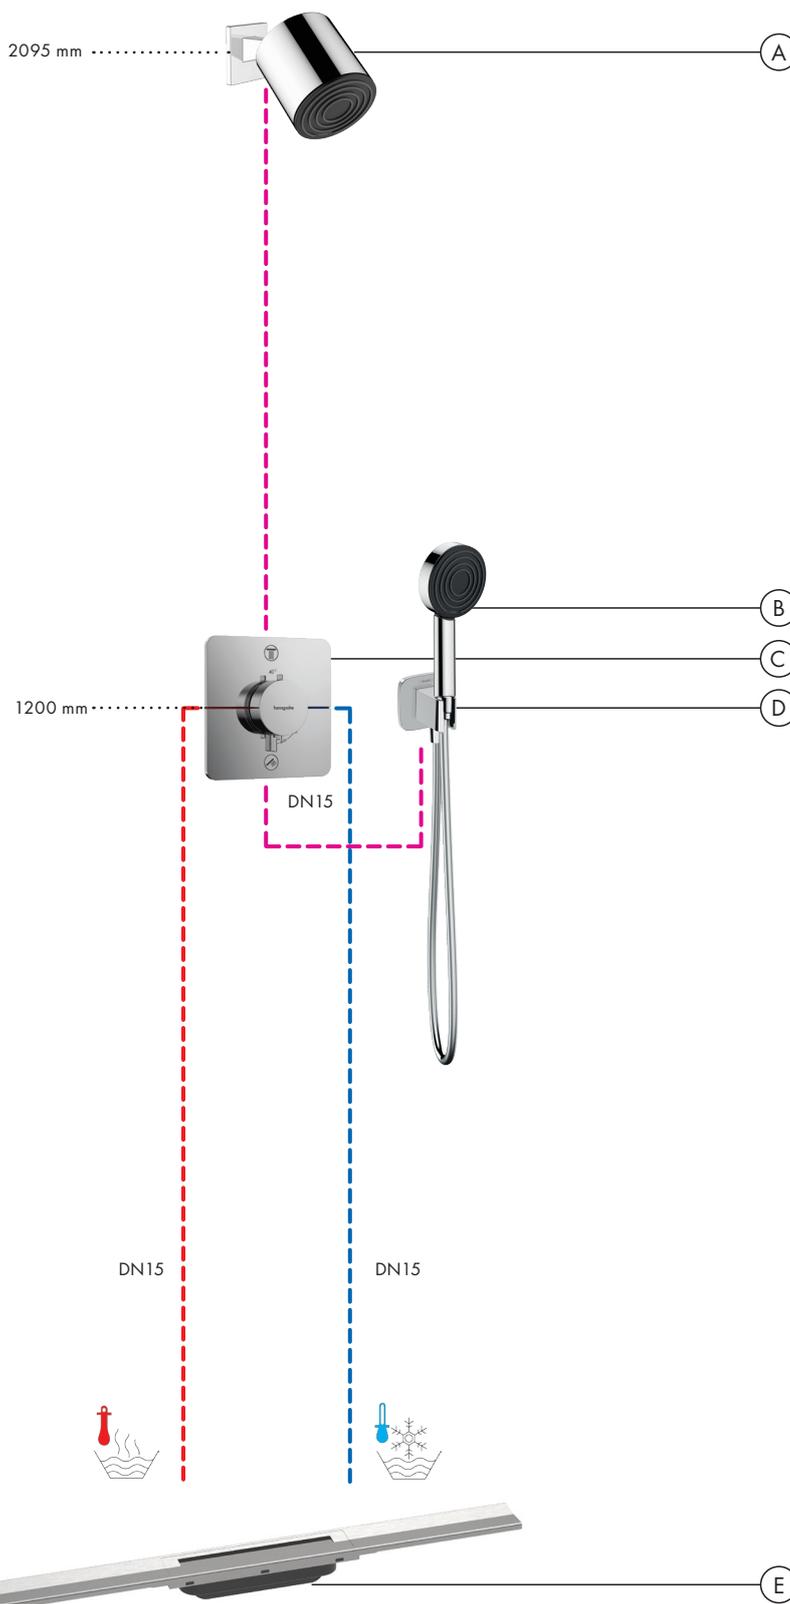

## Flow diagrams


### Pulsify S

Overhead shower 105 1jet  
# 24130XXX

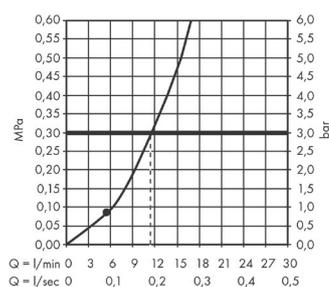

### Pulsify Select S

Hand shower 105 3jet Activation  
# 24100XXX

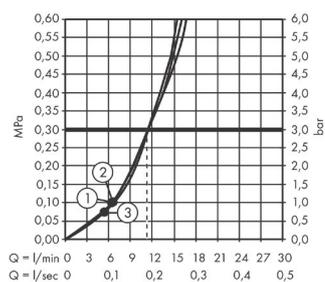

## Legend

- ① RainAir
- ② Rain
- ③ Whirl

• denotes minimum operating pressure.

# Installation types

## Concealed installation ShowerSelect Comfort Q, 2 functions/bath tub


- (A) Pulsify S** 

Hand shower 105 ljet EcoSmart+  
# 24121XXX  
Shower hose Isiflex 160 cm  
# 28276XXX
- (B) ShowerSelect Comfort Q**

Thermostat for concealed installation  
for 2 functions with integrated security  
combination according to EN1717  
# 15586XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- (C) FixFit Porter Q**


Wall outlet with shower holder  
# 26887XXX
- (D) Exafill S**

Basic set and finish set bath filler,  
waste and overflow set  
# 58117XXX  
# 58116180

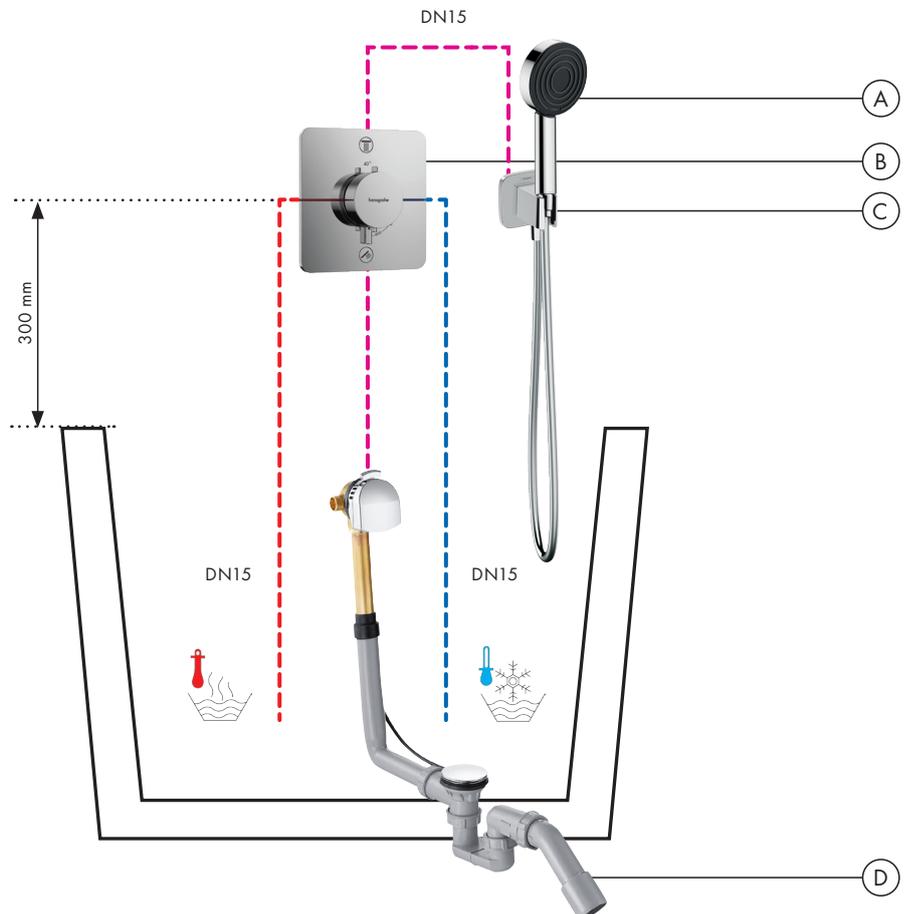

### Flow diagram

**Pulsify S**  
Hand shower 105 ljet EcoSmart+  
# 24121XXX

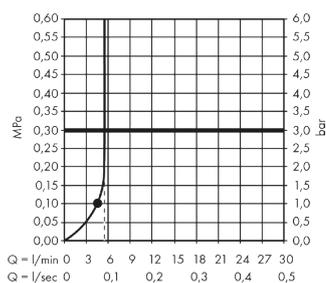

• denotes minimum operating pressure.


# Concealed installation ShowerSelect Comfort Q, 2 functions

- (A) Pulsify S**  
Overhead shower 260 1jet  
# 24140XXX  
Wall connector for overhead shower 260  
# 24149XXX
- (B) Pulsify S**  
Hand shower 105 1jet  
# 24120XXX  
Shower holder Porter S  
# 28331XXX  
Shower hose Isiflex 160 cm  
# 28276XXX
- (C) ShowerSelect Comfort Q**  
Thermostat for concealed installation  
for 2 functions  
# 15583XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- (D) FixFit**  
Wall outlet Q with non-return valve  
# 26457XXX
- (E) RainDrain Flex**  
Finish set shower drain 700 cuttable  
# 56043XXX  
Base set for finish sets  
for standard installation (not shown)  
# 01001180

## Flow diagrams



### Pulsify S

Overhead shower 260 1jet  
# 24140XXX

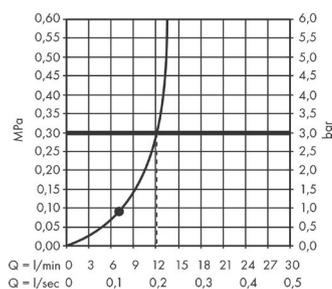

### Pulsify S

Hand shower 105 1jet  
# 24120XXX

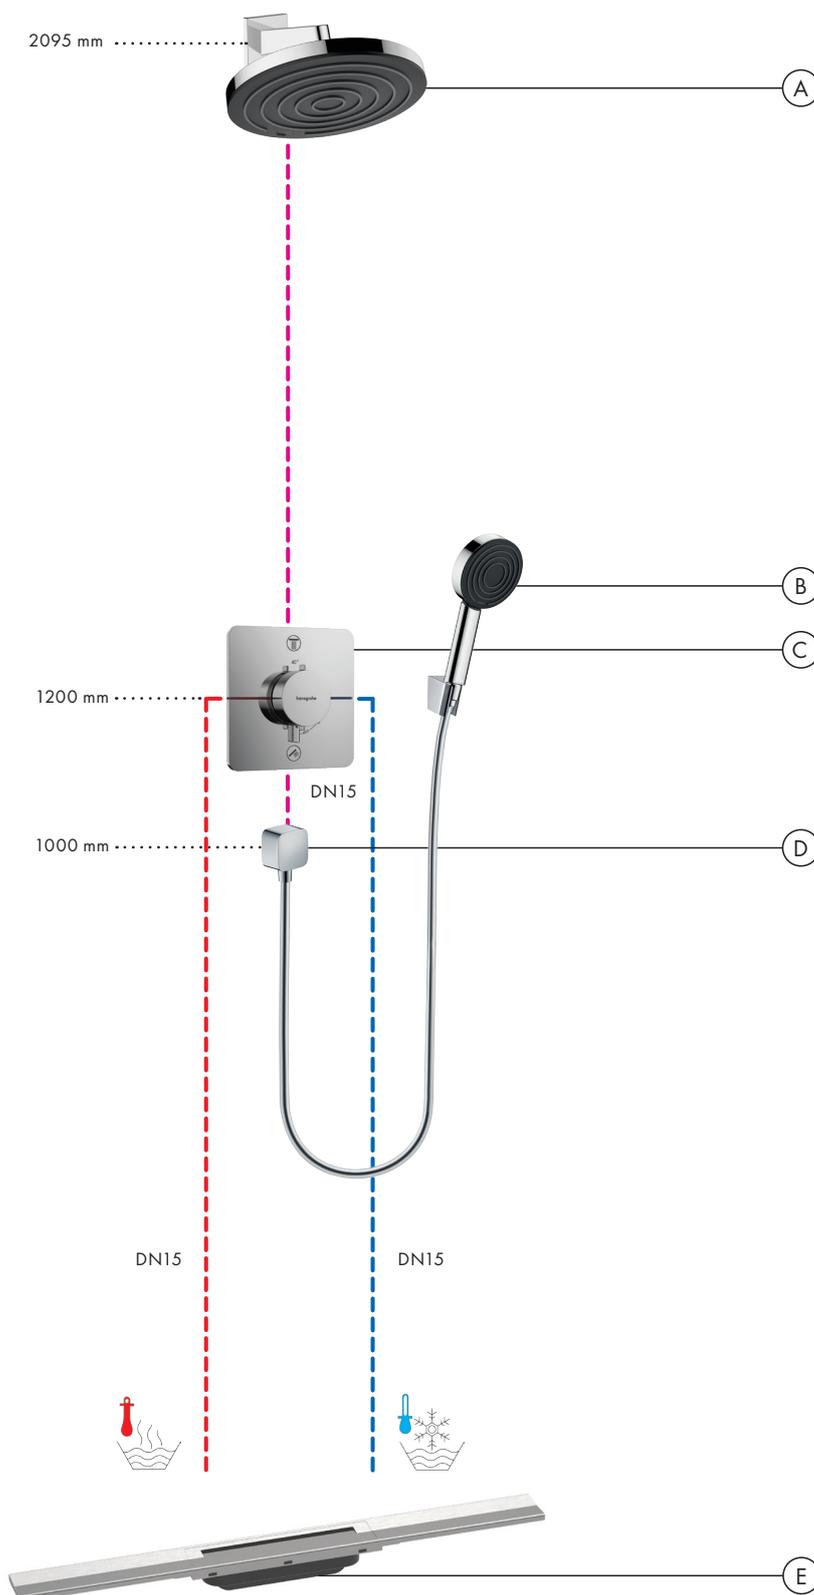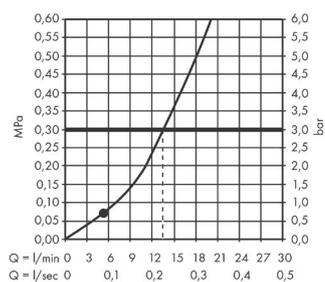


• denotes minimum operating pressure.

# Installation types

## Concealed installation ShowerSelect Comfort S, 2 functions


- (A) Raindance S**  
Overhead shower 240 1jet PowderRain with shower arm  
# 27607XXX
- (B) Raindance Select S**  
Hand shower 120 3jet  
# 26530XXX  
Shower hose Isiflex 160 cm  
# 28276XXX
- (C) ShowerSelect Comfort S**  
Thermostat for concealed installation for 2 functions  
# 15554XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- (D) FixFit Porter S**  
Wall outlet with shower holder  
# 26888XXX
- (E) RainDrain Flex**  
Finish set shower drain 700 cuttable  
# 56043XXX  
Base set for finish sets for standard installation (not shown)  
# 01001180

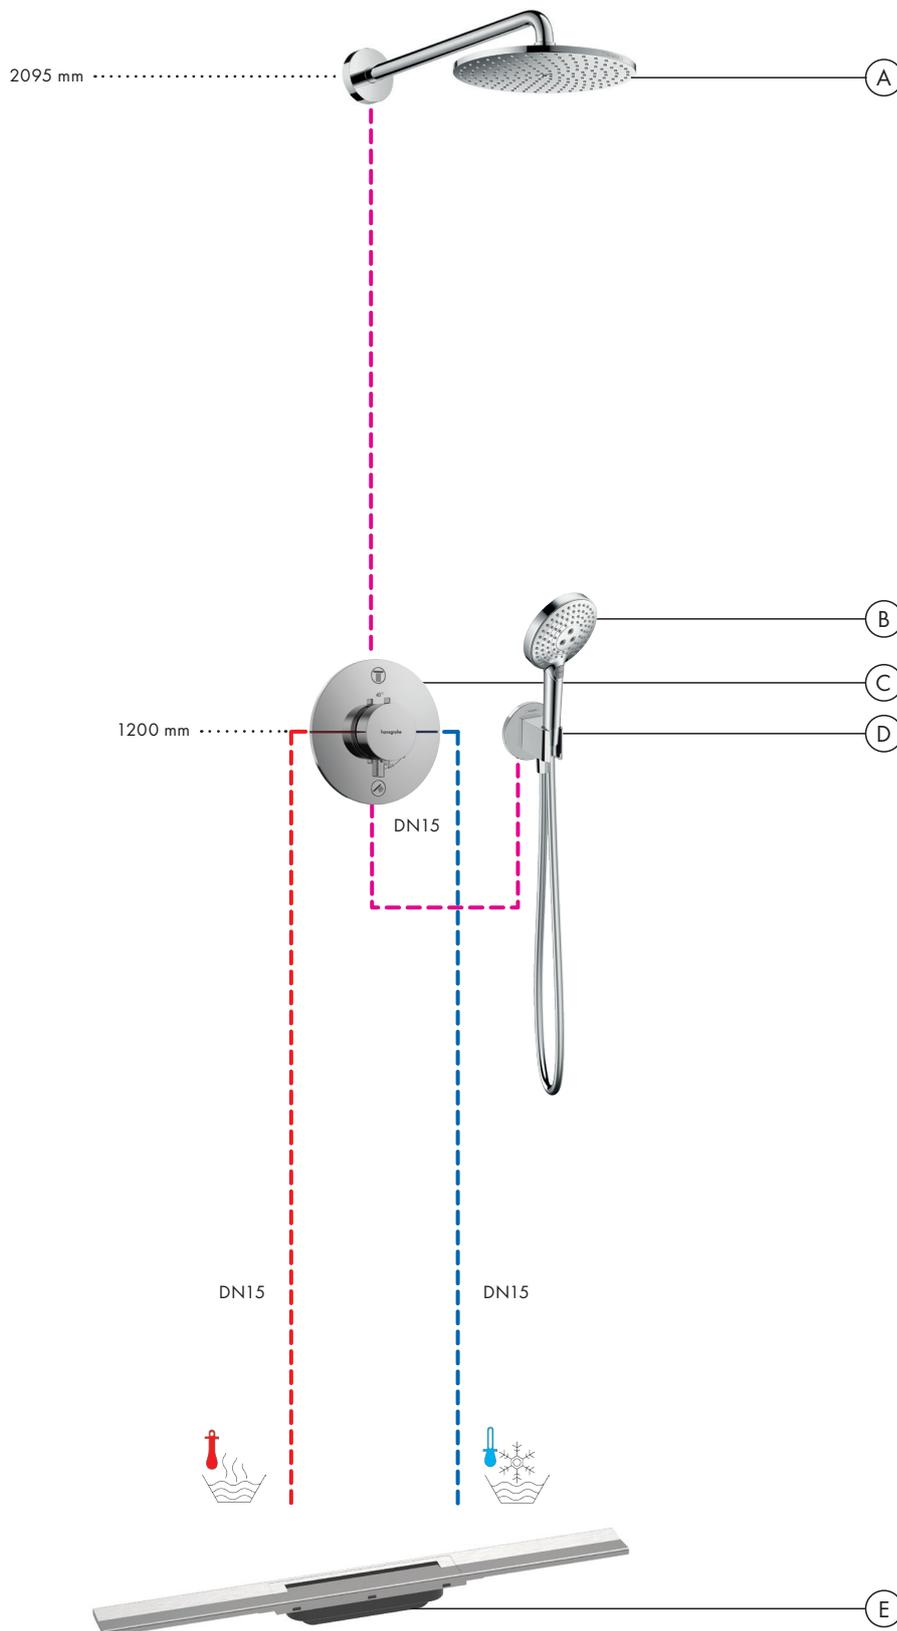

### Flow diagrams


#### Raindance S

Overhead shower 240 1jet PowderRain with shower arm  
# 27607XXX

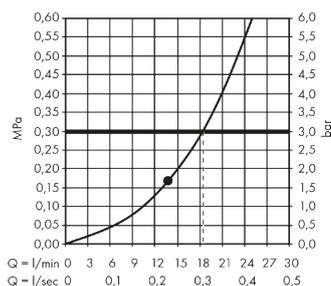

#### Raindance Select S

Hand shower 120 3jet  
# 26530XXX

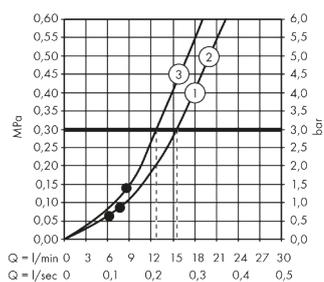

### Legend

- ① RainAir
- ② Rain
- ③ Whirl

• denotes minimum operating pressure.


# Concealed installation ShowerSelect Comfort E, 3 functions

- (A) Rainfinity**  
Overhead shower 360 1jet with wall connector  
# 26230XXX
- (B) Rainfinity**  
Shoulder shower 500 1jet with shower shelf  
# 26243XXX
- (C) Rainfinity**  
Hand shower 130 3jet  
# 26864000  
Shower holder Porter E  
# 28387XXX  
Shower hose Isiflex 160 cm  
# 28276XXX
- (D) ShowerSelect Comfort E**  
Valve for concealed installation for 3 functions  
# 15573XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- (E) ShowerSelect Comfort E**  
Thermostat for concealed installation  
# 15574XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- (F) FixFit**  
Wall outlet Square with non-return valve  
# 26455XXX
- (G) RainDrain Flex**  
Finish set shower drain 700 cuttable  
# 56043XXX  
Base set for finish sets for standard installation (not shown)  
# 01001180

## Flow diagrams


### Rainfinity

Overhead shower 360 1jet with wall connector  
# 26230XXX

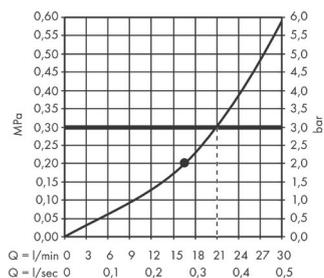


### Rainfinity

Hand shower 130 3jet  
# 26864000

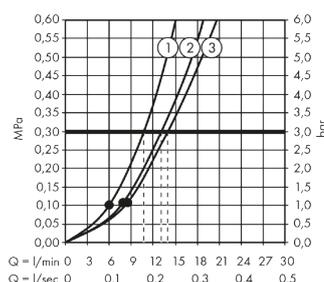

## Legend

- ① Mono
- ② Intense PowderRain
- ③ PowderRain

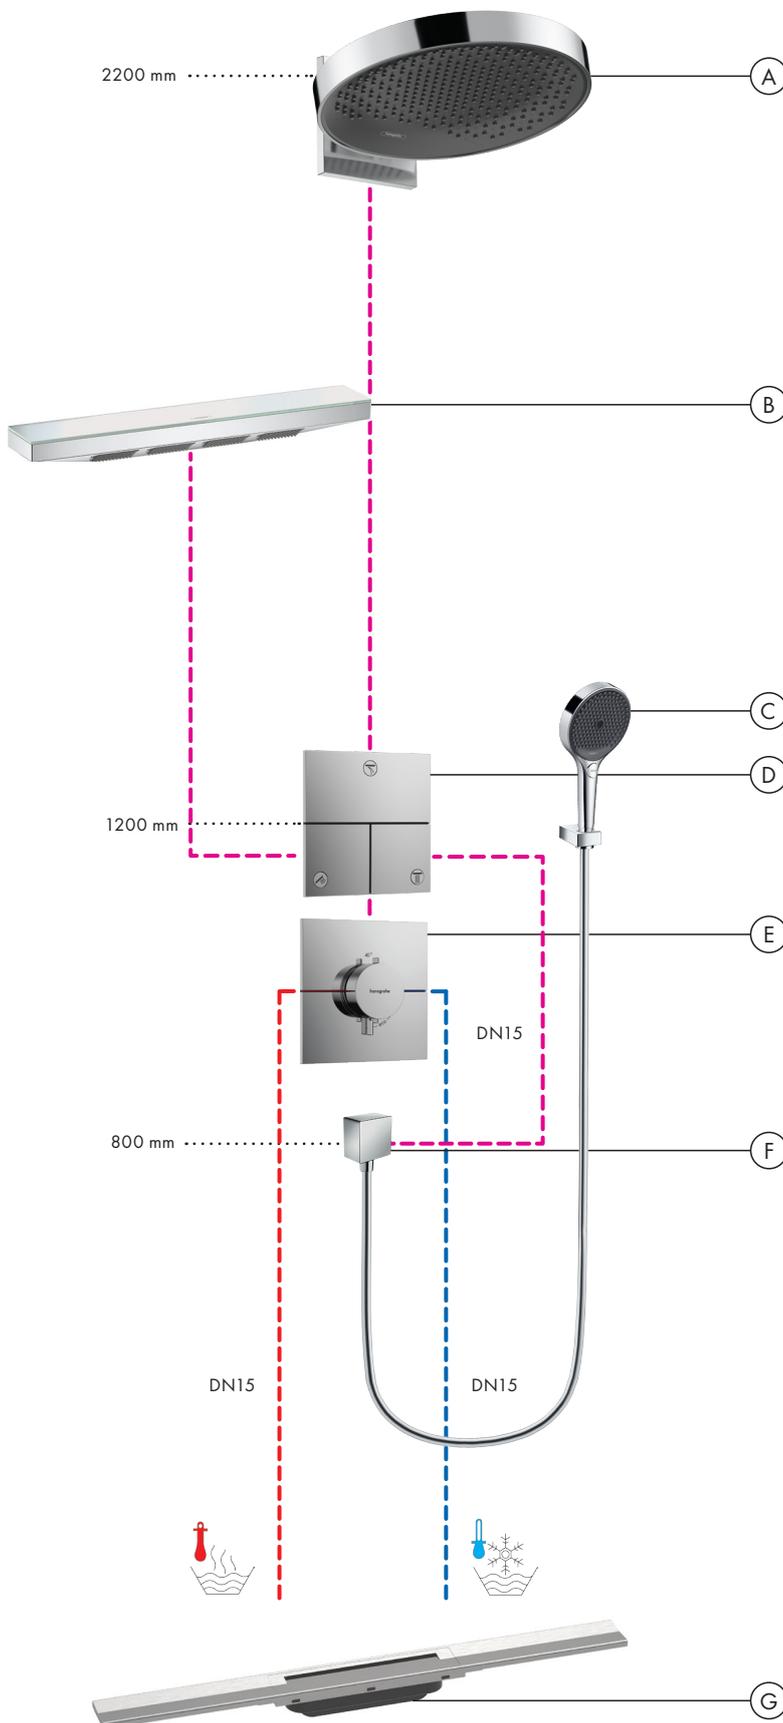

• denotes minimum operating pressure.

# Installation types


## Concealed installation ShowerSelect Comfort E, 3 functions

- (A) Pulsify E**  
Overhead shower 260 2jet with wall connector  
# 24350XXX  
Basic set iBox universal 2 (not shown)  
# 01500180  
Adapter plate for the iBox universal 2  
# 13588000
- (B) Pulsify E**  
Shower set 100 1jet EcoSmart with shower bar 90 cm  
# 24380XXX
- (C) ShowerSelect Comfort E**  
Valve for concealed installation for 3 functions  
# 15573XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- (D) ShowerSelect Comfort E**  
Thermostat for concealed installation  
# 15574XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- (E) FixFit**  
Wall outlet Square with non-return valve  
# 26455XXX
- (F) RainDrain Flex**  
Finish set shower drain 700 cuttable  
# 56043XXX  
Base set for finish sets for standard installation (not shown)  
# 01001180

### Flow diagrams


#### Pulsify E

Overhead shower 260 2jet with wall connector  
# 24350XXX

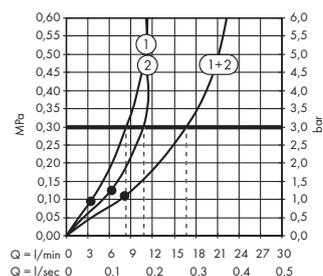


#### Pulsify E

Baton hand shower 100 1jet EcoSmart  
# 24320XXX

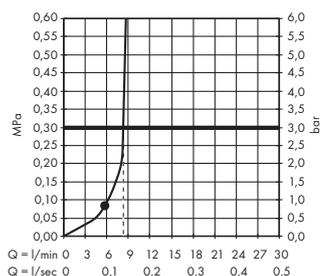

### Legend

- ① Intense PowderRain
- ② PowderRain

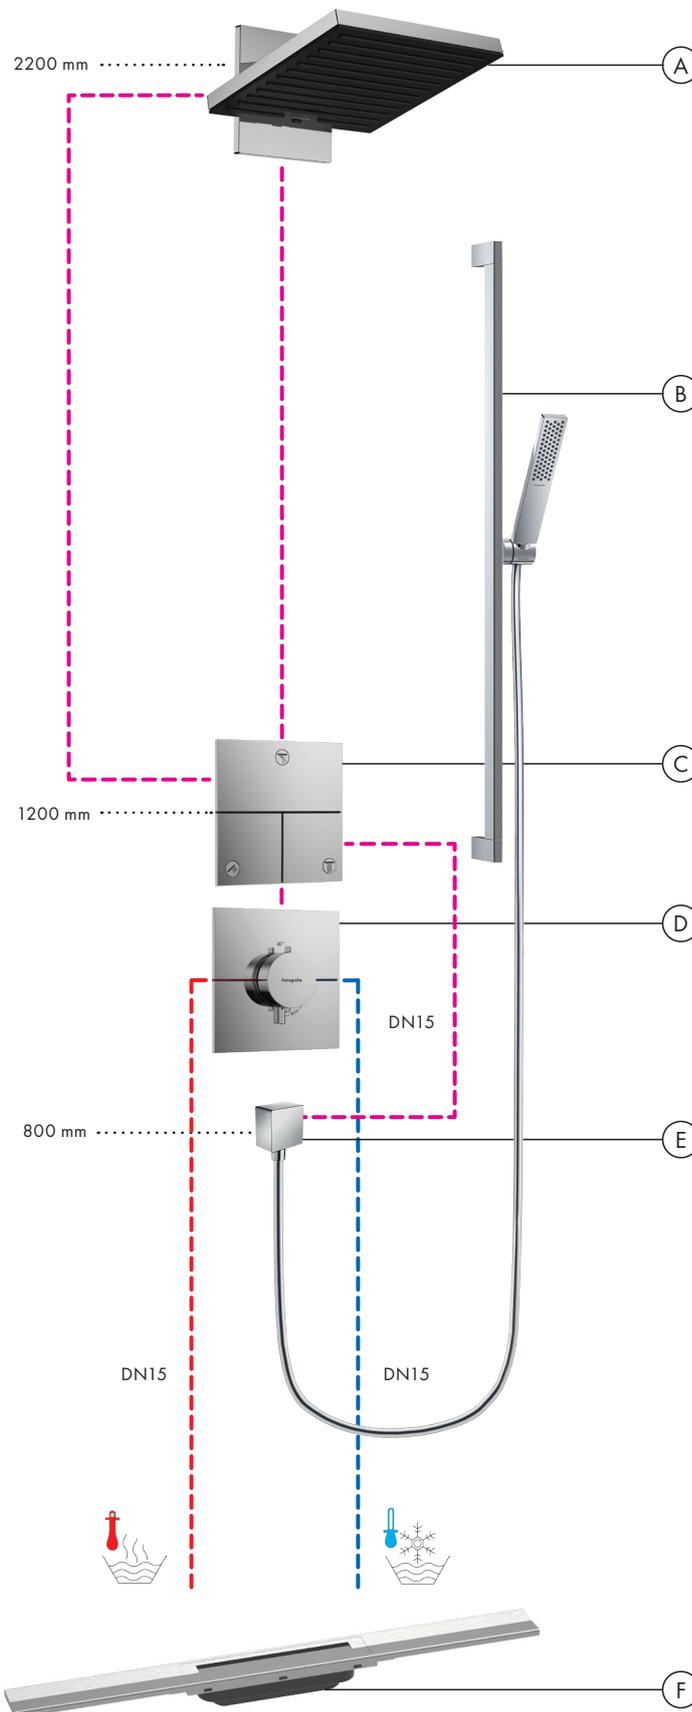

• denotes minimum operating pressure.

# Concealed installation ShowerSelect Comfort E, 4 functions


- (A) Rainfinity**  
Overhead shower 250 3jet with wall connector  
# 26232XXX  
Basic set iBox universal 2 (not shown)  
# 01500180  
Adapter plate for the iBox universal 2  
# 13588000
- (B) Rainfinity**  
Hand shower 130 3jet  
# 26864000  
Shower hose Isiflex 160 cm  
# 28276XXX
- (C) ShowerSelect Comfort E**  
Valve for concealed installation for 3 functions  
# 15573XXX  
Basic set iBox universal 2 (not shown)  
# 01500180

- (D) FixFit Porter E**  
Wandanschluss mit Brausehalter  
# 26889XXX
- (E) ShowerSelect Comfort E**  
Thermostat Thermostat for concealed installation for 1 function and additional outlet  
# 15575XXX
- (F) RainDrain Match**  
Finish set shower drain 700 with height adjustable frame  
# 56037XXX  
Base set for finish sets for standard installation (not shown)  
# 01001180

## Flow diagrams


### Rainfinity

Overhead shower 250 3jet with wall connector  
# 26232XXX

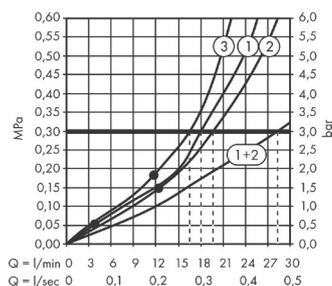


### Rainfinity

Hand shower 130 3jet  
# 26864XXX

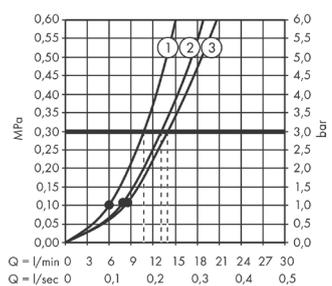

• denotes minimum operating pressure.

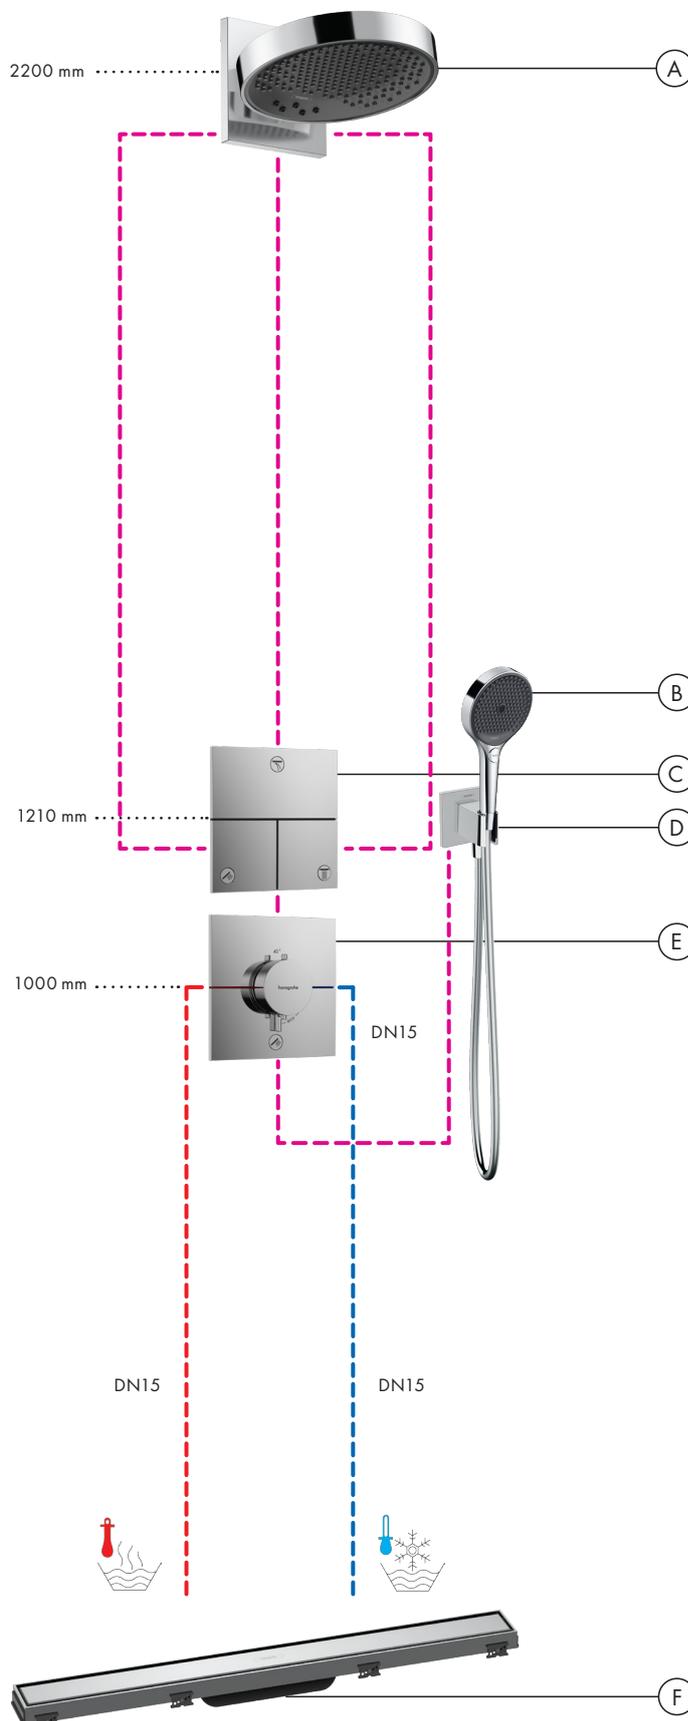

## Legend

- ① Intense PowderRain
- ② PowderRain
- ③ RainStream


## Legend

- ① Mono
- ② Intense PowderRain
- ③ PowderRain

# Installation types


## Concealed installation DuoTurn Q, 1 function

- Ⓐ **Croma Select E**  
Shower set Vario with shower bar 90 cm  
# 26592400
- Ⓑ **DuoTurn Q**  
Mixer for concealed installation  
for 1 function  
# 75614XXX  
Basic set iBox universal 2 (not shown)  
# 01500180
- Ⓒ **FixFit S**  
Wall outlet S with non-return valve  
# 27456XXX
- Ⓓ **RainDrain Flex**  
Finish set shower drain 700 cuttable  
# 56043XXX  
Base set for finish sets  
for standard installation (not shown)  
# 01001180

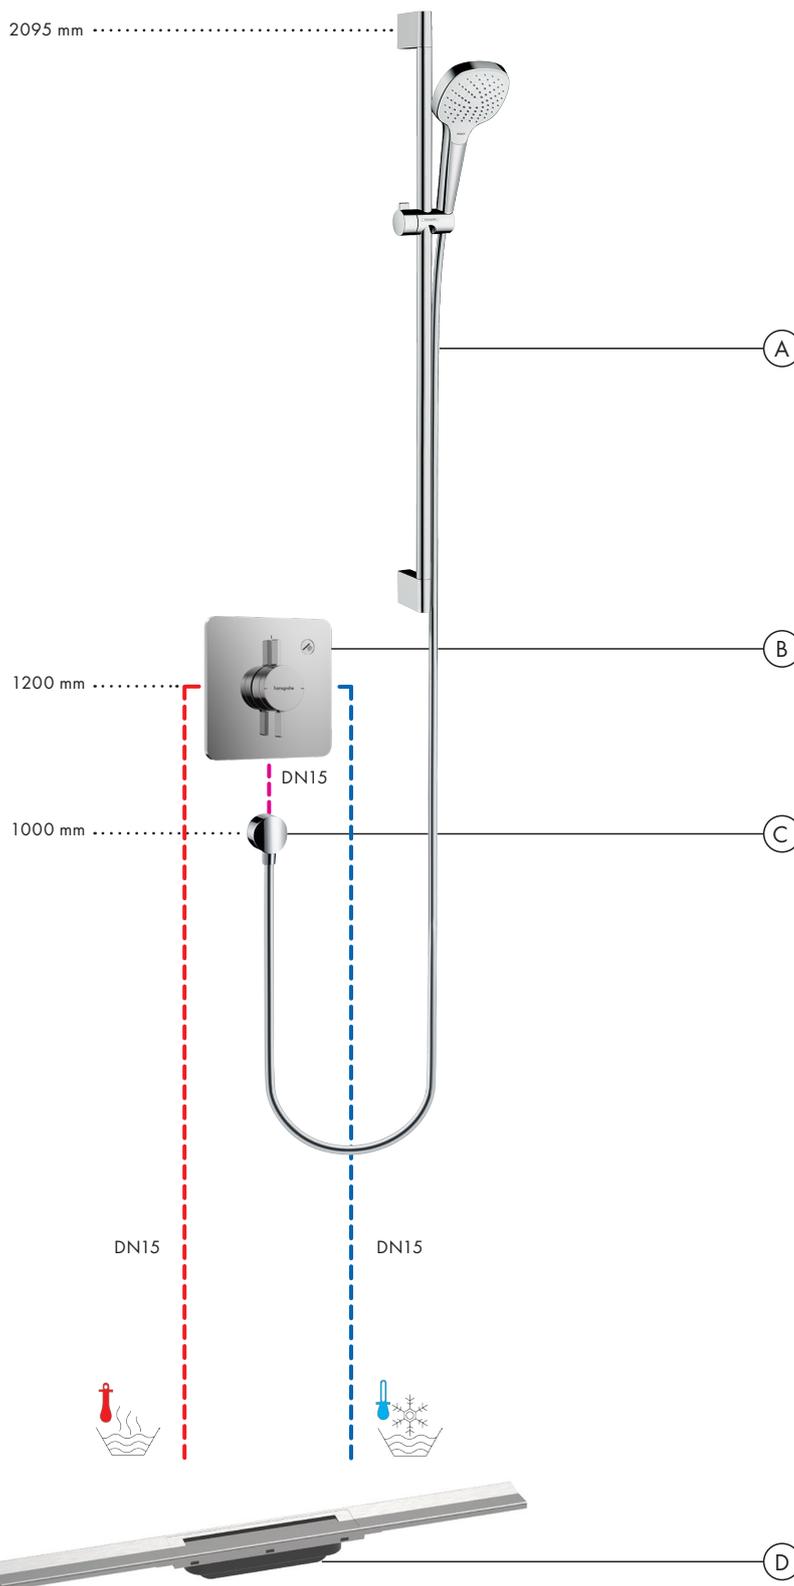

### Flow diagram

**Croma Select E**  
Hand shower Vario  
# 26812400

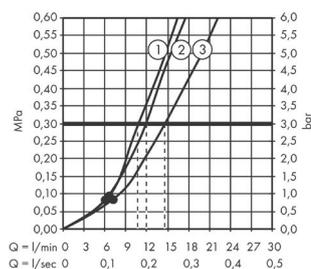


### Legend

- ① TurboRain
- ② IntenseRain
- ③ Rain

• denotes minimum operating pressure.


## Concealed installation DuoTurn S, 2 functions/bath tub

- (A) Pulsify S**  
Hand shower 105 ljet  
# 24120XXX  
Shower hose Isiflex 160 cm  
# 28276XXX
- (B) DuoTurn S**  
Mixer for concealed installation  
for 2 functions  
# 75418000  
Basic set iBox universal 2 (not shown)  
# 01500180
- (C) FixFit Porter S**  
Wall outlet with shower holder  
# 26888XXX
- (D) Exafill S**  
Basic set and finish set bath filler,  
waste and overflow set  
# 58117XXX  
# 58116180

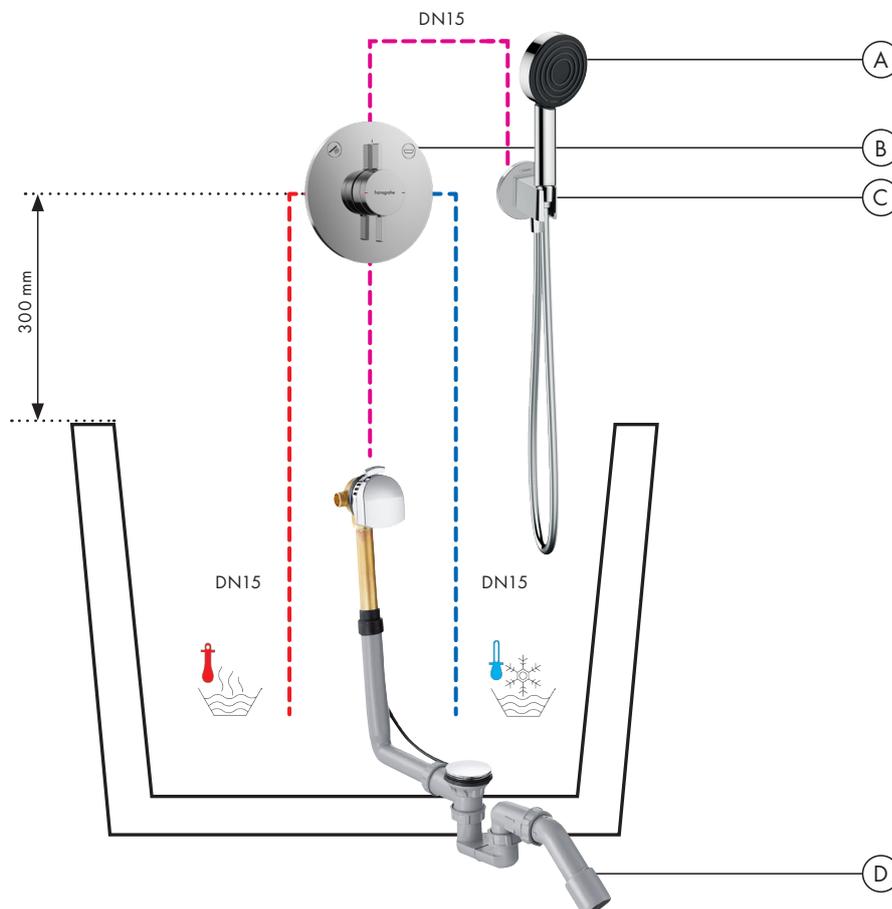

### Flow diagram

**Pulsify S**  
Hand shower 105 ljet  
# 24120XXX

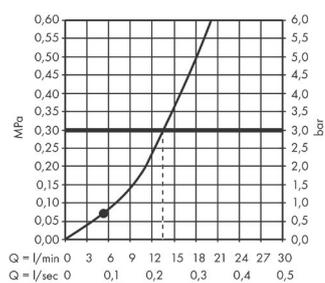

• denotes minimum operating pressure.


# Installation types

## Concealed installation DuoTurn Q, 2 functions


- (A) Crometta E**  
Overhead shower 240 ljet EcoSmart  
9 l/min  
# 26727XXX  
Shower arm 24 cm (not shown)  
# 26405XXX
- (B) Crometta**  
Hand shower Vario Green 6 l/min  
# 26336400  
Shower hose Isiflex 160 cm  
# 28276XXX  
Shower holder Porter S  
# 28331XXX
- (C) DuoTurn Q**  
Mixer for concealed installation  
for 2 functions  
# 75414000  
Basic set iBox universal 2 (not shown)  
# 01500180
- (D) FixFit S**  
Wall outlet S with non-return valve  
# 27456XXX
- (E) RainDrain Compact**  
Complete set shower drain 700  
for standard installation  
# 56176800

### Flow diagrams

**Crometta E**  
Overhead shower 240 ljet EcoSmart 9 l/min  
# 26727XXX

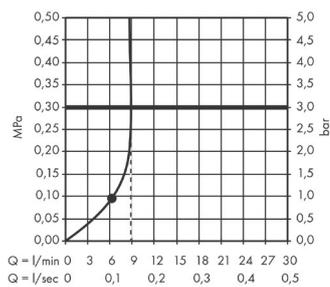


**Crometta**  
Hand shower Vario Green 6 l/min  
# 26336400

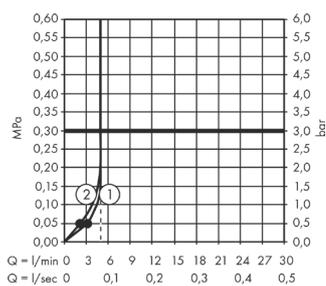

- Legend**
- ① Rain
  - ② IntenseRain

• denotes minimum operating pressure.

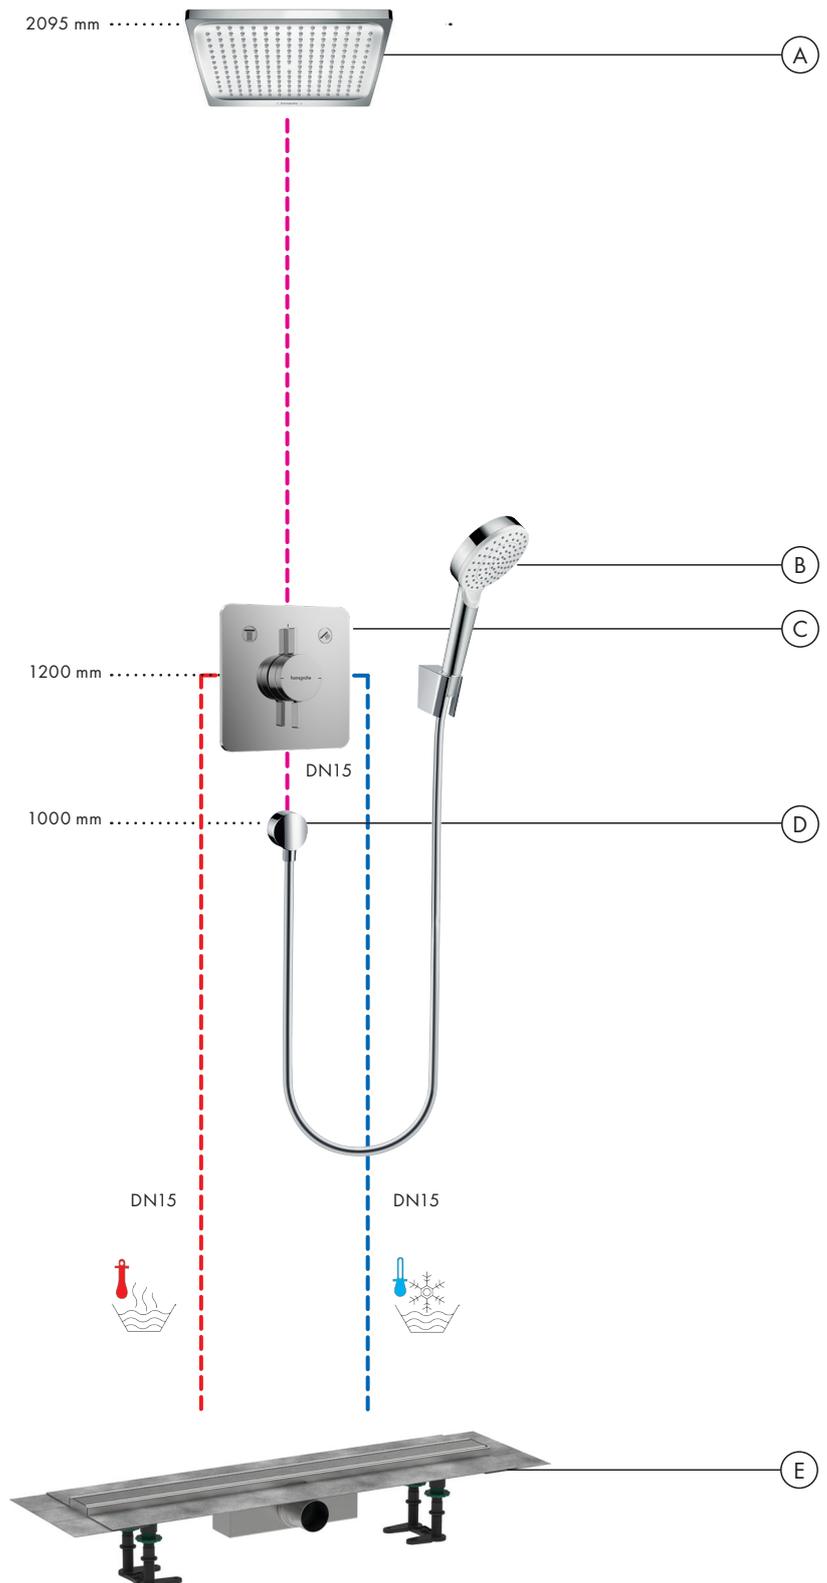


# Concealed installation DuoTurn Q, 2 functions

- (A) Vernis Blend**   
Overhead shower 200 1jet EcoSmart  
# 26277XXX  
Ceiling connector 10 cm  
# 26406XXX
- (B) Vernis Blend**  
Hand shower Vario EcoSmart  
# 26340000
- (C) DuoTurn Q**  
Mixer for concealed installation  
for 2 functions  
# 75414000  
Basic set iBox universal 2 (not shown)  
# 01500180
- (D) Porter S**  
Shower holder Porter S  
# 28331XXX  
Shower hose Isiflex 160 cm  
# 28276XXX
- (E) FixFit S**  
Wall outlet S with non-return valve  
# 27456XXX
- (F) RainDrain Compact**  
Complete set shower drain 700  
for standard installation  
# 56176800

## Flow diagrams


### Vernis Shape

Overhead shower 200 1jet EcoSmart  
# 26277XXX

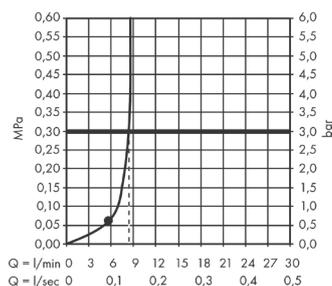


### Vernis Blend

Hand shower Vario EcoSmart  
# 26340000

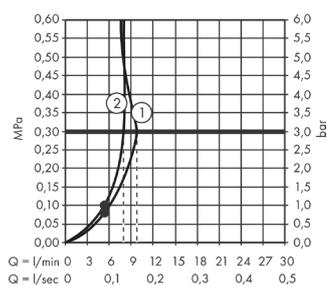

## Legend

- ① Rain
- ② IntenseRain

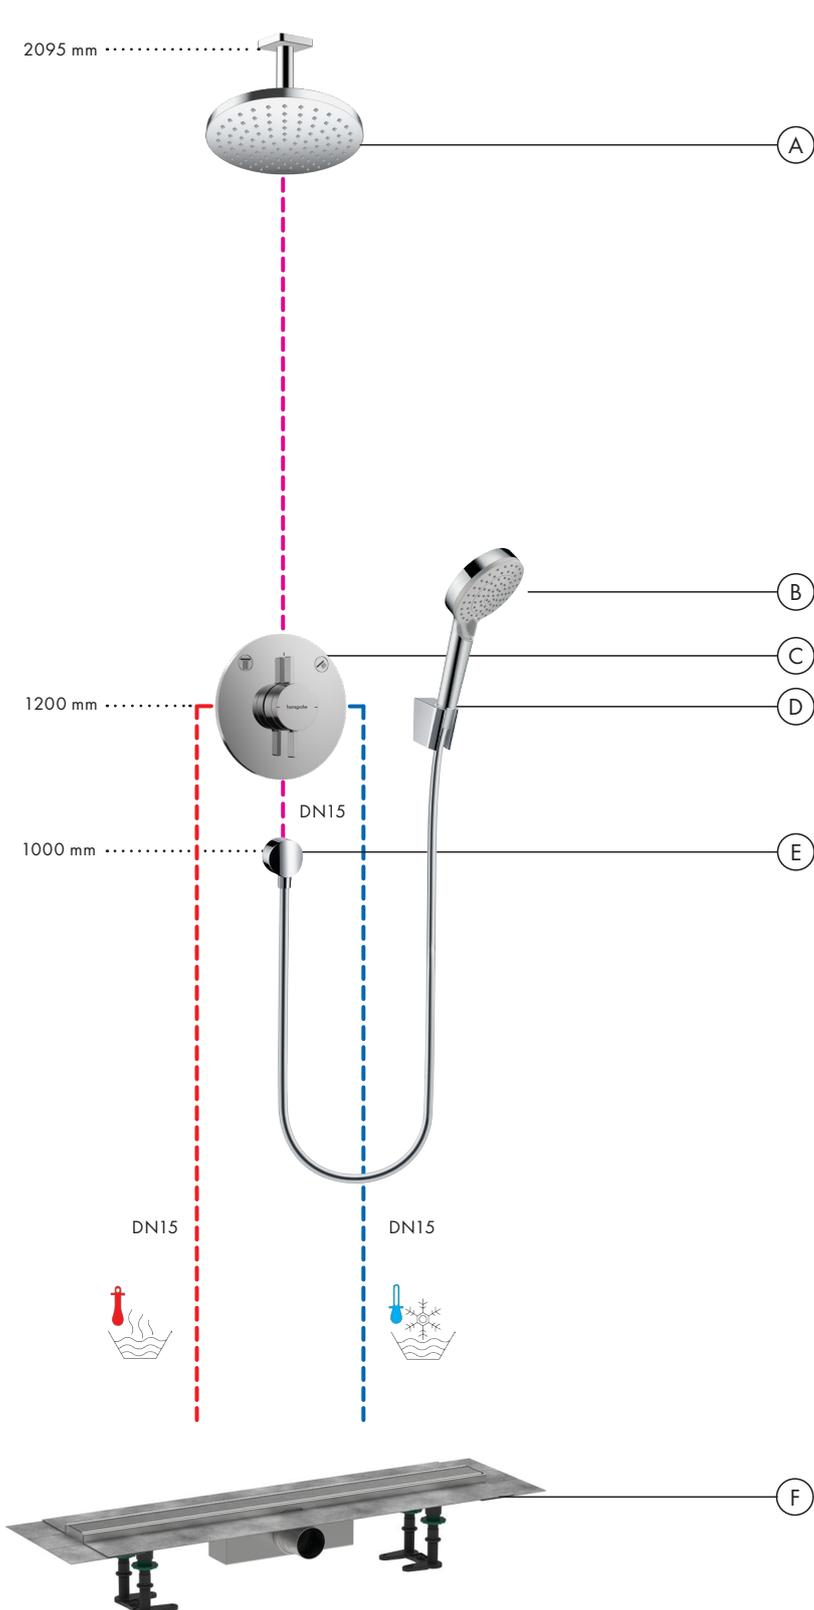


• denotes minimum operating pressure.

# Planning and installation information

## Base set

Fit the base set with the **hot water connection on the left** and the **cold water connection on the right**. Installation depth: 80 mm to 108 mm.

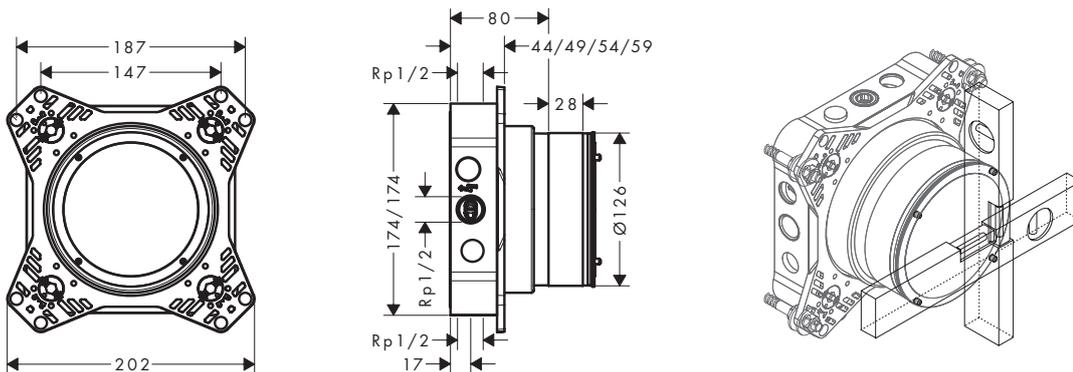

## Installing the base set

The base set can be fitted to suit the structural conditions. The iBox universal 2 is suitable for installing both bath tubs and showers. With shower installations, the outlet that is not required needs to be stopped with a plug.

The rotation-symmetrical base set of the iBox universal 2 can be used horizontally or vertically.


## Accessories



**Extension wall flange E, 5 mm, for use when installations are too flat**  
# 13612XXX



**Extension wall flange E, 22 mm, for use when installations are too flat**  
# 13617XXX



**DuoTurn adapter E and Q for ShowerSelect extension wall flange**  
# 13628000



**Extension set 25 mm, for installations that are too deep**  
# 13632000

**Extension wall flange Q, 5 mm, for use when installations are too flat**  
# 13613XXX (not shown)

**Extension wall flange Q, 22 mm, for use when installations are too flat**  
# 13618XXX (not shown)

**DuoTurn adapter S for ShowerSelect extension wall flange**  
# 13631000 (not shown)



**Adapter plate for the iBox universal 2\***  
# 13588000

**Extension wall flange S, 5 mm, for use when installations are too flat**  
# 13614XXX (not shown)

**Extension wall flange S, 22 mm, for use when installations are too flat**  
# 13624XXX (not shown)

\*is required when installing iBox universal compatible overhead showers, shower, bath tub and thermostat finish sets for concealed installation in conjunction with the iBox universal 2.

### Tips for the bath tub



### iBox universal 2 in combination with Exafill bath filler with waste and overflow set:

switch off water to the Exafill during the construction stage!

#### Basic installation:


1. Install iBox universal 2
2. Lay pipelines to the Exafill and block (metal plug)
3. Flush and press pipe system

#### Place bath tub:

1. Switch off water
2. Install bath tub with Exafill and connect to mains water
3. Flush pipe to the Exafill with sample filler necks and check for leaks
4. Switch off water at floor level
5. Remove flushing block
6. Insert plug (A) in outlet flushing block
7. Fit flushing block
8. Switch on water

### Sinks

Flush complete installation as per DIN 1988/EN 1717. The arrows on the flushing block indicate which inlet is connected to which outlet pipe, for instance cold water to outlet 1 and hot water to outlet 2. If only one outlet is required, then the flushing block needs to be rotated by 90° after the first flush.

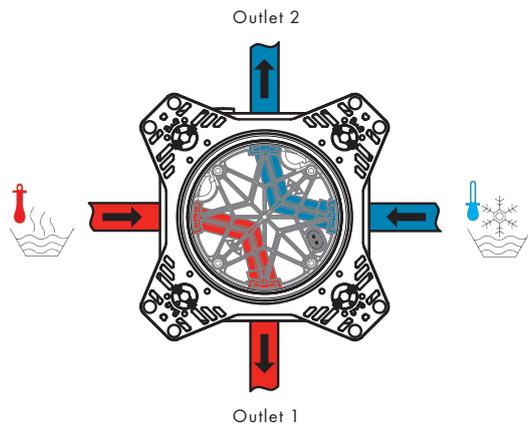

### iBox universal 2 # 01500180



### New finish sets ShowerSelect Comfort and DuoTurn



Adapter plate  
# 13588000 required

### iBox universal # 01800180



### Specifications

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0.1 – 0.5 MPa
Test pressure: (1 MPa = 10 bar = 147 PSI)	1.6 MPa
Hot water temperature:	max. 80 °C
Recommended hot water temperature:	65 °C
Connection dimensions:	Rp 1/2
Connections:	cold right, hot left


Free flow at:	0.3 MPa
Bath mixer outlet bath tub:	31 l/min
Bath mixer outlet shower:	24 l/min
Shower tap:	32 l/min
Bath mixer with integrated backflow prevention:	25 l/min // 24 l/min
Thermostatic mixer with shut-off valve:	26 l/min
HighFlow thermostatic mixer (outlet 1 + 2):	58 l/min
Test mark:	DVGW, SVGW

Please use/create your local QR Code directing our b2b partners to the iBox universal 2 section on country HPS!

Download the  
installation manual from  
[pro.hansgrohe.com](http://pro.hansgrohe.com).



# Product overview

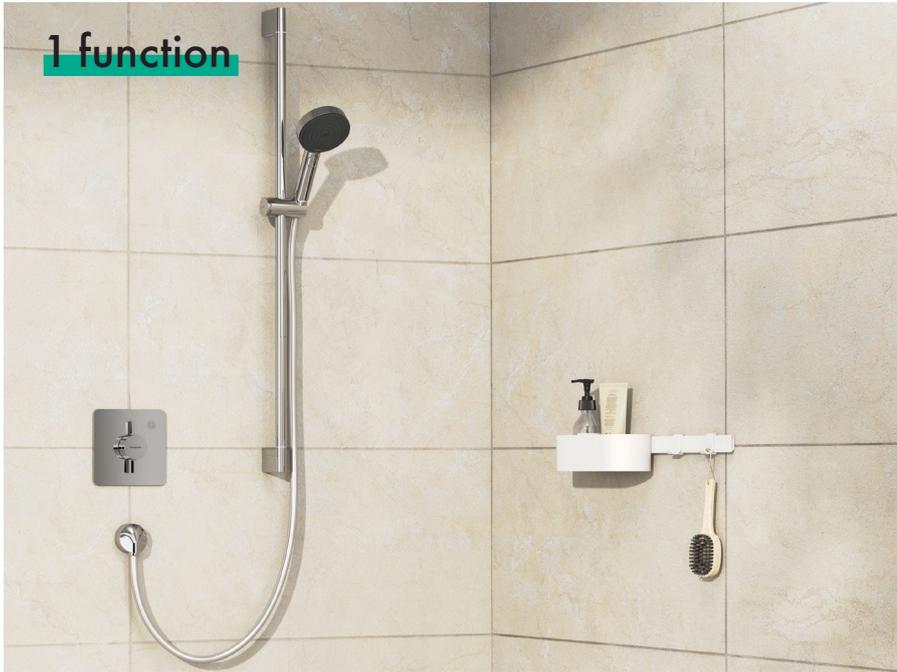

**ShowerSelect Comfort E**  
Thermostat for concealed installation for 1 function  
# 15571XXX



**DuoTurn E**  
Mixer for concealed installation for 1 function  
# 75617XXX




**iBox universal 2**  
Basic set  
# 01500180



**ShowerSelect Comfort Q**  
Thermostat for concealed installation for 1 function  
# 15581XXX



**DuoTurn Q**  
Mixer for concealed installation for 1 function  
# 75614XXX

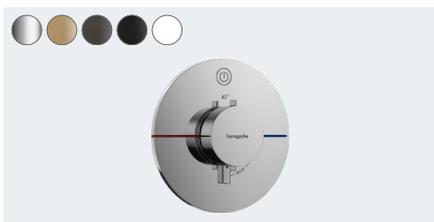



**ShowerSelect Comfort S**  
Thermostat for concealed installation for 1 function  
# 15553XXX



**DuoTurn S**  
Mixer for concealed installation for 1 function  
# 75618XXX



2 functions

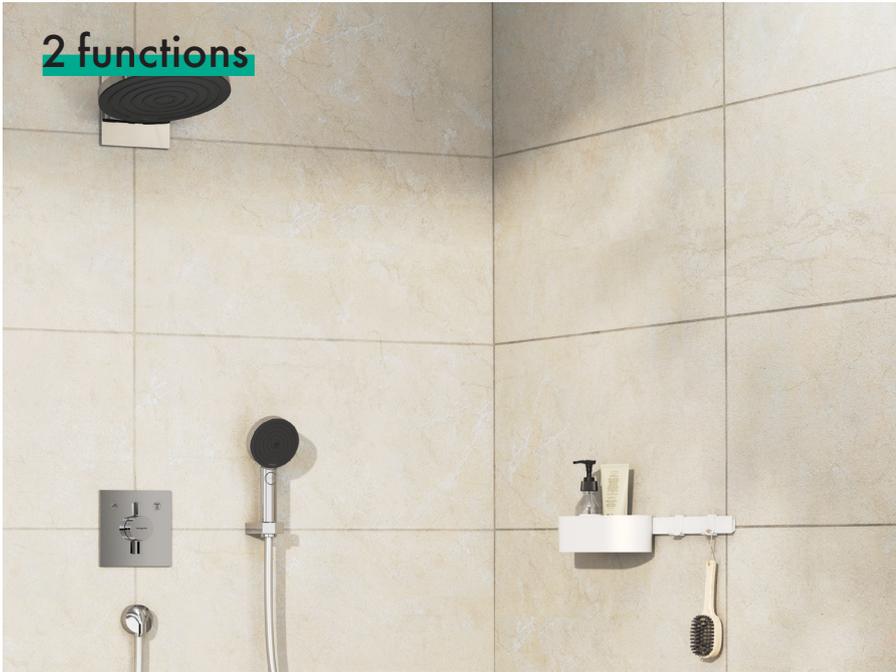

-000 Chrome




-140 Brushed Bronze



-340 Brushed Black Chrome



-670 Matt Black



-700 Matt White



**ShowerSelect Comfort E**

Thermostat for concealed installation for 2 functions  
# 15572XXX



**ShowerSelect Comfort E**

Thermostat for concealed installation for 2 functions  
with integrated security combination according to EN1717  
# 15578XXX



**DuoTurn E**

Mixer for concealed installation for 2 functions  
# 75417XXX



**ShowerSelect Comfort Q**

Thermostat for concealed installation for 2 functions  
# 15583XXX



**ShowerSelect Comfort Q**

Thermostat for concealed installation for 2 functions  
with integrated security combination according to EN1717  
# 15586XXX



**DuoTurn Q**

Mixer for concealed installation for 2 functions  
# 75414XXX




**ShowerSelect Comfort S**

Thermostat for concealed installation for 2 functions  
# 15554XXX



**ShowerSelect Comfort S**

Thermostat for concealed installation for 2 functions  
with integrated security combination according to EN1717  
# 15556XXX

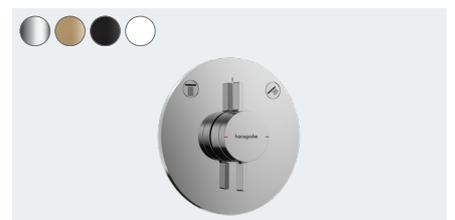


**DuoTurn S**

Mixer for concealed installation for 2 functions  
# 75418XXX




# Product overview

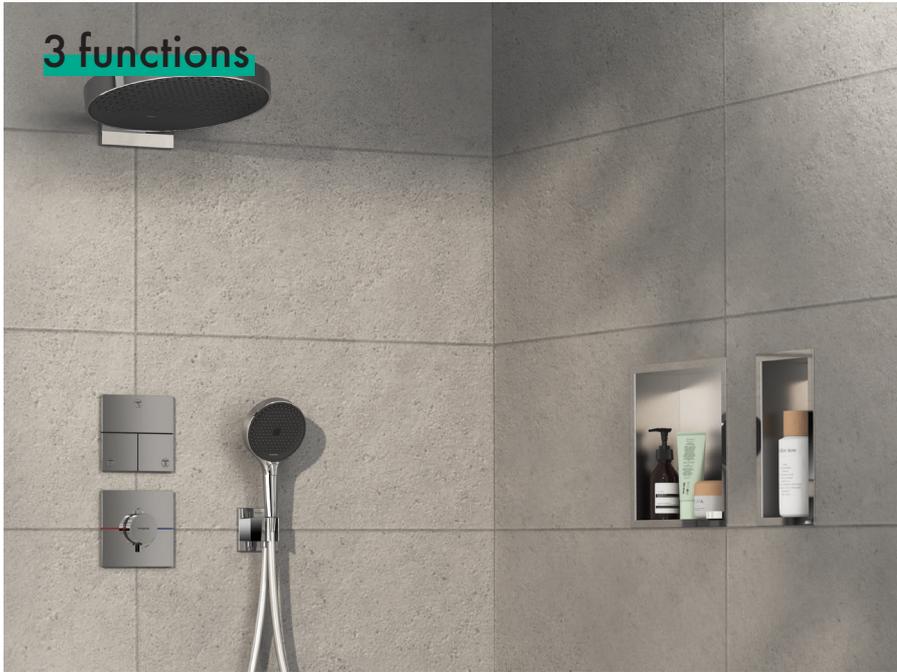

3 functions



**ShowerSelect Comfort E**  
Valve for concealed installation for 3 functions  
# 15573XXX

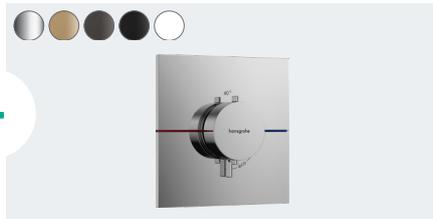

**ShowerSelect Comfort E**  
Thermostat for concealed installation  
# 15574XXX



**iBox universal 2**  
Basic set  
# 01500180



**ShowerSelect Comfort Q**  
Valve for concealed installation for 3 functions  
# 15587XXX



**ShowerSelect Comfort Q**  
Thermostat for concealed installation  
# 15588XXX




**Adapter plate for the iBox universal 2**

# 13588000  
is required to install iBox universal-compatible (# 01800180) overhead showers, prefabricated shower, bath tub and thermostat sets (concealed installation) using the iBox universal 2 (# 01500180).



**ShowerSelect Comfort S**  
Valve for concealed installation for 3 functions  
# 15558XXX

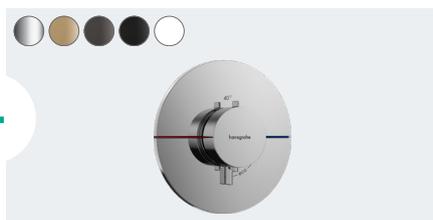

**ShowerSelect Comfort S**  
Thermostat for concealed installation  
# 15559XXX





**ShowerSelect Comfort E**  
Valve for concealed installation for 3 functions  
# 15573XXX



**ShowerSelect Comfort E**  
Thermostat for concealed installation  
for 1 function and additional outlet  
# 15575XXX



**iBox universal 2**  
Basic set  
# 01500180




**ShowerSelect Comfort Q**  
Valve for concealed installation for 3 functions  
# 15587XXX



**ShowerSelect Comfort Q**  
Thermostat for concealed installation  
for 1 function and additional outlet  
# 15589XXX



**Adapter plate for the iBox universal 2**  
# 13588000  
is required to install iBox universal-compatible (# 01800180) overhead showers, prefabricated shower, bath tub and thermostat sets (concealed installation) using the iBox universal 2 (# 01500180).

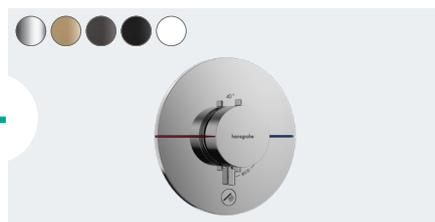

**ShowerSelect Comfort S**  
Valve for concealed installation for 3 functions  
# 15558XXX



**ShowerSelect Comfort S**  
Thermostat for concealed installation  
for 1 function and additional outlet  
# 15562XXX



# The future is here. Ready?

The iBox universal 2 and the new ShowerSelect Comfort and DuoTurn finish sets.



## Technologies



Fast, safer, and more secure installation – several features are there to ensure simple installation.




Actively regulates water consumption – the amount of water can be adjusted via the control dial.



The high-quality installation kit features a pre-assembled seal and is 100% waterproof.



Shower that consumes up to 40% less water than our standard shower heads and therefore also cuts energy costs.




A simple way to control the water flow, shower or spray type at the touch of a button.



This economical shower head consumes up to 60% less water than our standard showers. This also cuts energy costs.



Safety lock at over 40 °C – temperature limitation, which prevents excessively hot water from flowing.

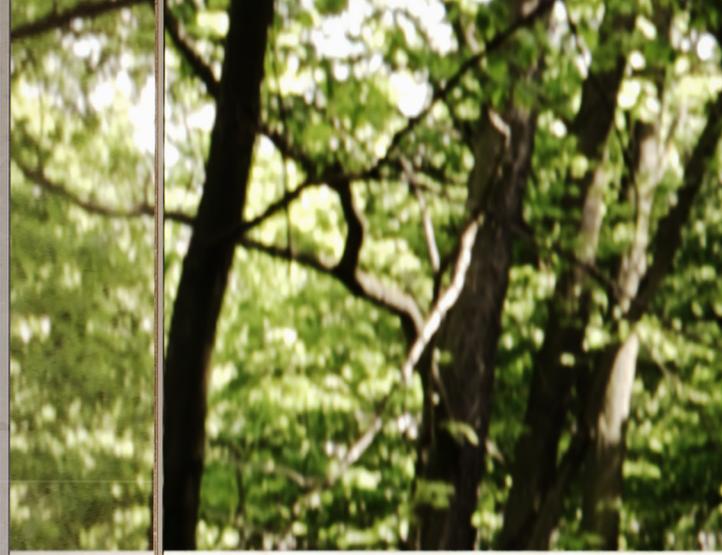

# RainDrain:

---

Systematic drainage



# Pretty.

One base set for all.


# Clever.

One bathroom, one look.



# uBox universal

One base set for all installation scenarios

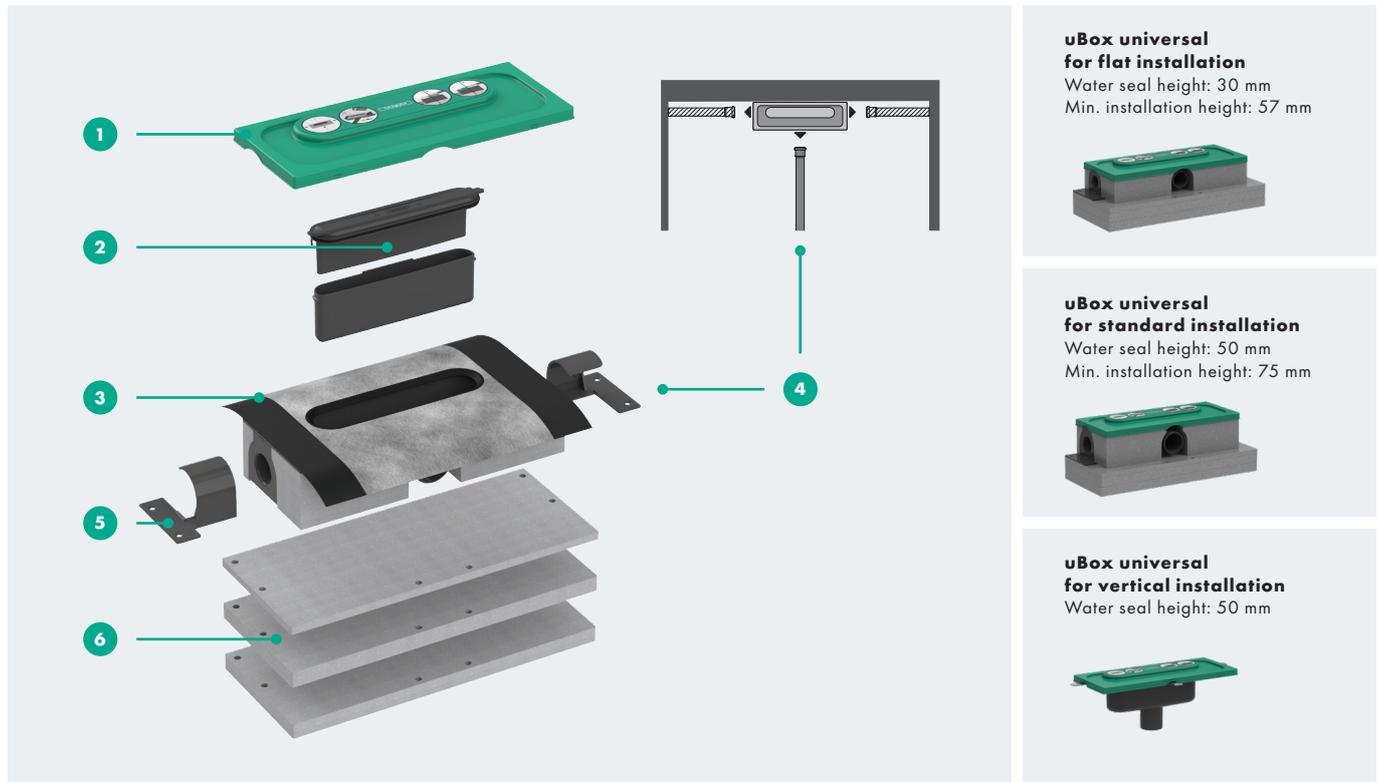

## Features

- 1 Screed cover protects from dirt during shell construction
- 2 Easy-to-clean siphon included as standard
- 3 Pre-assembled sealing membrane as per DIN 18534
- 4 Flexible connection options with outlets on three sides
- 5 Easy attachment to the floor with mounting bracket
- 6 Easy height adjustment with three plates (2 x 20 mm, 1 x 10 mm)

## Specifications

### uBox universal for flat installation


Minimum installation height: 57 mm  
 Siphon drainage capacity: up to 33 l/min  
 Dryphon drainage capacity: up to 55 l/min

### uBox universal for standard installation


Minimum installation height: 75 mm  
 Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
 Dryphon drainage capacity: up to 60 l/min

### uBox universal for vertical installation


Minimum installation height: -  
 Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
 Dryphon drainage capacity: up to 60 l/min

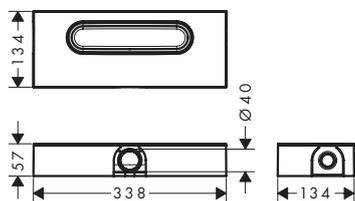

uBox universal for flat installation

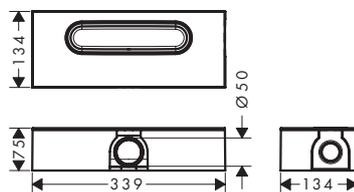


uBox universal for standard installation

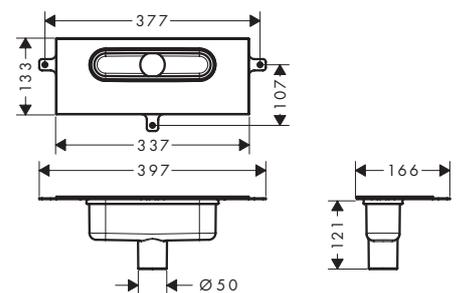

uBox universal for vertical installation

# RainDrain overview



<b>Product name</b>	RainDrain Flex	RainDrain Match	RainDrain Rock	RainDrain Original	RainDrain Compact
<b>Perfect for</b>	Easy to shorten on site	Perfectly flush with the tile thickness	Developed for use with natural stone	Effortless installation with maximum hygiene	Problem solver for renovation projects
<b>Length (mm)</b>	700-1200	600-1200	600-1200	600-1200	600-1200
<b>Finish</b>					
<b>Installation</b>	Free in floor / Wall	Free in floor / Wall	Free in floor	Free in floor	Free in floor
<b>Min. installation height</b>	63 mm (flat) 81 mm (standard)	80 mm (flat) 98 mm (standard)	80 mm (flat) 98 mm (standard)	63 mm (flat) 81 mm (standard)	63 mm (flat) 83 mm (standard)
<b>Drain Capacity up to (l/min)</b>	33 l/min (flat) 42 l/min (standard)	33 l/min (flat) 42 l/min (standard)	33 l/min (flat) 42 l/min (standard)	32 l/min (flat) 49 l/min (standard)	27 l/min (flat) 37 l/min (standard)
<b>Parts to order</b>	uBox Finish Set	uBox Installation Set Finish Set	uBox Installation Set Finish Set	uBox Finish Set	Complete Set
<b>uBox Technology</b>	■	■	■	■	
<b>Dryphon Technology</b>	■	■	■	■	
<b>Tileable Grate</b>		■	■		■





RainDrain Allround



RainDrain Match Plus



RainDrain Minimalistic



RainDrain Spot



RainDrain Brilliance



RainDrain Point

Complete waterproof solution

Effortless installation with maximum hygiene

Minimal appearance

Maximum placement flexibility

Perfectly flush with the tile thickness

Suitable for any bathroom

700-1200

800 - 1200

700 - 1200

150 x 150

100 x 100  
150 x 150

100 x 100  
150 x 150



Free in floor

Free in floor

Wall

Free in floor

Free in floor

Free in floor

67 mm (flat)  
83 mm (standard)

80 mm (flat)  
98 mm (standard)

67 mm (flat)  
85 mm (standard)

71 mm (standard)

75 mm (standard)

56 mm (standard)

32 l/min (flat)  
33 l/min (standard)

33 l/min (flat)  
42 l/min (standard)

28 l/min (flat)  
33 l/min (standard)

35 l/min

35 l/min

41 l/min

Complete Set

uBox  
Installation Set  
Finish Set

uBox  
Finish Set

Complete Set

Complete Set

Complete Set



# Technology

## Drainage reinvented: Dryphon

The design and high flow rate prevent dirt and hair from attaching, minimising cleaning efforts. The patented design offers a significant improvement in drainage capacity up to 60 litres per minute, exceeding all standard requirements and regulations.


The Dryphon system opens and closes with a flexible membrane. This membrane allows water to pass through when needed while blocking sewer gases when no water is flowing through. Also, because it does not rely on a traditional water seal to seal the connection to the sewer, it cannot dry out while still controlling pressure differences in the sewer.

Minimum cleaning  
combined with higher  
drainage capacity




### **hansgrohe Siphon technology**


- High drainage capacity up to 42 l/min
- Low dirt adhesion, as manufactured without seams
- Easy to clean, as can be dismantled
- Removable
- Minimal installation depth

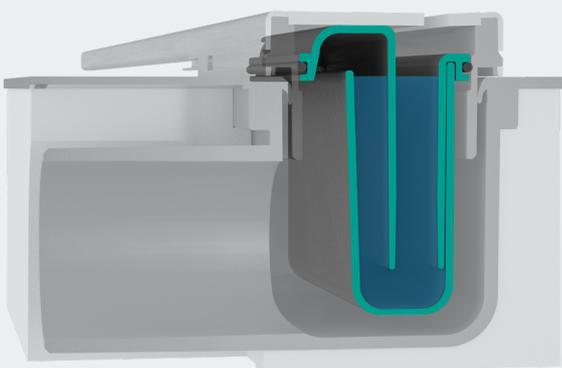

### **hansgrohe Dryphon technology**

- Significantly higher drainage capacity up to 60 l/min
- Durable and temperature-resistant membrane
- Minimal cleaning required, no siphon resistance
- Removable
- Minimal installation depth
- Full odour barrier
- Cannot dry out

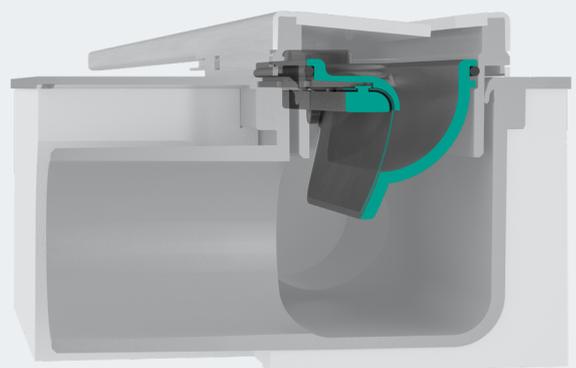

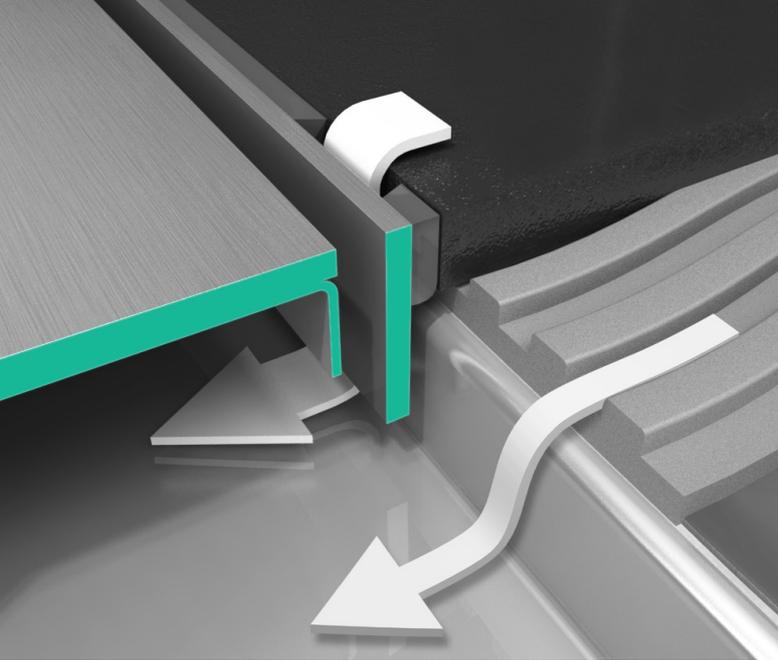


## Secondary drainage

With the RainDrain Match and Brilliance, the height-adjustable frame is not only used to level to tile thickness, but also for secondary drainage. With secondary drainage, water entering through the sealing joints or faulty tile joints will drain into the shower channel thanks to the slope.

For secondary drainage, the entire wet area must be professionally sealed and no sealing must be applied below the service joint between the frame and the installation set.

## Pre-assembled sealing membrane as per DIN 18534

Planners and contractors are required to comply with numerous works contract provisions. The pre-assembled sealing membrane was developed as a standard to prevent mistakes when installing shower drains in combination with waterproofing system.

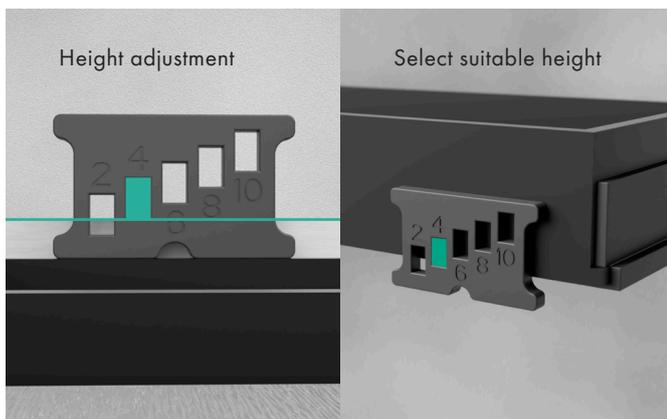

## Height flexibility

The finish set can be easily adjusted to different heights by using either the grate or the height adjustable frame. The sturdy Stainless Steel frame adapts to tile thicknesses of 7-18 mm, making installation easy and safe.

## Easy to clean siphon and surface



# Parts to order

When ordering a linear shower drain together with the uBox system, there are two part numbers:

1. finished set
2. base set / uBox universal (with or without an installation set, depending in on the product line)

Choose between the uBox for standard installation (50 mm water seal), uBox for low installation (30 mm water seal) or the uBox with vertical outlet.

## uBox universal + Finish set



**RainDrain Minimalistic**



**RainDrain Original**



**RainDrain Flex**  
Installation in thin bed

↓



**uBox universal**  
Installation in screed

## Installation set + Finish set



**RainDrain Match Plus**




**RainDrain Match**



**RainDrain Rock**

↓

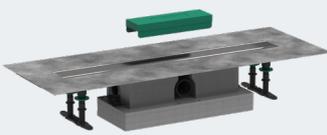

**uBox universal and installation set**  
Installation in screed

## Complete set



**RainDrain Compact**



**RainDrain Allround**



**RainDrain Spot**




**RainDrain Brilliance**




**RainDrain Point**

RainDrain Match wall mounted

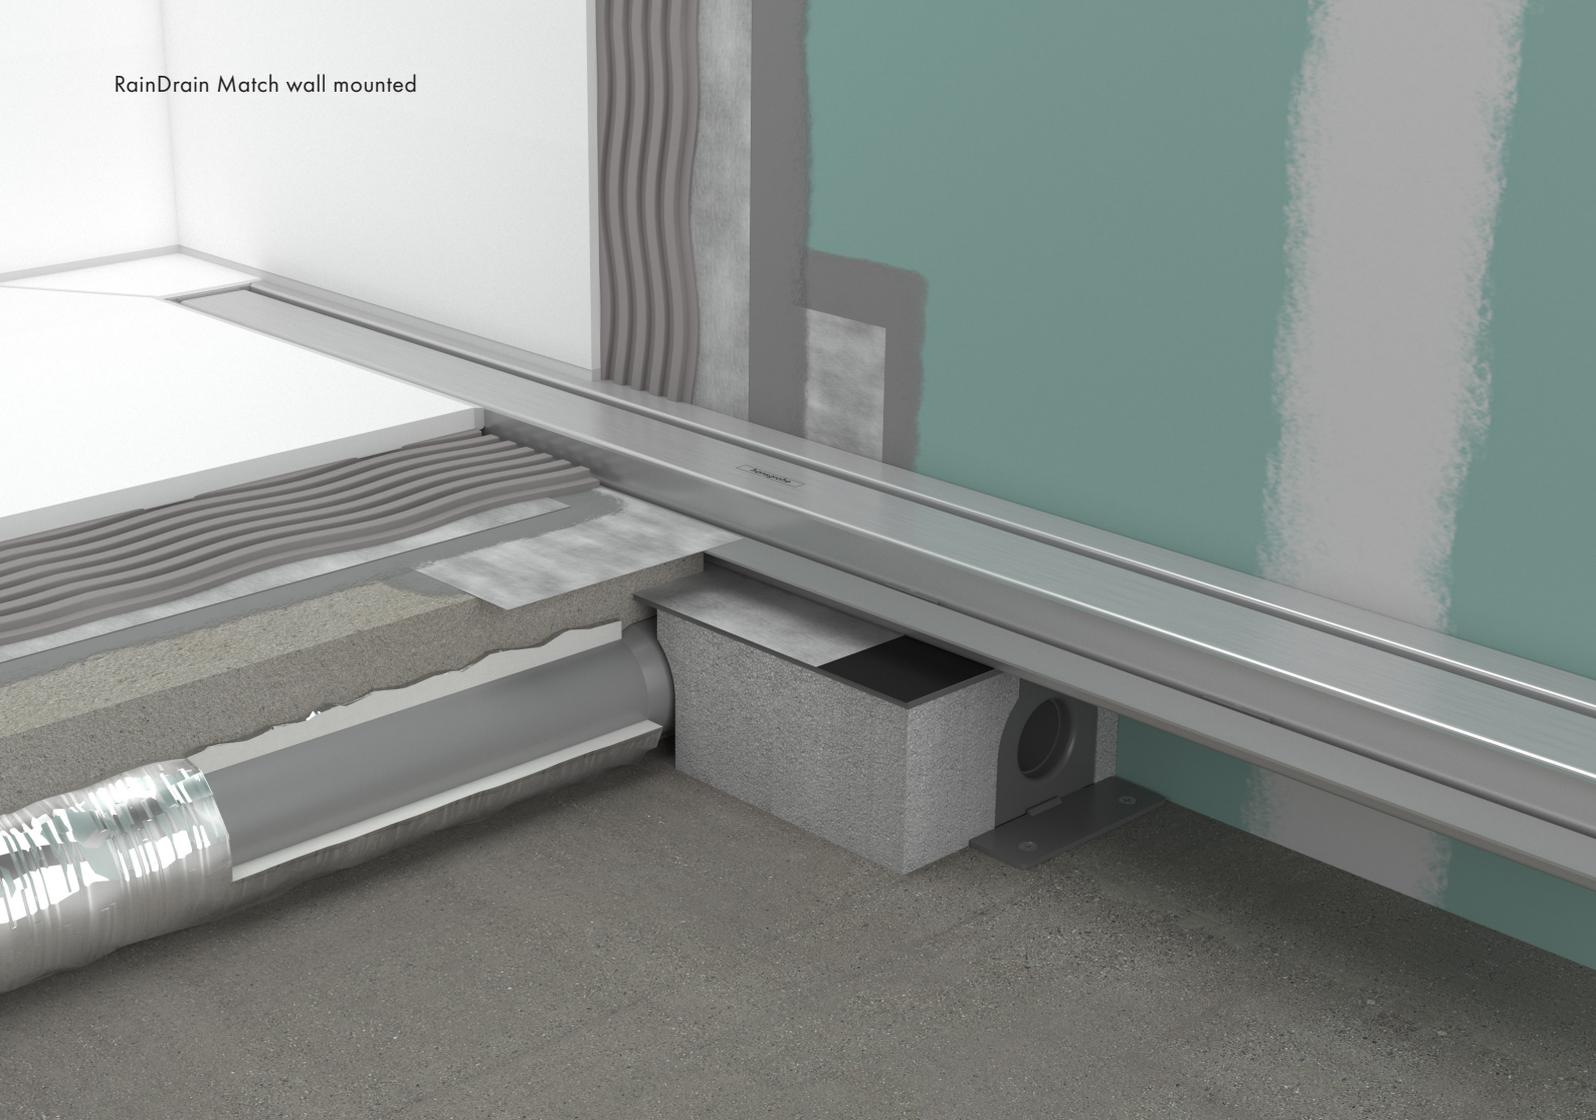


RainDrain Flex wall mounted

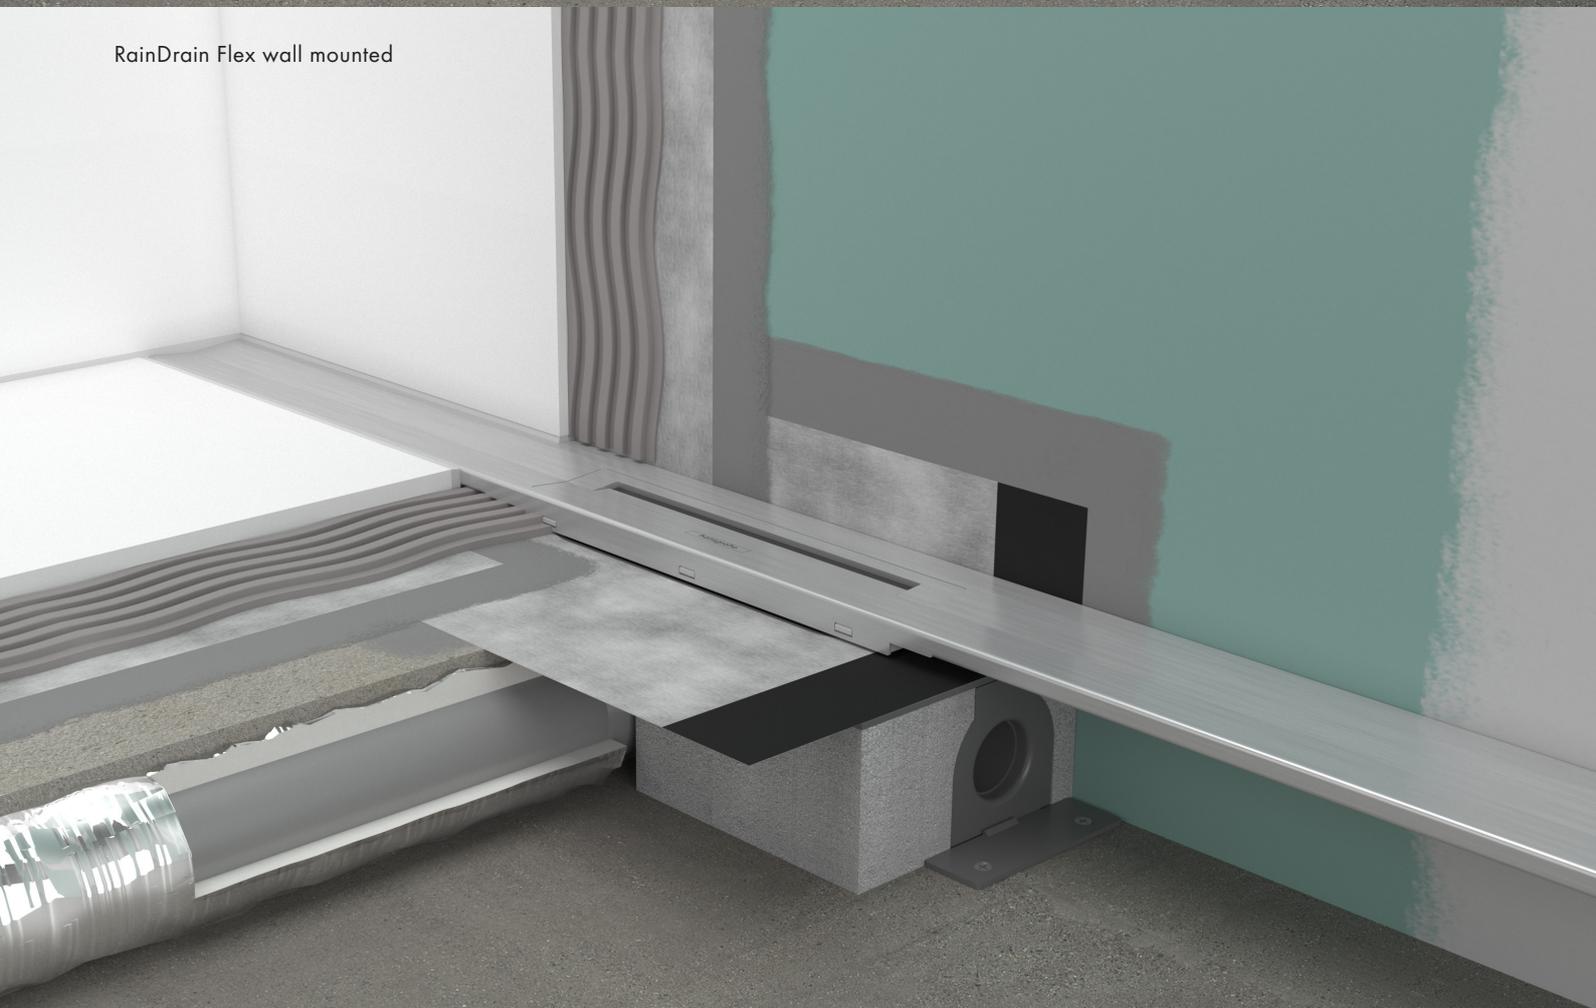

# RainDrain Flex


Easy to shorten on site

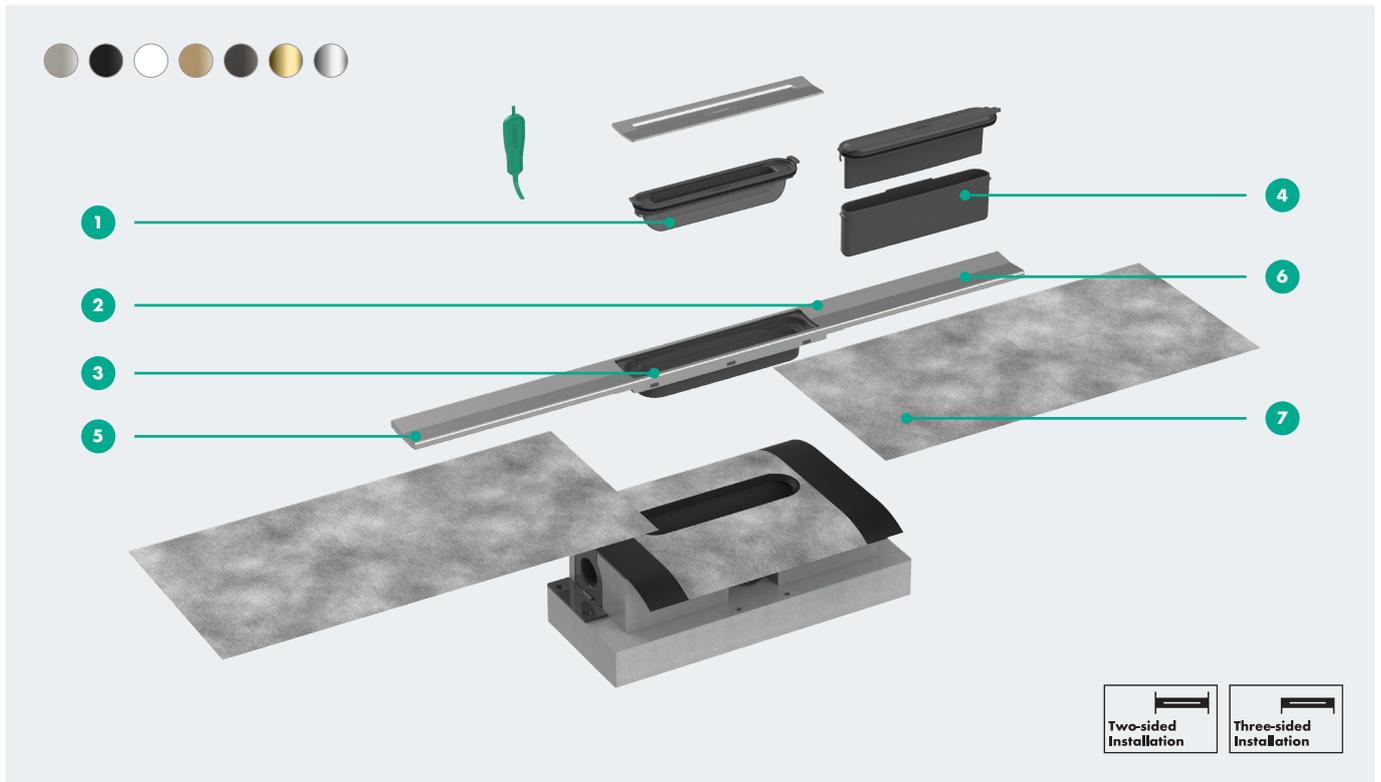

## Features


- 1 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 2 Design grate: Brushed Stainless Steel, Matt Black, Matt White, Brushed Bronze, Brushed Black Chrome, Polished Gold Optic, Chrome
- 3 Base set adapter: easy levelling to tile thickness 7-18 mm
- 4 Siphon 50 mm (as per EN 1253), also available in 30 mm
- 5 Installation: wall-mounted or in-floor. Both versions available
- 6 Design grate made of Stainless Steel 304 (1.4301) with built-in slope. Can be shortened on site.
- 7 Sealing membrane extension for uBox as per DIN 18534

## Required sets

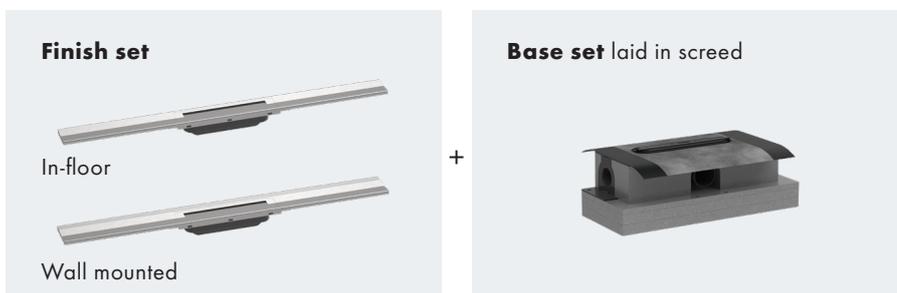



Simply scan the code and check out RainDrain Flex.

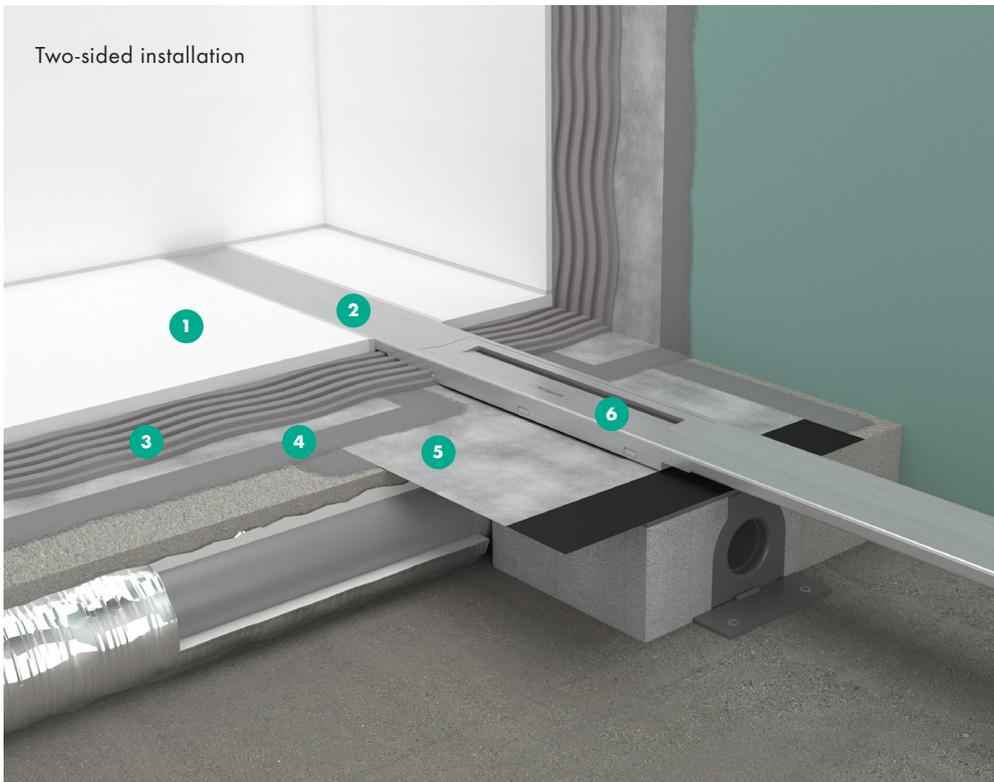

- 1 Tile thickness up to 18 mm
- 2 Design grate  
Stainless Steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Removable cover

## Specifications

**Dimensions**  
700, 800, 900,  
1000, 1200 mm

**Tile thickness**  
up to 18 mm

### uBox universal for flat installation

Minimum installation height: 63 mm  
Siphon drainage capacity: up to 33 l/min  
Dryphon drainage capacity: up to 55 l/min

**Connection**  
Horizontal  
Vertical


**Grate width**  
60 mm (In-floor)  
76 mm (Wall mounted)

### uBox universal for standard installation


Minimum installation height: 81 mm  
Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min

### uBox universal for vertical installation

Minimum installation height: -  
Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min

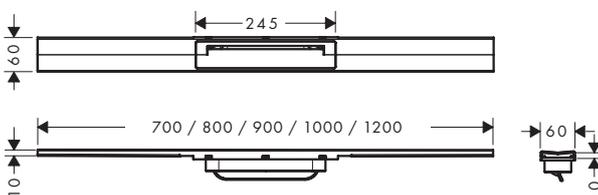


RainDrain Flex

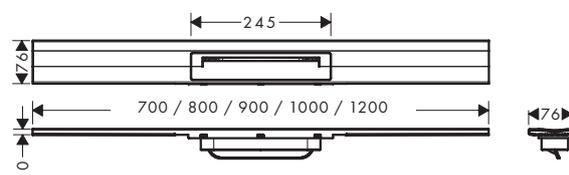

RainDrain Flex for wall mounting

# RainDrain Match

Perfectly flush with the tile thickness

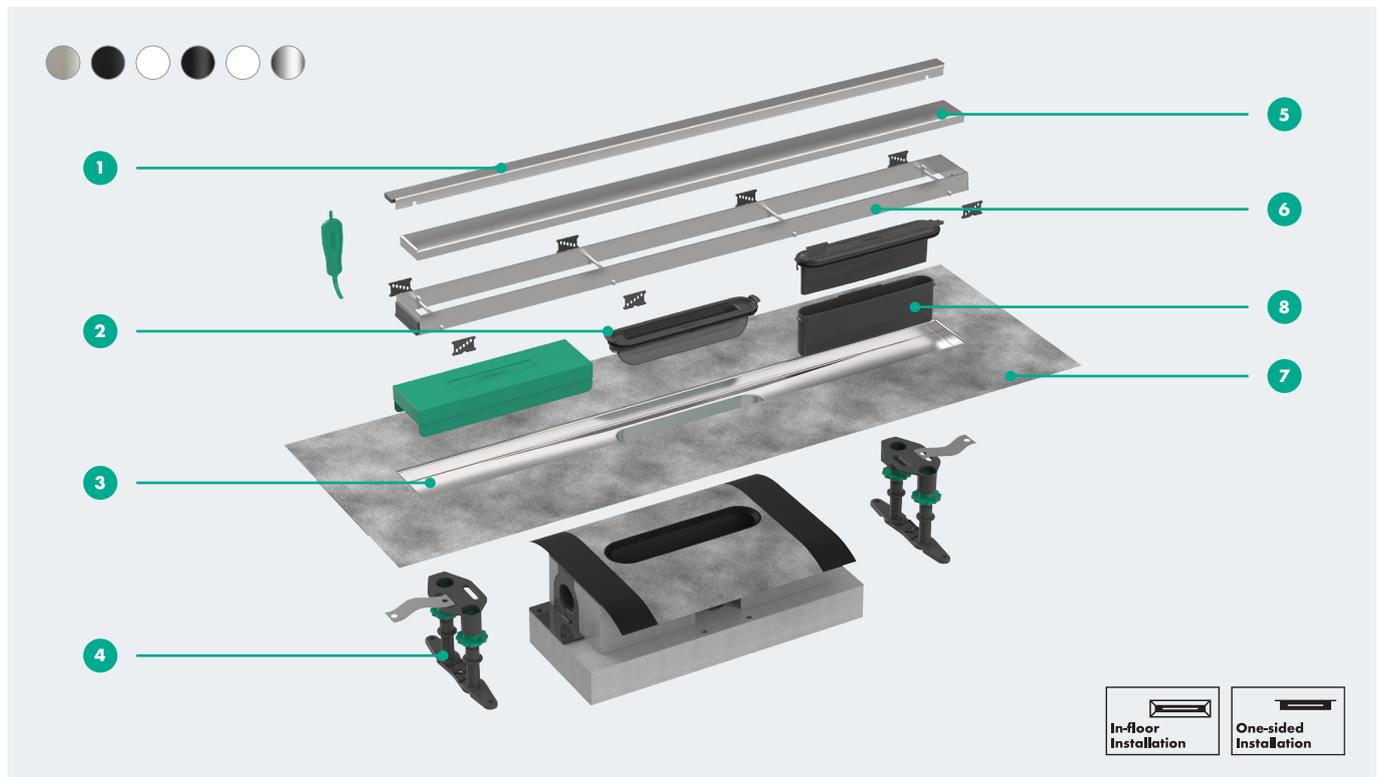

## Features


- 1 Installation: wall-mounted or in-floor. Wall flange included
- 2 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 3 Installation set: Stainless Steel 304 (1.4301) with built-in slope
- 4 Height-adjustable feet: easy adjustment and fixing to the floor
- 5 Design grate: Brushed Stainless Steel, Matt Black, Matt White, two glass surfaces (Black, White), Chrome. Design grate can be tiled on the back (except glass surfaces)
- 6 Height-adjustable frame: easy adjustment to tile thickness 7-18 mm
- 7 Pre-assembled sealing membrane as per DIN 18534
- 8 Siphon 50 mm (as per EN 1253), also available in 30 mm

## Required sets





Simply scan the code and check out RainDrain Match.

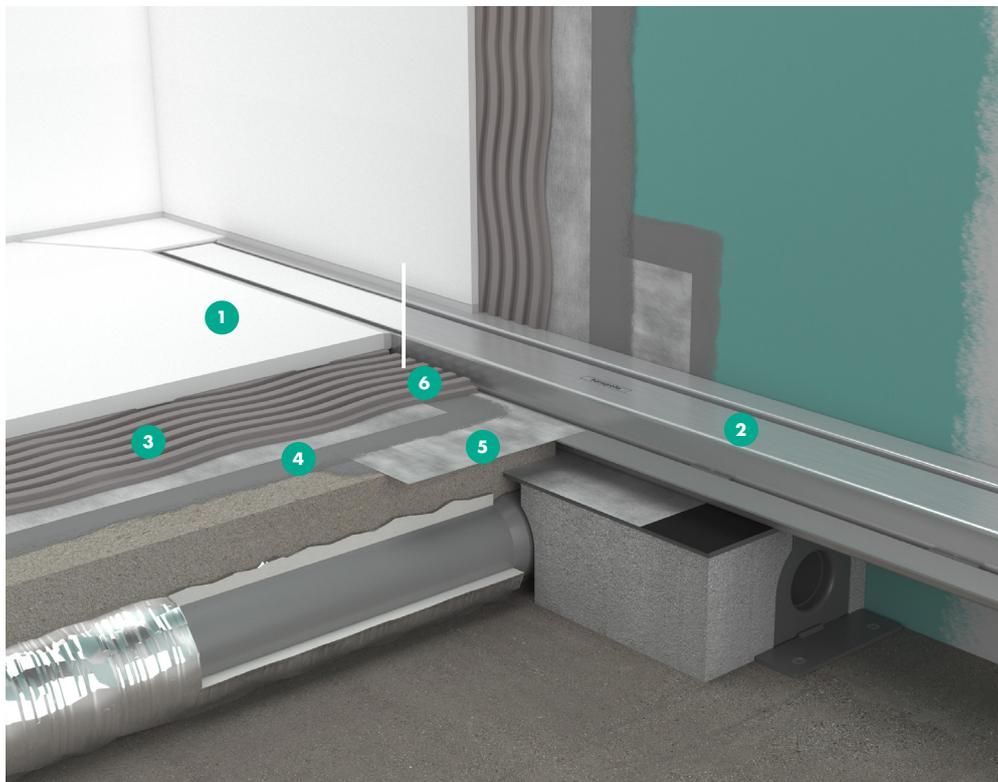

- 1 Tile thickness up to 18 mm
- 2 Design grate  
Stainless Steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Secondary drainage possible

## Specifications

### Dimensions

600, 700, 800, 900, 1000, 1200 mm

### Tile inlay depth

12 mm

### Connection

Horizontal  
Vertical

### Tile thickness

up to 18 mm

### Grate width

46 mm

### Frame width

62 mm (In-floor)  
81 mm (Wall flange included)

### uBox universal for flat installation



Minimum installation height: 80 mm  
Drainage capacity up to 33 l/min  
Dryphon drainage capacity: up to 55 l/min

### uBox universal for standard installation

Minimum installation height: 98 mm  
Drainage capacity up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min

### uBox universal for vertical installation


Minimum installation height: -  
Drainage capacity up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min

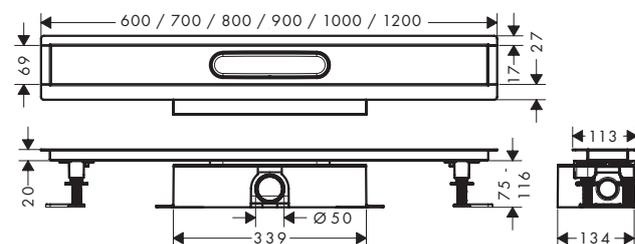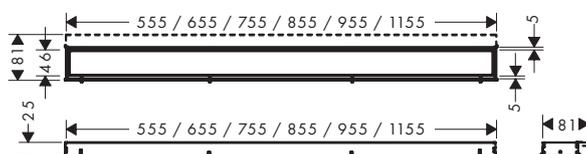

RainDrain Match

# RainDrain Rock

Developed for use with natural stone

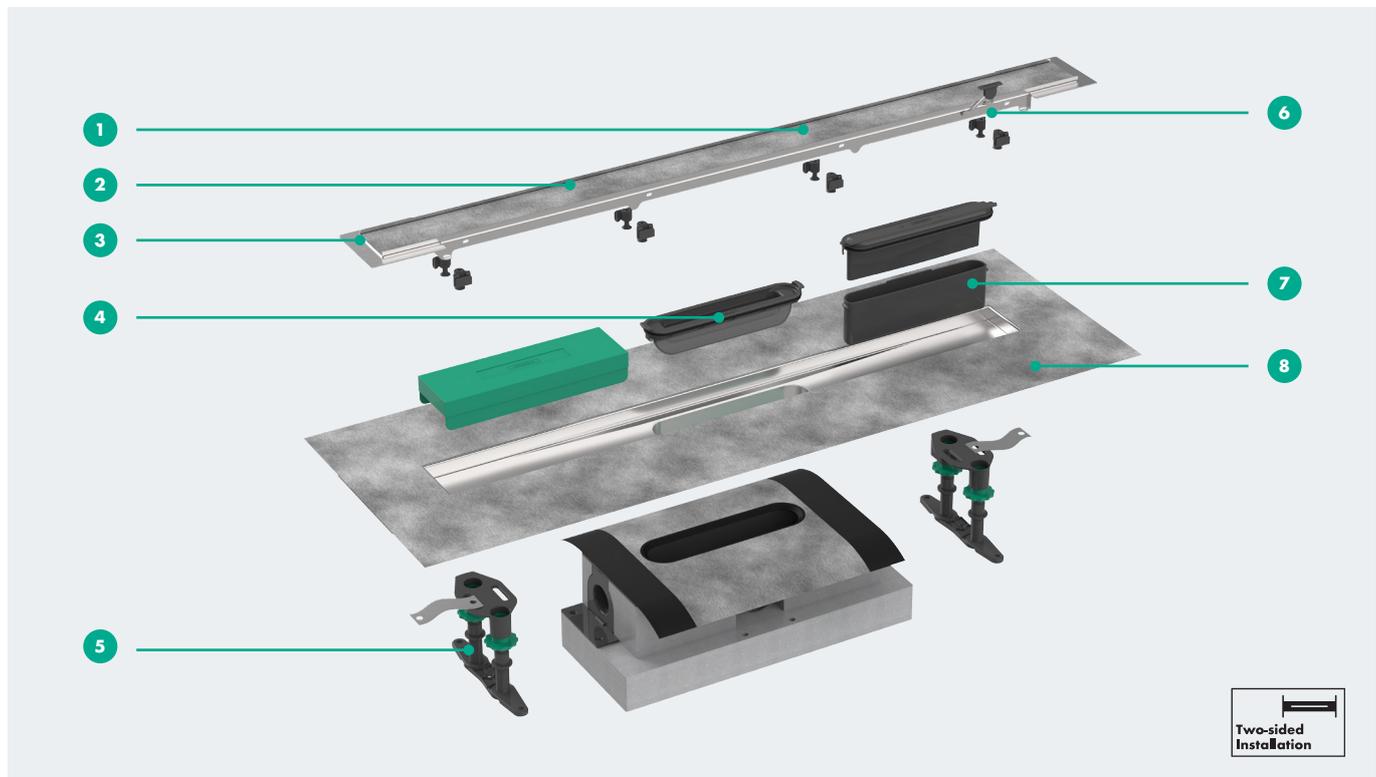

## Features


- 1 Design grate can be tiled, with tiles up to 40 mm thick.
- 2 304 Stainless Steel design grate with membrane for strong attachment to the tile adhesive
- 3 Cover: can be shortened on site, with 50 mm excess length on both sides
- 4 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 5 Height-adjustable feet: easy adjustment and fixing to the floor
- 6 Lifting tool for easy removal of the design grate
- 7 Siphon 50 mm (as per EN 1253), also available in 30 mm
- 8 Pre-assembled sealing membrane as per DIN 18534

## Required sets





Simply scan the code and check out RainDrain Rock.

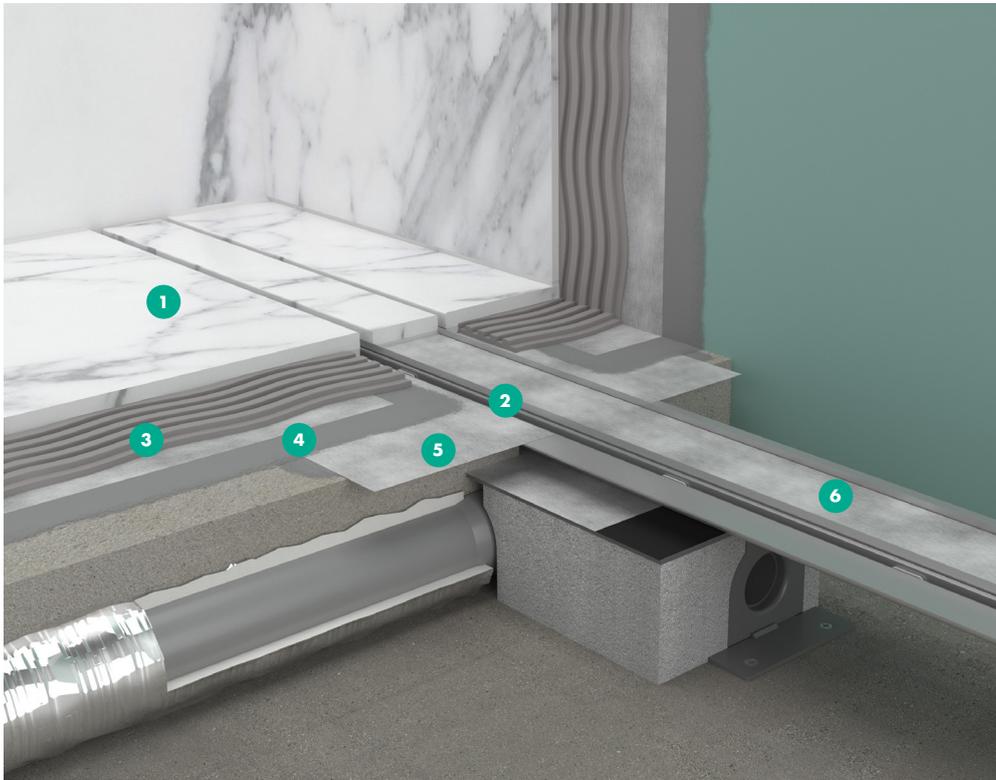

- 1 Tile thickness up to 40 mm
- 2 Design grate  
Stainless Steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Tileable design grate

## Specifications

### Dimensions

600, 700, 800, 900,  
1000, 1200 mm

### Grate width

58 mm

### uBox universal for flat installation

Minimum installation height: 80 mm  
Siphon drainage capacity: up to 33 l/min  
Dryphon drainage capacity: up to 55 l/min

### Connection

Horizontal  
Vertical

### Tile thickness



up to 40 mm

### uBox universal for standard installation

Minimum installation height: 98 mm  
Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min


### uBox universal for vertical installation

Minimum installation height: -  
Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min

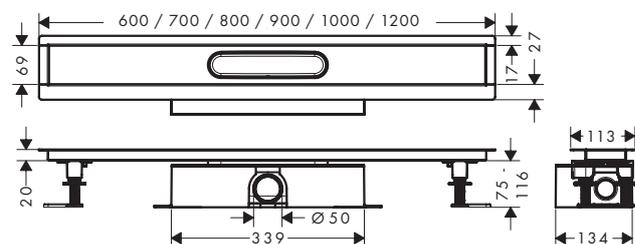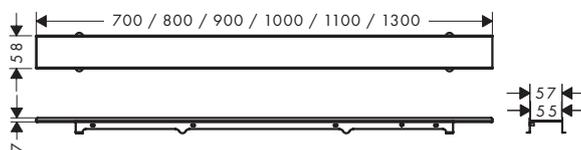

# RainDrain Original


Effortless installation with maximum hygiene

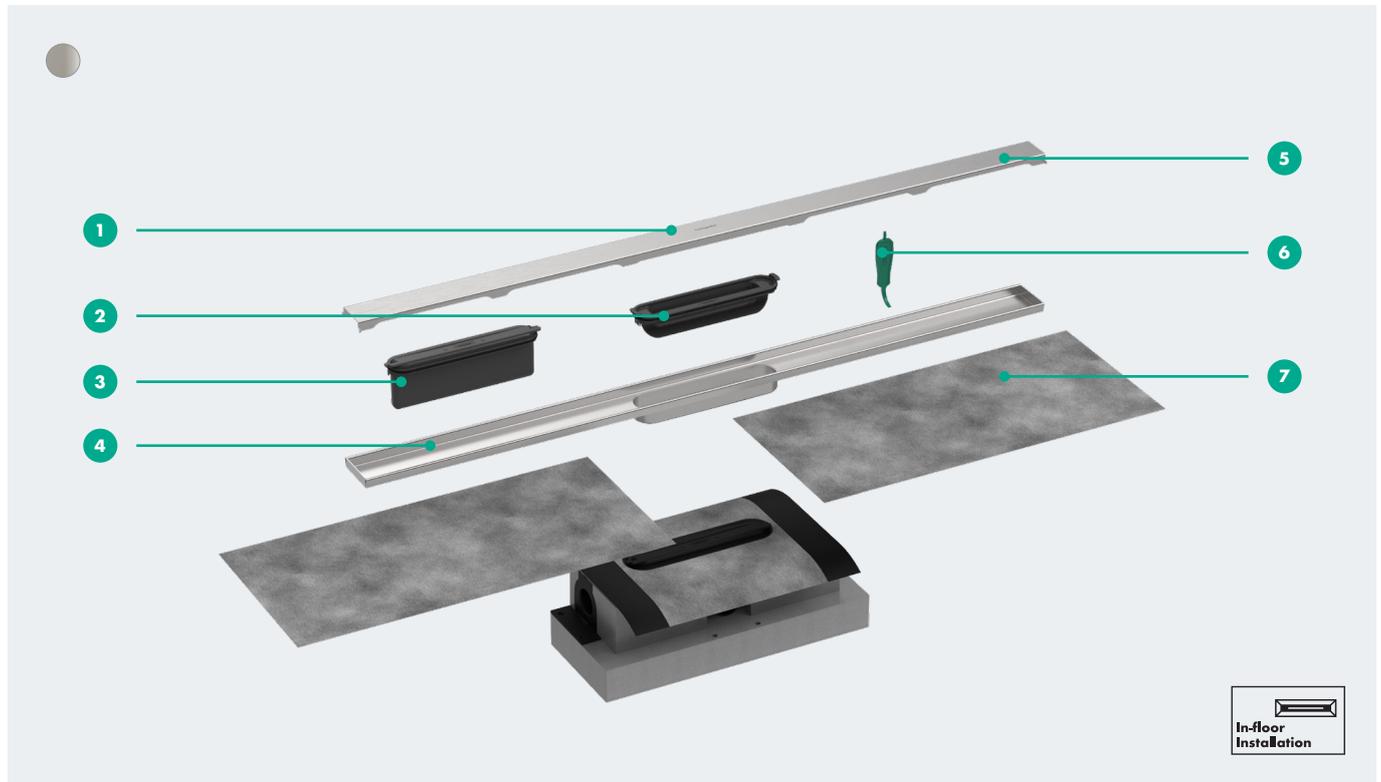

## Features


- 1 Design grate: Brushed Stainless Steel
- 2 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 3 Siphon 50 mm, siphon also available in 30 mm
- 4 Installation set: Stainless Steel 304 (1.4301)
- 5 Installation: in-floor
- 6 Grate removal tool: allows easy removal of the finish set
- 7 Sealing membrane extension for uBox as per DIN 18534

## Required sets

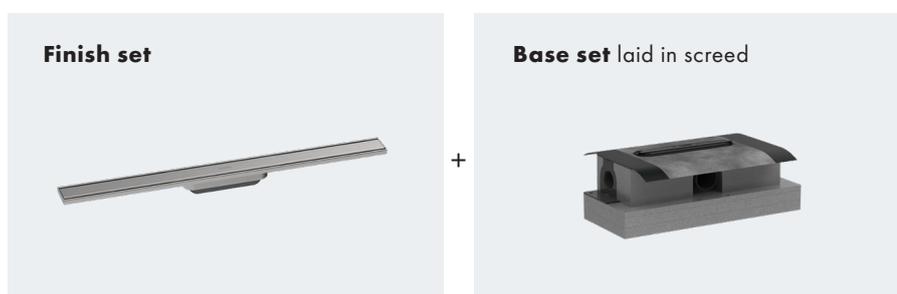



Simply scan the code and check out RainDrain Original.

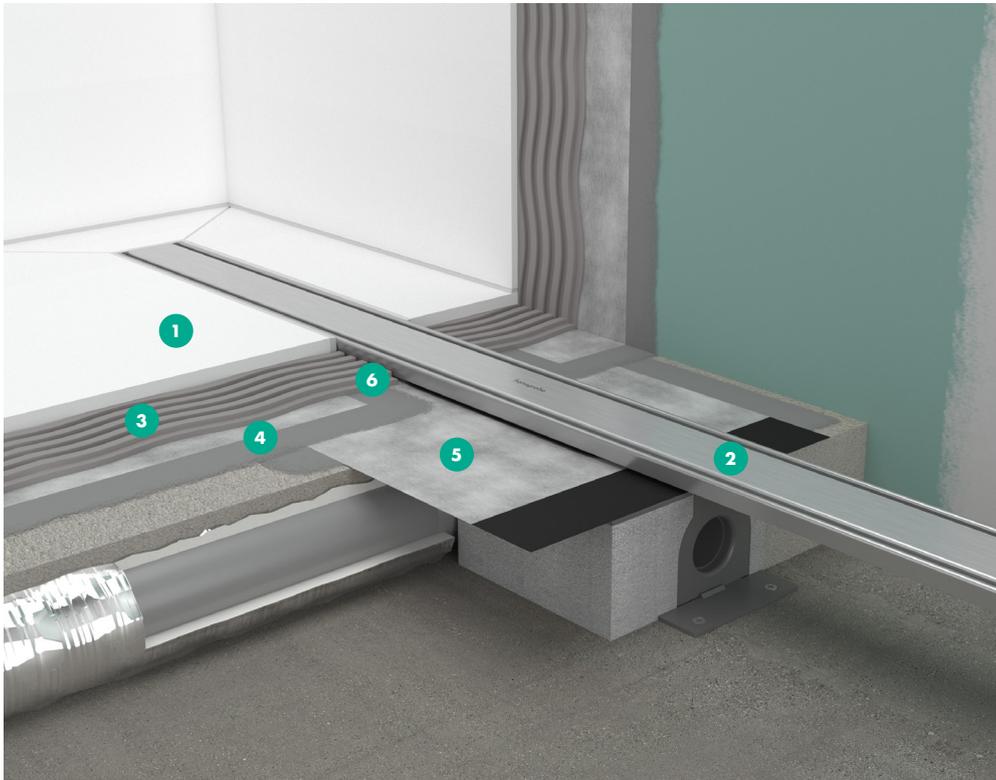

- 1 Tile thickness up to 18 mm
- 2 Design grate  
Stainless Steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane

## Specifications

### Dimensions

600, 700, 800, 900,  
1000, 1200 mm

### Tile thickness

up to 18 mm

### uBox universal for flat installation

Minimum installation height: 63 mm  
Drainage capacity up to 32 l/min  
Dryphon drainage capacity: up to 55 l/min

### Connection

Horizontal  
Vertical

### Grate width


65 mm

### uBox universal for standard installation

Minimum installation height: 81 mm  
Drainage capacity up to 49 l/min  
Dryphon drainage capacity: up to 60 l/min


### uBox universal for vertical installation

Minimum installation height: -  
Drainage capacity up to 42 l/min  
Dryphon drainage capacity: up to 60 l/min

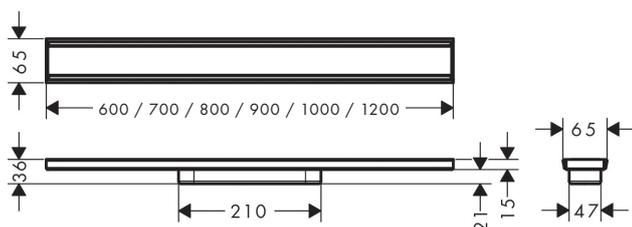


# RainDrain Compact

Problem solver for renovation projects

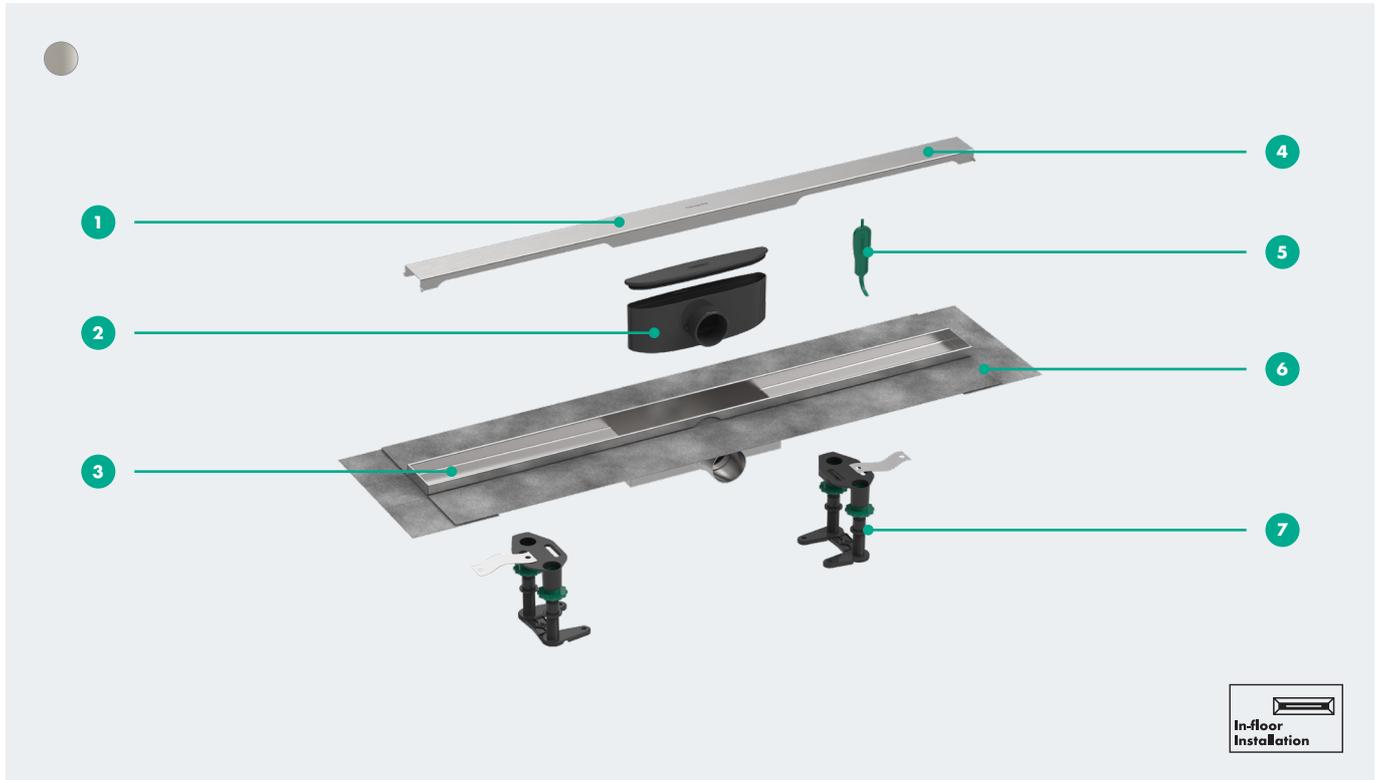


## Features

- 1 Design grate: Brushed Stainless Steel, Tileable inlay
- 2 Siphon 50 mm, siphon also available in 30 mm
- 3 Installation set: Stainless Steel 304 (1.4301) with built-in slope
- 4 Installation: in-floor
- 5 Grate removal tool: allows easy removal of the finish set
- 6 Pre-assembled sealing membrane as per DIN 18534
- 7 Height-adjustable feet: easy adjustment and fixing to the floor

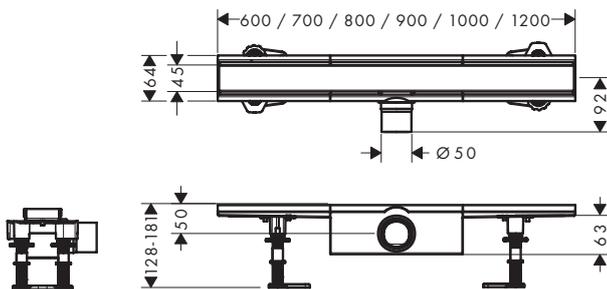


RainDrain Compact standard installation

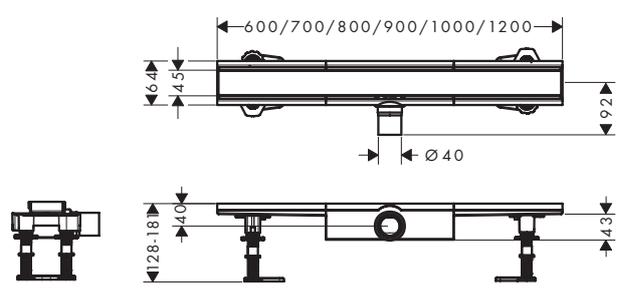

RainDrain Compact flat installation



Simply scan the code and check out RainDrain Compact.

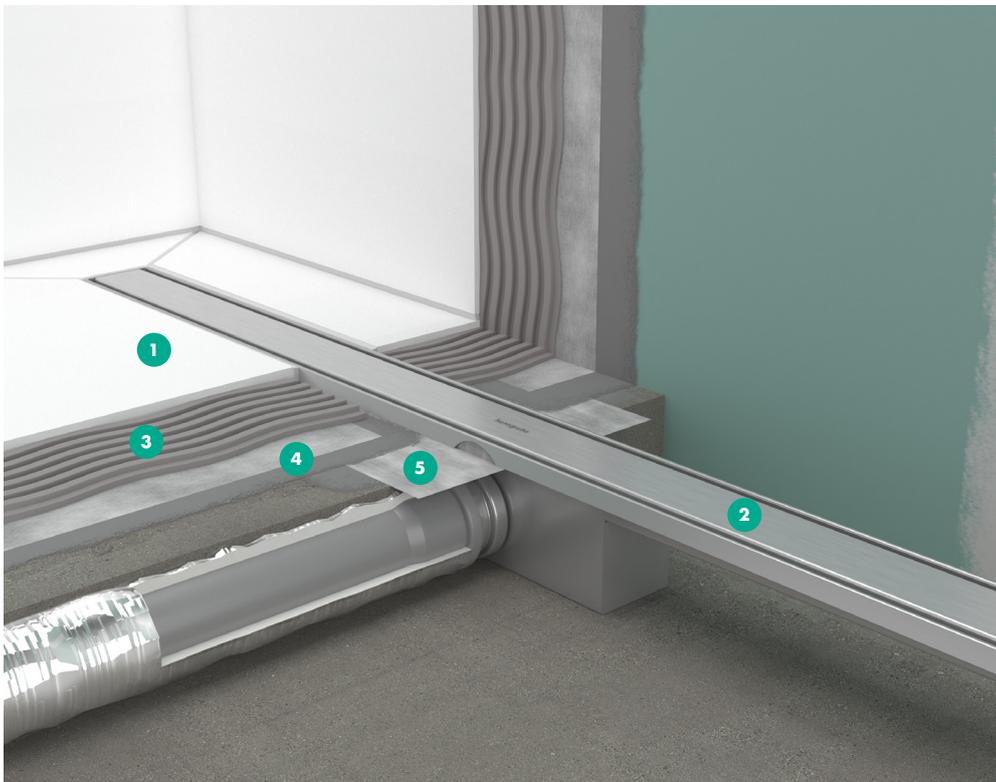

- 1 Tile thickness up to 18 mm
- 2 Design grate  
Stainless Steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane

## Specifications

### Dimensions

600, 700, 800, 900, 1000, 1200 mm

### Tile thickness

up to 18 mm

### Complete set for flat installation

Minimum installation height: 63 mm

Drainage capacity up to 27 l/min

### Tile inlay depth

12 mm

### Grate width

45 mm


### Complete set for standard installation

Minimum installation height: 83 mm


Drainage capacity up to 37 l/min

### Connection

Horizontal

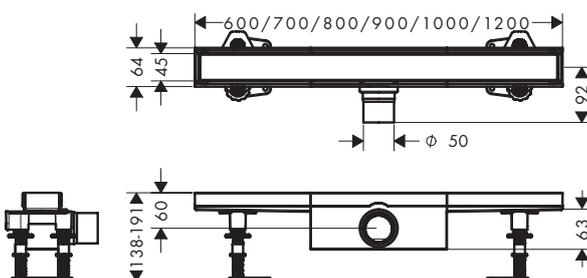


RainDrain Compact standard installation tile

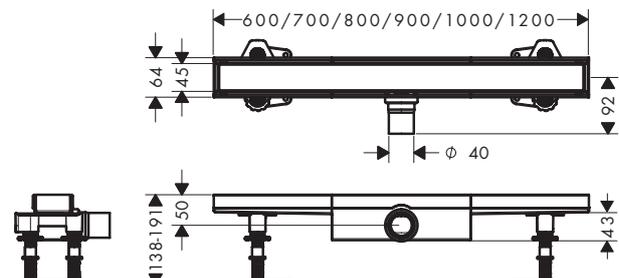

RainDrain Compact flat installation tile

# RainDrain Allround

Complete waterproof solution

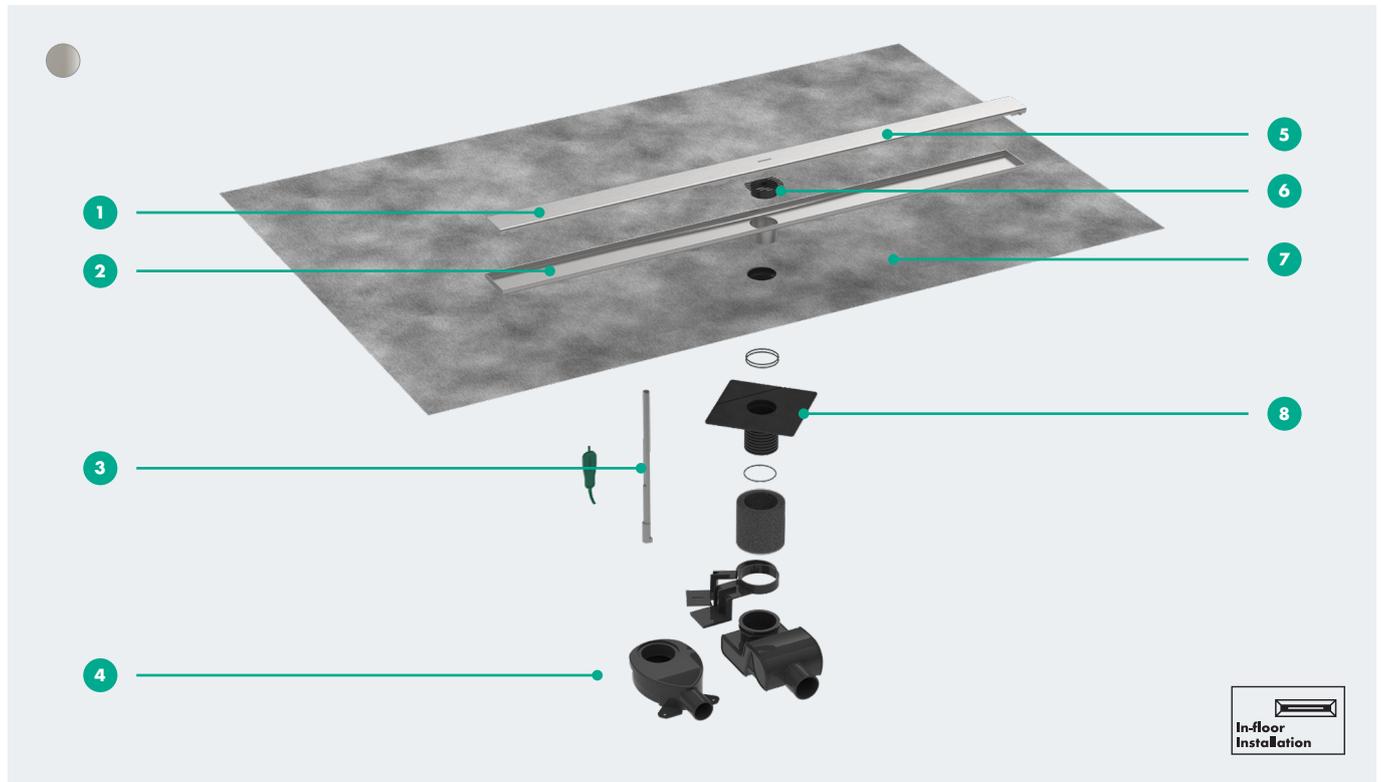


## Features

- 1 Design grate: Brushed Stainless Steel
- 2 Installation set: Stainless Steel 304 (1.4301) with built-in slope
- 3 Cleaning plug for access to siphon
- 4 Two siphons included: water seal 28 and 50 mm
- 5 Installation: in-floor
- 6 Hair catcher
- 7 Pre-assembled sealing membrane 1500 x 1300 mm as per DIN 18534
- 8 Screed adapter: for easy height adjustment of screed floor to the shower drain



Simply scan the code and check out RainDrain Allround.

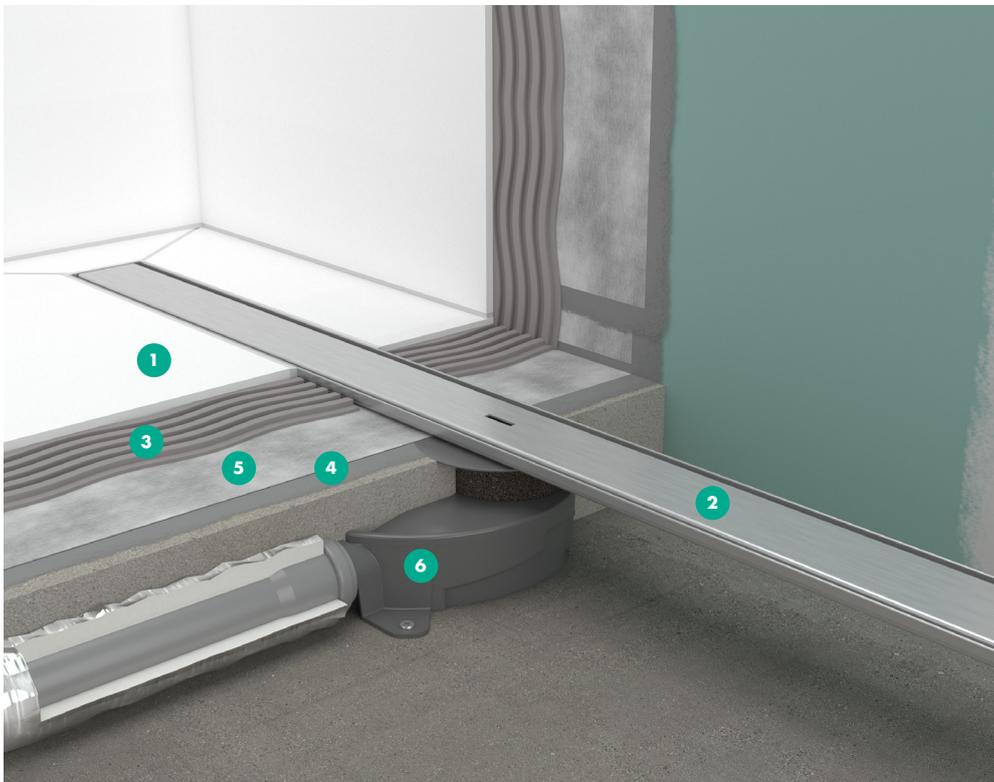

- 1** Tile thickness up to 18 mm
- 2** Design grate  
Stainless Steel 304 (1.4301)
- 3** Tile adhesive
- 4** Waterproofing membrane
- 5** Pre-assembled sealing membrane
- 6** Rotatable siphon

## Specifications

**Dimensions**  
700, 800, 900,  
1000, 1200 mm


**Grate width**  
69 mm

**Complete set for flat installation**  
Minimum installation height: 67 mm  
Drainage capacity up to 32 l/min


**Connection**  
Horizontal

**Tile thickness**  
up to 18 mm

**Complete set for standard installation**  
Minimum installation height: 83 mm  
Drainage capacity up to 33 l/min

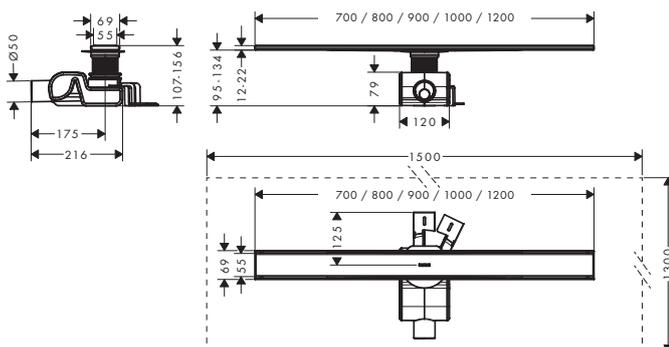


RainDrain Allround standard installation

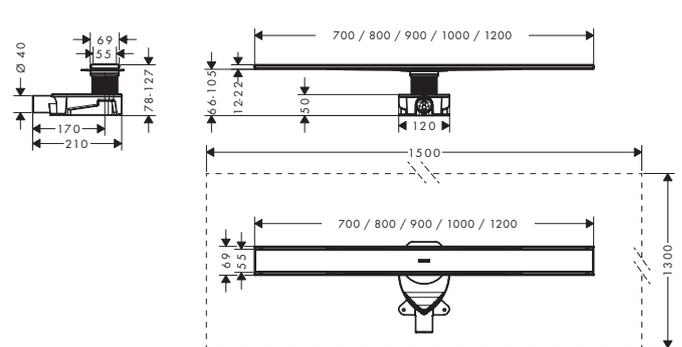

RainDrain Allround flat installation

# RainDrain Match Plus

Effortless installation with maximum hygiene

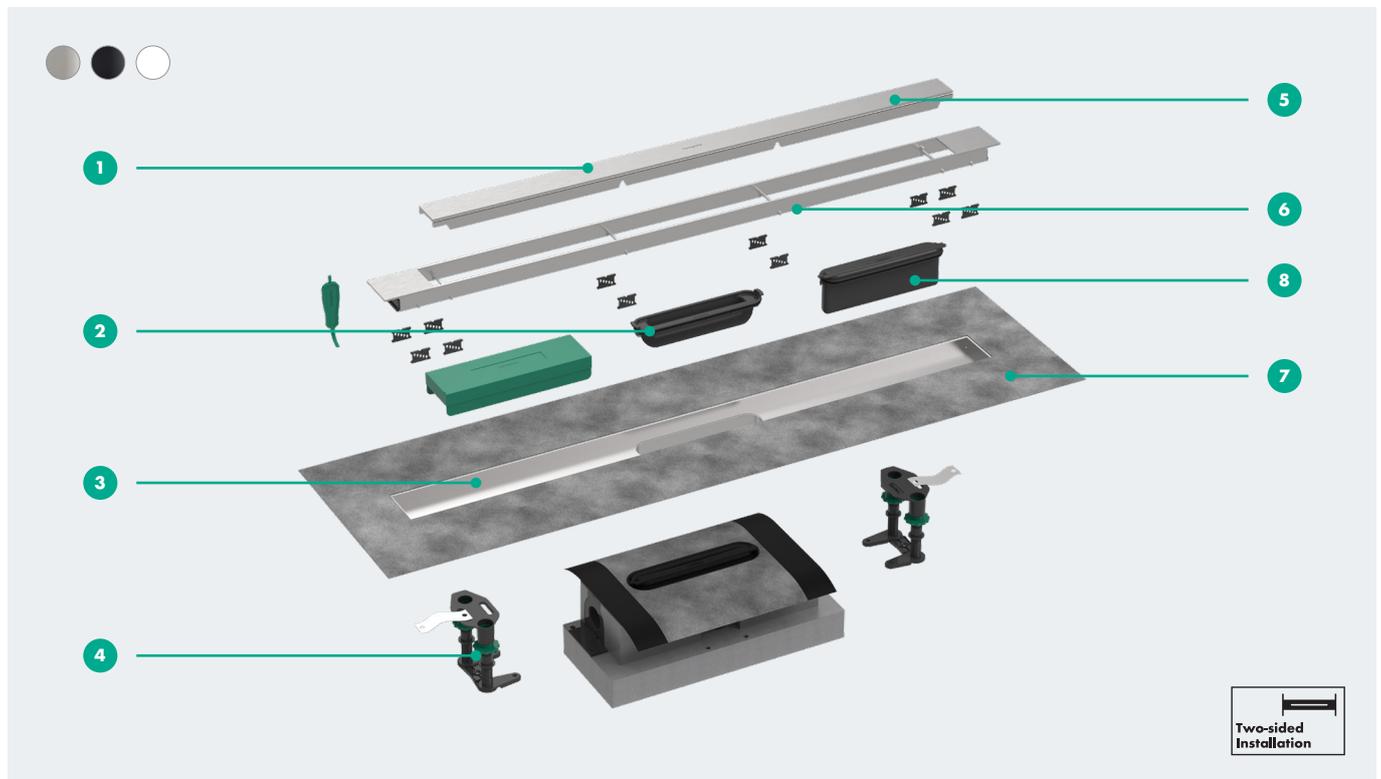

## Features


- 1 Installation: Two-sided
- 2 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 3 Installation set: Stainless Steel 304 (1.4301) with built-in slope
- 4 Height-adjustable feet: easy adjustment and fixing to the floor
- 5 Design grate: Brushed Stainless Steel, Matt Black and Matt White
- 6 Height-adjustable frame: easy adjustment to tile thickness 7-18 mm
- 7 Pre-assembled sealing membrane as per DIN 18534
- 8 Siphon 50 mm, siphon also available in 30 mm

## Required sets





Simply scan the code and check out RainDrain Match Plus.

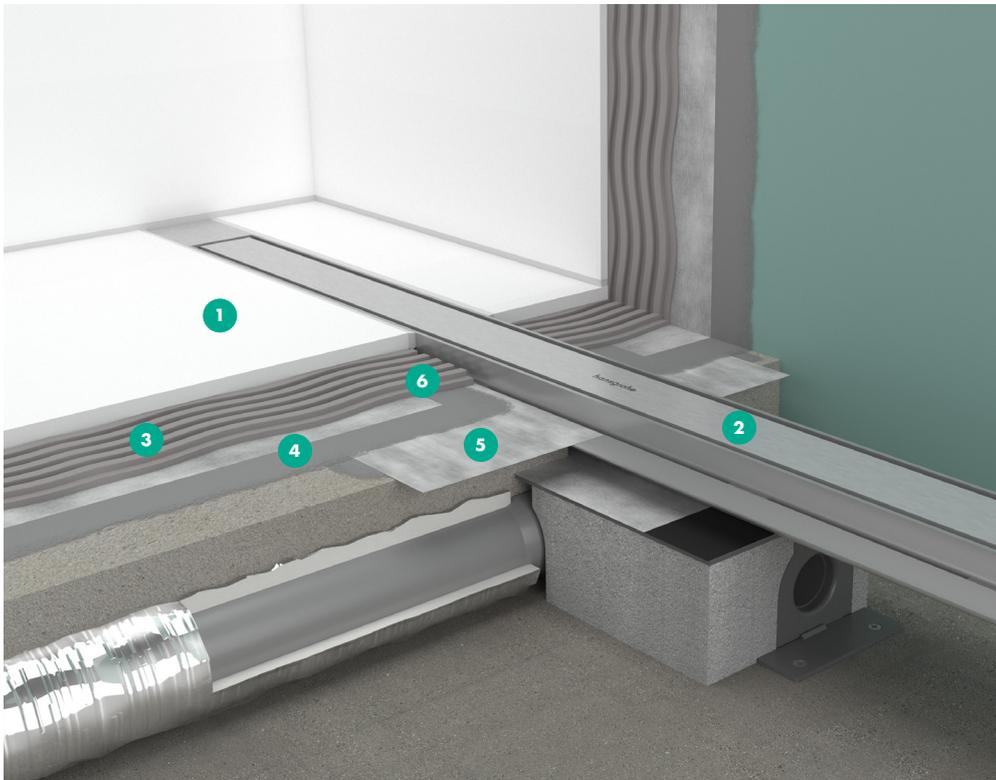

- 1 Tile thickness up to 18 mm
- 2 Design grate  
Stainless Steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Secondary drainage possible

## Specifications

### Dimensions

800, 900, 1000,  
1200 mm

### Grate width

46 mm

### uBox universal for flat installation

Minimum installation height: 80 mm

Drainage capacity up to 33 l/min

Dryphon drainage capacity: up to 55 l/min

### Connection

Horizontal

Vertical

### Frame width

62 mm

### uBox universal for standard installation

Minimum installation height: 98 mm

Drainage capacity up to 42 l/min (as per EN 1253)


Dryphon drainage capacity: up to 60 l/min

### uBox universal for vertical installation

Minimum installation height: -

Drainage capacity up to 42 l/min (as per EN 1253)


Dryphon drainage capacity: up to 60 l/min

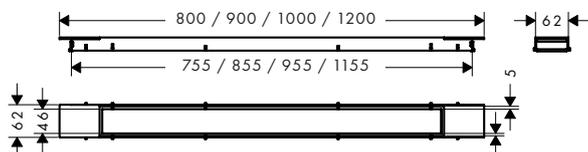

RainDrain Match Plus

# RainDrain Minimalistic


Minimal appearance

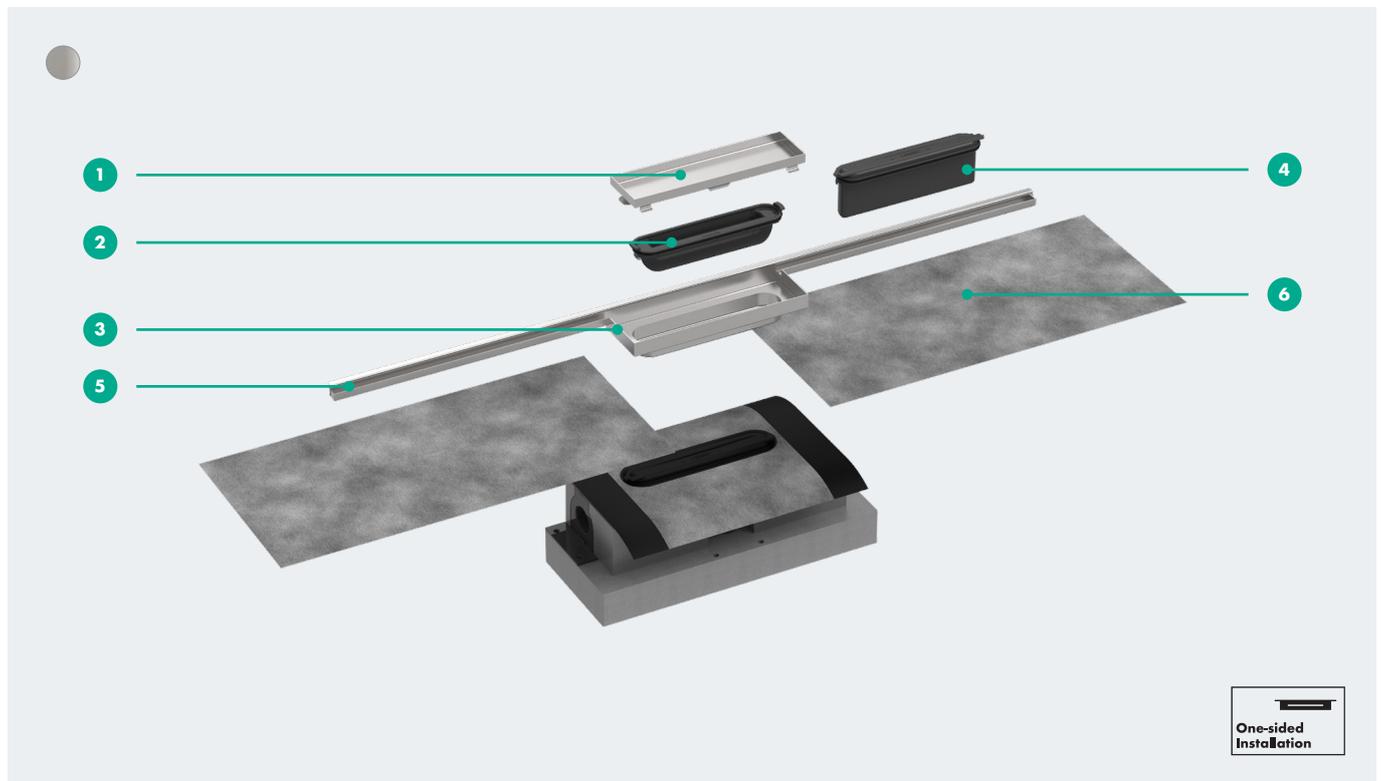

## Features


- 1 Design grate: Tileable
- 2 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 3 Installation set: Stainless Steel 304 (1.4301)
- 4 Siphon 50 mm, siphon also available in 30 mm
- 5 Installation: wall-mounted
- 6 Sealing membrane extension for uBox as per DIN 18534

## Required sets

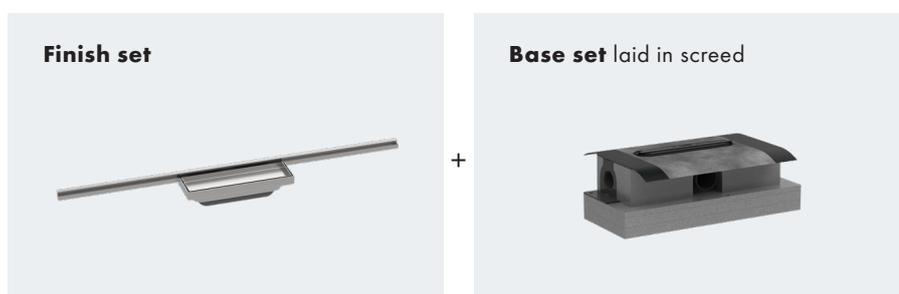



Simply scan the code and check out RainDrain Minimalistic.

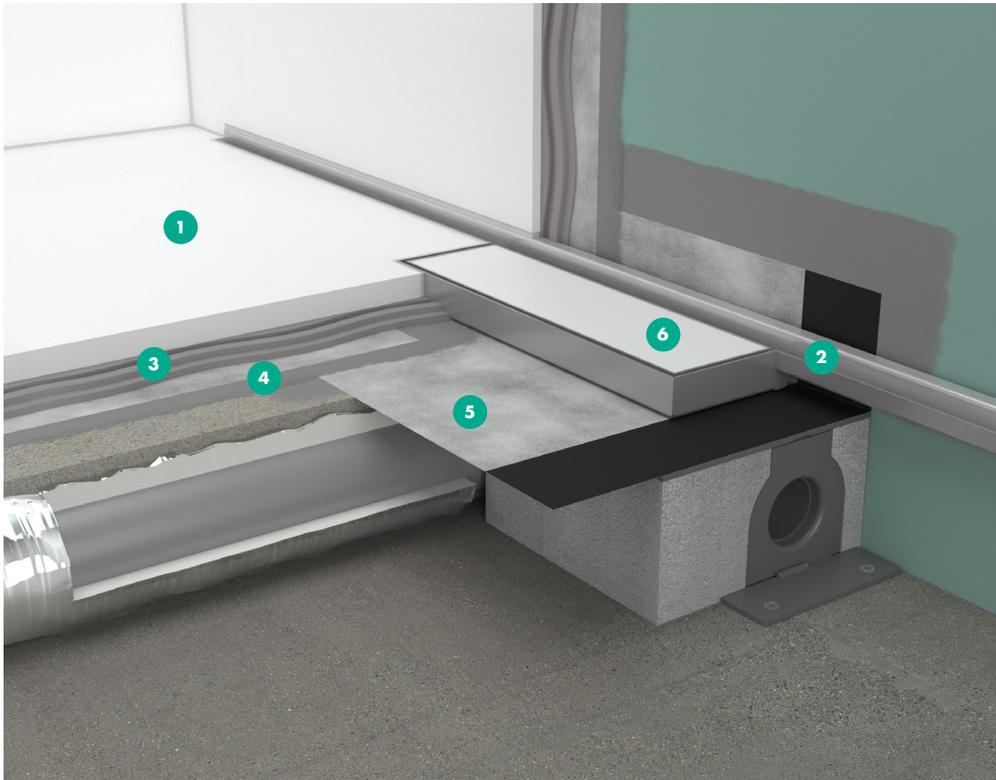

- 1 Tile thickness  
11 - 21 mm
- 2 Design grate  
Stainless Steel 304  
(1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Removable cover

## Specifications

**Dimensions**  
700, 800, 900,  
1000, 1200 mm

**Tile thickness**  
11 - 21 mm


**uBox universal for flat installation**  
Minimum installation height: 67 mm  
Siphon drainage capacity: up to 28 l/min  
Dryphon drainage capacity: up to 55 l/min

**Connection**  
Horizontal  
Vertical

**Grate width**  
85 mm

**uBox universal for standard installation**  
Minimum installation height: 85 mm  
Siphon drainage capacity: up to 33 l/min  
Dryphon drainage capacity: up to 60 l/min


**uBox universal for vertical installation**  
Minimum installation height: -  
Siphon drainage capacity: up to 42 l/min  
Dryphon drainage capacity: up to 60 l/min

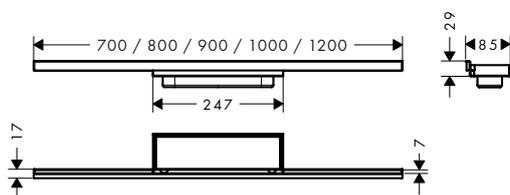

RainDrain Minimalistic

# RainTurn

Perfect finish of sloped tile edges in the shower

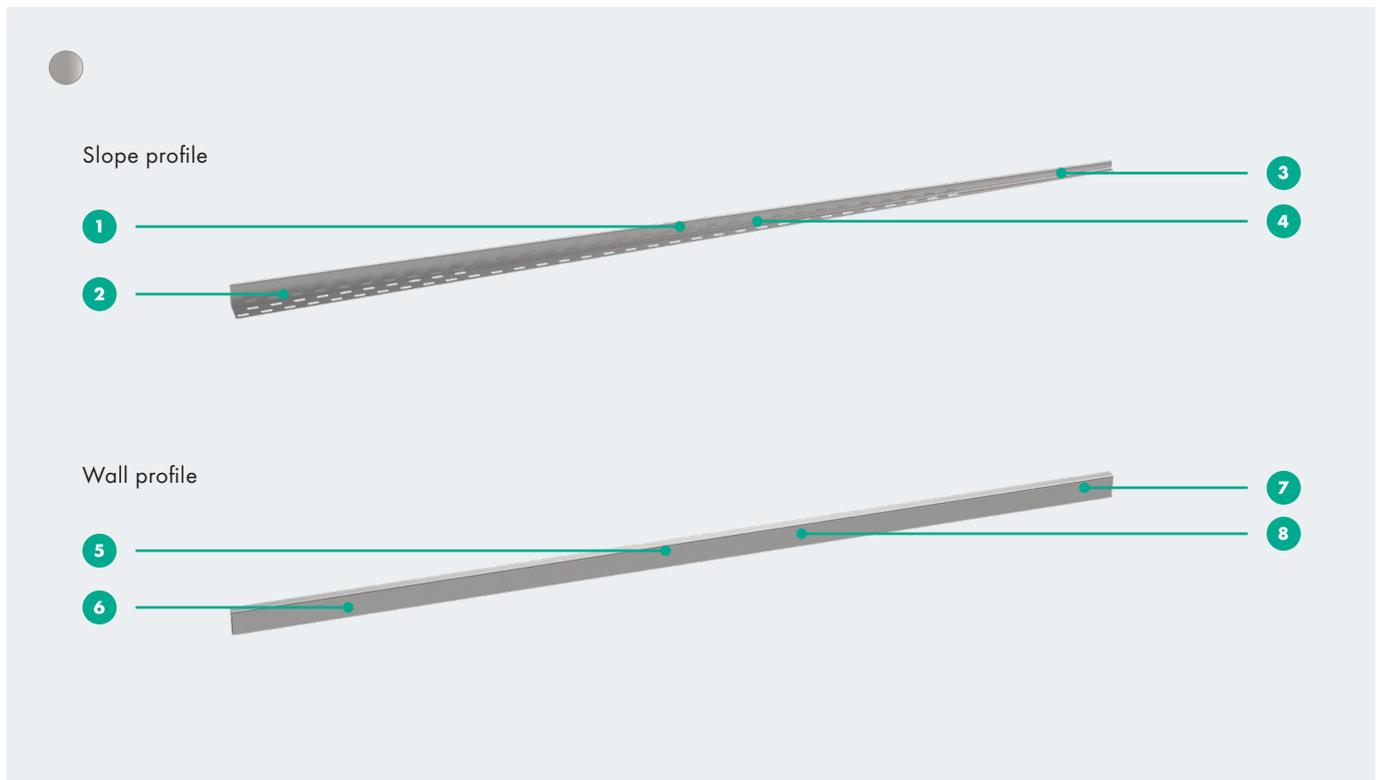


## Slope profile

- 1 Application left or right side and adjustable
- 2 Length: 1200 mm
- 3 Maximum height: 34.0 mm
- 4 Material: Stainless Steel 304 (1.4301).  
Can be shortened on site.

## Wall profile

- 5 Adjustable profile
- 6 Length: 1200 mm
- 7 Maximum height: 34.0 mm
- 8 Material: Stainless Steel 304 (1.4301).  
Can be shortened on site.

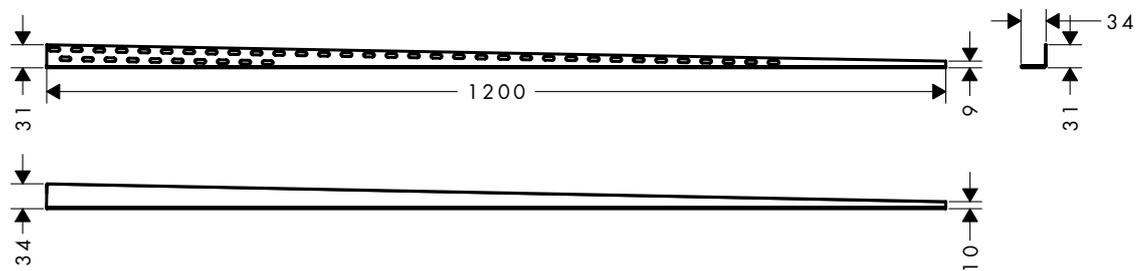

Slope profile



1 Slope profile

2 Wall profile


## Specifications

**Length**  
1200 mm

**Slope**  
2%

**Version**  
Left and right


**Material**  
Stainless Steel 304 (1.4301)

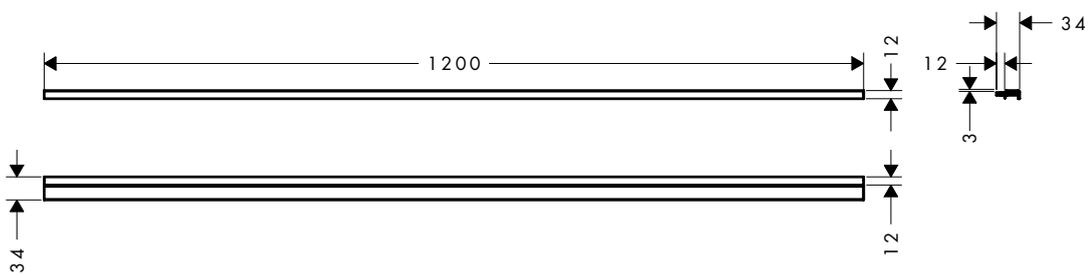

Wall profile

# RainDrain Spot

Maximum placement flexibility

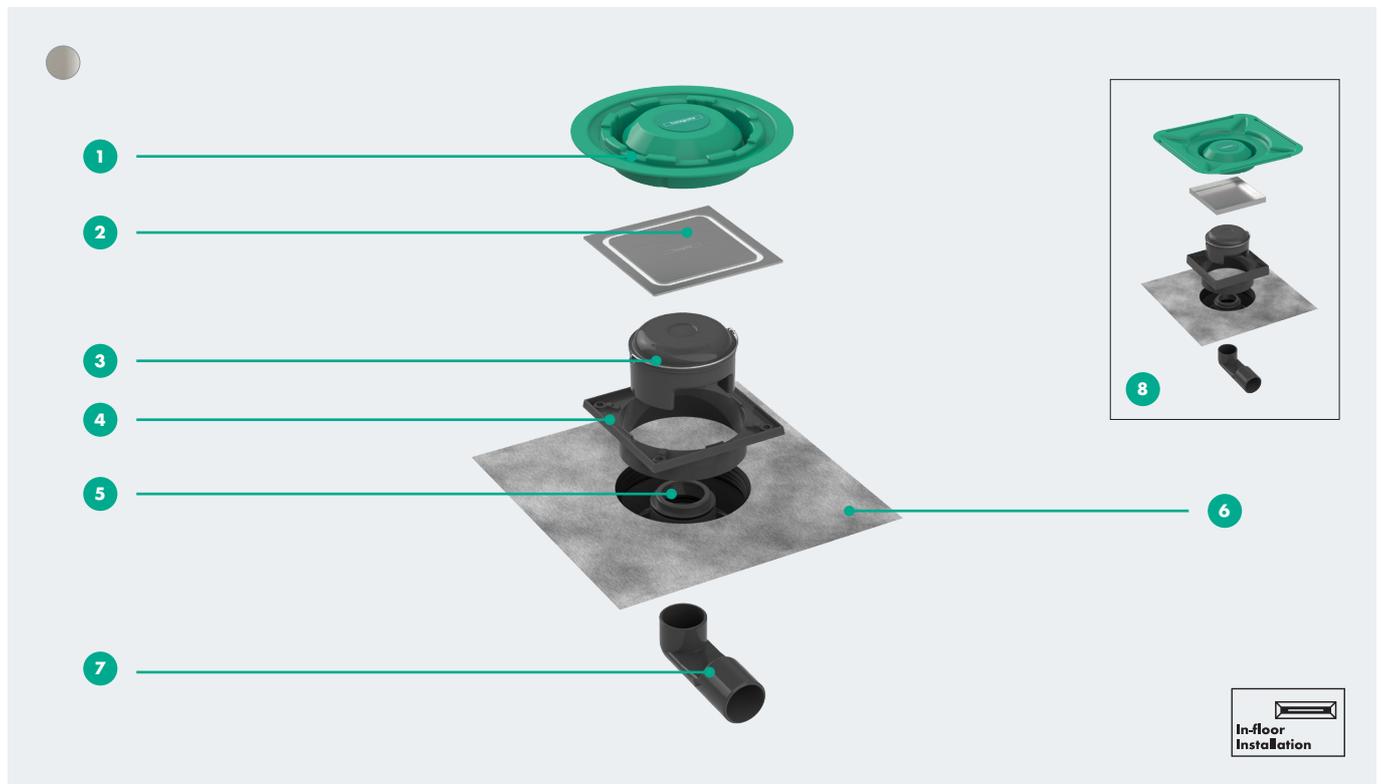


## Features

- 1 Screed cover protects from dirt during installation
- 2 Design grate: Brushed Stainless Steel
- 3 Siphon: removable for easy cleaning
- 4 Height adjustment: easy to adjust the design grate to the tile level
- 5 Siphon body: rotatable and adjustable
- 6 Pre-assembled sealing membrane as per DIN 18534
- 7 Variable connection: both horizontal and vertical outlet in one shower drain
- 8 Rotatable grate: tileable or Brushed Stainless Steel



Simply scan the code and check out RainDrain Spot.

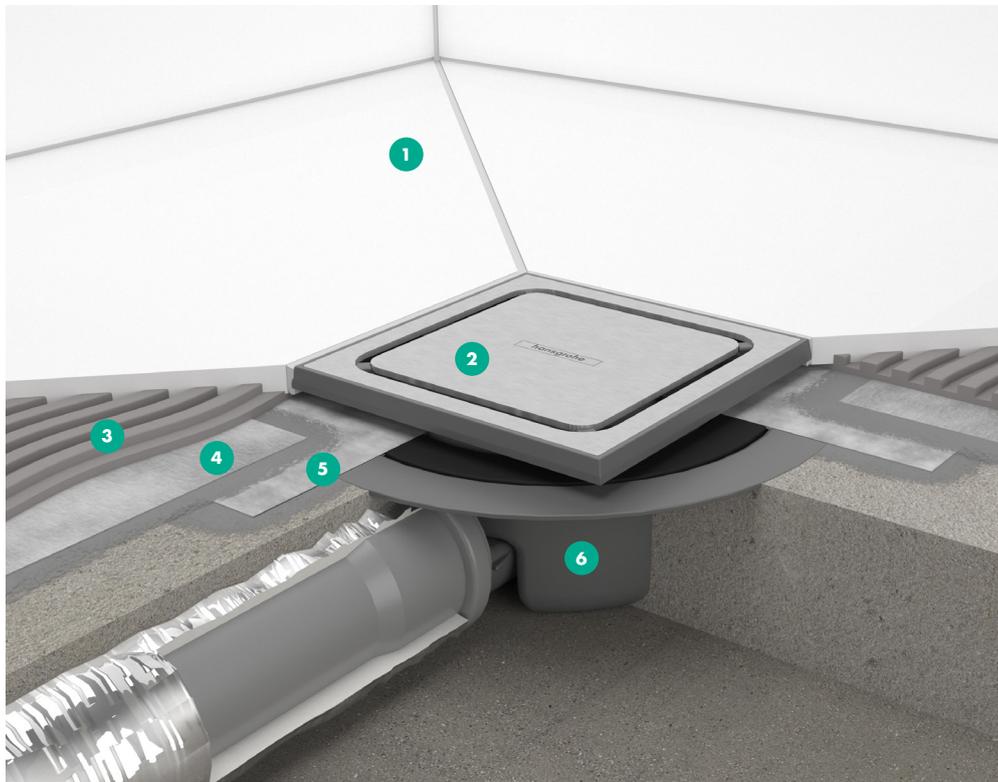

- 1 Tile thickness up to 18 mm
- 2 Design grate  
Stainless Steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Siphon body ABS

## Specifications

**Dimensions**  
150 x 150 mm

**Minimum height**  
71 mm

**Grate width**  
146 mm

**Connection**  
Horizontal  
Vertical


**Drainage capacity**  
up to 35 l/min

**Tile thickness**  
up to 18 mm


**Water seal height**  
50 mm

**Connection nominal diameter**  
DN50

**Tile inlay depth**  
12 mm

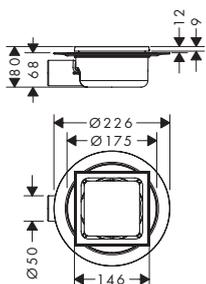


RainDrain Spot

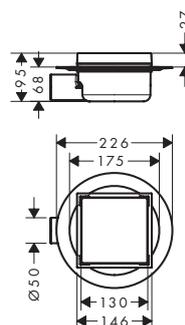

RainDrain Spot with tileable grate

# RainDrain Brilliance

Perfectly flush with the tile thickness

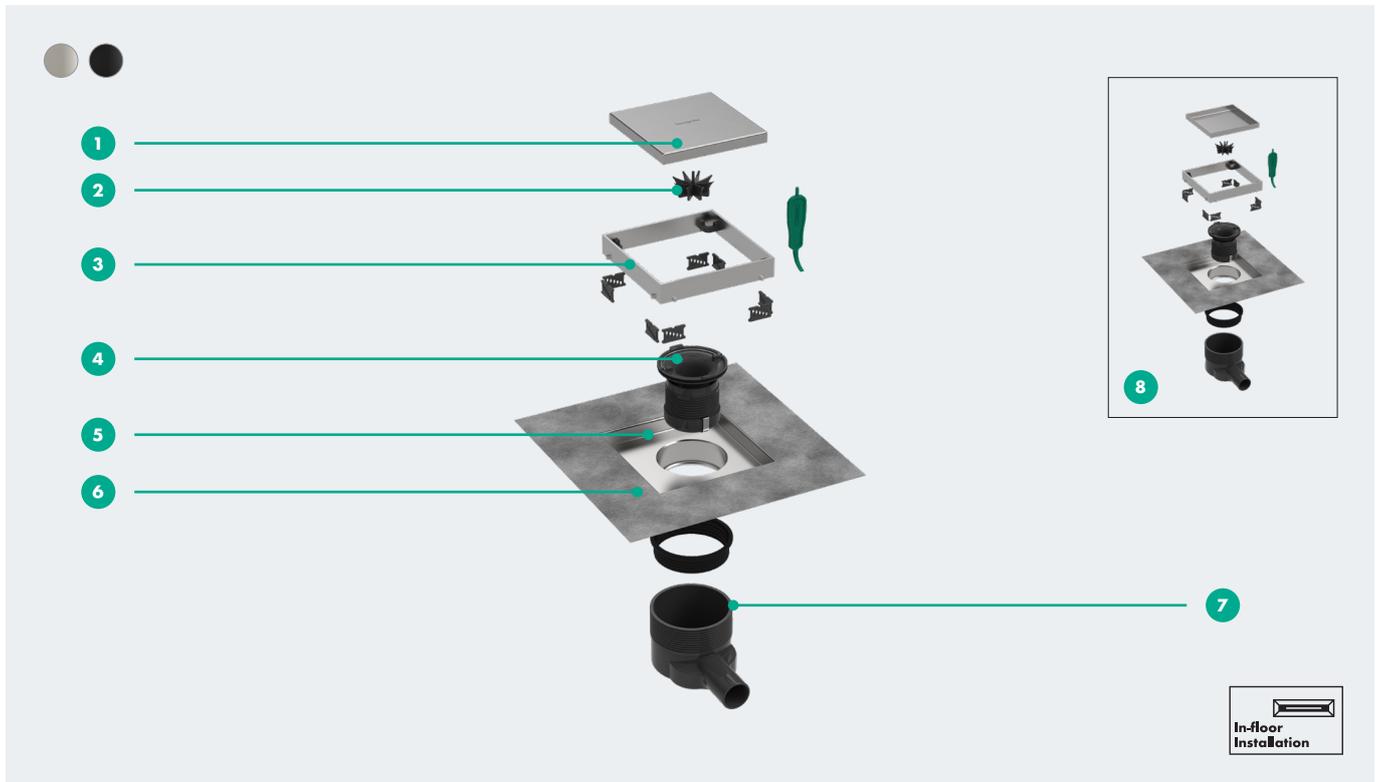


## Features

- 1 Design grate: Brushed Stainless Steel, Matt Black
- 2 Hair catcher
- 3 Height-adjustable frame: easy adjustment to tile thickness 7-18 mm
- 4 Siphon: removable for easy cleaning, can be shortened (50-25 mm water seal height)
- 5 Installation set: Stainless Steel 304 (1.4301)
- 6 Pre-assembled sealing membrane as per DIN 18534
- 7 Siphon body: rotatable and adjustable. Siphon with vertical outlet is optional
- 8 Reversible grate: tileable or Brushed Stainless Steel



Simply scan the code and check out RainDrain Brilliance.

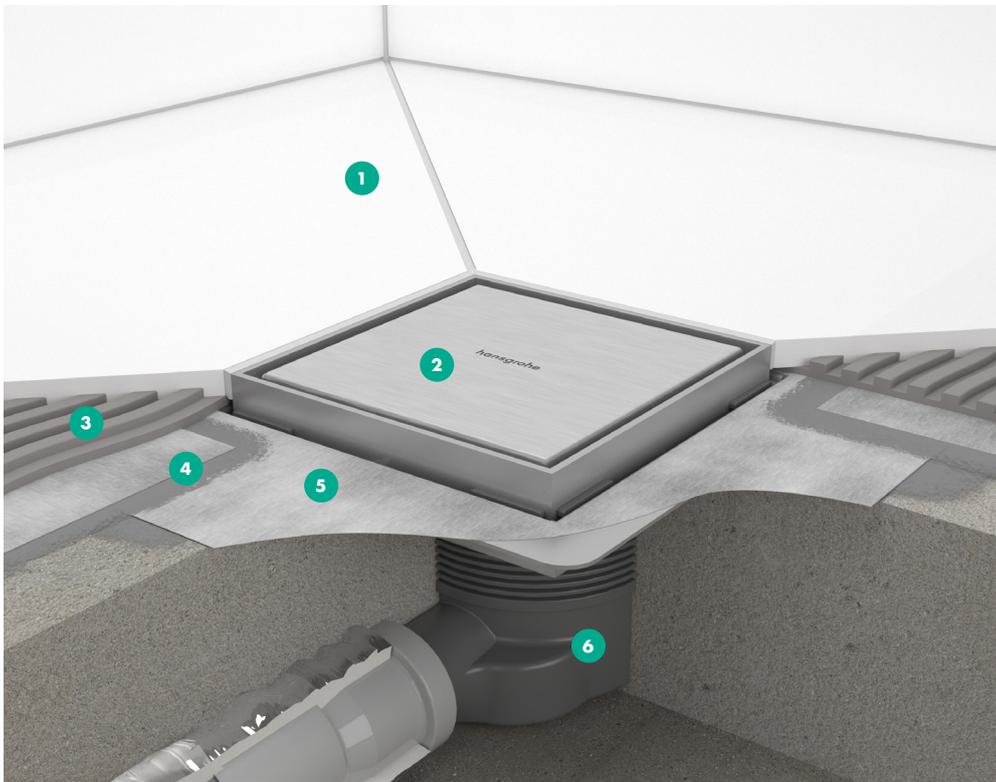

- 1 Tile thickness up to 18 mm
- 2 Design grate  
Stainless Steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Siphon body ABS

## Specifications

### Dimensions

100 x 100 mm  
150 x 150 mm

### Minimum height

75 mm

### Grate width

84 mm  
134 mm

### Connection

Horizontal  
Vertical (optional)

### Drainage capacity

up to 35 l/min

### Tile thickness

up to 18 mm

### Water seal height


50 - 25 mm

### Connection nominal diameter


DN40

### Tile inlay depth

12 mm

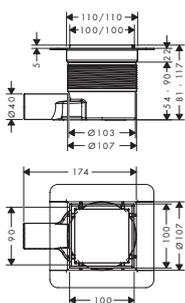


RainDrain Brilliance  
100 x 100

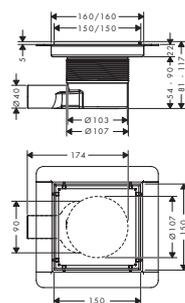

RainDrain Brilliance  
150 x 150

# RainDrain Point

Suitable for any bathroom

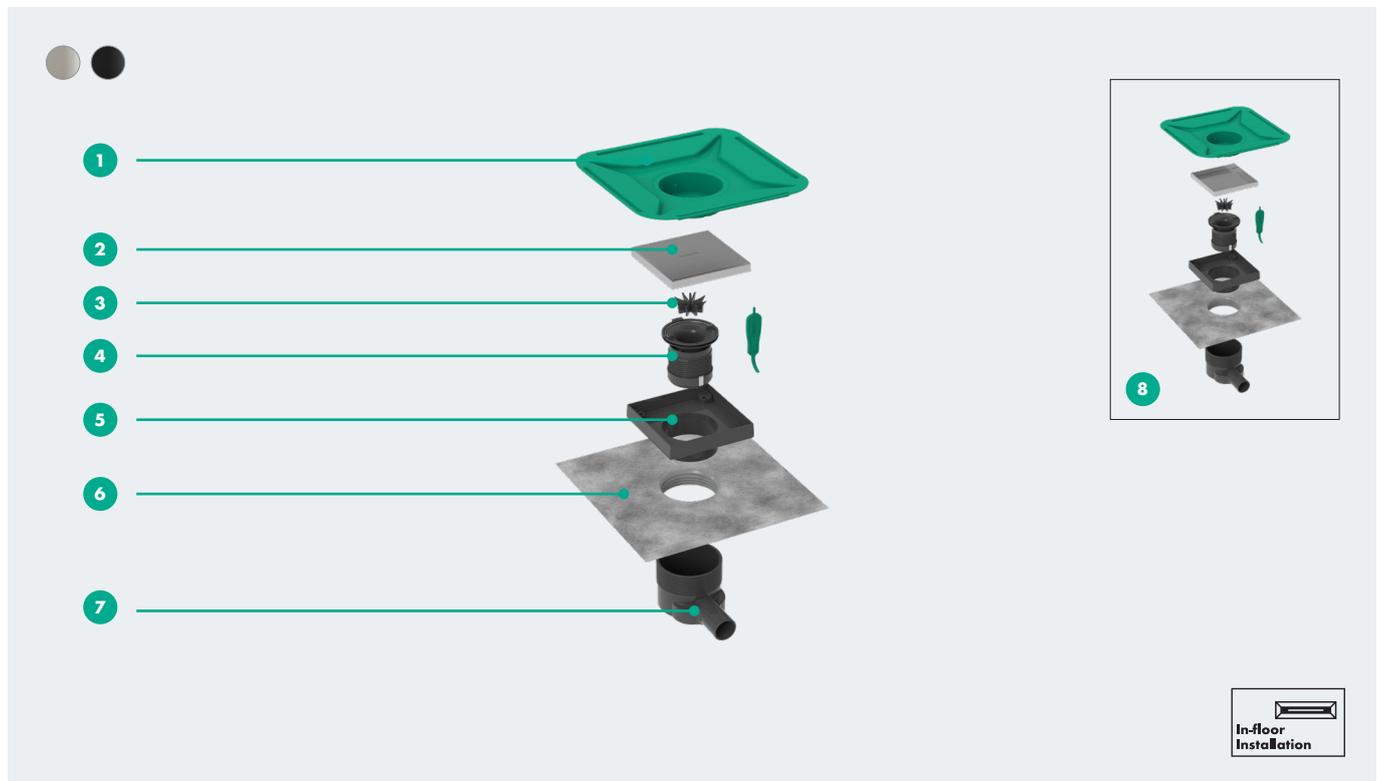


## Features

- 1 Screed cover protects from dirt during installation
- 2 Design grate: Brushed Stainless Steel, Matt Black
- 3 Hair catcher
- 4 Siphon: removable for easy cleaning, can be shortened (50-25 mm water seal height)
- 5 Height adjustment: easy to adjust the grate to the tile level
- 6 Pre-assembled sealing membrane as per DIN 18534
- 7 Siphon body: rotatable and adjustable. Siphon with vertical outlet is optional
- 8 Reversible grate: tileable or Brushed Stainless Steel



Simply scan the code and check out RainDrain Point.

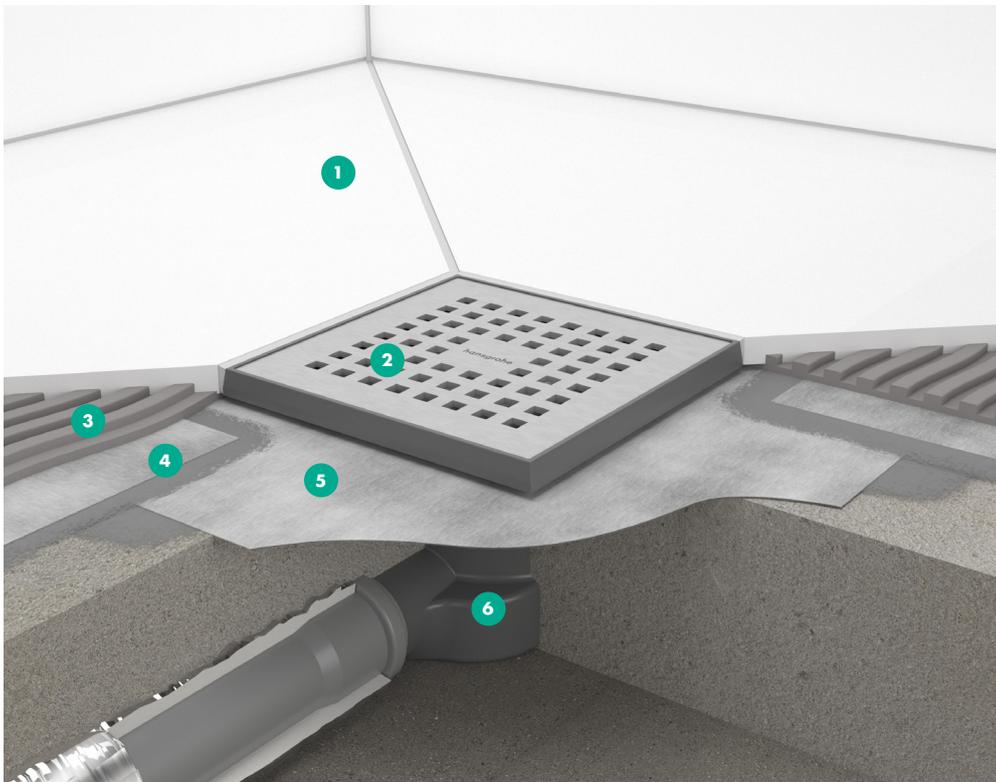

- 1** Tile thickness up to 18 mm
- 2** Design grate  
Stainless Steel 304 (1.4301)
- 3** Tile adhesive
- 4** Waterproofing membrane
- 5** Pre-assembled sealing membrane
- 6** Siphon body ABS

## Specifications

### Dimensions

100 x 100 mm  
150 x 150 mm

### Minimum height

56 mm

### Tile thickness

up to 18 mm

### Connection

Horizontal  
Vertical (optional)

### Drainage capacity

up to 41 l/min

### Tile inlay depth


12 mm

### Water seal height


50 - 25 mm

### Connection nominal diameter


DN40

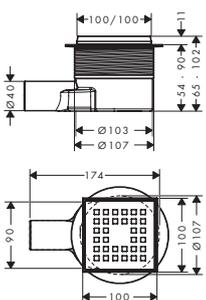


RainDrain Point  
100 x 100

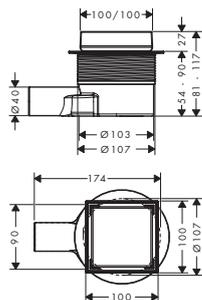

RainDrain Point  
with tileable grate  
100 x 100

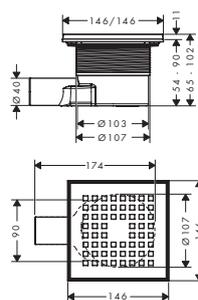

RainDrain Point  
150 x 150

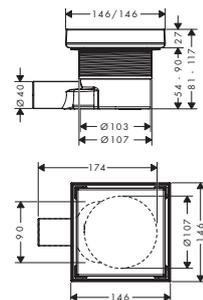

RainDrain Point  
with tileable grate  
150 x 150

# XtraStoris: storage space for your dream bathroom

XtraStoris complements the overall look of the shower place and toilet area. This accessories range is all about high-quality materials and manufacturing processes. These niches are reliable and protected against water damage thanks to the waterproof installation set and sealing membrane supplied.


**XtraStoris Original:** Wall niche with integrated frame up to 90 cm wide available in the colors Matt Black, Matt White and Concretegrey.

**XtraStoris Minimalistic:** Frameless wall niche available in various formats and finishes. This niche has a variable installation depth which means it can be installed flush with the tile or protruding as a design element.

**XtraStoris Individual:** The XtraStoris Individual body and frame finishes are to be combined individually. The design frames are available in Brushed Stainless Steel plus all hansgrohe FinishPlus surface finishes. The body is available in Matt Black, Matt White and Brushed Stainless Steel.

**XtraStoris Rock:** Tileable wall niche and toilet brush holder with push-open door. The installation depth can be adapted to the tile thickness. The storage space either merges almost seamlessly with the wall or is used as a design accent.

## Time-saving and watertight installation

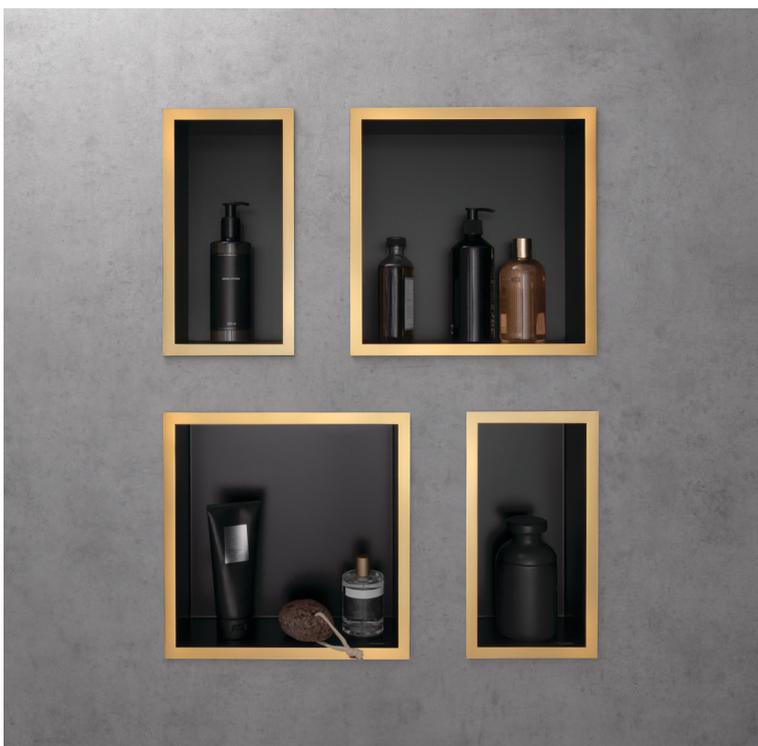



For brick-wall and  
dry-wall construction

**XtraStoris at a glance:**

- Waterproof installation set that is safe and ensures comfortable showering in the long term.
- Simple, time-saving installation.
- Suitable for brick-wall and dry-wall construction.
- Easy-to-clean surface.
- Space-saving solution for design-conscious bathroom owners who appreciate optimum freedom of movement when showering.
- High-quality solution available in four versions, numerous surface finishes and dimensions.

# XtraStoris overview



Product name	XtraStoris Original	XtraStoris Minimalistic	XtraStoris Individual	XtraStoris Rock	XtraStoris Rock
Type	Wall niche with frame	Frameless wall niche	Wall niche with frame	Wall niche with tileable door	Toilet paper and brush holder with tileable door
Dimensions (mm)	300 x 150 x 100/70 300 x 300 x 100/70 300 x 600 x 100 300 x 900 x 100	300 x 150 x 100 300 x 300 x 100 300 x 150 x 140 300 x 300 x 140	300 x 150 x 100 300 x 300 x 100	300 x 150 x 100 300 x 300 x 100 300 x 150 x 140 300 x 300 x 140	595 x 145 x 140
Finish	● ● ○	● ● ○	● ● ○ ● ● ●	● ● ○	● ● ○
Install Depth (mm)	100 70	100 140	100	100 140	140
Variable Installation Depth (mm)		■			
Complete Set	■	■	■	■	■





XtraStoris Original

Toilet paper holder

150 x 150 x 140



140



XtraStoris Safe

Wall niche with  
tileable door

150 x 300 x 100




100




# XtraStoris Original

Wall niche with frame

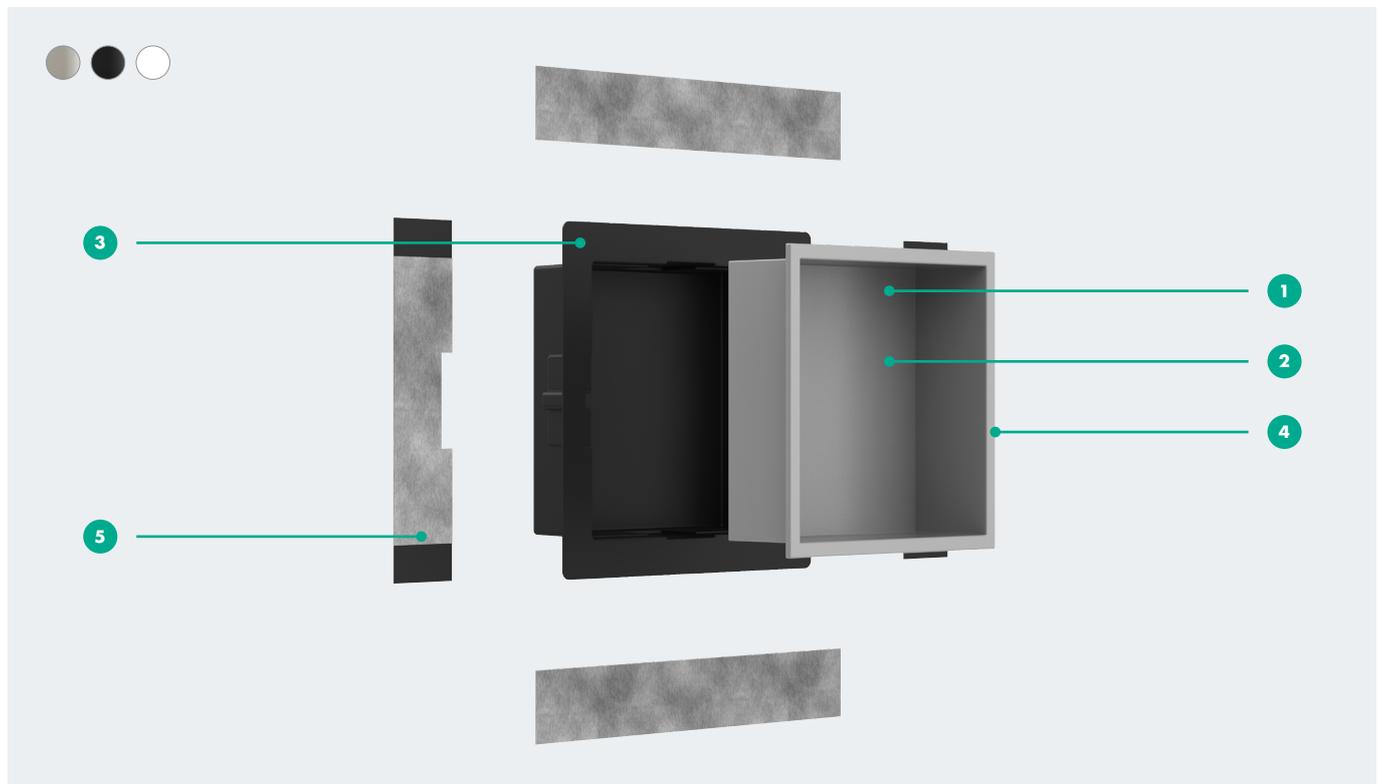


## Features

- 1 Finish: Concretegrey, Matt Black, Matt White
- 2 Surface: easy to clean and maintain Stainless Steel and powder coating
- 3 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 4 Integrated frame: seamless one-piece construction
- 5 Sealing membrane: straightforward sealing and protection from water damage (always included)

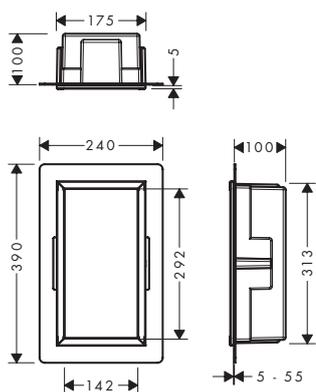


XtraStoris Original 300 x 150 x 100 mm

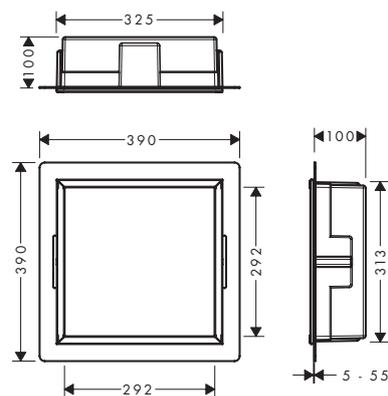

XtraStoris Original 300 x 300 x 100 mm



Simply scan the code and check out XtraStoris Original.

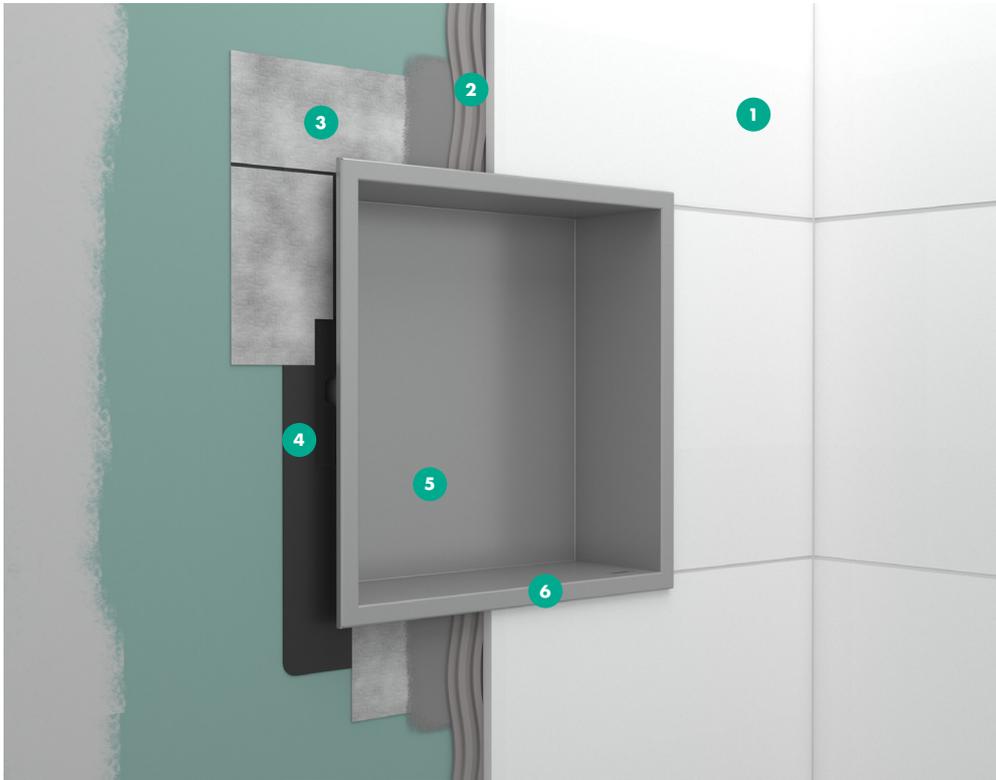

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Body Stainless Steel 304 (1.4301)
- 6 Frame

## Specifications

### Dimensions

300 x 150 x 100 mm  
 300 x 300 x 100 mm  
 300 x 600 x 100 mm  
 300 x 900 x 100 mm

300 x 150 x 70 mm  
 300 x 300 x 70 mm

### Installation depth


100 mm  
 70 mm

### Area of application


New build  
 Renovation

### Wall type

Brick-wall construction  
 Dry-wall construction

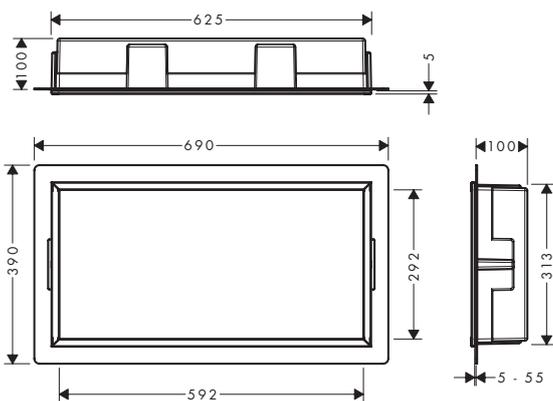


XtraStoris Original 300 x 600 x 100 mm

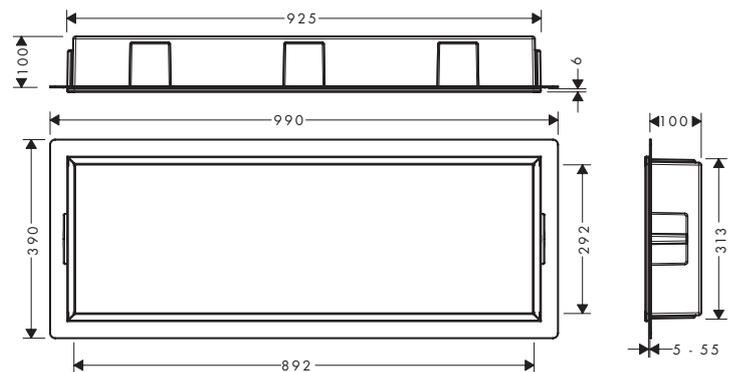

XtraStoris Original 300 x 900 x 100 mm


# XtraStoris Minimalistic

Wall niche frameless

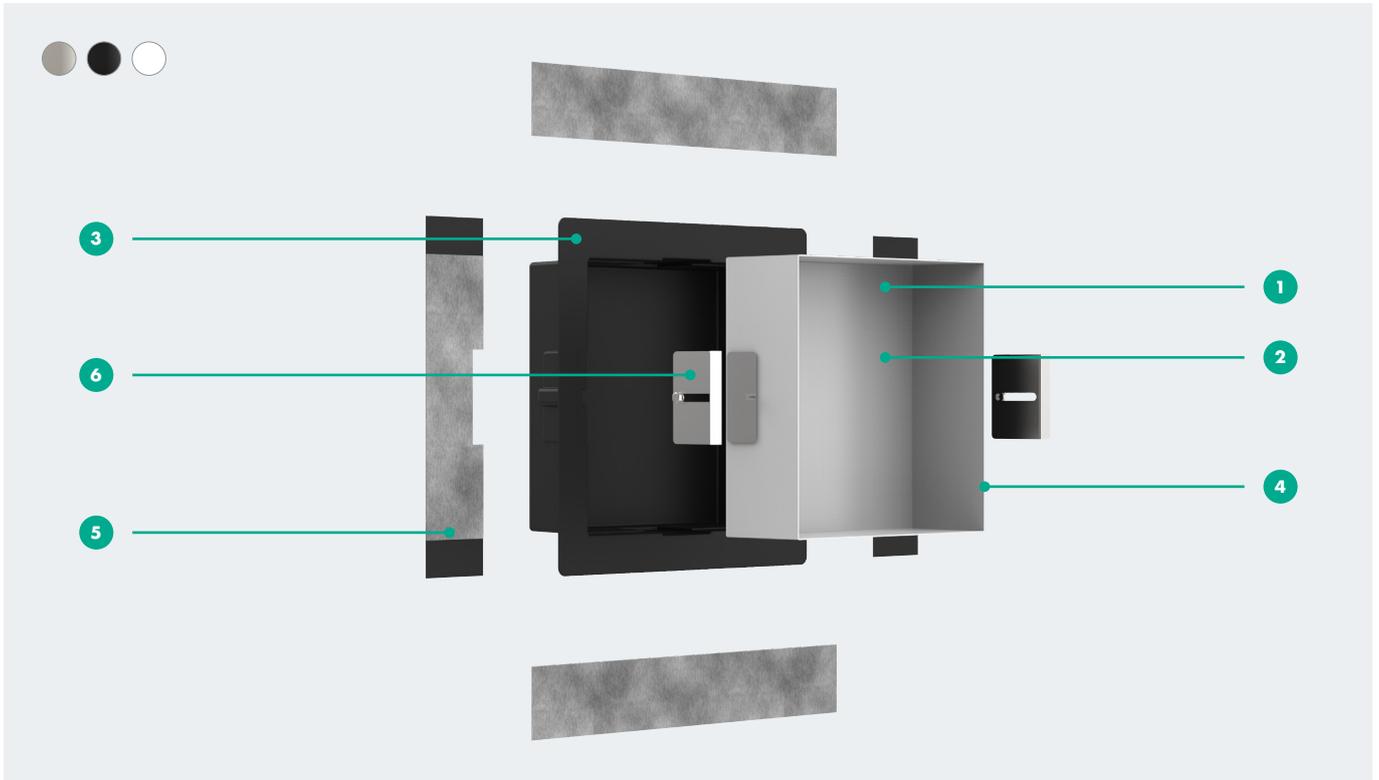


## Features

- 1 Finish: Brushed Stainless Steel, Matt Black, Matt White
- 2 Surface: easy to clean and maintain Stainless Steel and powder coating
- 3 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 4 Frameless: minimalist design
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)
- 6 Wall niche can be installed flush with the tile, or as a designelement protruding up to 55 mm

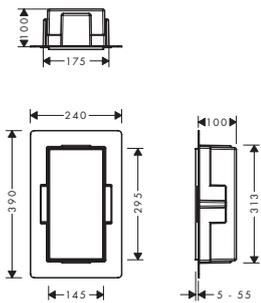


XtraStoris Minimalistic 300 x 150 x 100 mm

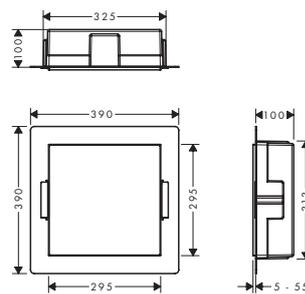

XtraStoris Minimalistic 300 x 300 x 100 mm



Simply scan the code and check out XtraStoris Minimalistic.

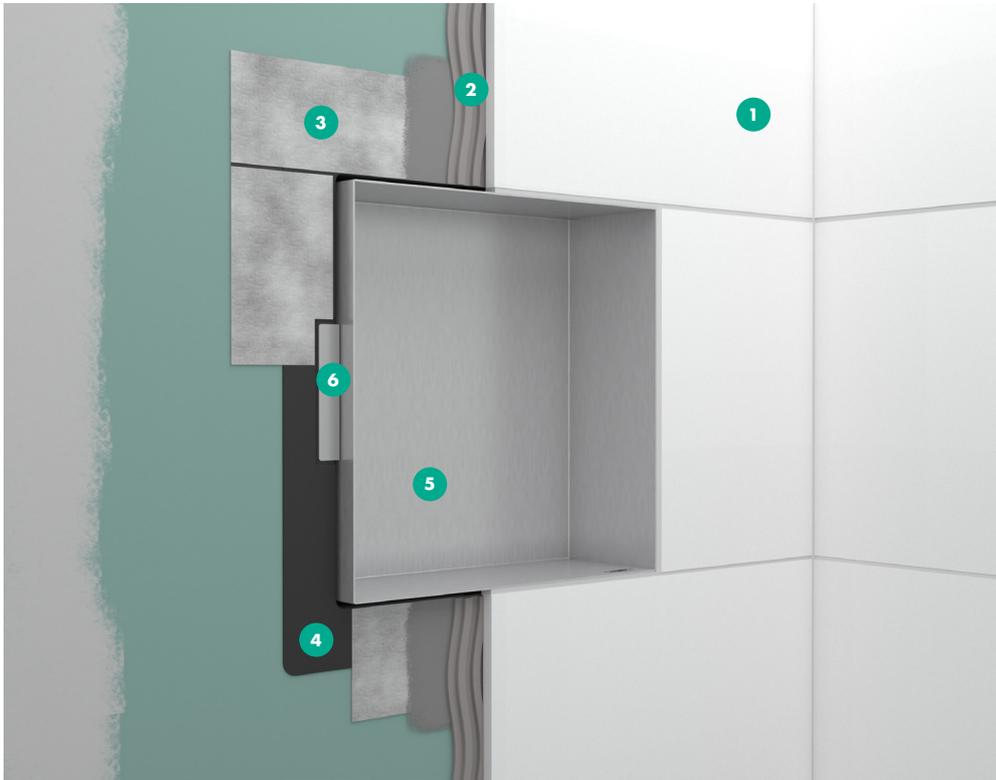

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Body Stainless Steel 304 (1.4301)
- 6 Mounting bracket

## Specifications

### Dimensions

300 x 150 x 100 mm  
 300 x 300 x 100 mm  
 300 x 150 x 140 mm  
 300 x 300 x 140 mm

### Wall type

Brick-wall construction  
 Dry-wall construction

### Area of application


New build  
 Renovation

### Installation depth


100 mm  
 140 mm

### Variable installation depth

Protruding up to 55 mm

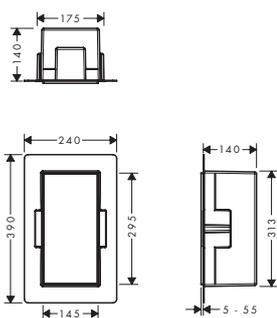


XtraStoris Minimalistic 300 x 150 x 140 mm

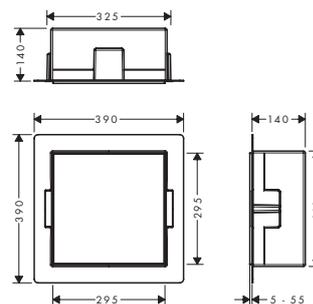

XtraStoris Minimalistic 300 x 300 x 140 mm

# XtraStoris Individual

Wall niche with design frame

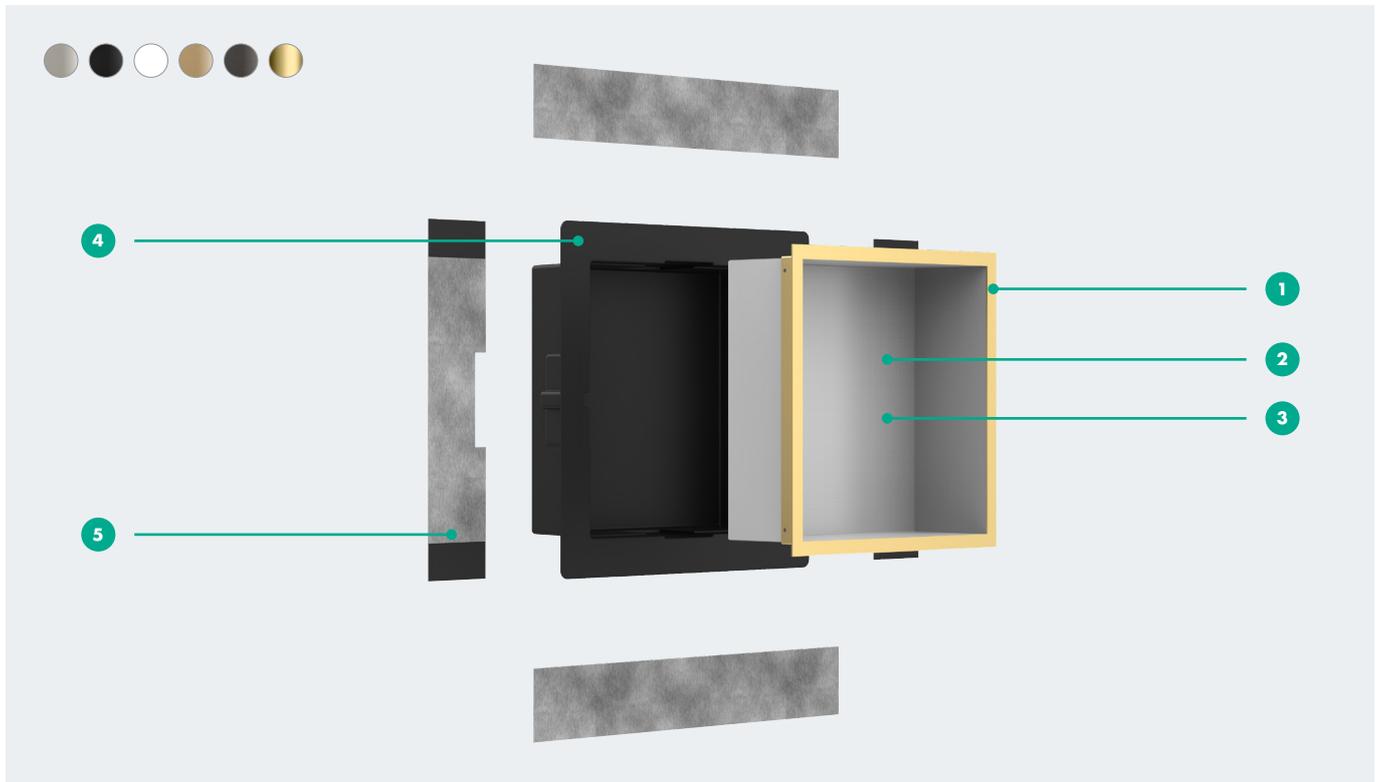


## Features

- 1 Design frame finish: Brushed Stainless Steel, Matt Black, Matt White, Brushed Bronze, Brushed Black Chrome, Polished Gold Optic
- 2 Body finish: Brushed Stainless Steel, Matt black, Matt White
- 3 Surface: easy to clean and maintain Stainless Steel and powder coating
- 4 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)



Simply scan the code and check out XtraStoris Individual.

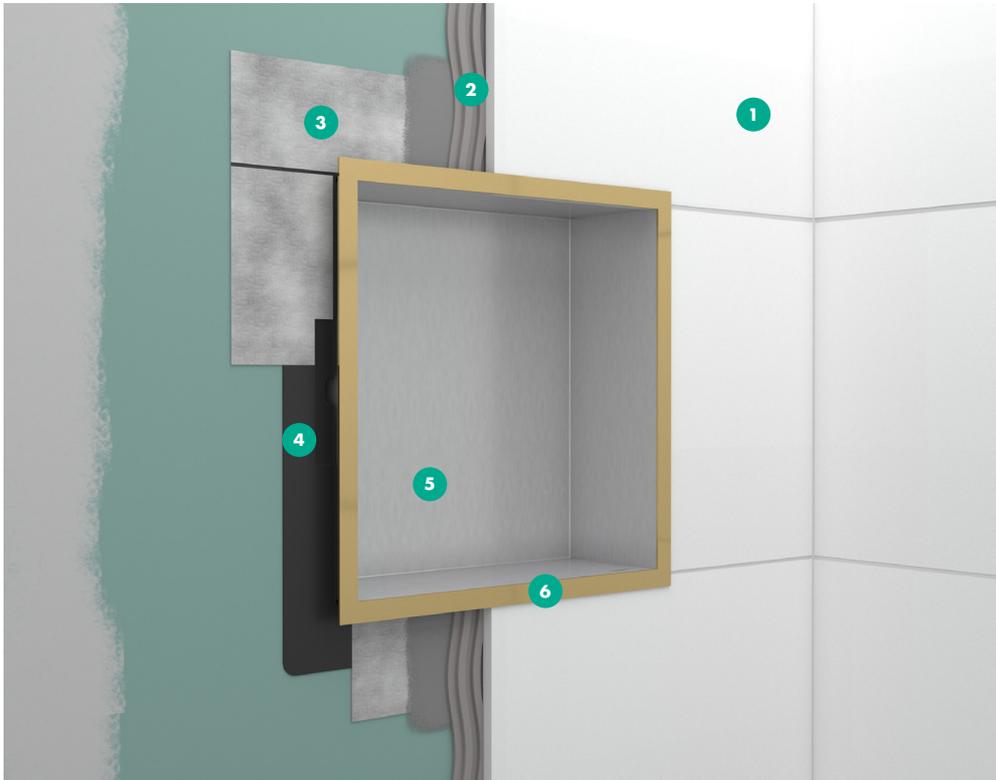

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Body Stainless Steel 304 (1.4301)
- 6 Frame

## Specifications

### Dimensions

300 x 150 x 100 mm  
300 x 300 x 100 mm

### Wall type


Brick-wall construction  
Dry-wall construction

### Installation depth


100 mm

### Area of application

New build  
Renovation

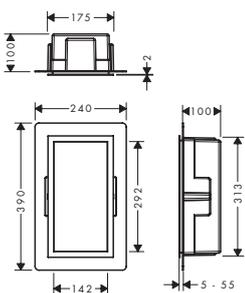


XtraStoris Individual 300 x 150 x 100 mm

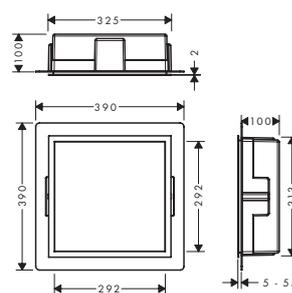

XtraStoris Individual 300 x 300 x 100 mm


# XtraStoris Rock

Wall niche with tileable door

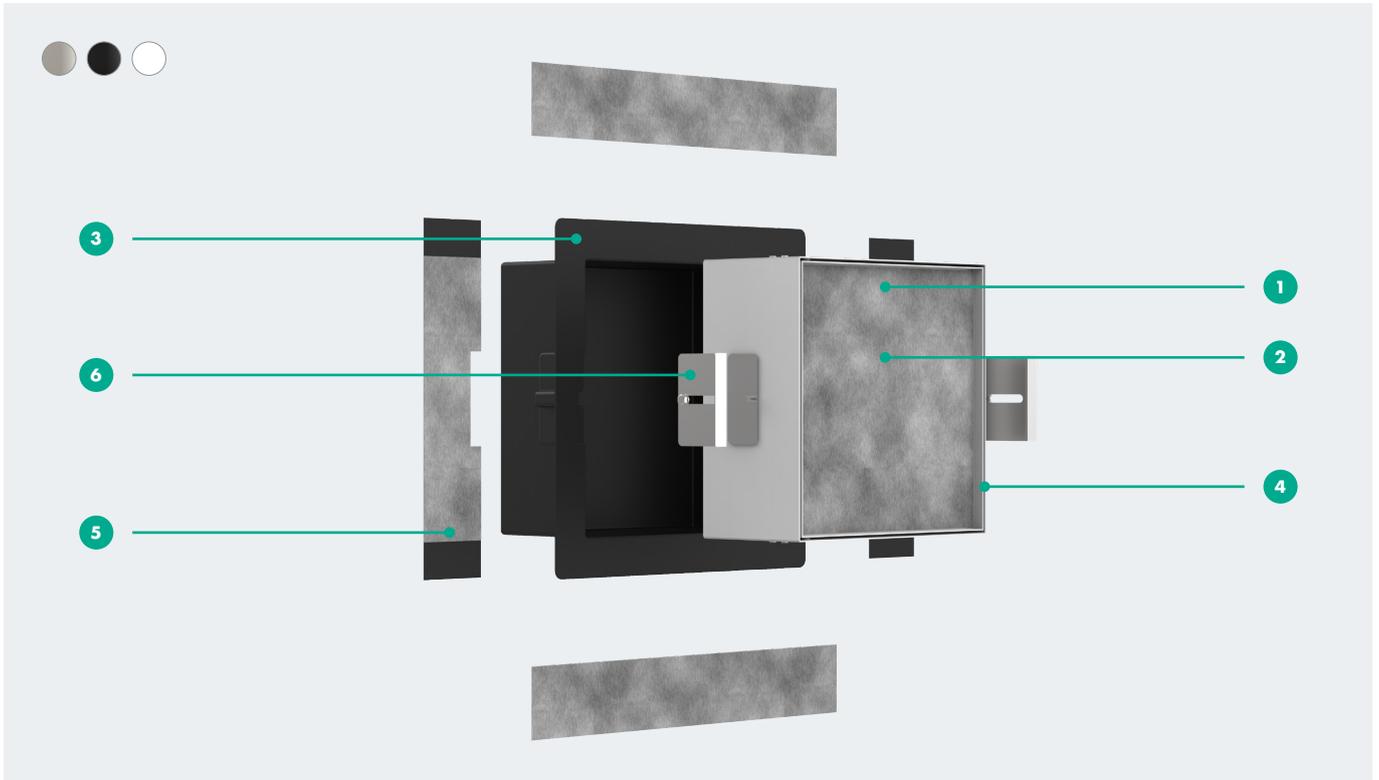


## Features

- 1 Finish: Brushed Stainless Steel, Matt Black, Matt White
- 2 Surface: easy to clean and maintain Stainless Steel and powder coating
- 3 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 4 Tileable door: push-open technology  
Tile thickness max. 12 mm
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)
- 6 Wall niche can be installed flush with the tile

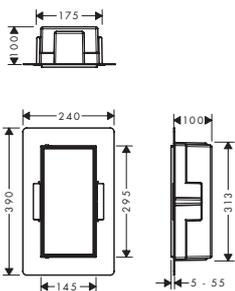


XtraStoris Rock 300 x 150 x 100 mm

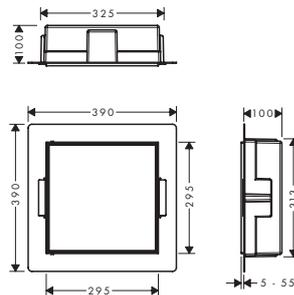

XtraStoris Rock 300 x 300 x 100 mm



Simply scan the code and check out XtraStoris Rock.

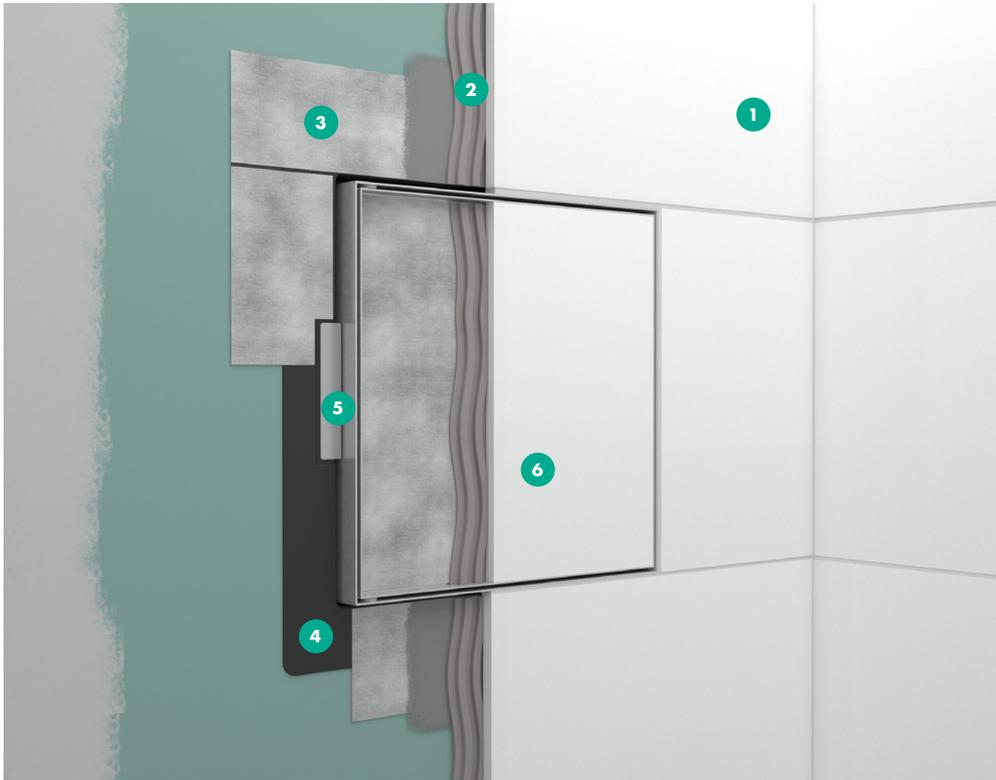

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Mounting bracket
- 6 Tileable door

## Specifications

### Dimensions

300 x 150 x 100 mm  
 300 x 300 x 100 mm  
 300 x 150 x 140 mm  
 300 x 300 x 140 mm

### Wall type

Brick-wall construction  
 Dry-wall construction

### Tile inlay depth


12 mm

### Installation depth


100 mm  
 140 mm

### Area of application

New build  
 Renovation

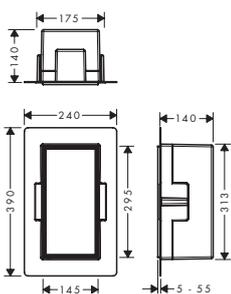


XtraStoris Rock 300 x 150 x 140 mm

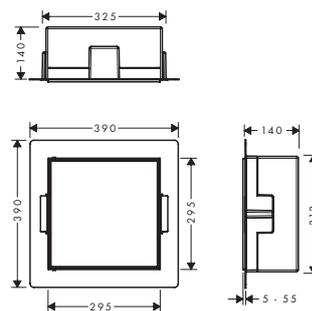

XtraStoris Rock 300 x 300 x 140 mm

# XtraStoris Rock

Recessed toilet brush and paper holder with tileable door

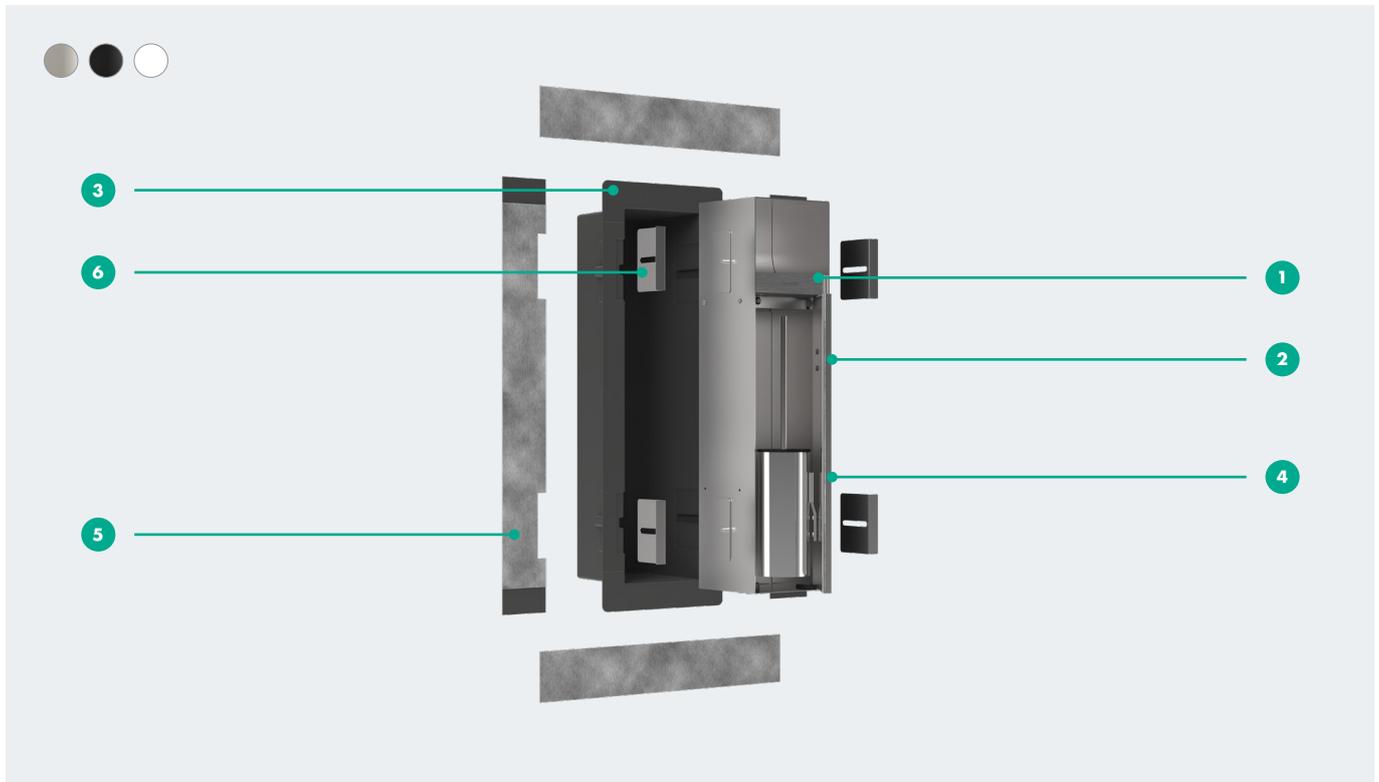

## Features

- 1 Finish: Brushed Stainless Steel, Matt Black, Matt White
- 2 Surface: easy to clean and maintain Stainless Steel and powder coating
- 3 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 4 Tileable door: push-open technology  
Tile thickness max. 12 mm
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)
- 6 Can be installed flush with the tile



Simply scan the code and check out XtraStoris Rock.



## Specifications

### Dimensions

595 x 145 x 140 mm

### Wall type

Brick-wall construction  
Dry-wall construction

### Tile inlay depth


12 mm

### Installation depth

140 mm

### Area of application


New build  
Renovation

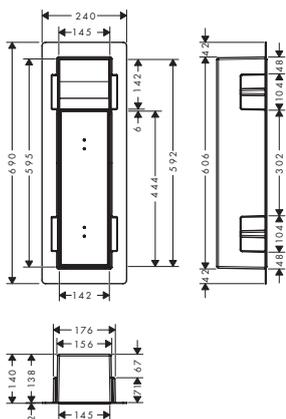

XtraStoris Rock 595 x 145 x 140 mm

# XtraStoris Original

Recessed toilet paper holder

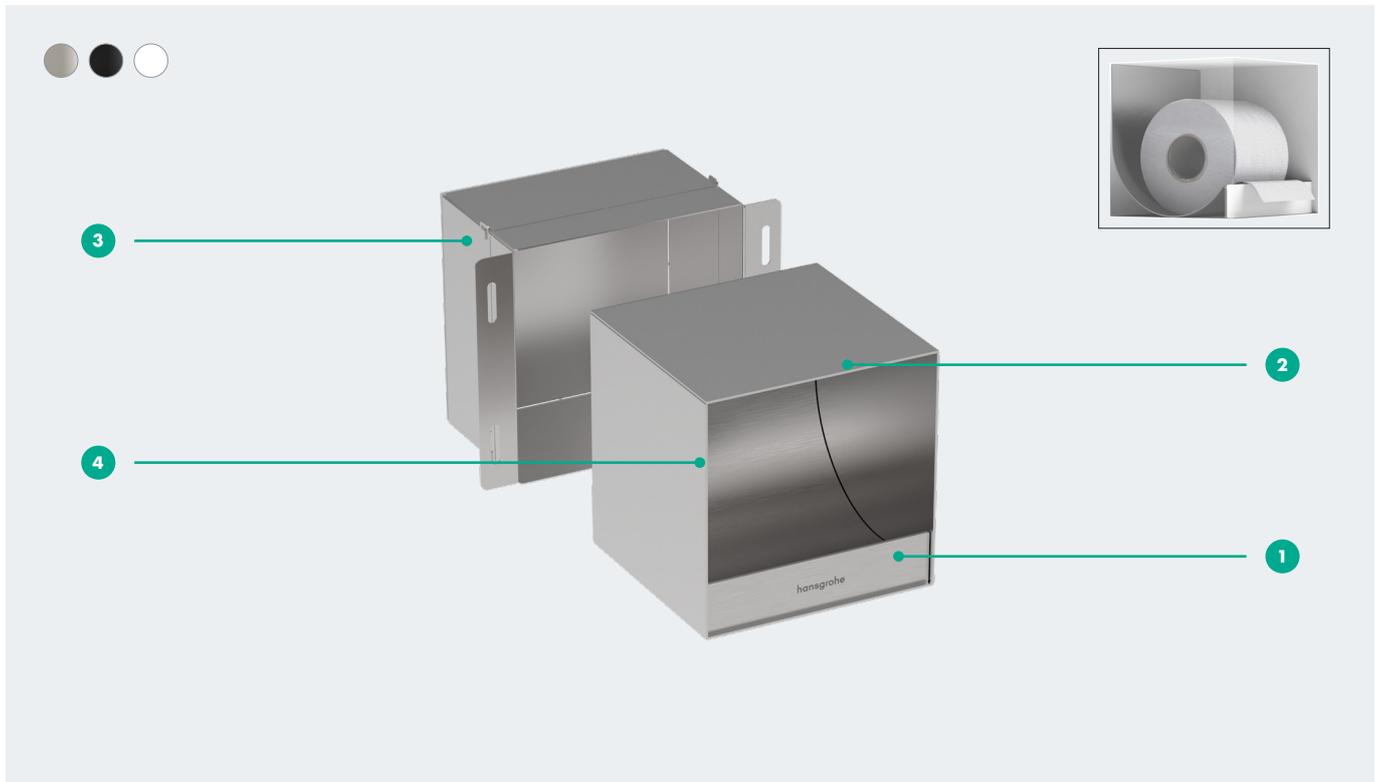

## Features

- 1 Finish: Brushed Stainless Steel, Matt Black, Matt White
- 2 Surface: easy to clean and maintain Stainless Steel and powder coating
- 3 Easy installation: stainless mounting bracket allows for installation at depth of 70, 100 and 140 mm
- 4 Frameless: minimalist design



Simply scan the code and check out XtraStoris Original.



- 1 Tile
- 2 Tile adhesive
- 3 Mounting bracket
- 4 Body Stainless Steel 304 (1.4301)

## Specifications

### Dimensions

150 x 150 x 140 mm

### Wall type


Brick-wall construction  
Dry-wall construction

### Installation depth

70/100/140 mm

### Area of application


New build  
Renovation

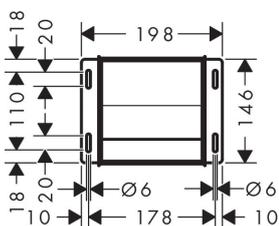

XtraStoris Original 150 x 150 x 140 mm


# XtraStoris Safe

Wall niche with tileable door and integrated water valves

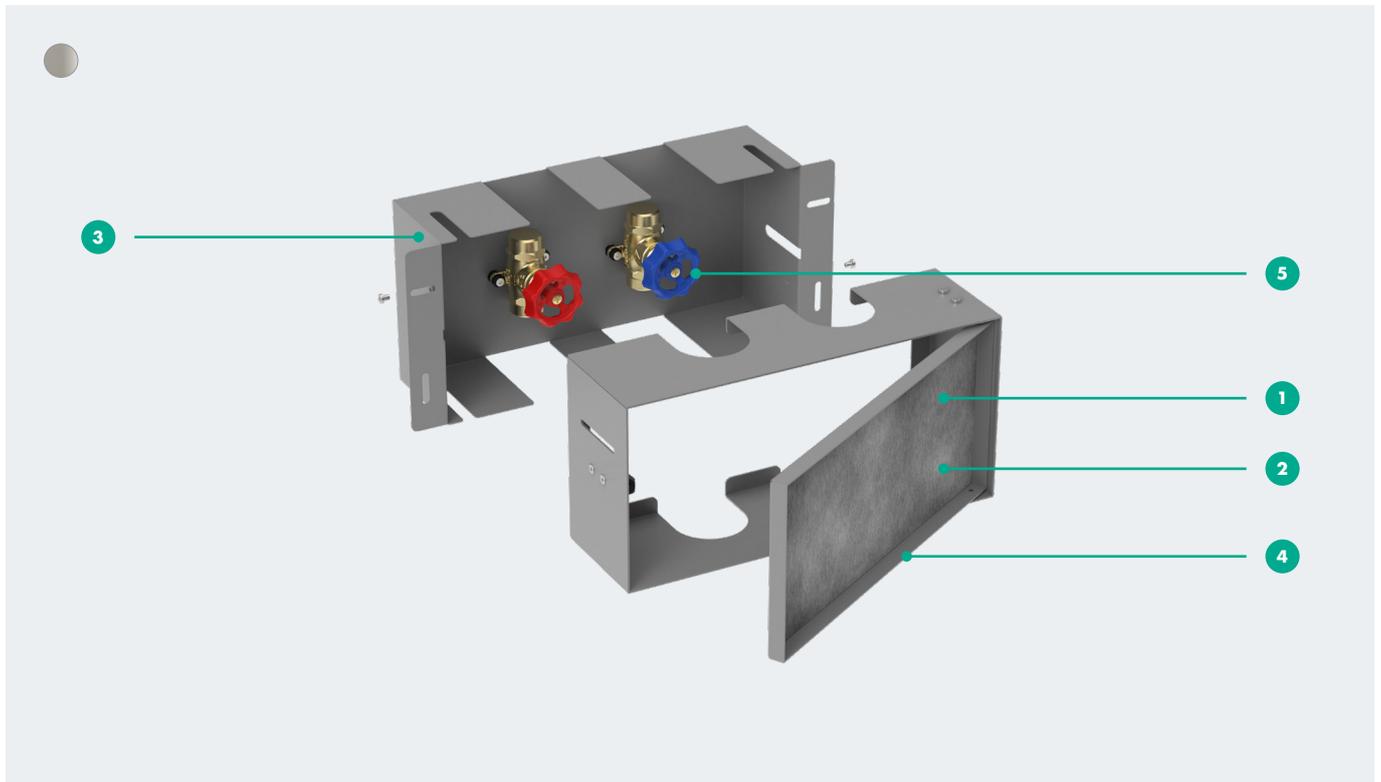

## Features

- 1 Finish: Stainless Steel Optic
- 2 Surface: the powder-coated Stainless Steel on the wall niche is easy to clean
- 3 Stainless Steel built-in box
- 4 Tileable door: push-open technology  
Tile thickness max. 12 mm
- 5 Shut-off valve

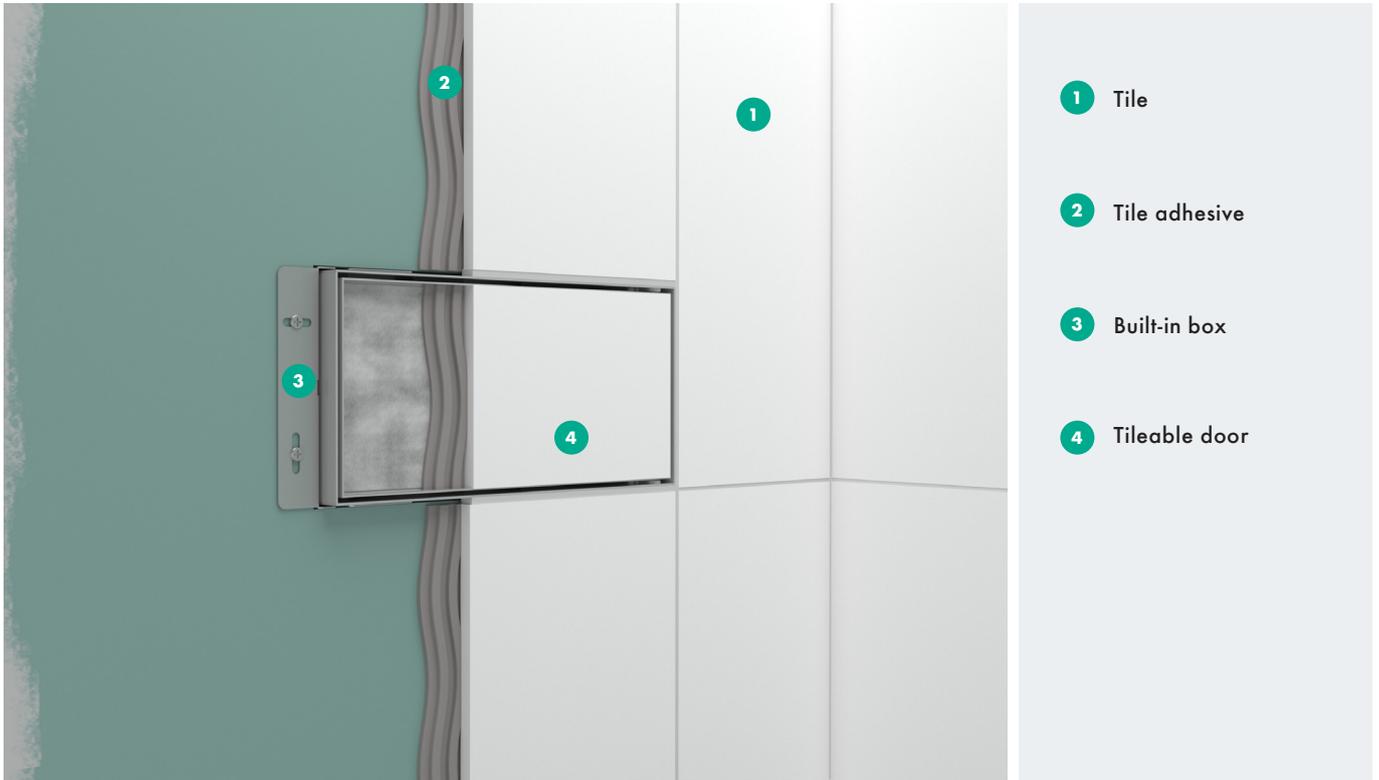

## Specifications

### Dimensions

150 x 300 x 100 mm

### Wall type

Dry-wall construction

### Tile inlay depth


12 mm

### Installation depth

90 mm

### Area of application

New build  
Renovation

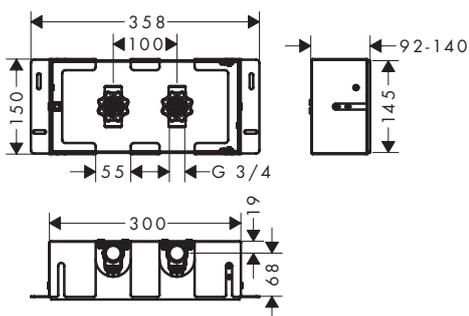

XtraStoris Safe 150 x 300 x 100 mm

# RainDrain



**RainDrain Match**

- Finish set shower drain 600 with height adjustable frame # 56036, -000, -450, -610, -670, -700, -800
- Finish set shower drain 700 with height adjustable frame # 56037, -000, -450, -610, -670, -700, -800 (not shown)
- Finish set shower drain 800 with height adjustable frame # 56038, -000, -450, -610, -670, -700, -800 (not shown)
- Finish set shower drain 900 with height adjustable frame # 56040, -000, -450, -610, -670, -700, -800 (not shown)
- Finish set shower drain 1000 with height adjustable frame # 56041, -000, -450, -610, -670, -700, -800 (not shown)
- Finish set shower drain 1200 with height adjustable frame # 56042, -000, -450, -610, -670, -700, -800 (not shown)



**RainDrain Rock**

- Finish set shower drain 600 cut to size and tileable # 56029, -000
- Finish set shower drain 800 cut to size and tileable # 56030, -000 (not shown)
- Finish set shower drain 800 cut to size and tileable # 56031, -000 (not shown)
- Finish set shower drain 900 cut to size and tileable # 56032, -000 (not shown)
- Finish set shower drain 1000 cut to size and tileable # 56033, -000 (not shown)
- Finish set shower drain 1200 cut to size and tileable # 56034, -000 (not shown)



**Installation accessories\***

Pipe coupler to connect UK pipe to European dimensions # 07003354

\*Only available in the United Kingdom



**Fire protection adapter**

Fire protection adapter (PP socket DN50) # 94343



**Complete set for flat installation**


- Complete set for flat installation - 600 for shower drains finish sets # 56016180
- Complete set for flat installation - 700 for shower drains finish sets # 56017180 (not shown)
- Complete set for flat installation - 800 for shower drains finish sets # 56018180 (not shown)
- Complete set for flat installation - 900 for shower drains finish sets # 56019180 (not shown)
- Complete set for flat installation - 1000 for shower drains finish sets # 56020180 (not shown)
- Complete set for flat installation - 1200 for shower drains finish sets # 56021180 (not shown)



**Complete set for standard installation**

- Complete set for standard installation - 600 for shower drains finish sets # 56022180
- Complete set for standard installation - 700 for shower drains finish sets # 56023180 (not shown)
- Complete set for standard installation - 800 for shower drains finish sets # 56024180 (not shown)
- Complete set for standard installation - 900 for shower drains finish sets # 56025180 (not shown)
- Complete set for standard installation - 1000 for shower drains finish sets # 56026180 (not shown)
- Complete set for standard installation - 1200 for shower drains finish sets # 56027180 (not shown)



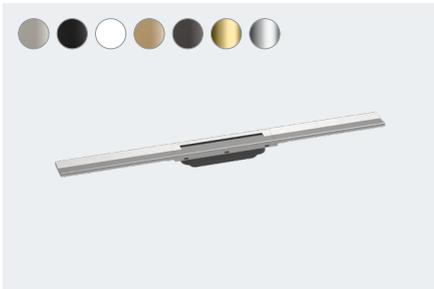

**RainDrain Flex**

Finish set shower drain 700 cuttable  
# 56043, -000, -140, -340, -670, -700, -800, -990

Finish set shower drain 800 cuttable  
# 56044, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 900 cuttable  
# 56045, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 1000 cuttable  
# 56046, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 1200 cuttable  
# 56047, -000, -140, -340, -670, -700, -800, -990 (not shown)



**RainDrain Flex**

Finish set shower drain 700 cuttable for wall mounting  
# 56050, -000, -140, -340, -670, -700, -800, -990

Finish set shower drain 800 cuttable for wall mounting  
# 56051, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 900 cuttable for wall mounting  
# 56052, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 1000 cuttable for wall mounting  
# 56053, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 1200 cuttable for wall mounting  
# 56054, -000, -140, -340, -670, -700, -800, -990 (not shown)



**RainDrain Spot**

Complete set 150/150 point drain and installation set  
# 56055, -800

Complete set 150/150 point drain tileable rear cover and installation set  
# 56112, -800 (not shown)



**uBox universal for flat installation**

Base set for finish sets for flat installation  
# 01000180



**uBox universal for standard installation**

Base set for finish sets for standard installation  
# 01001180



**uBox universal for vertical installation**

Base set for finish sets for vertical installation  
# 01002180



# RainDrain



**RainDrain Original**

- Finish set shower drain 600  
# 56196, -800
- Finish set shower drain 700  
# 56197, -800 (not shown)
- Finish set shower drain 800  
# 56198, -800 (not shown)
- Finish set shower drain 900  
# 56199, -800 (not shown)
- Finish set shower drain 1000  
# 56200, -800 (not shown)
- Finish set shower drain 1200  
# 56201, -800 (not shown)



**RainDrain Compact standard installation**

- Complete set shower drain 600  
# 56174, # 56175 (tile), -800
- Complete set shower drain 700  
# 56176, # 56177 (tile), -800 (not shown)
- Complete set shower drain 800  
# 56178, # 56179 (tile), -800 (not shown)
- Complete set shower drain 900  
# 56180, # 56181 (tile), -800 (not shown)
- Complete set shower drain 1000  
# 56182, # 56183 (tile), -800 (not shown)
- Complete set shower drain 1200  
# 56184, # 56185 (tile), -800 (not shown)




**RainDrain Compact flat installation**

- Complete set shower drain 600  
# 56162, # 56163 (tile), -800
- Complete set shower drain 700  
# 56164, # 56165 (tile), -800 (not shown)
- Complete set shower drain 800  
# 56166, # 56167 (tile), -800 (not shown)
- Complete set shower drain 900  
# 56168, # 56169 (tile), -800 (not shown)
- Complete set shower drain 1000  
# 56170, # 56171 (tile), -800 (not shown)
- Complete set shower drain 1200  
# 56172, # 56173 (tile), -800 (not shown)



**RainDrain Allround**

- Complete set shower drain 700 for standard/flat installation  
# 56186, -800
- Complete set shower drain 800 for standard/flat installation  
# 56187, -800 (not shown)
- Complete set shower drain 900 for standard/flat installation  
# 56188, -800 (not shown)
- Complete set shower drain 1000 for standard/flat installation  
# 56189, -800 (not shown)
- Complete set shower drain 1200 for standard/flat installation  
# 56190, -800 (not shown)

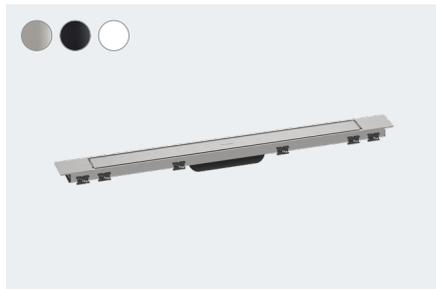

**RainDrain Match Plus**

- Finish set shower drain 800 with height adjustable frame  
# 56215, -800, -670, -700
- Finish set shower drain 900 with height adjustable frame  
# 56216, -800, -670, -700 (not shown)
- Finish set shower drain 1000 with height adjustable frame  
# 56217, -800, -670, -700 (not shown)
- Finish set shower drain 1200 with height adjustable frame  
# 56218, -800, -670, -700 (not shown)



**RainDrain Minimalistic**

- Finish set shower drain 700  
# 56219, -000
- Finish set shower drain 800  
# 56220, -000 (not shown)
- Finish set shower drain 900  
# 56221, -000 (not shown)
- Finish set shower drain 1000  
# 56222, -000 (not shown)
- Finish set shower drain 1200  
# 56223, -000 (not shown)





**RainDrain Brilliance**

Complete set point drain 100/100 tileable rear cover  
# 56250, -800, -670

Complete set point drain 150/150 tileable rear cover  
# 56251, -800, -670 (not shown)



**RainDrain Point**

Complete set point drain 100/100  
# 56246, -800

Complete set point drain 150/150  
# 56248, -800 (not shown)



**RainDrain Point**


Complete set point drain 100/100 tileable rear cover  
# 56247, -800, -670

Complete set point drain 150/150 tileable rear cover  
and installation set  
# 56249, -800, -670 (not shown)



**RainTurn Slope profile**

With left or right side connection, adjustable 1200  
# 56158, -800

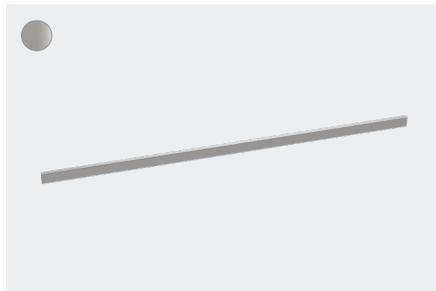


**RainTurn Wall profile**

adjustable 1200  
# 56161, -800




# XtraStoris

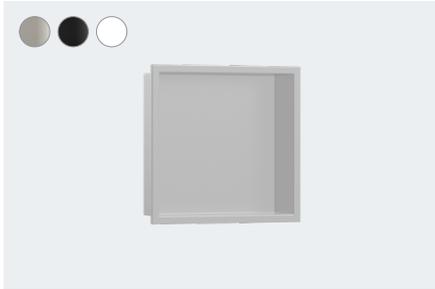

**XtraStoris Original**

- Wall niche with frame 300/150/100  
# 56057, -670, -700, -380
- Wall niche with frame 300/300/100  
# 56061, -670, -700, -380 (not shown)
- Wall niche with frame 300/600/100  
# 56064, -670, -700, -380 (not shown)
- Wall niche with frame 300/900/100  
# 56067, -670, -700, -380 (not shown)
- Wall niche with frame 300/150/70  
# 56092, -670, -700, -380 (not shown)
- Wall niche with frame 300/300/70  
# 56093, -670, -700, -380 (not shown)

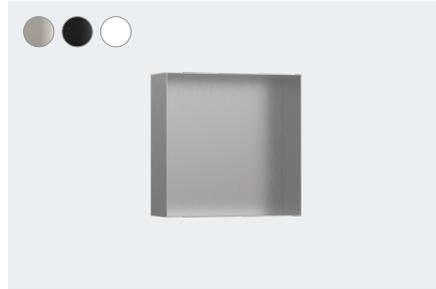


**XtraStoris Minimalistic**

- Wall niche frameless 300/300/100  
# 56073, -670, -700, -800
- Wall niche frameless 300/300/140  
# 56079, -670, -700, -800 (not shown)
- Wall niche frameless 300/150/100  
# 56070, -670, -700, -800 (not shown)
- Wall niche frameless 300/150/140  
# 56076, -670, -700, -800 (not shown)




**XtraStoris Rock**

- Wall niche with tileable door 300/300/100  
# 56085, -670, -700, -800
- Wall niche with tileable door 300/300/140  
# 56091, -670, -700, -800 (not shown)
- Wall niche with tileable door 300/150/100  
# 56082, -670, -700, -800 (not shown)
- Wall niche with tileable door 300/150/140  
# 56088, -670, -700, -800 (not shown)

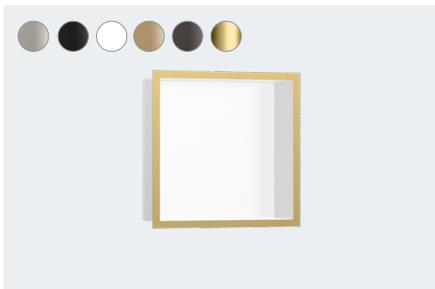

**XtraStoris Individual**

- Wall niche Brushed Stainless Steel with design frame 300/150/100  
# 56094, -140, -340, -670, -700, -800, -990 (not shown)
- Wall niche Brushed Stainless Steel with design frame 300/300/100  
# 56097, -140, -340, -670, -700, -800, -990 (not shown)
- Wall niche Matt Black with design frame 300/150/100  
# 56095, -140, -340, -670, -700, -800, -990 (not shown)
- Wall niche Matt Black with design frame 300/300/100  
# 56098, -140, -340, -670, -700, -800, -990 (not shown)
- Wall niche Matt White with design frame 300/150/100  
# 56096, -140, -340, -670, -700, -800, -990 (not shown)
- Wall niche Matt White with design frame 300/300/100  
# 56099, -140, -340, -670, -700, -800, -990 (not shown)

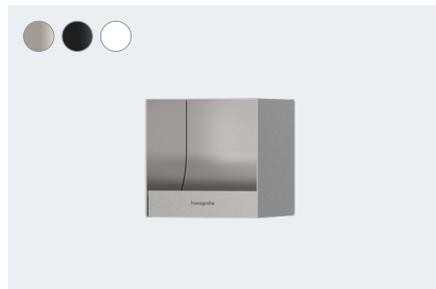


**XtraStoris Original**

- Recessed toilet paper holder 300/150/140  
# 56065, -670, -700, -800



**XtraStoris Rock**

- Recessed toilet brush holder with toilet paper holder and tileable door 595/145/140  
# 56062, -670, -700, -800

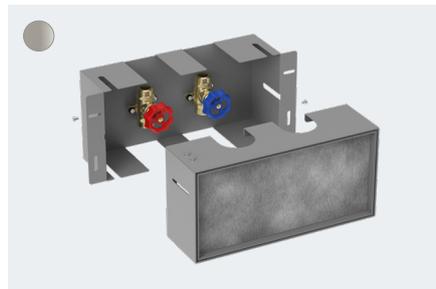

**XtraStoris Safe**

- Wall niche with tileable door and integrated shut-off valve 150/300/100  
# 56100, -800



## Technologies



Height-adjustable tiled frame.



High drainage capacity.



Easy to clean the siphon.



Simple and fast to clean and perform maintenance on the surfaces.



Waterproof basic set and pre-assembled seal to avoid water damage.



Installation anywhere in the space as a design highlight.



Wall-mounted installation for convenient use of space.



Installation fitted in the installation between two walls.



Minimalist installation against the back wall and side walls.



Shower channel can be cut to any length so that it is perfectly adapted to the installation environment.



Variable installation depth of the finish set for a unique look.

## Headquarters

Hansgrohe SE · P.O. Box 1145 · D-77757 Schiltach  
Tel. +49 7836 51-0 · Fax +49 7836 51-1300 · info@hansgrohe.com · pro.hansgrohe.com

## Hansgrohe Baltics

Hansgrohe Eesti · Mäealuse 2/1 · 12618 Tallinn  
Tel. +372 6826829 · info@hansgrohe.ee · hansgrohe.ee

## Australia

Hansgrohe Pty Ltd · Unit 4/71 Victoria Crescent · Abbotsford · VIC 3067 · Australia  
Tel. +61 03 8319 5753 · info@hansgrohe.com.au · hansgrohe.com.au

## India

Hansgrohe India (Pvt.) Ltd. · Office No. 5 · 7th Floor · Phoenix Fountainhead Tower II  
Nagar Road · Viman Nagar · Pune - 411 016 · Maharashtra · India  
Tel. +91 20 6625 9500 · info@hansgrohe.in · pro.hansgrohe.com

## Singapore

Hansgrohe Pte. Ltd. · 69 Mohamed Sultan Road · Singapore 239015  
Tel. +65 6884 5060 · Fax +65 6884 5070 · info@hansgrohe.com.sg · hansgrohe.com.sg

## United Kingdom

Hansgrohe Ltd · Unit 2 · Edgehill Drive · Tournament Fields · Warwick · Warwickshire · CV34 6XQ  
Tel. 01926 242300 · enquiries@hansgrohe.co.uk · hansgrohe.co.uk

Please note that we can only present a selection of our products in this technical manual.  
You can find our entire range at [hansgrohe.com](https://hansgrohe.com)



Find hansgrohe online and on social media.

