

**hansgrohe**

Life is waterful.



# News Product Book 2026

Hansgrohe contact

# Hansgrohe Headquarters



## The Hansgrohe Master Service - Headquarters

### Service hours:

Monday-Thursday: 8:00 am - 4:00 pm

Friday: 8:00 am - 3:00 pm

Phone: +49 7836 51-1282

Fax: +49 7836 51-1440

info@hansgrohe.com

You will also find technical information at

**[pro.hansgrohe-int.com](https://pro.hansgrohe-int.com)**



## Global Projects Services - Headquarters

**[gpservices@hansgrohe.com](mailto:gpservices@hansgrohe.com)**

You will also find tender texts and planning details at

**[pro.hansgrohe-int.com/planning-data](https://pro.hansgrohe-int.com/planning-data)**



## Hansgrohe Aquademie - Headquarters

Monday-Friday: 7:30 am - 7:00 pm

Saturday-Sunday: 10:00 am - 4:00 pm

Hansgrohe SE

Hansgrohe Aquademie

Austr. 9

77761 Schiltach/Germany

Phone: +49 7836 51-3272

Fax: +49 7836 51-1505

The Aquademie is our adventure centre on all aspects of water.

**[pro.hansgrohe-int.com/aquademie](https://pro.hansgrohe-int.com/aquademie)**

Errors and omissions excepted.

Upon publication of this price list, all previously published price lists are no longer valid.

Figures given for dimensional drawings are in mm.

When installing the products, please follow the instructions in the installation manual.

All products are subject to availability. The availability may be temporarily impacted by material shortages, interruptions in the supply chain or other force majeure events. Please contact us for further details.

Please note that the accuracy of color reproduction may vary due to technical limitations in color reproduction, material surfaces and lighting conditions. Although we make every effort to reproduce the colors shown as accurately as possible, we cannot exclude the possibility of color deviations.

The following general terms and conditions apply: <https://www.hansgrohe.com.sg/terms-of-conditions>

# Content

Raindance Alive	9
Pulsify	15
Activera	27
Design ShowerSets	41
Ecostat Element	49
Shower and bath mixers	53
Vivenis	67
Talis	71
Rebris	75
Logis	81
Neovis	85
AddStoris	91

## Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
<b>13</b>			
HG	13346009		51
HG	13346149		51
HG	13346349		51
HG	13347009		51
HG	13347149		51
HG	13347349		51
HG	13651000	4059625814819	64
HG	13652000	4059625814802	64
HG	13653000	4059625814796	64
HG	13654000	4059625814789	64
HG	13657000	4059625814772	65
HG	13658000	4059625814765	65
HG	13947009	4059625796542	29
HG	13947149	4059625796528	29
HG	13947349	4059625796504	29
<b>24</b>			
HG	24111000	4059625310922	17
HG	24111009	4059625319734	17
HG	24111140	4059625442654	17
HG	24111340	4059625810965	17
HG	24111670	4059625338773	17
HG	24111700	4059625338766	17
HG	24140000	4059625340073	19
HG	24140140	4059625453377	19
HG	24140340	4059625814932	19
HG	24140670	4059625340097	19
HG	24140700	4059625340080	19
HG	24141000	4059625340707	18
HG	24141140	4059625453384	18
HG	24141340	4059625814925	18
HG	24141670	4059625340721	18
HG	24141700	4059625340714	18
HG	24149000	4059625341063	21
HG	24149140	4059625453391	21
HG	24149340	4059625814918	21
HG	24149670	4059625341087	21
HG	24149700	4059625341070	21
HG	24221349	4059625815151	25
HG	24330000	4059625411094	20
HG	24330140	4059625467831	20
HG	24330340	4059625815120	20
HG	24330670	4059625411087	20
HG	24330700	4059625411070	20
HG	24331000	4059625411063	20
HG	24331140	4059625467824	20
HG	24331340	4059625815113	20
HG	24331670	4059625411025	20
HG	24331700	4059625410981	20
HG	24333000	4059625467800	20
HG	24333140	4059625467794	20
HG	24333340	4059625815106	20
HG	24333670	4059625467787	20
HG	24333700	4059625467770	20
HG	24357000	4059625459331	21
HG	24357140	4059625459362	21
HG	24357340	4059625815083	21
HG	24357670	4059625459355	21
HG	24357700	4059625459348	21
HG	24400000	4059625347799	22

brand	Code no.	EAN	page
HG	24400140	4059625811917	22
HG	24400340	4059625812839	22
HG	24400670	4059625489055	22
HG	24400700	4059625489048	22
HG	24401000	4059625347782	22
HG	24401140	4059625811924	22
HG	24401340	4059625811931	22
HG	24401670	4059625489031	22
HG	24401700	4059625489024	22
HG	24402000	4059625460726	23
HG	24402140	4059625460702	23
HG	24402340	4059625815069	23
HG	24402670	4059625460696	23
HG	24402700	4059625460672	23
HG	24403000	4059625445136	24
HG	24403140	4059625445167	24
HG	24403340	4059625815052	24
HG	24403670	4059625445150	24
HG	24403700	4059625445143	24
HG	24404000	4059625445174	24
HG	24404140	4059625445204	24
HG	24404340	4059625812846	24
HG	24404670	4059625445198	24
HG	24404700	4059625445181	24
HG	24405000	4059625460658	23
HG	24405140	4059625460634	23
HG	24405340	4059625815045	23
HG	24405670	4059625460627	23
HG	24405700	4059625460603	23
HG	24523000	4059625568361	13
HG	24523140	4059625568354	13
HG	24523340	4059625568347	13
HG	24523670	4059625568330	13
HG	24523700	4059625568323	13
HG	24523990	4059625568316	13
HG	24594000	4059625568897	14
HG	24594140	4059625568880	14
HG	24594340	4059625568873	14
HG	24594670	4059625568866	14
HG	24594700	4059625568859	14
HG	24594990	4059625568842	14
HG	24612000	4059625823613	12
HG	24612140	4059625824221	12
HG	24612340	4059625824214	12
HG	24612670	4059625824207	12
HG	24612700	4059625823699	12
HG	24612990	4059625823682	12
HG	24620140	4059625805619	45
HG	24620340	4059625823675	45
HG	24622000	4059625805602	43
HG	24622140	4059625805596	43
HG	24622340	4059625823668	43
HG	24622670	4059625805589	43
HG	24623000	4059625805572	46
HG	24623140	4059625823651	46
HG	24623340	4059625805565	46
HG	24623670	4059625805558	46
HG	24624000	4059625805541	47
HG	24624140	4059625805534	47
HG	24624340	4059625823644	47

**Code Numbers (HG = hansgrohe, AX = AXOR)**

brand	Code no.	EAN	page
HG	24624670	4059625805527	47
HG	24625000	4059625805510	48
HG	24625140	4059625805503	48
HG	24625340	4059625823637	48
HG	24625670	4059625805497	48
HG	24630140	4059625805480	44
HG	24630340	4059625823620	44
<b>26</b>			
HG	26971009	4059625836415	26
HG	26971149	4059625836392	26
HG	26971349	4059625836378	26
<b>28</b>			
HG	28035000	4059625610275	29
HG	28035670	4059625610282	29
HG	28036000	4059625615577	29
HG	28036670	4059625615584	29
HG	28055000	4059625618219	33
HG	28057001	4059625649992	33
HG	28057671	4059625649985	33
HG	28061000	4059625608616	34
HG	28061670	4059625608623	34
HG	28062000	4059625786840	33
HG	28062670	4059625786857	33
HG	28063007	4059625789537	30
HG	28063677	4059625789551	30
HG	28063707	4059625789575	30
HG	28083009	4059625786505	38
HG	28083679	4059625786512	38
HG	28099000	4059625757895	35
HG	28099670	4059625759509	35
HG	28737000	4059625769225	34
HG	28738000	4059625592236	34
HG	28738670	4059625592243	34
HG	28739000	4059625769232	34
HG	28739670	4059625769249	34
HG	28757000	4059625793138	39
HG	28757670	4059625793145	39
HG	28863000	4059625795774	31
HG	28863670	4059625795781	31
HG	28864000	4059625795798	31
HG	28864670	4059625795804	31
HG	28865000	4059625795811	32
HG	28865670	4059625795828	32
HG	28868009	4059625801697	35
HG	28871009	4059625786048	37
HG	28871679	4059625786055	37
HG	28878009	4059625801673	36
<b>31</b>			
HG	31425000	4059625815236	58
HG	31699000	4059625815199	58
<b>32</b>			
HG	32451000	4059625815380	55
HG	32451140	4059625815373	55
HG	32451340	4059625815366	55
HG	32451670	4059625815359	55
HG	32451990	4059625815335	55
HG	32651000	4059625815267	55
HG	32651140	4059625815250	55
HG	32651340	4059625815243	55
HG	32651670	4059625815533	55

brand	Code no.	EAN	page
HG	32651990	4059625815519	55
<b>41</b>			
HG	41761000	4059625763650	94
HG	41761140	4059625763643	94
HG	41761340	4059625763629	94
HG	41761670	4059625763612	94
HG	41761700	4059625763605	94
HG	41762000	4059625763254	96
HG	41762140	4059625763230	96
HG	41762340	4059625763216	96
HG	41762670	4059625763209	96
HG	41762700	4059625763186	96
HG	41763000	4059625762844	98
HG	41763140	4059625763032	98
HG	41763340	4059625763001	98
HG	41763670	4059625762998	98
HG	41763700	4059625762974	98
HG	41764000	4059625763599	95
HG	41764140	4059625763575	95
HG	41764340	4059625763544	95
HG	41764670	4059625763537	95
HG	41764700	4059625763513	95
HG	41765000	4059625762035	93
HG	41765140	4059625762011	93
HG	41765340	4059625761984	93
HG	41765670	4059625761977	93
HG	41765700	4059625761953	93
HG	41766000	4059625761915	94
HG	41766140	4059625761908	94
HG	41766340	4059625761885	94
HG	41766670	4059625761878	94
HG	41766700	4059625761861	94
HG	41767000	4059625762837	97
HG	41767140	4059625762813	97
HG	41767340	4059625762783	97
HG	41767670	4059625762776	97
HG	41767700	4059625762752	97
HG	41768000	4059625763438	99
HG	41768140	4059625763421	99
HG	41768340	4059625763407	99
HG	41768670	4059625763391	99
HG	41768700	4059625763384	99
HG	41769000	4059625761830	93
HG	41769140	4059625761823	93
HG	41769340	4059625761816	93
HG	41769670	4059625761809	93
HG	41769700	4059625761397	93
HG	41775140	4059625694190	101
HG	41775340	4059625698327	101
HG	41781000	4059625762936	97
HG	41781140	4059625762912	97
HG	41781340	4059625762899	97
HG	41781670	4059625762882	97
HG	41781700	4059625762875	97
HG	41782000	4059625762202	100
HG	41782140	4059625762189	100
HG	41782340	4059625762165	100
HG	41782670	4059625762158	100
HG	41782700	4059625762134	100
HG	41783000	4059625762646	99

## Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
HG	41783140	4059625762622	99
HG	41783340	4059625762592	99
HG	41783670	4059625762585	99
HG	41783700	4059625762561	99
HG	41784000	4059625762523	96
HG	41784140	4059625762714	96
HG	41784340	4059625762691	96
HG	41784670	4059625762684	96
HG	41784700	4059625762677	96
HG	41785000	4059625763377	96
HG	41785140	4059625763353	96
HG	41785340	4059625763322	96
HG	41785670	4059625763315	96
HG	41785700	4059625763292	96
HG	41786000	4059625762110	99
HG	41786140	4059625762103	99
HG	41786340	4059625762080	99
HG	41786670	4059625762073	99
HG	41786700	4059625762066	99
HG	41787000	4059625763124	95
HG	41787140	4059625763117	95
HG	41787340	4059625763094	95
HG	41787670	4059625763087	95
HG	41787700	4059625763070	95
HG	41788000	4059625762400	98
HG	41788140	4059625762387	98
HG	41788340	4059625762356	98
HG	41788670	4059625762349	98
HG	41788700	4059625762325	98
HG	41789000	4059625762288	98
HG	41789140	4059625762271	98
HG	41789340	4059625762264	98
HG	41789670	4059625762257	98
HG	41789700	4059625762240	98
HG	41794000	4059625763773	100
HG	41794140	4059625763759	100
HG	41794340	4059625763728	100
HG	41794670	4059625763711	100
HG	41794700	4059625763698	100
<b>71</b>			
HG	71273009	4059625808450	83
HG	71278009	4059625808252	83
HG	71350009	4059625815601	87
HG	71352009	4059625815588	87
HG	71478000	4059625815755	63
HG	71481009	4059625744475	87
HG	71482000	4059625744468	88
HG	71484000	4059625744444	88
HG	71494000	4059625815656	61
HG	71494670	4059625815915	61
HG	71615000	4059625815885	61
HG	71615670	4059625815861	61
HG	71636009	4059625807910	73
HG	71637009	4059625807620	73
HG	71637149	4059625807613	73
HG	71637349	4059625807606	73
HG	71637679	4059625807590	73
HG	71638009	4059625807903	74
HG	71638149	4059625807897	74
HG	71638349	4059625807880	74

brand	Code no.	EAN	page
HG	71638679	4059625807873	74
HG	71639009	4059625808184	74
HG	71639149	4059625808177	74
HG	71639349	4059625808160	74
HG	71639679	4059625808153	74
HG	71681009	4059625744376	89
HG	71682000	4059625744369	90
HG	71683000	4059625744352	89
HG	71684000	4059625815809	63
HG	71742000	4059625815786	57
HG	71742140	4059625816042	57
HG	71742340	4059625816035	57
HG	71742670	4059625816028	57
HG	71769000	4059625815939	57
HG	71769140	4059625815922	57
HG	71769340	4059625816219	57
HG	71769670	4059625816202	57
HG	71769990	4059625816189	57
<b>72</b>			
HG	72144009	4059625805886	77
HG	72144679	4059625805879	77
HG	72145009	4059625806203	77
HG	72163009	4059625805985	79
HG	72165009	4059625806289	79
HG	72484000	4059625816639	60
HG	72484670	4059625816622	60
HG	72489009	4059625806746	78
HG	72491009	4059625806869	80
HG	72498000	4059625816530	59
HG	72498670	4059625816523	59
HG	72635009	4059625807026	80
HG	72636009	4059625806982	78
HG	72657000	4059625817414	60
HG	72657670	4059625817407	60
HG	72660000	4059625817391	59
HG	72660670	4059625817384	59
<b>74</b>			
HG	74414000	4059625816844	62
HG	74414670	4059625816837	62
HG	74619000	4059625817100	62
HG	74619670	4059625817094	62
<b>75</b>			
HG	75020009	4059625334959	69
HG	75020149	4059625835555	69
HG	75020349	4059625835579	69
HG	75020679	4059625334911	69
HG	75020709	4059625334874	69
HG	75040009	4059625335574	69
HG	75040149		69
HG	75040349		69
HG	75040679	4059625335543	69
HG	75040709	4059625335512	69
HG	75408000	4059625817216	56
HG	75408140	4059625817209	56
HG	75408340	4059625817193	56
HG	75408670	4059625817186	56
HG	75408700	4059625817179	56
HG	75613000	4059625817148	56
HG	75613140	4059625817131	56
HG	75613340	4059625817124	56

## Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
HG	75613670	4059625817315	56
HG	75613700	4059625817308	56





# Raindance Alive

# Highlights

## Special feature



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.



Actively regulates water consumption – the amount of water can be adjusted via the control dial.

## Technologies



Mixes water with air. For a smooth, lower-splash water spray and light yet full shower droplets.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



Thermostat with integrated temperature control for constant water temperature.



Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.



A playful way to control the water flow, shower or spray type at the simple touch of a button.



The angle of the overhead shower can be adjusted and the water spray can be individually adapted.



This innovative function reduces the dripping after stopping the shower to just a few seconds.

## Spray types



Full shower rain with droplets enriched with air for soft yet efficient and indulgent showering.



Generous shower with air-infused droplets for a soft, enveloping experience feeling natural and indulgent.



Velvety, micro-fine droplets that gently caress the skin for a quiet, soothing shower experience.



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Invigorating, focused and powerful spray for the home spa that allows the day's stresses to simply drain off.

## Finish



Brushed Black  
Chrome

-340



Brushed Bronze

-140




Chrome

-000




Matt Black

-670



Matt White

-700




Polished Gold  
Optic  
-990

# Raindance Alive

## Raindance Alive Select S Shower holder set 125 3jet EcoSmart with Isiflex shower hose 160 cm

### Features of all variants

- consists of: hand shower, shower holder, shower hose
- shower head size: 125 mm
- spray type: RainAir, PowderRain, Massage spray
- convenient spray selection via Select button
- QuickClean: Limescale deposits can simply be rubbed off with your finger
- flow regulator: 8 l/min (with possible tolerances -20 %)
- maximum flow rate at 3 bar: 8 l/min
- design cover conceals the nozzles
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- suitable for continuous flow water heaters
- shower hose with conical nut on both ends
- pivot connector prevents hose from tangling
- shower hose length: 1600 mm
- Porter Fine S shower holder in minimalist design
- integrated support function
- wall mounting: screw fastening
- rinseable filter washer
- EU taxonomy: max. 8 l/min - Do No Significant Harm (DNSH)

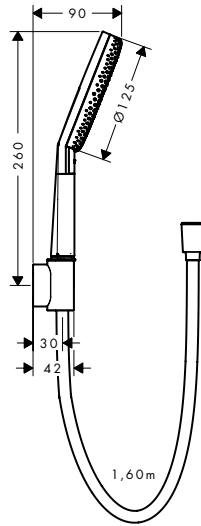

### Special feature



### Technologies



### Spray types



Shower head size	Shower hose length (mm)	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
125	1600	3	RainAir, PowderRain, Massage spray	8	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Matt Black</li> <li>Matt White</li> <li>Polished Gold Optic</li> </ul>	Q1/2026	24612000

### Consisting of:



Raindance Alive Select S Hand shower 125 3jet EcoSmart

Included in Code no.  
24612XXX 24511XXX



Isiflex Shower hose 160 cm

24612XXX 28276XXX



Porter Fine Shower holder

24612XXX 28885XXX


**Raindance Alive S** Overhead shower 300 1jet EcoSmart+

**Features**

- shower head size: 300 mm
- spray type: Rain, or PowderRain
- Spray Type Switch: allows the spray type to be changed even after installation, Rain (preset), change to PowderRain can be selected upon installation or changed easily at any later stage
- flow regulator: 6 l/min (with possible tolerances -20 %)
- flow rate PowderRain spray at 3 bar: 5,9 l/min

- flow rate Rain spray at 3 bar: 5,9 l/min
- function from: 5,3 l/min
- maximum flow rate at 3 bar: 6 l/min
- minimum flow pressure: 1,1 bar
- DropGuard reduces the dripping after stopping the shower to just a few seconds
- overhead shower angle adjustable
- material spray disc: anodized aluminium


- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- flat, minimalist design
- installation: ceiling or wall
- connection thread: G 1/2
- suitable for continous flow water heaters
- EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

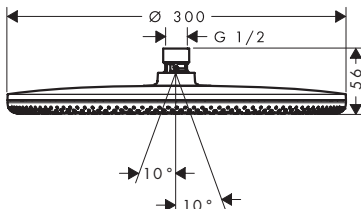

**Special feature**



**Technologies**



**Spray types**



Finish	Available from	Code no.
Chrome	Q1/2026	24523000
Brushed Bronze	Q1/2026	24523140
Brushed Black Chrome	Q1/2026	24523340
Matt Black	Q1/2026	24523670
Matt White	Q1/2026	24523700
Polished Gold Optic	Q1/2026	24523990

**Required parts (choose one):**



Shower arm E 39 cm

Finish	Code no.
Chrome	24337000
Brushed Bronze	24337140
Brushed Black Chrome	24337340
Matt Black	24337670
Matt White	24337700
Polished Gold Optic	24337990



Ceiling connector E 10 cm

Finish	Code no.
Chrome	24338000
Brushed Bronze	24338140
Brushed Black Chrome	24338340
Matt Black	24338670
Matt White	24338700
Polished Gold Optic	24338990



Ceiling connector E 30 cm

Finish	Code no.
Chrome	24339000
Brushed Bronze	24339140
Brushed Black Chrome	24339340
Matt Black	24339670
Matt White	24339700
Polished Gold Optic	24339990

# Raindance Alive


## Raindance Alive S Puro Showerpipe 300 1jet EcoSmart+ with Ecostat Element

### Features of all variants

- consists of: overhead shower, hand shower, shower thermostat, slider, shower hose, shower bar
- overhead shower Raindance Alive S 300 1jet
- shower head size overhead shower: 300 mm
- spray type overhead shower: Rain, or PowderRain
- Spray Type Switch: allows the spray type to be changed even after installation, Rain (preset), change to PowderRain can be selected upon installation or changed easily at any later stage
- flow regulator: 6 l/min (with possible tolerances -20 %)
- function from: 1,5 l/min
- flow rate RainAir spray at 3 bar: 5,9 l/min
- flow rate PowderRain spray at 3 bar: 5,5 l/min
- spray type hand shower: RainAir, PowderRain, Massage spray

- maximum flow rate of hand shower at 3 bar: 5,6 l/min
- maximum flow rate for Showerpipe at 3 bar: 6 l/min
- max. operating pressure: 10 bar
- DropGuard reduces the dripping after stopping the shower to just a few seconds
- convenient spray selection via Select button on the hand shower
- ball-joint: overhead shower angle adjustable
- design cover conceals the nozzles, flat, minimalist design
- spray disc removable for cleaning
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- height-adjustable slider


- thermostat Ecostat Element
- SafetyStop at 40 °C
- adjustable hot water limitation
- temperature and water flow control
- with extra large handles
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection dimension: DN15
- connection thread: G 1/2
- centre distance: 150 ± 12 mm
- pipe can be shortened in height
- intrinsically safe against backflow
- shower bar diameter: 25 mm
- 2 functions
- EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

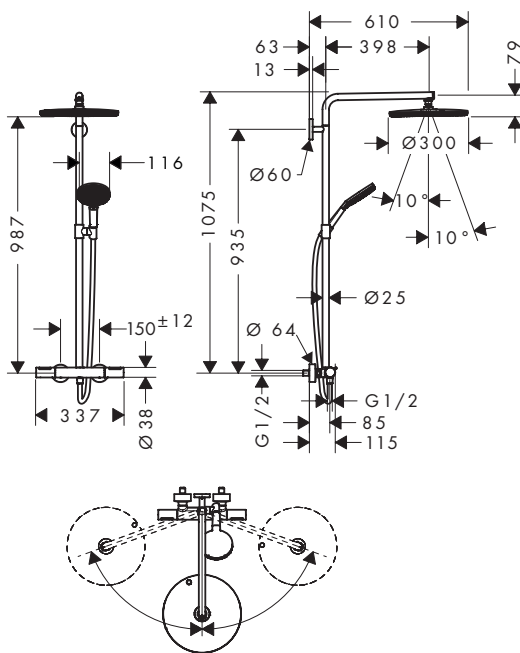

### Special feature



### Technologies



### Spray types



Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
300	1	Rain, or PowderRain	1.5	6	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Matt Black</li> <li>Matt White</li> <li>Polished Gold Optic</li> </ul>	Q1/2026	24594000

### Consisting of:

	Included in	Code no.
 Raindance Alive S Overhead shower 300 1jet EcoSmart+	24594XXX	24523XXX
 Raindance Alive Select S Hand shower 125 3jet EcoSmart+	24594XXX	24512XXX
 Isiflex Shower hose 160 cm	24594XXX	28276XXX



**Pulsify**

# Highlights

## Special feature



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

## Technologies



Thermostatic mixer with innovative cooling technology to prevent scalding and unpleasant touching.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



Thermostat with integrated temperature control for constant water temperature.



Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.




A playful way to control the water flow, shower or spray type at the simple touch of a button.



Full installation flexibility by using existing holes for easy renovation.



The angle of the overhead shower can be adjusted and the water spray can be individually adapted.



The height of the hand shower can be single-handedly and smoothly shifted at the touch of a button.



The shower's quick and efficient emptying function reduces the dripping time after showering.

## Spray types



Velvety, micro-fine droplets that gently caress the skin for a quiet, soothing shower experience.



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Powerful, stimulating water spray that washes away tiredness and leaves people feeling fit.



Invigorating, focused and powerful spray for the home spa that allows the day's stresses to simply drain off.

## Finish



Brushed Black Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670



Matt White


-700

# Pulsify Select S Hand showers 3jet, 1jet

### Features of all variants

- shower head size: 105 mm
- spray type: PowderRain, IntenseRain, Massage spray
- convenient spray selection via Select button
- spray disc surface: graphite
- QuickClean: Limescale deposits can simply be rubbed off with your finger
- minimum flow pressure: 1 bar
- with internal water conduction
- rinseable sieve insert
- connection thread: G 1/2
- suitable for continuous flow water heaters

### Relaxation

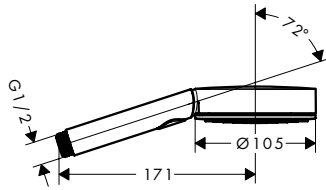

### Special feature



### Technologies



### Spray types





### Overview variants

	Shower head size	Shower effect	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Select	Finish	Available from	Code no.
	105	Relaxation	3	PowderRain, IntenseRain, Massage spray	4	6.9	1	■	Chrome	Q3/2026	24111000
									Brushed Bronze		24111140
									Brushed Black Chrome		24111340
									Matt Black		24111670
									Matt White		24111700
	105	Relaxation	3	PowderRain, IntenseRain, Massage spray	4.4	5.6	1	■	Chrome		24111009

**Pulsify S** Overhead shower 260 1jet EcoSmart

**Features**

- shower head size: 260 mm
- spray type: PowderRain
- flow rate PowderRain spray at 3 bar: 8,4 l/min
- function from: 5,7 l/min
- maximum flow rate at 3 bar: 8,4 l/min
- minimum flow pressure: 1 bar
- Fast Drain empties the overhead shower from an angle of 10°
- overhead shower angle adjustable
- material spray disc: plastic
- spray disc surface: graphite
- installation: ceiling or wall
- connection thread: G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

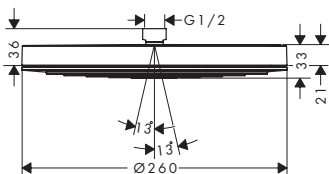

**Special feature**



**Technologies**



**Spray types**



Finish	Available from	Code no.
Chrome		24141000
Brushed Bronze		24141140
Brushed Black Chrome	Q3/2026	24141340
Matt Black		24141670
Matt White		24141700

**Required parts (choose one):**



Pulsify Wall connector for overhead shower 260

Finish	Code no.
Chrome	24149000
Brushed Bronze	24149140
Brushed Black Chrome	24149340
Matt Black	24149670
Matt White	24149700



Shower arm S 39 cm

Finish	Code no.
Chrome	24357000
Brushed Bronze	24357140
Brushed Black Chrome	24357340
Matt Black	24357670
Matt White	24357700



Ceiling connector S 10 cm

Finish	Code no.
Chrome	27393000
Brushed Bronze	27393140
Brushed Black Chrome	27393340
Matt Black	27393670
Matt White	27393700




Ceiling connector S 30 cm

Finish	Code no.
Chrome	27389000
Brushed Bronze	27389140
Brushed Black Chrome	27389340
Matt Black	27389670
Matt White	27389700

# Pulsify S Overhead shower 260 1jet

## Features

- shower head size: 260 mm
- spray type: PowderRain
- flow rate PowderRain spray at 3 bar: 12,3 l/min
- function from: 6,9 l/min
- maximum flow rate at 3 bar: 12,3 l/min
- minimum flow pressure: 1 bar
- Fast Drain empties the overhead shower from an angle of 10°
- overhead shower angle adjustable
- material spray disc: plastic
- spray disc surface: graphite
- installation: ceiling or wall
- connection thread: G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

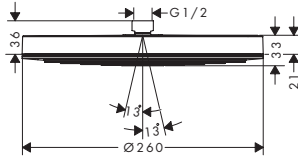

## Technologies



## Spray types



Finish	Available from	Code no.
Chrome		24140000
Brushed Bronze		24140140
Brushed Black Chrome	Q3/2026	24140340
Matt Black		24140670
Matt White		24140700

## Required parts (choose one):



Pulsify Wall connector for overhead shower 260

Finish	Code no.
Chrome	24149000
Brushed Bronze	24149140
Brushed Black Chrome	24149340
Matt Black	24149670
Matt White	24149700



Shower arm S 39 cm

Finish	Code no.
Chrome	24357000
Brushed Bronze	24357140
Brushed Black Chrome	24357340
Matt Black	24357670
Matt White	24357700



Ceiling connector S 10 cm

Finish	Code no.
Chrome	27393000
Brushed Bronze	27393140
Brushed Black Chrome	27393340
Matt Black	27393670
Matt White	27393700




Ceiling connector S 30 cm

Finish	Code no.
Chrome	27389000
Brushed Bronze	27389140
Brushed Black Chrome	27389340
Matt Black	27389670
Matt White	27389700

Pulsify E Overhead showers 1jet

Features of all variants

- shower head size: 260 x 260 mm
- spray type: PowderRain
- minimum flow pressure: 0,9 bar
- Fast Drain empties the overhead shower from an angle of 10°
- material spray disc: plastic
- spray disc surface: graphite
- installation: ceiling or wall
- connection thread: G 1/2
- suitable for continuous flow water heaters

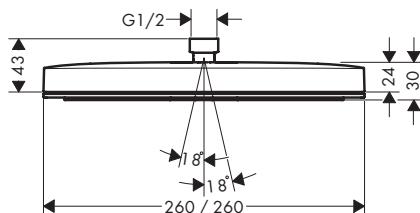

Special feature



Technologies



Spray types



Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
260/260	1	PowderRain	4.5	5.5	0.9	Chrome		24333000
						Brushed Bronze		24333140
						Brushed Black Chrome	Q3/2026	24333340
						Matt Black		24333670
						Matt White		24333700
260/260	1	PowderRain	7	8.4	0.9	Chrome		24331000
						Brushed Bronze		24331140
						Brushed Black Chrome	Q3/2026	24331340
						Matt Black		24331670
						Matt White		24331700
260/260	1	PowderRain	7.6	11.7	0.9	Chrome		24330000
						Brushed Bronze		24330140
						Brushed Black Chrome	Q3/2026	24330340
						Matt Black		24330670
						Matt White		24330700

Required parts (choose one):


Part	Finish	Code no.
Shower arm E 39 cm	Chrome	24337000
	Brushed Bronze	24337140
	Brushed Black Chrome	24337340
	Matt Black	24337670
	Matt White	24337700
Ceiling connector E 10 cm	Chrome	24338000
	Brushed Bronze	24338140
	Brushed Black Chrome	24338340
	Matt Black	24338670
	Matt White	24338700
Ceiling connector E 30 cm	Chrome	24339000
	Brushed Bronze	24339140
	Brushed Black Chrome	24339340
	Matt Black	24339670
	Matt White	24339700

## Pulsify Wall connector for overhead shower 260

### Features of all variants

- installation type: exposed installation
- material: plastic connection angle
- connection type: G 1/2
- suitable for: overhead showers up to 260 mm diameter
- Product outlet type: with G1/2 union nut

### for overhead shower 260

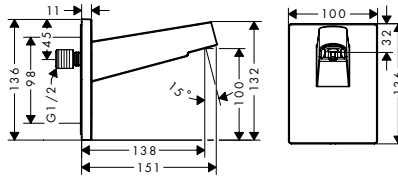


Suitable for	Shape	Finish	Available from	Code no.
overhead shower 260	square	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #ccc; border-radius: 50%; margin-right: 5px;"></span> Chrome</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #8b4513; border-radius: 50%; margin-right: 5px;"></span> Brushed Bronze</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #333; border-radius: 50%; margin-right: 5px;"></span> Brushed Black Chrome</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #000; border-radius: 50%; margin-right: 5px;"></span> Matt Black</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border-radius: 50%; margin-right: 5px; border: 1px solid #000;"></span> Matt White</li> </ul>	Q3/2026	<ul style="list-style-type: none"> <li>24149000</li> <li>24149140</li> <li>24149340</li> <li>24149670</li> <li>24149700</li> </ul>

## Shower arm S 39 cm

### Features of all variants

- length: 390 mm
- installation type: exposed installation
- material: brass/ plastic
- connection type: G 1/2

### 390 mm

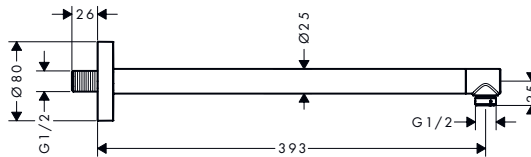

Length (mm)	Finish	Available from	Code no.
390	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #ccc; border-radius: 50%; margin-right: 5px;"></span> Chrome</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #8b4513; border-radius: 50%; margin-right: 5px;"></span> Brushed Bronze</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #333; border-radius: 50%; margin-right: 5px;"></span> Brushed Black Chrome</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #000; border-radius: 50%; margin-right: 5px;"></span> Matt Black</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #fff; border-radius: 50%; margin-right: 5px; border: 1px solid #000;"></span> Matt White</li> </ul>	Q3/2026	<ul style="list-style-type: none"> <li>24357000</li> <li>24357140</li> <li>24357340</li> <li>24357670</li> <li>24357700</li> </ul>

## Unica Shower bars Pulsify S with push slider and shower hose


### Features of all variants

- consists of: shower bar, slider, shower hose
- pivot connector prevents hose from tangling
- shower bar diameter: 22 mm
- profile pipe: round
- shower hose length: 1600 mm
- height-adjustable slider with locking push-button
- slider, slider rotatable on the pipe for left or right operation
- slider with locking mechanism
- slider steplessly adjustable
- wall supports made of plastic
- metal hand shower holder

90



65

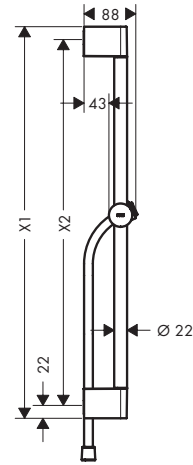

### Technologies



### Overview variants

Version	X1 Length shower bar (mm)	X2 Drilling distance (mm)	Shower hose length (mm)	Finish	Available from	Code no.
90	959	915	1600	Chrome		24401000
				Brushed Bronze	Q3/2026	24401140
				Brushed Black Chrome	Q3/2026	24401340
				Matt Black		24401670
				Matt White		24401700
65	669	625	1600	Chrome		24400000
				Brushed Bronze	Q3/2026	24400140
				Brushed Black Chrome	Q3/2026	24400340
				Matt Black		24400670
				Matt White		24400700

### Consisting of:



Isiflex Shower hose 160 cm

Included in  
24401XXX  
24400XXX

Code no.

28276XXX

## Unica Shower bars S Puro with easy slider and shower hose


### Features of all variants

- consists of: shower bar, slider, shower hose
- swivelling shower bar
- pivot connector prevents hose from tangling for shower hoses with a conical nut
- profile pipe: round
- shower hose length: 1600 mm
- slider for right- and left-hand installation
- slider with locking mechanism
- slider steplessly adjustable
- wall supports made of plastic
- slider made of plastic/metal

90



65

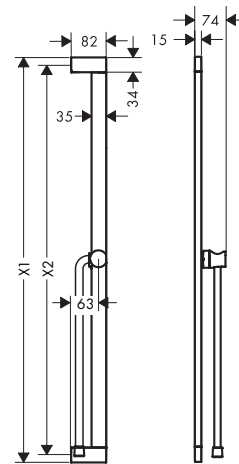

### Overview variants

Version	X1 Length shower bar (mm)	X2 Drilling distance (mm)	Shower hose length (mm)	Finish	Available from	Code no.
90	950	915	1600	Chrome		24405000
				Brushed Bronze		24405140
				Brushed Black Chrome	Q3/2026	24405340
				Matt Black		24405670
				Matt White		24405700
65	663	625	1600	Chrome		24402000
				Brushed Bronze		24402140
				Brushed Black Chrome	Q3/2026	24402340
				Matt Black		24402670
				Matt White		24402700

### Consisting of:



Isiflex Shower hose 160 cm

Included in	Code no.
24405XXX	28276XXX
24402XXX	

Unica Shower bars E Puro with easy slider and shower hose


Features of all variants

- consists of: shower bar, slider, shower hose
- swivelling shower bar
- pivot connector prevents hose from tangling
- profile pipe: cubic
- shower hose length: 1600 mm
- slider for right- and left-hand installation
- slider with locking mechanism
- slider steplessly adjustable
- wall supports made of plastic
- metal hand shower holder

90



65

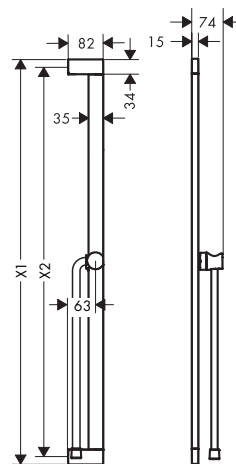

Overview variants

Version	X1 Length shower bar (mm)	X2 Drilling distance (mm)	Shower hose length (mm)	Finish	Available from	Code no.
90	950	915	1600	Chrome	Q3/2026	24403000
				Brushed Bronze		24403140
				Brushed Black Chrome		24403340
				Matt Black		24403670
				Matt White		24403700
65	663	625	1600	Chrome	Q3/2026	24404000
				Brushed Bronze		24404140
				Brushed Black Chrome		24404340
				Matt Black		24404670
				Matt White		24404700

Consisting of:




Isiflex Shower hose 160 cm

Included in	Code no.
24403XXX	28276XXX
24404XXX	


**Pulsify S Showerpipe 260 1jet 2 ticks with ShowerTablet Select 400**

**Features of all variants**

- consists of: overhead shower, hand shower, shower thermostat, shower bar, slider, shower hose
- overhead shower Pulsify 260 1jet
- shower head size overhead shower: 260 mm
- spray type overhead shower: PowderRain
- spray disc surface: graphite
- Fast Drain empties the overhead shower from an angle of 10°
- removable shower head
- shelf made of plastic
- surface shelf: graphite
- function from: 5,6 l/min
- flow rate PowderRain spray at 3 bar: 5,9 l/min
- spray type hand shower: PowderRain, IntenseRain, Massage spray
- maximum flow rate of hand shower at 3 bar: 5,9 l/min
- maximum flow rate for Showerpipe at 3 bar: 11,2 l/min
- minimum flow pressure: 1,5 bar
- max. operating pressure: 10 bar
- ball-joint: overhead shower angle adjustable
- height-adjustable slider with locking push-button
- slider rotatable on the pipe for left or right operation
- shower arm length overhead shower: 398 mm
- swivelling shower arm
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat ShowerTablet Select 400
- SafetyStop at 40°C
- adjustable hot water limitation
- convenient diversion via Select button
- simultaneous utilization of 2 functions
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection thread: G 1/2
- centre distance: 150 ± 12 mm
- pipe can be shortened in height
- intrinsically safe against backflow
- shower bar diameter: 22 mm
- Thermostat is delivered with buttons hand shower and overhead shower
- 2 functions

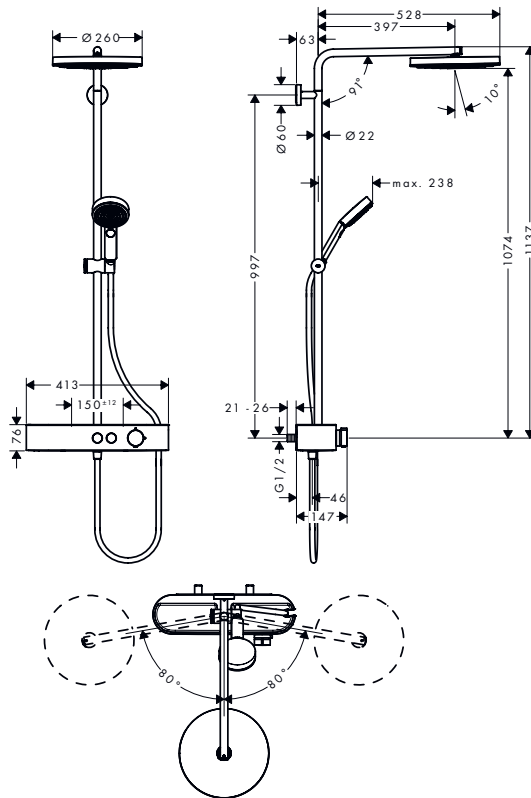


**Technologies**




**Spray types**




Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
260	1	PowderRain	5.6	11.2	1.5	● Brushed Black Chrome	Q3/2026	24221349
<b>Consisting of:</b>							Included in	Code no.
	Isiflex Shower hose 160 cm						24221349	28276340

### Features of all variants

- consists of: overhead shower, hand shower, bath thermostat, shower hose, slider
- overhead shower Pulsify 260 1jet
- shower head size overhead shower: 260 mm
- spray type overhead shower: Rain
- Fast Drain empties the overhead shower from an angle of 10°
- shelf made of plastic
- spray type hand shower: PowderRain, IntenseRain, Massage spray
- ball-joint: overhead shower angle adjustable
- height-adjustable slider with locking push-button slider
- slider rotatable on the pipe for left or right operation
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat ShowerTablet Select 360
- SafetyStop at 40°C
- convenient diversion via Select button
- simultaneous utilization of 3 functions
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection dimension: DN15
- connection thread: G 1/2
- centre distance: 150 ± 12 mm
- variable wall support
- variable drilling hole distance: 700 - 850 mm
- pipe can be shortened in height
- intrinsically safe against backflow
- shower bar diameter: 22 mm
- Thermostat is delivered with buttons overhead shower, bath tub and hand shower
- 3 functions

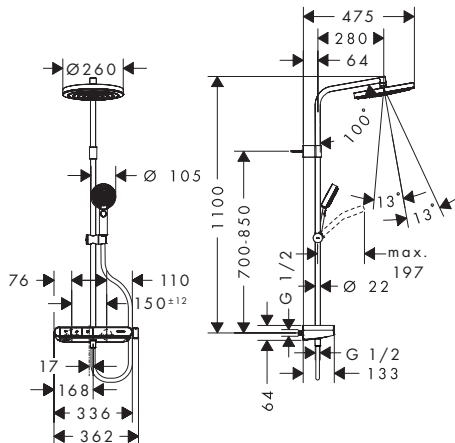

### Technologies

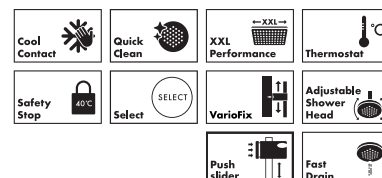

### Spray types



Shower head size	Number of sprays	Spray types	Thermostat	Finish	Code no.
260	1	Rain	ShowerTablet Select 360	Chrome Brushed Bronze Brushed Black Chrome	26971009 26971149 26971349

### Consisting of:

		Included in	Code no.
	Pulsify S Overhead shower 260 1jet 2 ticks	26971009	24141009
	Pulsify Select S Hand shower 105 3jet Relaxation 2 ticks	26971009	24111009
	Isiflex Shower hose 160 cm	26971XX9	28276XXX



**Activera**

# Highlights

## Special feature



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.



Actively regulates water consumption – the amount of water can be adjusted via the control dial.

## Technologies



Thermostatic mixer with innovative cooling technology to prevent scalding and unpleasant touching.



Flexible, elastic nozzles in the spray head ensure greater comfort and efficiency when showering.



Elastic spray nozzles expand and return to their original position, reducing limescale buildup.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



Thermostat with integrated temperature control for constant water temperature.



Press and hold the side boost button to temporarily increase the hand shower water flow.



Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.



A playful way to control the water flow, shower or spray type at the simple touch of a button.




Full installation flexibility by using existing holes for easy renovation.



The angle of the overhead shower can be adjusted and the water spray can be individually adapted.



This shower head can be easily disassembled to replace parts or separate into individual components.



The height of the hand shower can be single-handedly and smoothly shifted at the touch of a button.

## Spray types



Refreshing shower rain for everyday use – invigorating, efficient and perfect for thorough cleansing.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Massaging spray with an innovative design creates an intense showering feeling with just a little water.

## Finish




Chrome

-000



Matt Black

-670




Matt White

-707

## Activera Select S Hand shower 2jet with booster

### Features of all variants


- shower head size: 95 mm
- spray type: Rain, ImpactRain
- convenient spray selection via Select button
- spray disc surface: graphite
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- Water Boost: boost function to increase waterflow when needed
- EasySplit: simplified repair of the product with internal water conduction
- rinseable filter washer
- connection thread: G 1/2
- suitable for continuous flow water heaters
- flow rate Rain Strahl + Booster spray at 3 bar: 9,4 l/min
- flow rate ImpactRain Strahl + Booster spray at 3 bar: 6,6 l/min

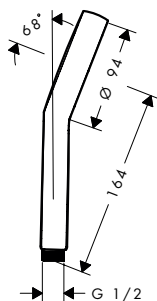

### Special feature



### Technologies



### Spray types




### Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Select	Finish	Available from	Code no.
95	2	Rain, ImpactRain	3	5	0.8	■	Chrome	Q2/2026	28036000
							Matt Black	Q2/2026	28036670
95	2	Rain, ImpactRain	3.6	8	0.6	■	Chrome	Q2/2026	28035000
							Matt Black	Q2/2026	28035670

## Angle valve E outlet G 1/2 2-tick

### Features

- connection dimension entry: G 1/2
- connection dimension outlet: G 1/2
- packaging unit: 1 piece




Finish	Code no.
Chrome	13947009
Brushed Bronze	13947149
Brushed Black Chrome	13947349

Unica Shower bar Activera S 65 cm with push slider and Isiflex shower hose 160 cm

Features of all variants

- consists of: shower bar, slider, shower hose
- pivot connector prevents hose from tangling
- slide inclination angle can be adjusted by 45°
- pipe length: 669 mm
- shower bar diameter: 22 mm
- profile pipe: round
- drilling distance: 625 mm
- shower hose length: 1600 mm
- height-adjustable slider with locking push-button
- slider, slider rotatable on the pipe for left or right operation
- slider with locking mechanism
- slider steplessly adjustable
- wall supports made of plastic
- metal hand shower holder

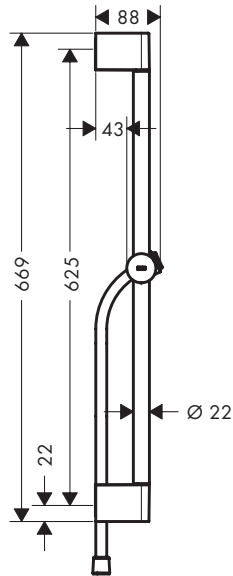

Technologies



Version	Length shower bar (mm)	Drilling distance (mm)	Shower hose length (mm)	Finish	Code no.
65	669	625	1600	● Chrome	28063007
				● Matt Black	28063677
				○ Matt White	28063707

Consisting of:



Isiflex Shower hose 160 cm


Included in	Code no.
28063XX7	28276XX7

# Activera Select S Shower set 2jet with booster


### Features of all variants

- consists of: hand shower, slider, shower bar, shower hose
- shower head size: 95 mm
- spray type: Rain, ImpactRain
- convenient spray selection via Select button
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- Water Boost: boost function to increase waterflow when needed
- flow regulator: 4 l/min (with possible tolerances -20 %)
- flow rate Rain spray at 3 bar: 3,9 l/min
- maximum flow rate at 3 bar: 3,9 l/min
- function from: 3 l/min
- minimum flow pressure: 0,8 bar
- EasySplit: simplified repair of the product
- height-adjustable slider with locking push-button slider
- slider rotatable on the pipe for left or right operation
- slider with locking mechanism
- wall supports made of plastic
- profile pipe: round
- shower bar diameter: 22 mm
- shower hose with conical nut on both ends
- pivot connector prevents hose from tangling
- rinseable filter washer
- EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

90

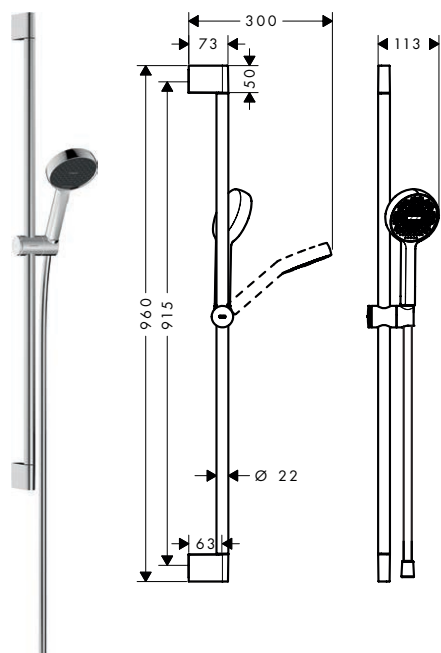

65

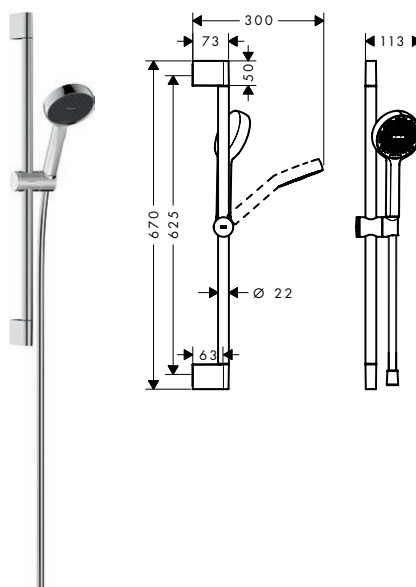

### Special feature



### Technologies



### Spray types



### Overview variants

Version	Drilling distance (mm)	Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Select	Finish	Available from	Code no.
90	915	95	Rain, ImpactRain	3	3.9	0.8	■	<ul style="list-style-type: none"> <li>● Chrome</li> <li>● Matt Black</li> </ul>	Q2/2026	28864000 28864670
65	625	95	Rain, ImpactRain	3	3.9	0.8	■	<ul style="list-style-type: none"> <li>● Chrome</li> <li>● Matt Black</li> </ul>	Q2/2026	28863000 28863670

### Consisting of:


	Included in	Code no.
Activera Select S Hand shower 95 2jet EcoSmart+ with booster	28864XXX 28863XXX	28036XXX
Isiflex Shower hose 160 cm	28864XXX 28863XXX	28276XXX

**Activera Select S Shower set 95 2jet EcoSmart+ with shower bar 90 cm**

**Features of all variants**

- consists of: hand shower, slider, shower bar, shower hose
- shower head size: 95 mm
- spray type: Rain, ImpactRain
- convenient spray selection via Select button
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- flow regulator: 6 l/min (with possible tolerances -20 %)
- flow rate Rain spray at 3 bar: 5,7 l/min
- maximum flow rate at 3 bar: 5,7 l/min
- function from: 3,3 l/min
- minimum flow pressure: 0,5 bar
- EasySplit: simplified repair of the product
- height-adjustable slider with locking push-button slider
- slider rotatable on the pipe for left or right operation
- slider with locking mechanism
- wall supports made of plastic
- profile pipe: round
- pipe length: 959 mm
- shower bar diameter: 22 mm
- drilling distance: 915 mm
- shower hose with conical nut on both ends
- pivot connector prevents hose from tangling
- rinseable filter washer
- EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

90

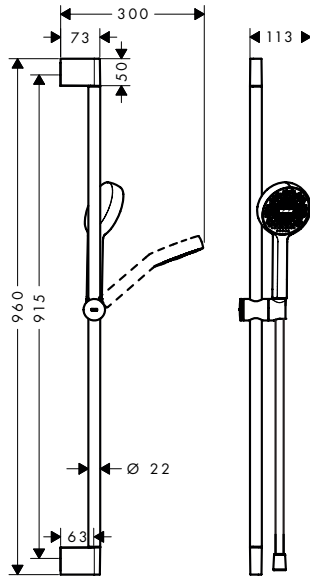

**Special feature**



**Technologies**



**Spray types**



Version	Drilling distance (mm)	Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Select	Finish	Available from	Code no.
90	915	95	Rain, ImpactRain	3.3	5.7	0.5	■	● Chrome ● Matt Black	Q2/2026	28865000 28865670

**Consisting of:**



Activera Select S Hand shower 95 2jet EcoSmart+

Included in 28865XXX Code no. 28034XXX




Isiflex Shower hose 160 cm

28865XXX 28276XXX

## Activera S Overhead showers 1jet

### Features of all variants

- shower head size: 240 mm
- spray type: Rain
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- overhead shower angle adjustable
- material spray disc: plastic
- installation: ceiling or wall
- connection thread: G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

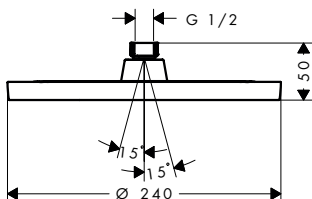

### Special feature



### Technologies



### Spray types



### Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
240	1	Rain	4.7	11.6	0.5	Chrome	Q1/2026	28055000
240	1	Rain		6.6		Chrome		28057001
						Matt Black		28057671


### Required parts (choose one):

		For	Finish	Code no.
	Vernis Blend Shower arm 24 cm	28055XXX	Chrome	27809000
	Vernis Blend Ceiling connector 10 cm	28055XXX	Chrome	27804000
	Vernis Blend Ceiling connector 30 cm	28055XXX	Chrome	27805000

## Activera S Overhead showers 2jet

### Features of all variants


- shower head size: 95 mm
- spray type: Rain, ImpactRain
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- convenient spray selection via Select button
- overhead shower angle adjustable
- material spray disc: plastic
- spray disc surface: graphite
- installation: ceiling or wall
- connection thread: G 1/2
- connection dimension: DN15
- EasySplit: simplified repair of the product
- suitable for continuous flow water heaters



### Special feature



### Technologies



### Spray types



### Overview variants

Shower head size	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
95	2	Rain, ImpactRain	6	Chrome	Q4/2026	28062000
				Matt Black	Q4/2026	28062670

For more information about this product, please see the next page.

**Activera S** Overhead showers 2jet

**Overview variants**

Shower head size	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
95	2	Rain, ImpactRain	8	Chrome	Q4/2026	28061000
				Matt Black	Q4/2026	28061670


**Optional parts:**

	Finish	Code no.
 Activera Wall connector for overhead shower 95	Chrome	28099000
	Matt Black	28099670

**Activera Q** Overhead showers 1jet

**Features of all variants**

- shower head size: 290 x 180 mm
- spray type: Rain
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- overhead shower angle adjustable
- material spray disc: plastic
- installation: ceiling or wall
- connection thread: G 1/2
- connection dimension: DN15
- suitable for continuous flow water heaters

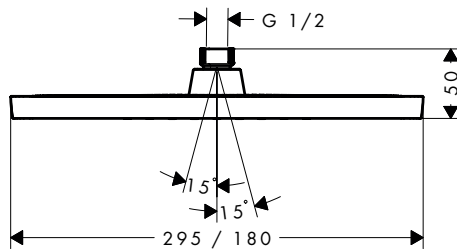

**Special feature**



**Technologies**






**Spray types**



**Overview variants**

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
290/180	1	Rain	2.2	5.9	0.3	Chrome	Q1/2026	28739000
						Matt Black	Q1/2026	28739670
290/180	1	Rain	4.8	7.2	0.7	Chrome	Q1/2026	28738000
						Matt Black	Q1/2026	28738670
290/180	1	Rain	4.7	11.6	0.5	Chrome	Q1/2026	28737000


**Required parts (choose one):**

	Finish	Code no.
 Vernis Shape Shower arm 24 cm	Chrome	26405000
 Vernis Shape Ceiling connector 10 cm	Chrome	26406000
 Vernis Shape Ceiling connector 30 cm	Chrome	26407000

## Activera Wall connector for overhead shower 95

### Features of all variants

- installation type: exposed installation
- material: plastic
- suitable for: Activera overhead shower 95
- connection thread: G 1/2




Shape	Finish	Available from	Code no.
round	Chrome	Q4/2026	28099000
	Matt Black	Q4/2026	28099670

## Activera Q Showerpipe 290/180 1jet 2 ticks with bath thermostat ShowerTablet 360 Varia

### Features of all variants

- consists of: overhead shower, hand shower, bath thermostat, shower hose, slider
- overhead shower Activera Q 290/180 1jet
- shower head size overhead shower: 290 x 180 mm
- spray type overhead shower: Rain
- shelf made of plastic
- flow rate ImpactRain spray at 3 bar: 5,8 l/min
- spray type hand shower: Rain, ImpactRain
- maximum flow rate of hand shower at 3 bar: 6,1 l/min
- maximum flow rate for Showerpipe at 3 bar: 16,5 l/min
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- ball-joint: overhead shower angle adjustable
- height-adjustable slider with locking push-button slider
- slider rotatable on the pipe for left or right operation
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat ShowerTablet Select 360
- SafetyStop at 40°C
- convenient diversion via Select button
- simultaneous utilization of 3 functions
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection dimension: DN15
- connection thread: G 1/2
- centre distance: 150 ± 12 mm (fittings offset 17 mm to the right)
- variable wall support
- variable drilling hole distance: 700 - 850 mm
- pipe can be shortened in height
- intrinsically safe against backflow
- shower bar diameter: 22 mm
- Thermostat is delivered with buttons overhead shower, bath tub and hand shower
- 3 functions

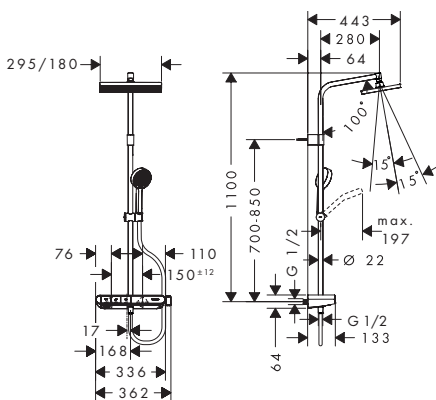

### Special feature



### Technologies



### Spray types



Shower head size	Number of sprays	Spray types	flow rate of hand shower at 3 bar (l/min)	flow rate for bath spout at 3 bar (l/min)	Thermostat	Finish	Code no.
290/180	1	Rain	6.1	16.5	ShowerTablet Select 360	Chrome	28868009

### Consisting of:




Isiflex Shower hose 160 cm

Included in Code no.  
28868009 28276000

**Activera S Showerpipe 240 1jet 2 ticks with bath thermostat ShowerTablet Select 360 Varia**

**Features of all variants**

- consists of: overhead shower, hand shower, bath thermostat, shower hose, slider
- overhead shower Activera S 240 1jet
- shower head size overhead shower: 240 mm
- spray type overhead shower: Rain
- shelf made of plastic
- flow rate Rain spray at 3 bar: 6 l/min
- spray type hand shower: Rain, ImpactRain
- maximum flow rate of hand shower at 3 bar: 5,9 l/min
- maximum flow rate for Showerpipe at 3 bar: 16,5 l/min
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- ball-joint: overhead shower angle adjustable
- height-adjustable slider with locking push-button slider
- slider rotatable on the pipe for left or right operation
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat ShowerTablet Select 360
- SafetyStop at 40°C
- convenient diversion via Select button
- simultaneous utilization of 3 functions
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection dimension: DN15
- connection thread: G 1/2
- centre distance: 150 ± 12 mm (fittings offset 17 mm to the right)
- variable wall support
- variable drilling hole distance: 700 - 850 mm
- pipe can be shortened in height
- intrinsically safe against backflow
- shower bar diameter: 22 mm
- Thermostat is delivered with buttons overhead shower, bath tub and hand shower
- 3 functions

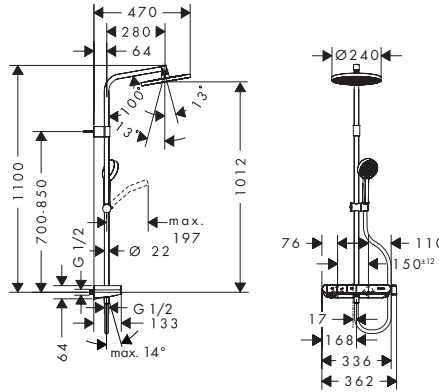

**Special feature**



**Technologies**

Cool Contact	Flex Power	Quick Clean+	XXL Performance
Thermostat	Safety Stop	Select	VarioFix
Adjustable Shower Head	Push slider		

**Spray types**



Shower head size	Number of sprays	Spray types	flow rate of hand shower at 3 bar (l/min)	flow rate for overhead shower at 3 bar (l/min)	flow rate for bath spout at 3 bar (l/min)	Thermostat	Finish	Code no.
240	1	Rain	5.9	6	16.5	ShowerTablet Select 360	Chrome	28878009

**Consisting of:**




Isiflex Shower hose 160 cm

Included in	Code no.
28878009	28276000

# Activera S Showerpipe 240 1jet 2 ticks with bath thermostat Ecostat Fine

### Features of all variants


- consists of: overhead shower, hand shower, bath thermostat, shower bar, slider, shower hose
- overhead shower Activera S 240 1jet
- shower head size overhead shower: 240 mm
- spray type overhead shower: Rain
- spray disc surface: graphite
- removable shower head
- flow rate Rain spray at 3 bar: 5,8 l/min
- spray type hand shower: Rain, ImpactRain
- maximum flow rate of hand shower at 3 bar: 5,2 l/min
- maximum flow rate for Showerpipe at 3 bar: 18,9 l/min
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- convenient spray selection via Select button on the hand shower
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- ball-joint: overhead shower angle adjustable
- height-adjustable slider with locking push-button
- slider rotatable on the pipe for left or right operation
- shower arm length overhead shower: 344 mm
- thermostat Ecostat Fine
- SafetyStop at 40°C
- adjustable hot water limitation
- temperature and water flow control
- Outlets may not be operated simultaneously
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection thread: G 1/2
- centre distance: 150 ± 12 mm
- intrinsically safe against backflow
- shower bar diameter: 22 mm
- 3 functions

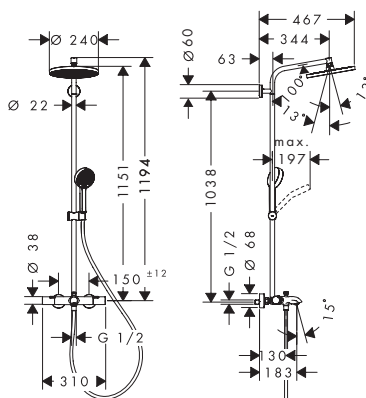

### Special feature



### Technologies



### Spray types



Number of sprays	Spray types	flow rate of hand shower at 3 bar (l/min)	flow rate for overhead shower at 3 bar (l/min)	flow rate for bath spout at 3 bar (l/min)	Thermostat	Finish	Available from	Code no.
1	Rain	5.2	5.8	18.9	Ecostat Fine	● Chrome ● Matt Black	Q2/2026 Q2/2026	28871009 28871679


### Consisting of:

	Activera S Overhead shower 240 1jet 1.75 GPM	Included in	Code no.
		28871XX9	28057XX1
	Isiflex Shower hose 160 cm	28871XX9	28276XXX

**Activera S Showerpipe 240 1jet 2 ticks with Ecostat Fine Varia**

**Features of all variants**


- consists of: overhead shower, hand shower, shower thermostat, shower bar, slider, shower hose
- overhead shower Activera S 240 1jet
- shower head size overhead shower: 240 mm
- spray type overhead shower: Rain
- spray disc surface: graphite
- removable shower head
- function from: 4,4 l/min
- spray type hand shower: Rain, ImpactRain
- maximum flow rate of hand shower at 3 bar: 4,6 l/min
- maximum flow rate for Showerpipe at 3 bar: 6,2 l/min
- minimum flow pressure: 0,8 bar
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
- convenient spray selection via Select button on the hand shower
- QuickClean+: reduce limescale deposits thanks to the elasticity of the nozzles
- ball-joint: overhead shower angle adjustable
- height-adjustable slider with locking push-button
- slider rotatable on the pipe for left or right operation
- shower arm length overhead shower: 344 mm
- thermostat Ecostat Fine
- SafetyStop at 40°C
- adjustable hot water limitation
- temperature and water flow control
- Outlets may not be operated simultaneously
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection dimension: DN15
- connection thread: G 1/2
- centre distance: 150 ± 12 mm
- variable wall support
- variable drilling hole distance: 750 - 900 mm
- pipe can be shortened in height
- intrinsically safe against backflow
- shower bar diameter: 22 mm
- 2 functions

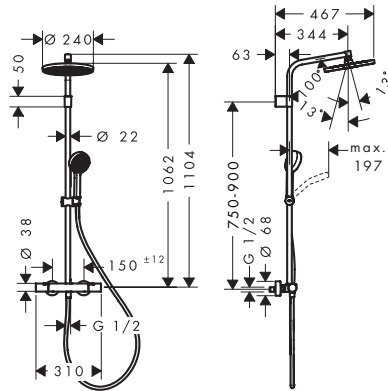

**Special feature**



**Technologies**

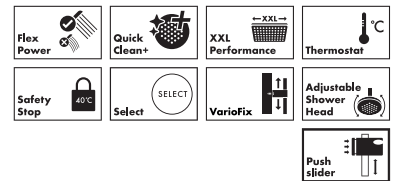

**Spray types**



Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
1	Rain	4.4	6.2	0.8	Chrome Matt Black	Q2/2026	28083009 28083679

**Consisting of:**

	Activera S Overhead shower 240 1jet 1.75 GPM	Included in	Code no.
	Isiflex Shower hose 160 cm	28083XX9	28057XX1
		28083XX9	28276XXX







# Design ShowerSets

# Highlights

## Special feature



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.



Actively regulates water consumption – the amount of water can be adjusted via the control dial.

## Technologies



Mixes water with air. For a smooth, lower-splash water spray and light yet full shower droplets.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.




Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



Thermostat with integrated temperature control for constant water temperature.



Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.



A playful way to control the water flow, shower or spray type at the simple touch of a button.



The angle of the overhead shower can be adjusted and the water spray can be individually adapted.



Quick and safe installation - several features ensure easy installation.



The shower's quick and efficient emptying function reduces the dripping time after showering.

## Installation



The high-quality installation set features a pre-assembled seal and is 100% waterproof.

## Spray types



Generous shower with air-infused droplets for a soft, enveloping experience feeling natural and indulgent.



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Invigorating, focused and powerful spray for the home spa that allows the day's stresses to simply drain off.



Concentrated massage spray that helps to nicely and gently wash away everyday tensions and stress.

## Finish



Brushed Black Chrome

-340



Brushed Bronze

-140



Chrome

-000




Matt Black

-670

**Raindance Alive S** Design ShowerSet 300 1jet with Ecostat Comfort E and basic set iBox universal 2

**Features of all variants**


- consists of: overhead shower, shower arm, hand shower, shower holder, textile shower hose, shower thermostat, basic set
- shower head size: 300 mm
- shower arm length: 390 mm
- spray type overhead shower: RainAir, or PowderRain
- Spray Type Switch: RainAir (preset), change to PowderRain can be selected upon installation or changed easily at any later stage
- flow rate PowderRain spray at 3 bar: 11 l/min
- material spray disc overhead shower: anodized aluminium
- spray type hand shower: RainAir, PowderRain, Massage spray
- flow regulator: 12 l/min (with possible tolerances ± 10 %)
- maximum flow rate of hand shower at 3 bar: 7,1 l/min
- maximum flow rate at 3 bar: 11 l/min
- minimum flow pressure: 1 bar
- max. operating pressure: 10 bar
- QuickClean: limescale deposits can simply be rubbed off with your finger
- simultaneous use of several outlets
- temperature and water flow control
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- thermostat: Ecostat Comfort E
- SafetyStop at 40°C
- drilling distance: 915 mm
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- design cover conceals the nozzles
- connection type: basic set iBox universal 2 (# 01500180)
- material handles: metal
- Designflex textile shower hose, water-resistant and water-repellant material, unique design with multi-colored braided yarns, yarns are made of recycled PET, warm, cotton-like material feels great to the skin
- shower hose length: 1600 mm
- 1x conical nut, 1x cylindrical nut
- pivot connector prevents hose from tangling
- DropGuard reduces the dripping after stopping the shower to just a few seconds

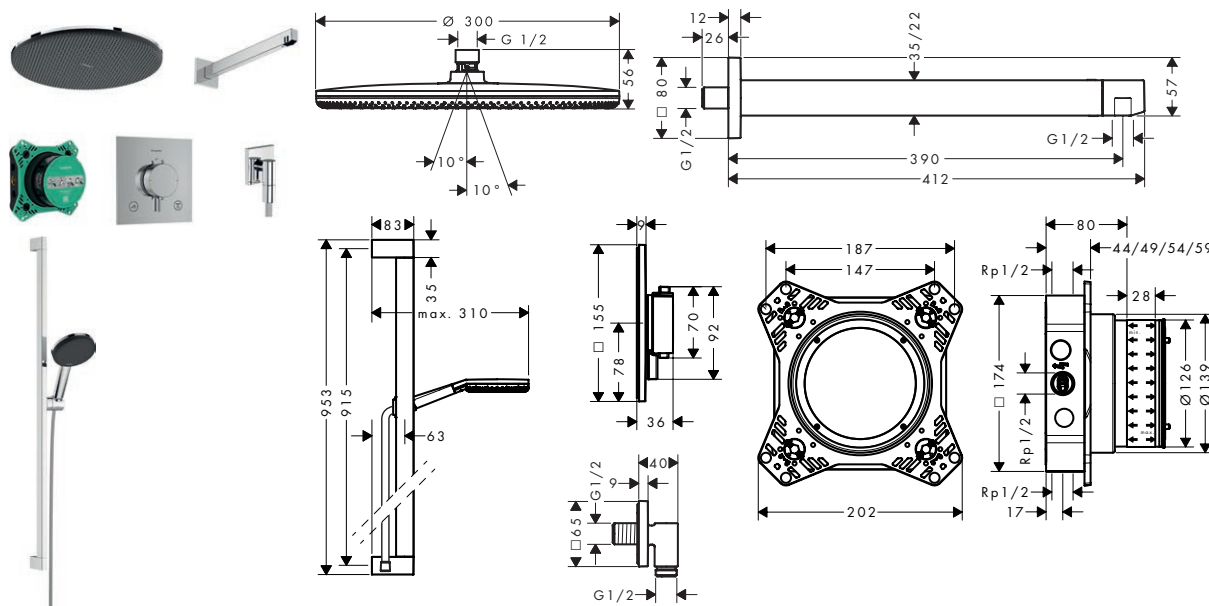

**Special feature**



**Technologies**



**Spray types**



**Installation**



Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Thermostat	Finish	Available from	Code no.
300	RainAir, or PowderRain	6.4	11	1	Ecostat Comfort E	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Matt Black</li> </ul>	Q1/2026	24622000

**Consisting of:**

		Included in	Code no.
	Raindance Alive S Overhead shower 300 1jet	24622XXX	24520XXX
	Shower arm E 39 cm	24622XXX	24337XXX
	Raindance Alive Select S Shower set 125 3jet EcoSmart with shower bar Unica E Puro 90 cm and easy slide hand shower holder	24622XXX	24601XXX
	Ecostat Comfort E Thermostat for concealed installation for 2 functions	24622XXX	33711XXX
	iBox universal 2 Basic set	24622XXX	01500180
	FixFit Fine E Wall outlet with non-return valve	24622XXX	28883XXX


Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.



Raindance Alive Q Design ShowerSet 210/340 1jet with thermostat and basic set iBox universal 2

Features of all variants

- consists of: overhead shower, shower arm, hand shower, wall outlet with shower holder, textile shower hose, shower thermostat, basic set
- shower head size: 214 x 343 mm
- shower arm length: 390 mm
- spray type overhead shower: RainAir, or PowderRain
- Spray Type Switch: RainAir (preset), change to PowderRain can be selected upon installation or changed easily at any later stage
- flow rate PowderRain spray at 3 bar: 11 l/min
- material spray disc overhead shower: anodized aluminium
- spray type hand shower: RainAir, PowderRain, Massage spray
- flow regulator: 12 l/min (with possible tolerances ± 10 %)
- maximum flow rate at 3 bar: 11 l/min
- minimum flow pressure: 1 bar
- max. operating pressure: 10 bar
- QuickClean: limescale deposits can simply be rubbed off with your finger
- simultaneous use of several outlets
- comfortable turning on / off of outlets with large Select-paddle
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- thermostat: ShowerSelect Comfort E
- SafetyStop at 40 °C
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- design cover conceals the nozzles
- connection type: basic set iBox universal 2 (# 01500180)
- material handles: metal
- Designflex textile shower hose, water-resistant and water-repellant material, unique design with multi-colored braided yarns, yarns are made of recycled PET, warm, cotton-like material feels great to the skin
- shower hose length: 1600 mm
- 1x conical nut, 1x cylindrical nut
- pivot connector prevents hose from tangling

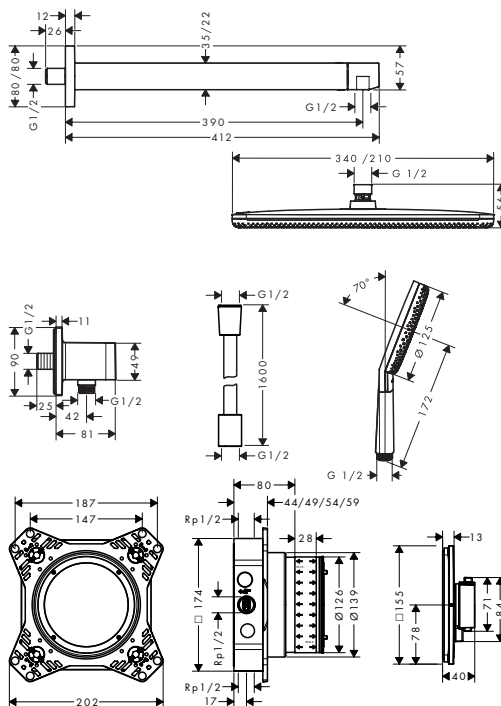

Special feature



Technologies



Spray types



Installation



Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Thermostat	Finish	Available from	Code no.
210/340	RainAir, or PowderRain	6.1	11	1	ShowerSelect Comfort E	<ul style="list-style-type: none"> <li>● Brushed Bronze</li> <li>● Brushed Black Chrome</li> </ul>	Q1/2026	24620140
							Q1/2026	24620340

Consisting of:


		Included in	Code no.
	Raindance Alive Q Overhead shower 210/340 1jet	24620XXX	24530XXX
	Shower arm E 39 cm	24620XXX	24337XXX
	Raindance Alive Select S Hand shower 125 3jet EcoSmart	24620XXX	24511XXX
	FixFit E Wall outlet with shower holder	24620XXX	26889XXX
	Designflex Textile shower hose 160 cm	24620XXX	28260XXX
	ShowerSelect Comfort E Thermostat for concealed installation for 2 functions	24620XXX	15572XXX
	iBox universal 2 Basic set	24620XXX	01500180

## Design ShowerSets

### Raindance E Design ShowerSet 300 1jet with Ecostat Comfort E and basic set iBox universal 2

#### Features of all variants

- consists of: overhead shower, shower arm, hand shower, shower holder, shower hose, shower thermostat, basic set
- shower head size: 300 x 300 mm
- shower arm length: 390 mm
- spray type overhead shower: RainAir
- flow rate Rain spray at 3 bar: 16,7 l/min
- material spray disc overhead shower: anodized aluminium
- spray type hand shower: PowderRain, Rain, Whirl
- flow regulator: 12 l/min (with possible tolerances  $\pm 10\%$ )
- maximum flow rate of hand shower at 3 bar: 6,8 l/min
- maximum flow rate at 3 bar: 17 l/min
- max. operating pressure: 6 bar
- QuickClean: limescale deposits can simply be rubbed off with your finger
- simultaneous use of several outlets
- temperature and water flow control
- thermostat: Ecostat Comfort
- SafetyStop at 40°C
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- design cover conceals the nozzles
- connection type: basic set iBox universal 2 (# 01500180)
- material handles: metal
- shower hose length: 1600 mm
- shower hose with conical nut on both ends
- pivot connector prevents hose from tangling
- DropGuard reduces the dripping after stopping the shower to just a few seconds

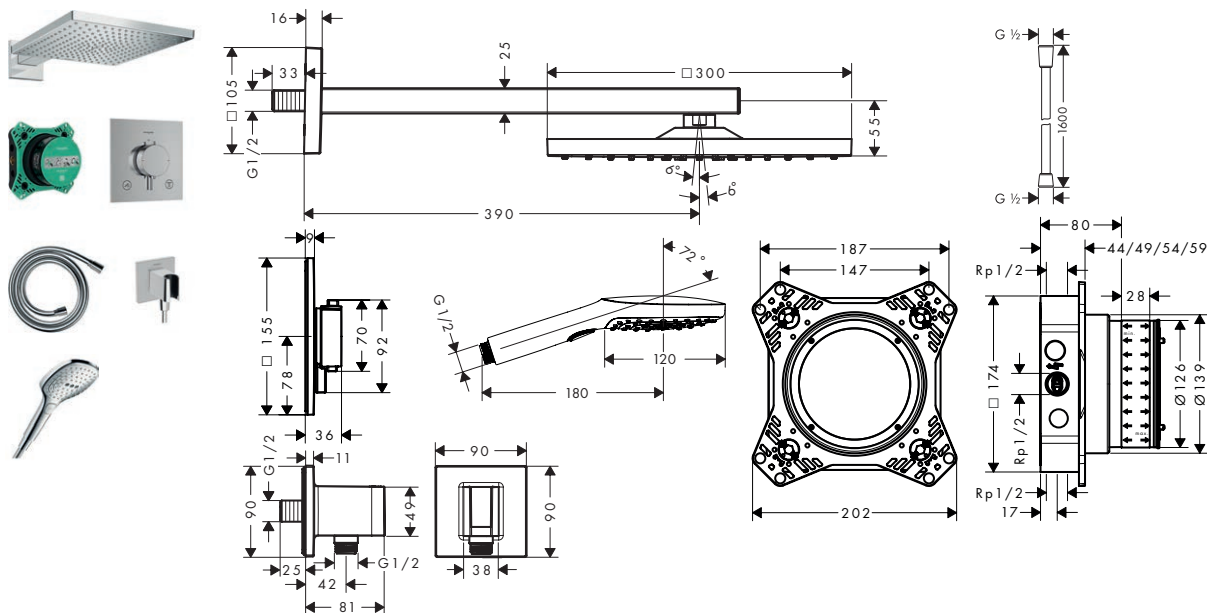

#### Special feature



#### Technologies



#### Spray types



#### Installation



Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Thermostat	Finish	Available from	Code no.
300/300	RainAir	12.5	17	Ecostat Comfort	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Matt Black</li> </ul>	Q1/2026	24623000


#### Consisting of:

		Included in	Code no.
	Raindance E Overhead shower 300 1jet with shower arm	24623XXX	26238XXX
	Raindance Select E Hand shower 120 3jet PowderRain EcoSmart	24623XXX	28728XXX
	Ecostat Comfort E Thermostat for concealed installation for 2 functions	24623XXX	33711XXX
	iBox universal 2 Basic set	24623XXX	01500180
	Isiflex Shower hose 160 cm	24623XXX	28276XXX
	FixFit E Wall outlet with shower holder	24623XXX	26889XXX

**Pulsify S Design ShowerSet 260 1jet with Ecostat Comfort S and basic set iBox universal 2**

**Features of all variants**

- consists of: overhead shower, shower arm, hand shower, shower holder, wall outlet, thermostat, basic set, shower hose
- shower head size: 260 mm
- shower arm length: 389 mm
- spray type overhead shower: PowderRain
- flow rate PowderRain spray at 3 bar: 12,3 l/min
- spray type hand shower: PowderRain
- flow regulator: 12 l/min (with possible tolerances ± 10 %)
- maximum flow rate of hand shower at 3 bar: 6,9 l/min
- maximum flow rate at 3 bar: 12,3 l/min
- minimum flow pressure: 1 bar
- QuickClean: limescale deposits can simply be rubbed off with your finger
- thermostat: Ecostat Comfort
- SafetyStop at 40°C
- Porter Fine S shower holder in minimalist design
- installation: wall
- connection type: basic set
- shower hose length: 1600 mm
- shower hose with conical nut on both ends
- pivot connector prevents hose from tangling
- with non-return valve

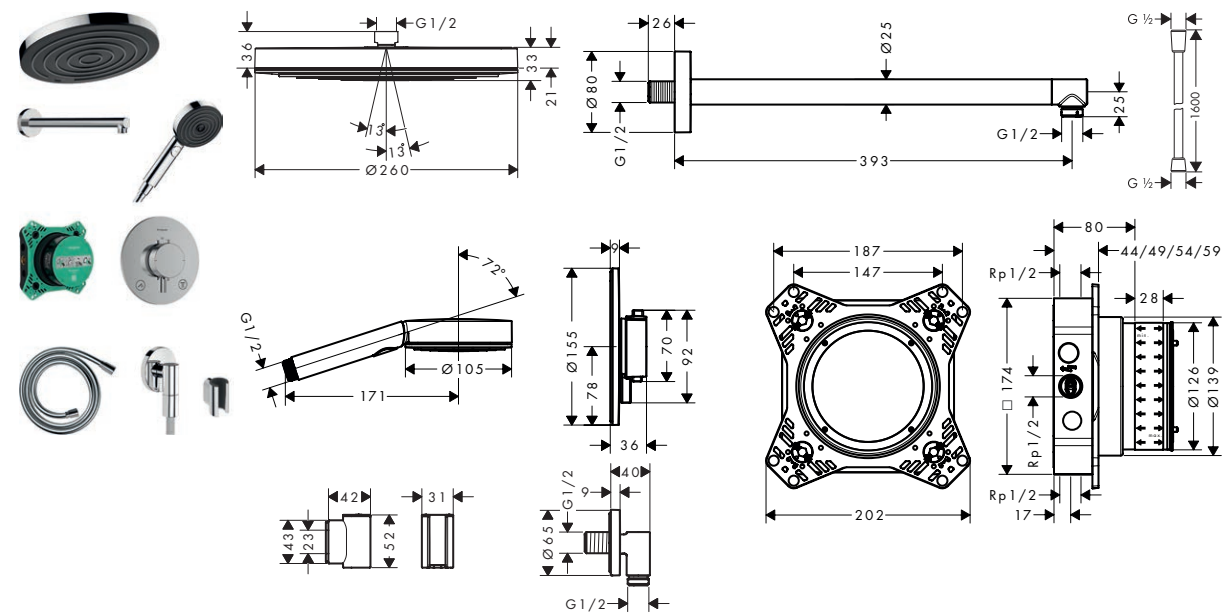

**Special feature**



**Technologies**



**Spray types**



Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Thermostat	Finish	Available from	Code no.
260	PowderRain	6.9	12.3	1	Ecostat Comfort	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Matt Black</li> </ul>	Q1/2026	24624000

Consisting of:		Included in	Code no.
	Pulsify S Overhead shower 260 1jet	24624XXX	24140XXX
	Shower arm S 39 cm	24624XXX	24357XXX
	Pulsify Select S Hand shower 105 3jet Relaxation EcoSmart	24624XXX	24111XXX
	Ecostat Comfort S Thermostat for concealed installation for 2 functions	24624XXX	33715XXX
	iBox universal 2 Basic set	24624XXX	01500180
	Isiflex Shower hose 160 cm	24624XXX	28276XXX
	Porter Fine Shower holder	24624XXX	28885XXX
	FixFit Fine S Wall outlet with non-return valve	24624XXX	28882XXX


Measurements within scale drawings are in mm. Technical specifications and units of measure are subject to change.

# Design ShowerSets

## Pulsify E Design ShowerSet 260 1jet with Ecostat Comfort E and basic set iBox universal 2

### Features of all variants

- consists of: overhead shower, shower arm, hand shower, shower holder, wall outlet, thermostat, basic set, shower hose
- shower head size: 260 x 260 mm
- shower arm length: 389 mm
- spray type overhead shower: PowderRain
- flow rate PowderRain spray at 3 bar: 11,7 l/min
- spray type hand shower: PowderRain
- flow regulator: 12 l/min (with possible tolerances  $\pm 10\%$ )
- maximum flow rate of hand shower at 3 bar: 6,9 l/min
- maximum flow rate at 3 bar: 12 l/min
- minimum flow pressure: 0,9 bar
- max. operating pressure: 6 bar
- QuickClean: limescale deposits can simply be rubbed off with your finger
- thermostat: Ecostat Comfort
- SafetyStop at 40 °C
- Porter Fine E shower holder in minimalist design
- installation: wall
- connection type: basic set
- shower hose length: 1600 mm
- shower hose with conical nut on both ends
- pivot connector prevents hose from tangling
- with non-return valve

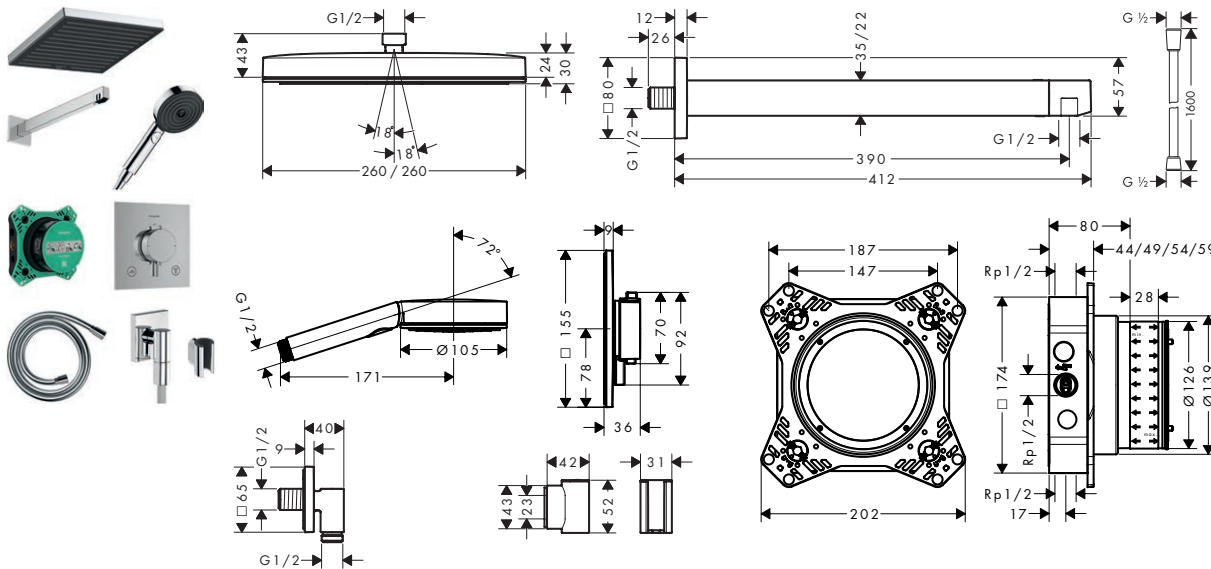

### Special feature



### Technologies



### Spray types



Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Thermostat	Finish	Available from	Code no.
260/260	PowderRain	7.6	12	0.9	Ecostat Comfort	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Matt Black</li> </ul>	Q1/2026	24625000

### Consisting of:

		Included in	Code no.
	Pulsify E Overhead shower 260 1jet	24625XXX	24330XXX
	Shower arm E 39 cm	24625XXX	24337XXX
	Pulsify Select S Hand shower 105 3jet Relaxation EcoSmart	24625XXX	24111XXX
	Ecostat Comfort E Thermostat for concealed installation for 2 functions	24625XXX	33711XXX
	iBox universal 2 Basic set	24625XXX	01500180
	Isiflex Shower hose 160 cm	24625XXX	28276XXX
	Porter Fine Shower holder	24625XXX	28885XXX
	FixFit Fine E Wall outlet with non-return valve	24625XXX	28883XXX



# Ecostat Element

# Highlights

---

## Special feature



Simple and precise control for saving water. The EcoStop+ function regulates the water flow to max. 6 l/min.



Actively regulates water consumption – the amount of water can be adjusted via the control dial.

## Technologies



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



Thermostat with integrated temperature control for constant water temperature.



Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.

## Finish




Brushed Black  
Chrome

-349



Brushed Bronze

-149




Chrome

-009

**EcoStat Element Shower thermostat for exposed installation 2 ticks**

**Features**


- 1 function
- temperature and water flow control
- EcoStop+ button limits the water consumption to 6 l/min
- thermostat cartridge
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- non-return valve
- with silencer
- material handles: metal
- centre distance: 150 ± 12 mm
- connection dimension: DN15
- connection type: S-connections, G 1/2
- dirt filter included

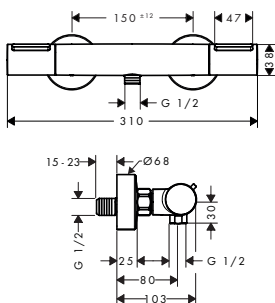

**Special feature**



**Technologies**




Finish	Code no.
Chrome	13346009
Brushed Bronze	13346149
Brushed Black Chrome	13346349

**EcoStat Element Bath thermostat for exposed installation 2 ticks**

**Features of all variants**

- projection 177 mm
- 2 functions
- temperature and water flow control
- thermostat cartridge, shut-off/ diverter valve
- spray type spout: NormalSpray
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- Safety stop at 40 °C
- temperature limitation adjustable
- non-return valve
- protected against backflow, according to DIN EN 1717
- with silencer
- material handles: metal
- connection dimension: DN15
- connection type: G 1/2
- centre distance: 150 ± 12 mm
- dirt filter included

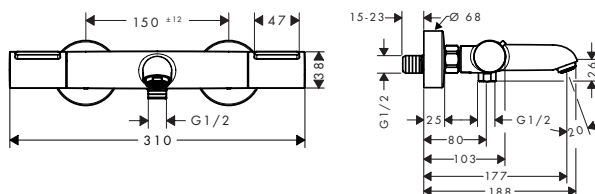

**Special feature**



**Technologies**



Projection (mm)	Finish	Code no.
177	Chrome	13347009
	Brushed Bronze	13347149
	Brushed Black Chrome	13347349





# Shower and bath mixers

# Highlights

---

## Technologies



A touch of a button is all it takes for the water in the bathtub to come out of the bath spout or shower.



Quick and safe installation - several features ensure easy installation.

## Finish



Brushed Black  
Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670



Matt White

-700




Polished Gold  
Optic

-990

## Metropol Single lever bath mixer for concealed installation for iBox universal 2

### Features of all variants

- consists of: single lever bath mixer
- 2 functions
- temperature and on/off control for 2 outlets
- pressure diverter Select with automatic resetting
- maximum flow rate at 3 bar: 28,7 l/min
- flow rate for bath spout at 3 bar: 28,7 l/min
- maximum flow rate of hand shower at 3 bar: 16,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continous flow water heaters
- connection type: basic set iBox universal 2
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- height of the lever depending on the installation depth of the base body
- material handles: metal
- material escutcheon: plastic



### Technologies



Handle version	Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
lever	-	28.7	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Matt Black</li> <li>Polished Gold Optic</li> </ul>	Q1/2027	32451000 32451140 32451340 32451670 32451990

### Required parts:



iBox universal 2 Basic set


Code no.

01500180

## Metropol Single lever shower mixer for concealed installation for iBox universal 2

### Features

- consists of: single lever shower mixer
- 1 function
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continous flow water heaters
- height of the lever depending on the installation depth of the base body
- material escutcheon: plastic
- material handles: metal
- connection type: basic set iBox universal 2



### Technologies



Finish	Available from	Code no.
Chrome	Q1/2027	32651000
Brushed Bronze	Q1/2027	32651140
Brushed Black Chrome	Q1/2027	32651340
Matt Black	Q1/2027	32651670
Polished Gold Optic	Q1/2027	32651990

### Required parts:



iBox universal 2 Basic set

Code no.


01500180

## Shower and bath mixers

### Vivenis Single lever bath mixer for concealed installation for iBox universal 2

#### Features of all variants

- consists of: single lever bath mixer
- 2 functions
- temperature and on/off control for 2 outlets
- pressure diverter Select with automatic resetting
- maximum flow rate at 3 bar: 28,7 l/min
- flow rate for bath spout at 3 bar: 28,7 l/min
- maximum flow rate of hand shower at 3 bar: 16,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- connection type: basic set iBox universal 2
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- height of the lever depending on the installation depth of the base body
- material handles: metal
- material escutcheon: plastic



#### Technologies



Handle version	Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
lever	-	28.7	<ul style="list-style-type: none"> <li> Chrome</li> <li> Brushed Bronze</li> <li> Brushed Black Chrome</li> <li> Matt Black</li> <li> Matt White</li> </ul>	Q1/2027	75408000
				Q1/2027	75408140
				Q1/2027	75408340
				Q1/2027	75408670
				Q1/2027	75408700

#### Required parts:



iBox universal 2 Basic set


Code no.

01500180

### Vivenis Single lever shower mixer for concealed installation for iBox universal 2

#### Features

- consists of: single lever shower mixer
- 1 function
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- height of the lever depending on the installation depth of the base body
- material escutcheon: plastic
- material handles: metal
- connection type: basic set iBox universal 2



#### Technologies



Finish	Available from	Code no.
Chrome	Q1/2027	75613000
Brushed Bronze	Q1/2027	75613140
Brushed Black Chrome	Q1/2027	75613340
Matt Black	Q1/2027	75613670
Matt White	Q1/2027	75613700

#### Required parts:



iBox universal 2 Basic set


Code no.

01500180

## Talis E Single lever bath mixer for concealed installation for iBox universal 2

### Features of all variants

- consists of: single lever bath mixer
- 2 functions
- temperature and on/off control for 2 outlets
- pressure diverter Select with automatic resetting
- maximum flow rate at 3 bar: 28,7 l/min
- flow rate for bath spout at 3 bar: 28,7 l/min
- maximum flow rate of hand shower at 3 bar: 16,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- connection type: basic set iBox universal 2
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- height of the lever depending on the installation depth of the base body
- material handles: metal
- material escutcheon: plastic



### Technologies



Handle version	Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
lever	-	28.7	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Mat Black</li> </ul>	Q1/2027	71742000 71742140 71742340 71742670


### Required parts:

	iBox universal 2 Basic set	Code no.	01500180
---	----------------------------	----------	----------

## Talis E Single lever shower mixer for concealed installation for iBox universal 2

### Features

- consists of: single lever shower mixer
- 1 function
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- height of the lever depending on the installation depth of the base body
- material escutcheon: plastic
- material handles: metal
- connection type: basic set iBox universal 2



### Technologies



Finish	Available from	Code no.
Chrome	Q1/2027	71769000
Brushed Bronze	Q1/2027	71769140
Brushed Black Chrome	Q1/2027	71769340
Mat Black	Q1/2027	71769670
Polished Gold Optic	Q1/2027	71769990

### Required parts:


	iBox universal 2 Basic set	Code no.	01500180
--	----------------------------	----------	----------

## Shower and bath mixers

### Focus Single lever bath mixer for concealed installation for iBox universal 2

#### Features of all variants

- consists of: single lever bath mixer
- 2 functions
- temperature and on/off control for 2 outlets
- pressure diverter Select with automatic resetting
- maximum flow rate at 3 bar: 28,7 l/min
- flow rate for bath spout at 3 bar: 28,7 l/min
- maximum flow rate of hand shower at 3 bar: 16,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- connection type: basic set iBox universal 2
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- height of the lever depending on the installation depth of the base body
- material handles: metal
- material escutcheon: plastic



#### Technologies



Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
-	28.7	Chrome	Q1/2027	31425000

#### Required parts:



iBox universal 2 Basic set


Code no.

01500180

### Focus Single lever shower mixer for concealed installation for iBox universal 2

#### Features

- consists of: single lever shower mixer
- 1 function
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- height of the lever depending on the installation depth of the base body
- material escutcheon: plastic
- material handles: metal
- connection type: basic set iBox universal 2



#### Technologies



Finish	Available from	Code no.
Chrome	Q1/2027	31699000

#### Required parts:



iBox universal 2 Basic set


Code no.

01500180

## Rebris S Single lever bath mixer for concealed installation for iBox universal 2

### Features of all variants

- consists of: single lever bath mixer
- 2 functions
- temperature and on/off control for 2 outlets
- pressure diverter Select with automatic resetting
- maximum flow rate at 3 bar: 28,7 l/min
- flow rate for bath spout at 3 bar: 28,7 l/min
- maximum flow rate of hand shower at 3 bar: 16,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continous flow water heaters
- connection type: basic set iBox universal 2
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- height of the lever depending on the installation depth of the base body
- material handles: metal
- material escutcheon: plastic



### Technologies



Handle version	Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
lever	-	28.7	<ul style="list-style-type: none"> <li>Chrome</li> <li>Matt Black</li> </ul>	<ul style="list-style-type: none"> <li>Q1/2027</li> <li>Q1/2027</li> </ul>	<ul style="list-style-type: none"> <li>72498000</li> <li>72498670</li> </ul>

### Required parts:



iBox universal 2 Basic set


Code no.

01500180

## Rebris S Single lever shower mixer for concealed installation for iBox universal 2

### Features

- consists of: single lever shower mixer
- 1 function
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continous flow water heaters
- height of the lever depending on the installation depth of the base body
- material escutcheon: plastic
- material handles: metal
- connection type: basic set iBox universal 2



### Technologies



Finish	Available from	Code no.
Chrome	Q1/2027	72660000
Matt Black	Q1/2027	72660670

### Required parts:



iBox universal 2 Basic set

Code no.


01500180

## Shower and bath mixers

### Rebris E Single lever bath mixer for concealed installation for iBox universal 2

#### Features of all variants

- consists of: single lever bath mixer
- 2 functions
- temperature and on/off control for 2 outlets
- pressure diverter Select with automatic resetting
- maximum flow rate at 3 bar: 28,7 l/min
- flow rate for bath spout at 3 bar: 28,7 l/min
- maximum flow rate of hand shower at 3 bar: 16,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- connection type: basic set iBox universal 2
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- height of the lever depending on the installation depth of the base body
- material handles: metal
- material escutcheon: plastic



#### Technologies



Handle version	Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
lever	-	28.7	<ul style="list-style-type: none"> <li>Chrome</li> <li>Matt Black</li> </ul>	<ul style="list-style-type: none"> <li>Q1/2027</li> <li>Q1/2027</li> </ul>	<ul style="list-style-type: none"> <li>72484000</li> <li>72484670</li> </ul>

#### Required parts:



iBox universal 2 Basic set


Code no.

01500180

### Rebris E Single lever shower mixer for concealed installation for iBox universal 2

#### Features

- consists of: single lever shower mixer
- 1 function
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- height of the lever depending on the installation depth of the base body
- material escutcheon: plastic
- material handles: metal
- connection type: basic set iBox universal 2



#### Technologies



Finish	Available from	Code no.
<ul style="list-style-type: none"> <li>Chrome</li> <li>Matt Black</li> </ul>	<ul style="list-style-type: none"> <li>Q1/2027</li> <li>Q1/2027</li> </ul>	<ul style="list-style-type: none"> <li>72657000</li> <li>72657670</li> </ul>

#### Required parts:



iBox universal 2 Basic set


Code no.

01500180

**Logis** Single lever bath mixer for concealed installation for iBox universal 2

**Features of all variants**

- consists of: single lever bath mixer
- 2 functions
- temperature and on/off control for 2 outlets
- pressure diverter Select with automatic resetting
- maximum flow rate at 3 bar: 28,7 l/min
- flow rate for bath spout at 3 bar: 28,7 l/min
- maximum flow rate of hand shower at 3 bar: 16,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- connection type: basic set iBox universal 2
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- height of the lever depending on the installation depth of the base body
- material handles: metal
- material escutcheon: plastic



**Technologies**




Handle version	Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
lever	-	28.7	<ul style="list-style-type: none"> <li> Chrome</li> <li> Matt Black</li> </ul>	Q1/2027	71494000 71494670

! Required parts:		Code no.
	iBox universal 2 Basic set	01500180

**Logis** Single lever shower mixer for concealed installation for iBox universal 2

**Features**

- consists of: single lever shower mixer
- 1 function
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- height of the lever depending on the installation depth of the base body
- material escutcheon: plastic
- material handles: metal
- connection type: basic set iBox universal 2



**Technologies**



Finish	Available from	Code no.
Chrome	Q1/2027	71615000
Matt Black	Q1/2027	71615670


! Required parts:		Code no.
	iBox universal 2 Basic set	01500180

## Shower and bath mixers

### Zesis S Single lever bath mixer for concealed installation for iBox universal 2

#### Features of all variants

- consists of: single lever bath mixer
- 2 functions
- temperature and on/off control for 2 outlets
- pressure diverter Select with automatic resetting
- maximum flow rate at 3 bar: 28,7 l/min
- flow rate for bath spout at 3 bar: 28,7 l/min
- maximum flow rate of hand shower at 3 bar: 16,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- connection type: basic set iBox universal 2
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- height of the lever depending on the installation depth of the base body
- material handles: metal
- material escutcheon: plastic



#### Technologies



Handle version	Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
lever	-	28.7	<ul style="list-style-type: none"> <li>Chrome</li> <li>Mat Black</li> </ul>	Q1/2027	74414000 74414670

#### Required parts:



iBox universal 2 Basic set


Code no.

01500180

### Zesis S Single lever shower mixer for concealed installation for iBox universal 2

#### Features

- consists of: single lever shower mixer
- 1 function
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- height of the lever depending on the installation depth of the base body
- material escutcheon: plastic
- material handles: metal
- connection type: basic set



#### Technologies



Finish	Available from	Code no.
Chrome	Q1/2027	74619000
Mat Black	Q1/2027	74619670

#### Required parts:



iBox universal 2 Basic set


Code no.

01500180

## Neovis Q Single lever bath mixer for concealed installation for iBox universal 2

### Features of all variants

- consists of: single lever bath mixer
- 2 functions
- temperature and on/off control for 2 outlets
- pressure diverter Select with automatic resetting
- maximum flow rate at 3 bar: 28,7 l/min
- flow rate for bath spout at 3 bar: 28,7 l/min
- maximum flow rate of hand shower at 3 bar: 16,3 l/min
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- connection type: basic set iBox universal 2
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- height of the lever depending on the installation depth of the base body
- material handles: metal
- material escutcheon: plastic



### Technologies



Handle version	Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
lever	-	28.7	Chrome	Q1/2027	71478000

### Required parts:



iBox universal 2 Basic set


Code no.

01500180

## Neovis Q Single lever shower mixer for concealed installation for iBox universal 2

### Features

- consists of: single lever shower mixer
- 1 function
- ceramic cartridge
- temperature limitation adjustable
- with silencer
- suitable for continuous flow water heaters
- height of the lever depending on the installation depth of the base body
- material escutcheon: plastic
- material handles: metal
- connection type: basic set iBox universal 2

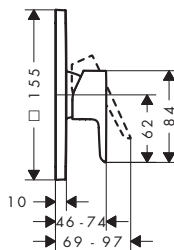

### Technologies



Finish	Available from	Code no.
Chrome	Q1/2027	71684000

### Required parts:



iBox universal 2 Basic set

Code no.



01500180

## Shower and bath mixers

### Extension finish sets 25 mm

#### Features

- is required if the basic set is installed too deep
- extension length: 25 mm

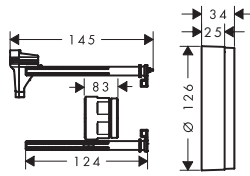



Available from	Code no.
Q1/2027	13651000

### Extension finish sets 25 - 75 mm

#### Features

- is required if the basic set is installed too deep
- extension length: 25 - 75 mm

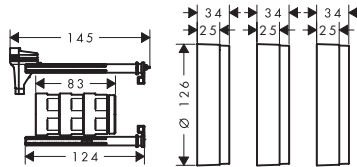



Available from	Code no.
Q1/2027	13652000

### Adapter for extension element round 22 mm

#### Features

- is required if the basic set is installed too flat
- is required for round (S) shower/bath mixer solutions based on the iBox universal 2
- extension length: 22 mm





Available from	Code no.
Q1/2027	13653000

### Adapter for extension element square 22 mm

#### Features

- is required if the basic set is installed too flat
- is required for square (E) and softsquare (Q) shower/bath mixer solutions based on the iBox universal 2
- extension length: 22 mm





Available from	Code no.
Q1/2027	13654000

Adapter for extension element round 5 mm

Features

- is required if the basic set is installed too flat
- is required for round (S) shower/bath mixer solutions based on the iBox universal 2

· extension length: 5 mm

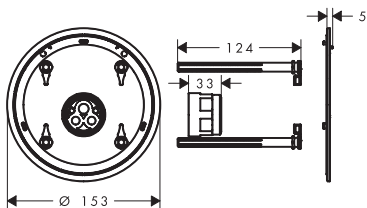



Available from	Code no.
Q1/2027	13657000

Adapter for extension element square 5 mm

Features

- is required if the basic set is installed too flat
- is required for square (E) and softsquare (Q) shower/bath mixer solutions based on the iBox universal 2

· extension length: 5 mm

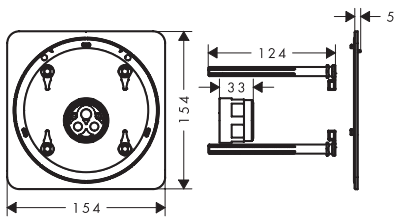

Available from	Code no.
Q1/2027	13658000





**Vivenis**

# Highlights

---

## Special feature



Tap that only uses 5 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

## Technologies



Mixes air into the water. For a soft, less splashing water jet and full, light drops.



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.

## Finish




Brushed Black  
Chrome

-349



Brushed Bronze

-149




Chrome

-009



Matt Black

-679



Matt White

-709

Vivenis Single lever basin mixers



Features of all variants

- consists of: single lever basin mixer, waste set
- handle variant: lever handle
- spray type: WaterfallStream
- maximum flow rate at 3 bar: 3,5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- pop-up waste set G 1¼
- material waste set: metal
- connection type: G ½ connections
- connection dimension: DN15

110



250

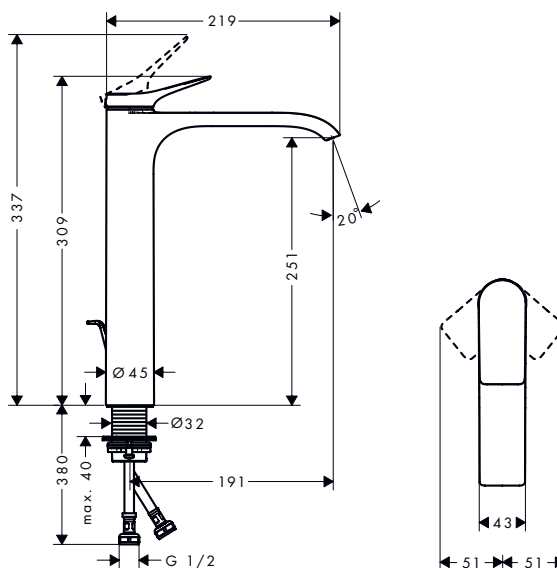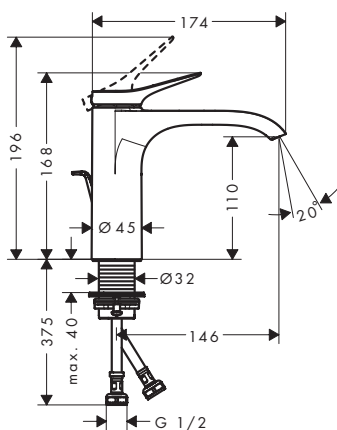

Special feature



Technologies



Overview variants

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	Material waste set	CoolStart	For wash bowls	Finish	Code no.
110	146	110	pop-up	metal	-	-	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Matt Black</li> <li>Matt White</li> </ul>	<ul style="list-style-type: none"> <li>75020009</li> <li>75020149</li> <li>75020349</li> <li>75020679</li> <li>75020709</li> </ul>
250	191	251	pop-up	metal	-	■	<ul style="list-style-type: none"> <li>Chrome</li> <li>Brushed Bronze</li> <li>Brushed Black Chrome</li> <li>Matt Black</li> <li>Matt White</li> </ul>	<ul style="list-style-type: none"> <li>75040009</li> <li>75040149</li> <li>75040349</li> <li>75040679</li> <li>75040709</li> </ul>





**Talis**

# Highlights

---

## Special feature



Tap that only uses 5 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

## Technologies



Thermostatic mixer with innovative cooling technology to prevent scalding and unpleasant touching.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



Mixes air into the water. For a soft, less splashing water jet and full, light drops.



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.



Remove and clean the aerator in no time at all with the aid of a coin - no tools required.

## Finish




Brushed Black  
Chrome

-349



Brushed Bronze

-149



Chrome

-009




Matt Black


-679

Talis E Single lever basin mixers

110

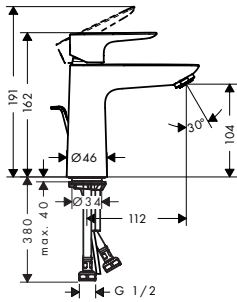

240

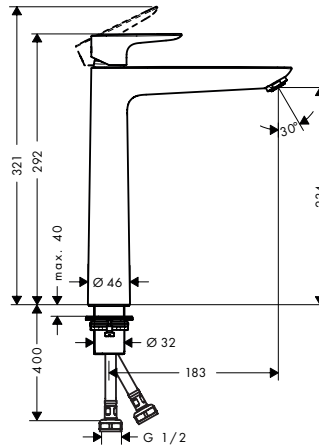

Special feature



Technologies




Overview variants

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	For wash bowls	Finish	Available from	Code no.
110	110	104	pop-up		<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #ccc; border-radius: 50%; margin-right: 5px;"></span> Chrome</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #8b4513; border-radius: 50%; margin-right: 5px;"></span> Brushed Bronze</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #333; border-radius: 50%; margin-right: 5px;"></span> Brushed Black Chrome</li> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #000; border-radius: 50%; margin-right: 5px;"></span> Matt Black</li> </ul>	Q4/2026	71637009 71637149 71637349 71637679
240	183	234	without	■	<ul style="list-style-type: none"> <li><span style="display: inline-block; width: 10px; height: 10px; background-color: #ccc; border-radius: 50%; margin-right: 5px;"></span> Chrome</li> </ul>	Q4/2026	71636009

**Talis E** Single lever basin mixer 240 with pop-up waste set 2 ticks

**Features**

- consists of: single lever basin mixer, waste set
- ComfortZone: 240
- projection: 183 mm
- spout height: 234 mm
- handle variant: lever handle
- spray type: NormalSpray
- ceramic cartridge
- temperature limitation adjustable
- pop-up waste set G 1/4
- material waste set: metal
- connection type: G 1/2 connections
- connection dimension: DN15

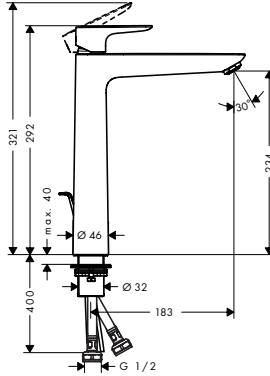

**Special feature**



**Technologies**




Finish	Available from	Code no.
Chrome	Q4/2026	71638009
Brushed Bronze		71638149
Brushed Black Chrome		71638349
Matt Black		71638679

**Talis E** Single lever bath mixer for exposed installation 2 ticks

**Features of all variants**

- 2 functions
- projection: 194 mm
- centre distance: 150 ± 12 mm
- spray type mixer: NormalSpray
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- with silencer
- suitable for continous flow water heaters
- connection dimension: DN15
- connection type: S-connections
- wall-mounted
- aerator can be easily removed with the help of a coin and without tools
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer

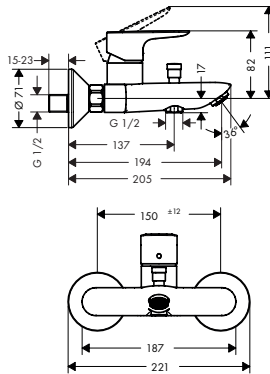

**Technologies**



Centre distance (mm)	Projection (mm)	Finish	Available from	Code no.
150 ± 12	194	Chrome	Q4/2026	71639009
		Brushed Bronze		71639149
		Brushed Black Chrome		71639349
		Matt Black		71639679



**Rebris**

# Highlights

---

## Special feature



Tap that only uses 5 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

## Technologies



Thermostatic mixer with innovative cooling technology to prevent scalding and unpleasant touching.




Mixes air into the water. For a soft, less splashing water jet and full, light drops.



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.

## Finish



Chrome

-009



Matt Black

-679

## Rebris S Single lever basin mixers



### Features of all variants

- handle variant: lever handle
- spray type: NormalSpray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- push-open waste set G 1¼
- material waste set: synthetic
- connection type: G ½ connections
- connection dimension: DN15

110



240

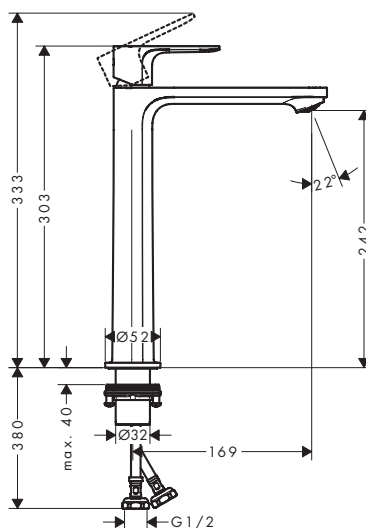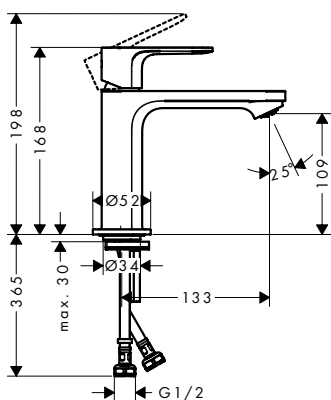

### Special feature



### Technologies



### Overview variants

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	Material waste set	CoolStart	For wash bowls	Finish	Available from	Code no.
110	121	109	push-open	synthetic	-	-	● Chrome	Q4/2026	72144009
							● Matt Black		72144679
240	169	242	without	synthetic	-	■	● Chrome	Q4/2026	72145009


**Rebris S** Single lever bath mixer for exposed installation 2 ticks

**Features**

- 2 functions
- projection: 173 mm
- centre distance:  $150 \pm 12$  mm
- spray type mixer: NormalSpray
- ceramic cartridge
- temperature limitation adjustable

- diverter with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15

- connection type: S-connections
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer

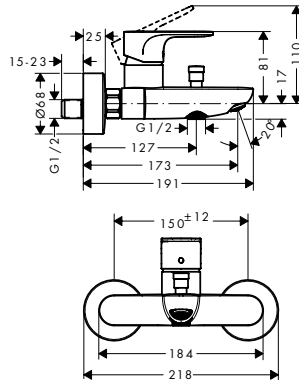

**Technologies**



Finish	Available from	Code no.
● Chrome	Q4/2026	72489009


**Rebris S** Single lever shower mixer for exposed installation 2 ticks

**Features**

- 1 function
- centre distance:  $150 \pm 12$  mm
- ceramic cartridge
- temperature limitation adjustable
- non-return valve

- with silencer
- hose connection: DN15
- connection dimension: DN15
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

- connection type: S-connections
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer

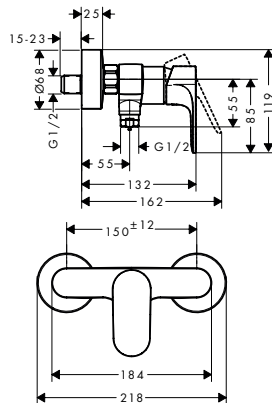

**Technologies**



Finish	Available from	Code no.
● Chrome	Q4/2026	72636009

Rebris E Single lever basin mixers



Features of all variants

- handle variant: lever handle
- spray type: NormalSpray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- push-open waste set G 1 1/4
- material waste set: synthetic
- connection type: G 1/2 connections
- connection dimension: DN15

110



240

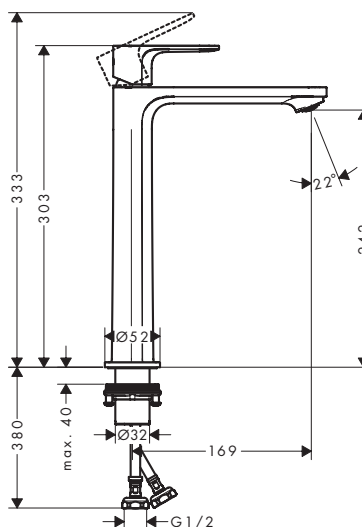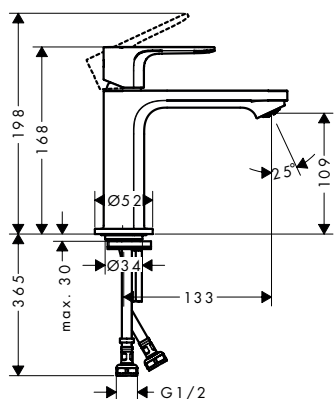

Special feature



Technologies




Overview variants

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	Material waste set	CoolStart	For wash bowls	Finish	Available from	Code no.
110	121	109	push-open	synthetic	-		● Chrome	Q4/2026	72163009
240	169	242	without	synthetic	-	■	● Chrome	Q4/2026	72165009

## Rebris E Single lever bath mixer for exposed installation 2 ticks

### Features

- 2 functions
- centre distance:  $150 \pm 12$  mm
- spray type mixer: NormalSpray
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continous flow water heaters
- connection dimension: DN15
- connection type: S-connections
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer

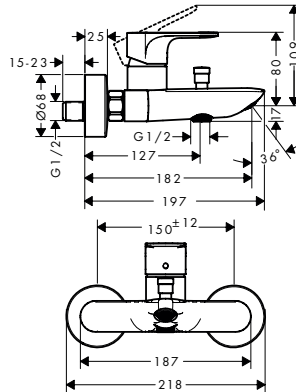

### Technologies




Finish	Available from	Code no.
● Chrome	Q4/2026	72491009

## Rebris E Single lever shower mixer for exposed installation 2 ticks

### Features

- 1 function
- centre distance:  $150 \pm 12$  mm
- ceramic cartridge
- temperature limitation adjustable
- non-return valve
- with silencer
- hose connection: DN15
- connection dimension: DN15
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- connection type: S-connections
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer

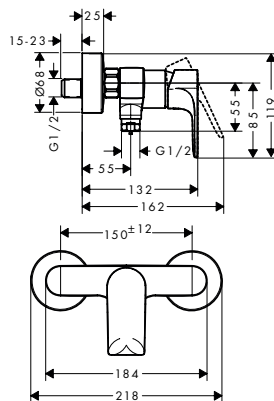

### Technologies



Finish	Available from	Code no.
● Chrome	Q4/2026	72635009



**Logis**

# Highlights

---

## Special feature



Tap that only uses 5 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

## Technologies




Mixes air into the water. For a soft, less splashing water jet and full, light drops.



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.

## Finish



Chrome


-009

**Logis Single lever basin mixers Fine**


**Features of all variants**

- consists of: single lever basin mixer, waste set
- handle variant: lever handle
- spray type: NormalSpray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- material waste set: synthetic
- connection type: G 1/2 connections
- connection dimension: DN15

**110**

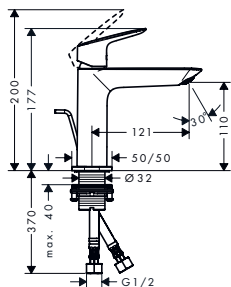

**240**

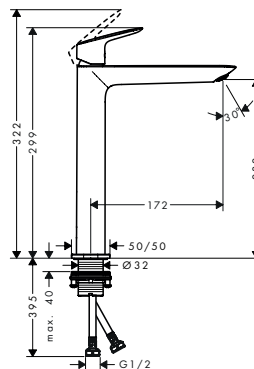

**Special feature**



**Technologies**



**Overview variants**

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	Material waste set	CoolStart	Finish	Available from	Code no.
110	121	110	pop-up	synthetic	-	● Chrome	Q4/2026	71273009
240	172	232	push-open	synthetic	-	● Chrome	Q4/2026	71278009





**Neovis**

# Highlights

---

## Special feature



Faucet that helps save energy by only allowing hot water to flow when the lever is actively moved.



Tap that only uses 5 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

## Technologies



Mixes air into the water. For a soft, less splashing water jet and full, light drops.




Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.



Remove and clean the aerator in no time at all with the aid of a coin - no tools required.

## Finish



Chrome


-009

## Neovis Q Single lever basin mixers


### Features of all variants

- consists of: single lever basin mixer, waste set
- handle variant: lever handle
- spray type: NormalSpray
- ceramic cartridge
- temperature limitation adjustable
- push-open waste set G 1¼
- material waste set: synthetic
- connection dimension: DN15
- cold water in basic handle position
- aerator can be easily removed with the help of a coin and without tools

70



100



### Special feature



### Technologies




### Overview variants

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	Material waste set	CoolStart	Finish	Code no.
70	92	63	push-open	synthetic	■	● Chrome	71350009
100	102	96	push-open	synthetic	■	● Chrome	71352009

## Neovis Q Single lever bath mixer for exposed installation 2 ticks

### Features

- 2 functions
- projection: 151 mm
- centre distance: 150 ± 12 mm
- spray type mixer: NormalSpray
- maximum flow rate at 3 bar: 28,4 l/min
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: S-connections
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

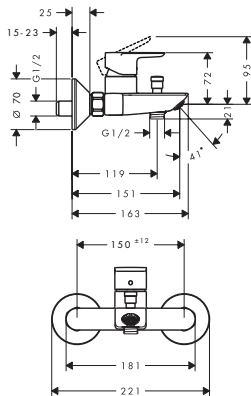

### Technologies




Finish	Code no.
● Chrome	71481009

**Neovis Q** Single lever bath mixer for concealed installation for iBox universal

**Features of all variants**

- 2 functions
- maximum flow rate at 3 bar: 28 l/min
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- with silencer
- connection type: basic set
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

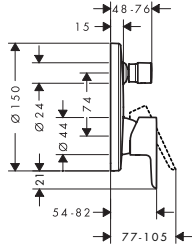

Security combination EN 1717	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
-	28	● Chrome	Q2/2026	71482000


**Required parts (choose one):**

Option	Image	Description	Code no.
Option 1		iBox universal 2 Basic set	01500180
	+	Adapter plate for iBox universal 2	13588000
Option 2		iBox universal Basic set	01800180

**Neovis Q** Single lever bath mixer for concealed installation

**Features**

- 2 functions
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: basic set
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

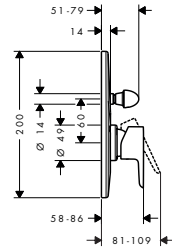

Finish	Available from	Code no.
● Chrome	Q2/2026	71484000


**Required parts:**

Image	Description	Code no.
	Basic set for single lever bath mixer for concealed installation	31741180

**Neovis Q** Single lever shower mixer for exposed installation 2 ticks

**Features**

- 1 function
- temperature and volume control for 1 outlet
- centre distance: 150 ± 12 mm
- maximum flow rate at 3 bar: 5,8 l/min
- maximum flow rate of hand shower at 3 bar: 5,8 l/min
- ceramic cartridge
- temperature limitation adjustable
- non-return valve
- with silencer
- suitable for continuous flow water heaters
- hose connection: DN15
- connection dimension: DN15
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- connection type: S-connections

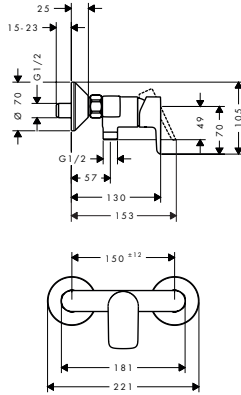


Finish	Code no.
● Chrome	71681009

**Neovis Q** Single lever shower mixer for concealed installation

**Features**

- 1 function
- maximum flow rate at 3 bar: 28,7 l/min
- maximum flow rate at 1 bar: 16,9 l/min
- ceramic cartridge
- temperature limitation adjustable
- connection dimension: DN15
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- connection type: basic set



Finish	Available from	Code no.
● Chrome	Q2/2026	71683000

**Required parts:**




Basic set for single lever shower mixer for concealed installation

Code no.
13620180


**Neovis Q** Single lever shower mixer for concealed installation for iBox universal

**Features**

- 1 function
- maximum flow rate at 3 bar: 31 l/min
- maximum flow rate at 1 bar: 13,4 l/min
- ceramic cartridge
- temperature limitation adjustable
- connection dimension: DN15
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- connection type: basic set

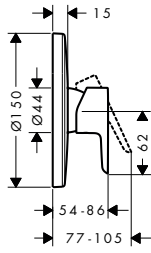

Finish	Available from	Code no.
● Chrome	Q2/2026	71682000

! Required parts (choose one):		Code no.
Option 1	 iBox universal 2 Basic set	01500180
	+  Adapter plate for iBox universal 2	13588000
Option 2	 iBox universal Basic set	01800180



**AddStoris**

# Highlights

---

## Technologies



This high-quality product is made of durable material that is suitable for bathrooms.



The accessory can be mounted securely and stylishly on the wall with just a few screws and hand movements.

## Finish



Brushed Black  
Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670



Matt White

-700


## AddStoris S Toothbrush tumbler

### Features

- wall-mounted
- material: metal, matt glass
- holder material: metal

- with mounting material
- concealed fastening
- drilling distance: 26 mm

- diameter drill hole: 6 mm

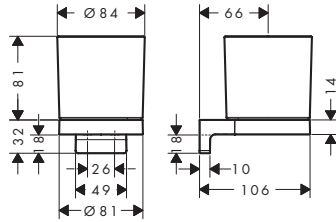

### Technologies



Finish	Available from	Code no.
Chrome	Q1/2026	41769000
Brushed Bronze	Q1/2026	41769140
Brushed Black Chrome	Q1/2026	41769340
Matt Black	Q1/2026	41769670
Matt White	Q1/2026	41769700


## AddStoris S Liquid soap dispenser

### Features

- wall-mounted
- holder material: metal
- material container: matt glass
- type of soap: liquid soap

- filling capacity 200 ml
- dosage 1 ml
- with mounting material
- concealed fastening

- drilling distance: 26 mm
- diameter drill hole: 6 mm

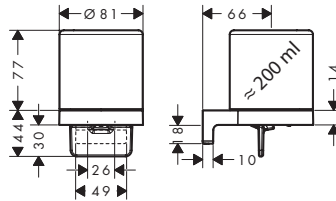

### Technologies




Finish	Available from	Code no.
Chrome	Q1/2026	41765000
Brushed Bronze	Q1/2026	41765140
Brushed Black Chrome	Q1/2026	41765340
Matt Black	Q1/2026	41765670
Matt White	Q1/2026	41765700

## AddStoris S Soap dish

### Features

- wall-mounted
- material recess: matt glass
- holder material: metal
- with mounting material
- concealed fastening
- drilling distance: 26 mm
- diameter drill hole: 6 mm

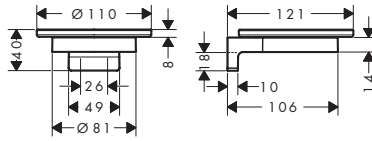

### Technologies




Finish	Available from	Code no.
Chrome	Q1/2026	41766000
Brushed Bronze	Q1/2026	41766140
Brushed Black Chrome	Q1/2026	41766340
Matt Black	Q1/2026	41766670
Matt White	Q1/2026	41766700

## AddStoris S Corner basket

### Features

- wall-mounted
- holder material: metal
- with mounting material
- concealed fastening
- diameter drill hole: 6 mm
- can be used additional as a shelf

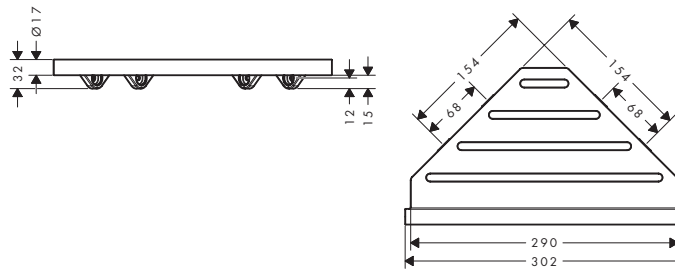

### Technologies




Finish	Available from	Code no.
Chrome	Q1/2026	41761000
Brushed Bronze	Q1/2026	41761140
Brushed Black Chrome	Q1/2026	41761340
Matt Black	Q1/2026	41761670
Matt White	Q1/2026	41761700

## AddStoris S Grab bar

### Features

- wall-mounted
- material: metal
- length: 340 mm
- with mounting material
- concealed fastening
- drilling distance: 306 mm
- diameter drill hole: 6 mm

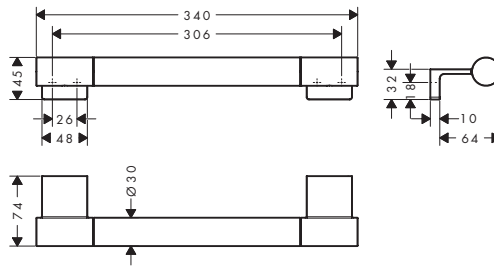

### Technologies




Finish	Available from	Code no.
Chrome	Q1/2026	41764000
Brushed Bronze	Q1/2026	41764140
Brushed Black Chrome	Q1/2026	41764340
Matt Black	Q1/2026	41764670
Matt White	Q1/2026	41764700

## AddStoris S Towel holder twin-handle

### Features

- wall-mounted
- material: metal
- holder material: metal
- fixed
- length: 441 mm
- with mounting material
- drilling distance: 26 mm
- diameter drill hole: 6 mm
- concealed fastening

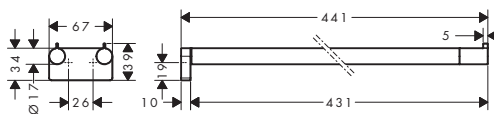

### Technologies




Finish	Available from	Code no.
Chrome	Q1/2026	41787000
Brushed Bronze	Q1/2026	41787140
Brushed Black Chrome	Q1/2026	41787340
Matt Black	Q1/2026	41787670
Matt White	Q1/2026	41787700

## AddStoris S Towel ring

**Features**

- wall-mounted
- material: metal
- swivelling
- with mounting material
- concealed fastening
- drilling distance: 26 mm
- diameter drill hole: 6 mm

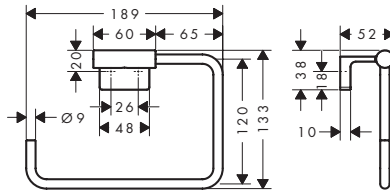

**Technologies**




Finish	Available from	Code no.
Chrome	Q1/2026	41784000
Brushed Bronze	Q1/2026	41784140
Brushed Black Chrome	Q1/2026	41784340
Matt Black	Q1/2026	41784670
Matt White	Q1/2026	41784700

## AddStoris S Towel hooks

**Features of all variants**

- wall-mounted
- material: metal
- with mounting material
- concealed fastening
- diameter drill hole: 6 mm

**single**

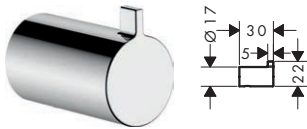

**double**



**Technologies**






**Overview variants**

Number of hooks	Finish	Available from	Code no.
1 hook	Chrome	Q1/2026	41762000
	Brushed Bronze	Q1/2026	41762140
	Brushed Black Chrome	Q1/2026	41762340
	Matt Black	Q1/2026	41762670
	Matt White	Q1/2026	41762700
2 hooks	Chrome	Q1/2026	41785000
	Brushed Bronze	Q1/2026	41785140
	Brushed Black Chrome	Q1/2026	41785340
	Matt Black	Q1/2026	41785670
	Matt White	Q1/2026	41785700

**AddStoris S** Towel rack with towel holder**Features**



- wall-mounted
- material: metal
- holder material: metal
- length: 661 mm
- with mounting material
- concealed fastening
- drilling distance: 627 mm
- diameter drill hole: 6 mm

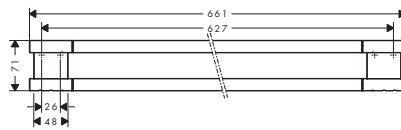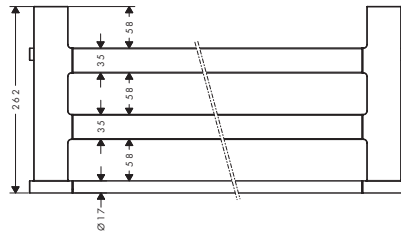**Technologies**

Finish	Available from	Code no.
Chrome	Q1/2026	41781000
Brushed Bronze	Q1/2026	41781140
Brushed Black Chrome	Q1/2026	41781340
Matt Black	Q1/2026	41781670
Matt White	Q1/2026	41781700

**AddStoris S** Bath towel rails**Features of all variants**

- wall-mounted
- material: metal
- holder material: metal
- length: 661 mm
- with mounting material
- drilling distance: 627 mm
- diameter drill hole: 6 mm
- concealed fastening

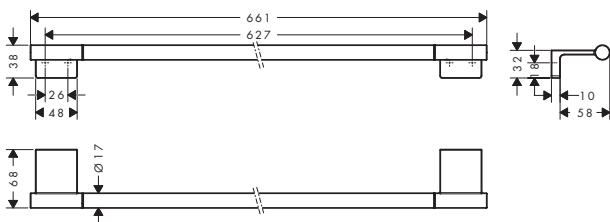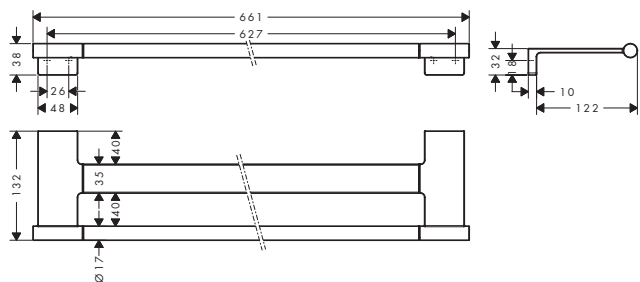**single****double****Technologies****Overview variants**

Number of holder	Finish	Available from	Code no.
1 holder	Chrome	Q1/2026	41767000
	Brushed Bronze	Q1/2026	41767140
	Brushed Black Chrome	Q1/2026	41767340
	Matt Black	Q1/2026	41767670
	Matt White	Q1/2026	41767700

For more information about this product, please see the next page.

**AddStoris S** Bath towel rails

**Overview variants**


Number of holder	Finish	Available from	Code no.
2 holders	● Chrome	Q1/2026	41763000
	● Brushed Bronze	Q1/2026	41763140
	● Brushed Black Chrome	Q1/2026	41763340
	● Matt Black	Q1/2026	41763670
	○ Matt White	Q1/2026	41763700

**AddStoris S** Toilet paper holders


**Features of all variants**

- wall-mounted
- material: metal
- with mounting material
- concealed fastening
- drilling distance: 26 mm
- diameter drill hole: 6 mm


**without cover**

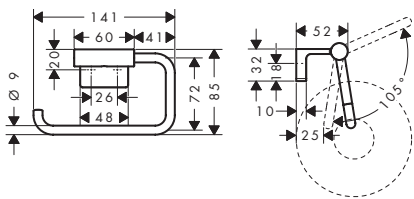

**with shelf**

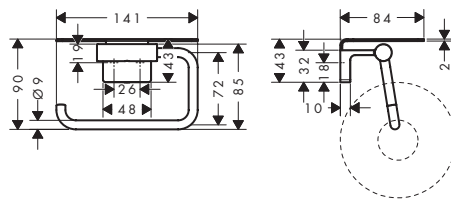

**with cover**

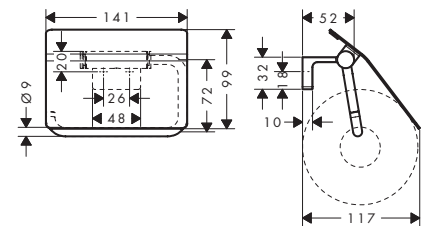

**Technologies**



**Overview variants**

Version	Finish	Available from	Code no.
without cover	● Chrome	Q1/2026	41788000
	● Brushed Bronze	Q1/2026	41788140
	● Brushed Black Chrome	Q1/2026	41788340
	● Matt Black	Q1/2026	41788670
	○ Matt White	Q1/2026	41788700
with shelf	● Chrome	Q1/2026	41789000
	● Brushed Bronze	Q1/2026	41789140
	● Brushed Black Chrome	Q1/2026	41789340
	● Matt Black	Q1/2026	41789670
	○ Matt White	Q1/2026	41789700

## AddStoris S Toilet paper holders


### Overview variants

Version	Finish	Available from	Code no.
with cover	 Chrome	Q1/2026	41783000
	 Brushed Bronze	Q1/2026	41783140
	 Brushed Black Chrome	Q1/2026	41783340
	 Matt Black	Q1/2026	41783670
	 Matt White	Q1/2026	41783700

## AddStoris S Toilet paper holder double



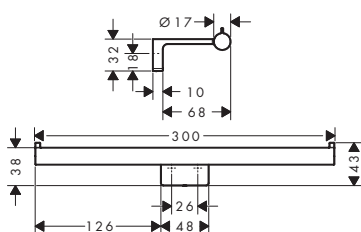


### Features

- wall-mounted
- material: metal
- with mounting material
- concealed fastening
- drilling distance: 26 mm
- diameter drill hole: 6 mm
- for 2 paper rolls



### Technologies




Finish	Available from	Code no.
 Chrome	Q1/2026	41768000
 Brushed Bronze	Q1/2026	41768140
 Brushed Black Chrome	Q1/2026	41768340
 Matt Black	Q1/2026	41768670
 Matt White	Q1/2026	41768700

## AddStoris S Spare roll holder



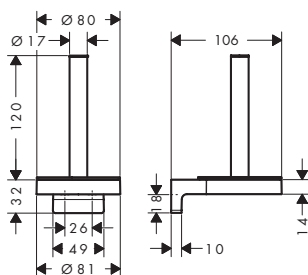


### Features

- wall-mounted
- material: metal
- with mounting material
- concealed fastening
- drilling distance: 26 mm
- diameter drill hole: 6 mm



### Technologies




Finish	Available from	Code no.
 Chrome	Q1/2026	41786000
 Brushed Bronze	Q1/2026	41786140
 Brushed Black Chrome	Q1/2026	41786340
 Matt Black	Q1/2026	41786670
 Matt White	Q1/2026	41786700

## AddStoris S Toilet brush holder wall-mounted

### Features

- wall-mounted
- material: metal, glass
- material recess: matt glass
- with removable insert
- with mounting material
- concealed fastening
- drilling distance: 26 mm
- diameter drill hole: 6 mm

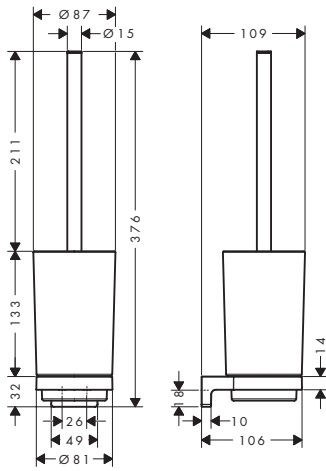

### Technologies



Finish	Available from	Code no.
Chrome	Q1/2026	41782000
Brushed Bronze	Q1/2026	41782140
Brushed Black Chrome	Q1/2026	41782340
Matt Black	Q1/2026	41782670
Matt White	Q1/2026	41782700

### Optional parts:




Replacement toilet brush with handle

Finish	Code no.
Chrome	93286000

## AddStoris Shelf

### Features

- wall-mounted
- length: 400 mm
- with mounting material
- concealed fastening




### Technologies





Finish	Available from	Code no.
Chrome	Q1/2026	41794000
Brushed Bronze	Q1/2026	41794140
Brushed Black Chrome	Q1/2026	41794340
Matt Black	Q1/2026	41794670
Matt White	Q1/2026	41794700

**AddStoris** Pedal Bin**Features**

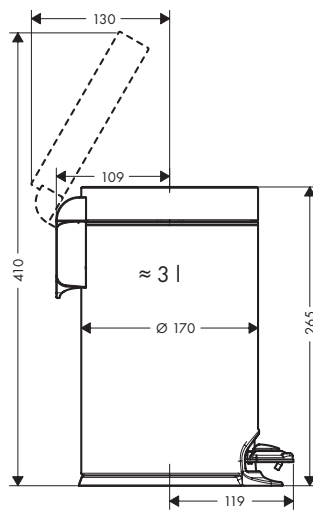- free-standing
- material: metal, plastic
- material recess: plastic
- capacity: 3 l
- with removable insert
- softclose function guarantees a quiet closing of the lid



Finish	Available from	Code no.
 Brushed Bronze	Q1/2026	41775140
 Brushed Black Chrome	Q1/2026	41775340

# hansgrohe

Life is waterful.

Singapore News Product Book 2026  
Subject to change in the interest of technical advancement

**Hansgrohe Pte Ltd**  
69 Mohamed Sultan Road  
Singapore 239015  
Tel. +65 6884 5060  
Fax +65 68845071  
info@hansgrohe.com.sg  
www.hansgrohe.com.sg



Discover hansgrohe online and on social media.  
Find out more about the hansgrohe world at [pro.hansgrohe.com.sg](http://pro.hansgrohe.com.sg)