

Planning and installing RainDrain / XtraStoris

Technical Manual


pro.hansgrohe.com
pro.hansgrohe.co.uk

RainDrain: A sophisticated shower drain

A sensational sight in the shower

A cohesive bathroom design is key to creating that special feel-good factor – and this is particularly true for your customer's shower. So it's not at all surprising to witness the increasing popularity of visually appealing shower drains that integrate seamlessly into any shower floor. RainDrain offers the right color and finish to match its surroundings - especially other hansgrohe products such as showers or taps. And it is not just the perfectly coordinated look that's important, but also the durability.

With RainDrain, you benefit from a wide range of designs and drainage solutions to meet the requirements of any bathroom project. You also benefit from easy and safe installation, as there is one basic set for all linear drains. As for safety, you can rely on the proven technologies that guarantee the drain will remain leak-free for years to come.

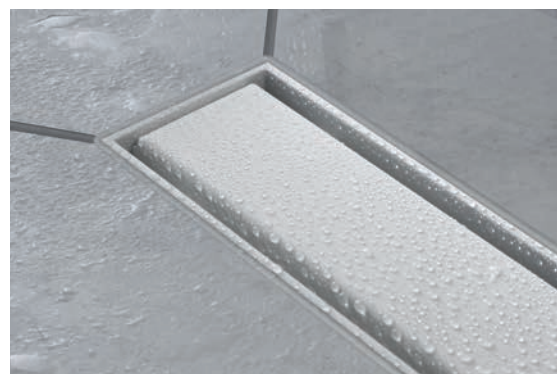

One base set for all
linear shower drains.



RainDrain is a high-grade shower drainage system that seamlessly blends into your shower.

RainDrain at a glance:

- High-grade shower drainage system developed in collaboration with the drainage specialists from ESS.
- Perfect drainage solution for any bathroom project with a floor-level shower.
- Two water seal heights for new builds and renovations.
- Optional Dryphon technology for minimal cleaning and maximal capacity of up to 60 l/min.
- Secure, integrated waterproofing thanks to factory-assembled sealing membrane as per DIN 18534.
- One base set for all hansgrohe linear shower drains.
- Floor-level showers with RainDrain shower drains offers greater mobility and accessibility
- The drainage capacity is specifically tailored to hansgrohe shower systems.
- Various surfaces and finishes that perfectly match the mixers.



Pretty.

One base set for all.




Clever.

One bathroom, one look.



uBox universal

One base set for all installation scenarios

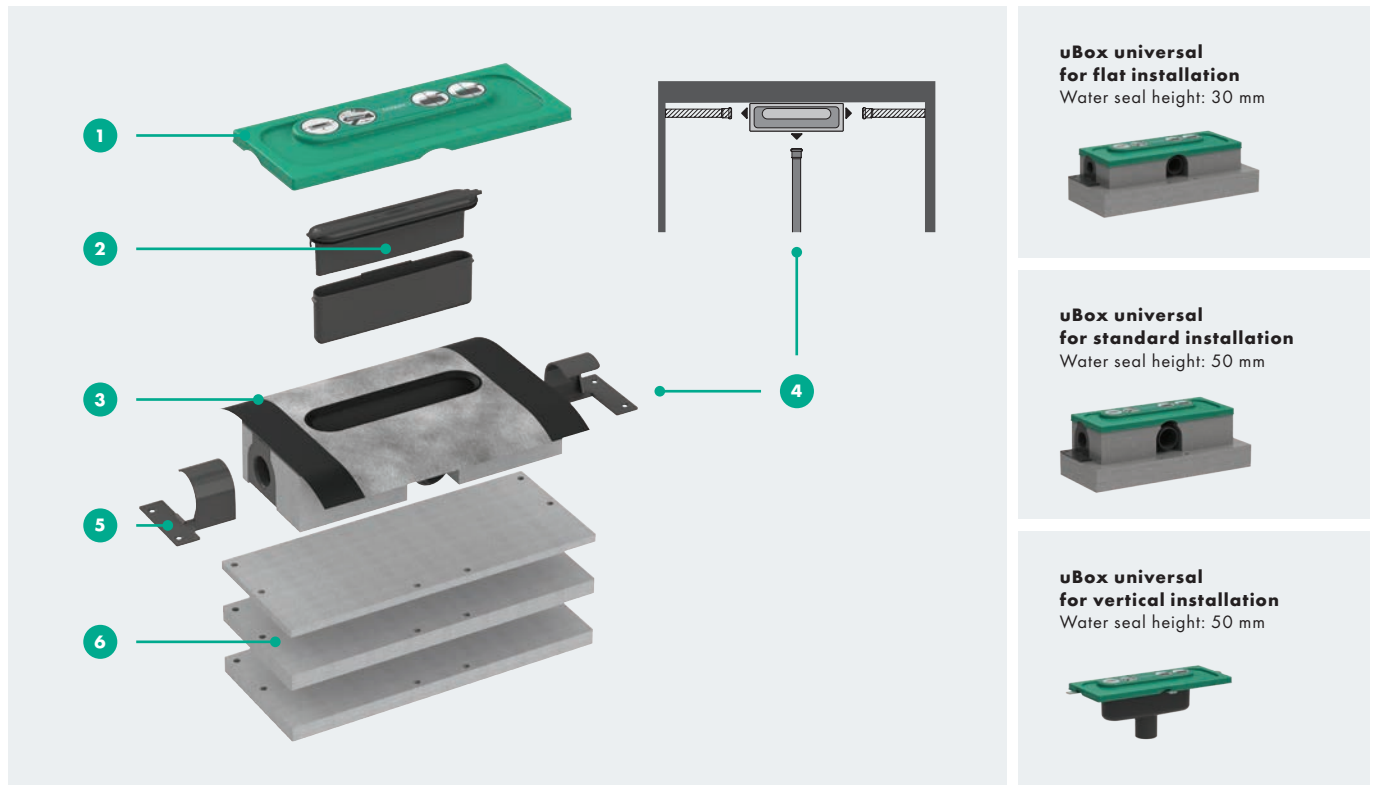

Features

- 1 Screed cover protects from dirt during shell construction
- 2 Easy-to-clean siphon included as standard
- 3 Pre-assembled sealing membrane as per DIN 18534
- 4 Flexible connection options with outlets on three sides
- 5 Easy attachment to the floor with mounting bracket
- 6 Easy height adjustment with three plates (2 x 20 mm, 1 x 10 mm). Suitable for soundproof mounting

Specifications

uBox universal for flat installation


Minimum Installation height: 57 mm
 Siphon drainage capacity: 33 l/min
 Dryphon drainage capacity: 55 l/min

uBox universal for standard installation


Minimum Installation height: 75 mm
 Siphon drainage capacity: 42 l/min (as per EN 1253)
 Dryphon drainage capacity: up to 60 l/min

uBox universal for vertical installation


Minimum Installation height: -
 Siphon drainage capacity: 42 l/min (as per EN 1253)
 Dryphon drainage capacity: up to 60 l/min

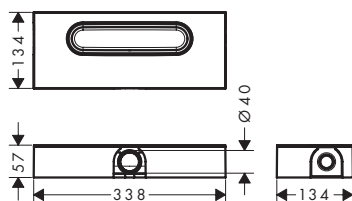

uBox universal for flat installation

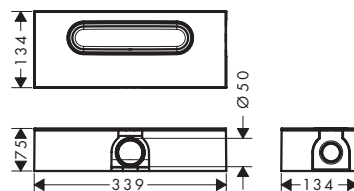


uBox universal for standard installation

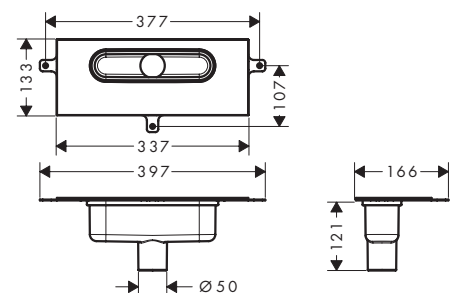

uBox universal for vertical installation

RainDrain Flex


Easy to shorten on site

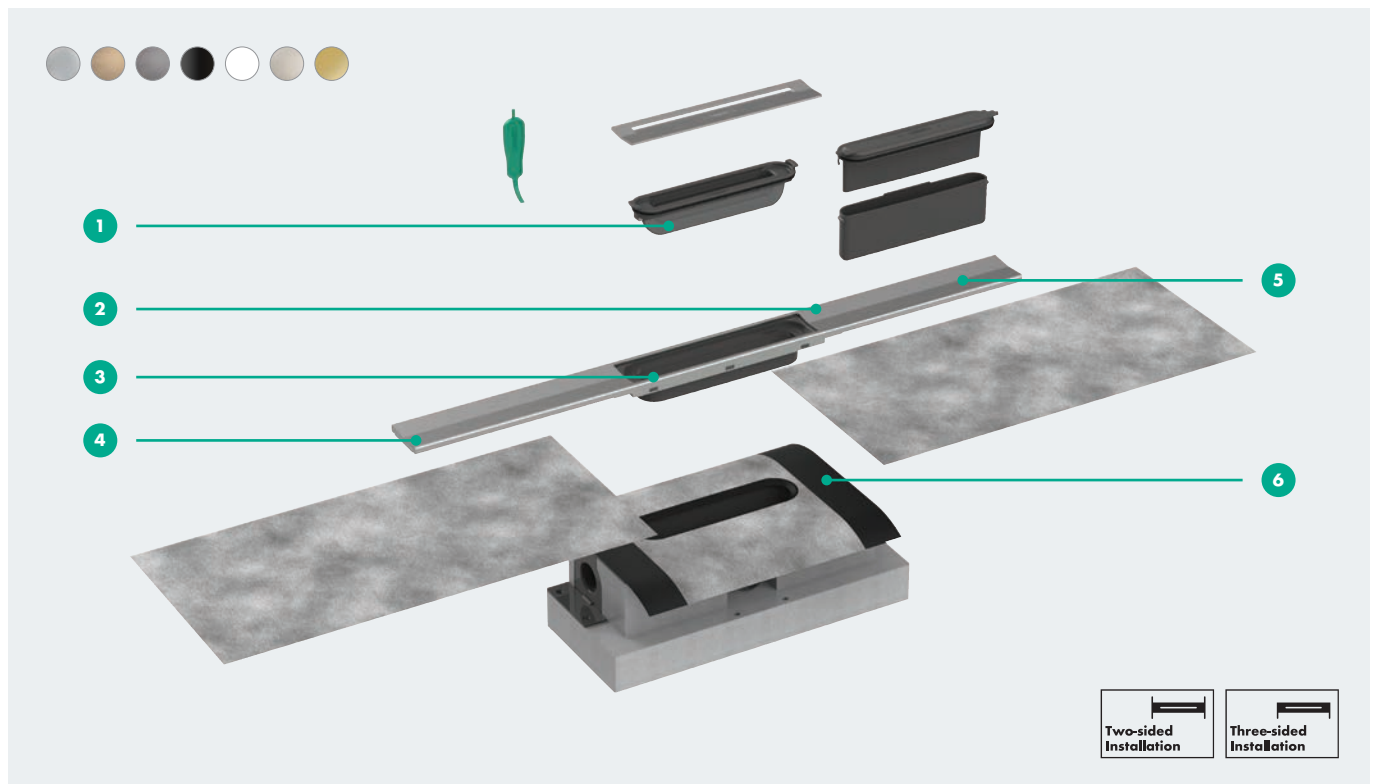

Features


- 1 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 2 Design grate: Chrome, Brushed Bronze, Brushed Black Chrome, Matt Black, Matt White, Brushed Stainless Steel, Polished Gold Optic
- 3 Base set adapter: easy levelling to tile thickness 7 - 18 mm
- 4 Installation: wall-mounted or in-floor. Both versions available
- 5 Design grate made of stainless steel 304 (1.4301) with built-in slope. Can be shortened on site.
- 6 Pre-assembled sealing membrane as per DIN 18534

Required sets

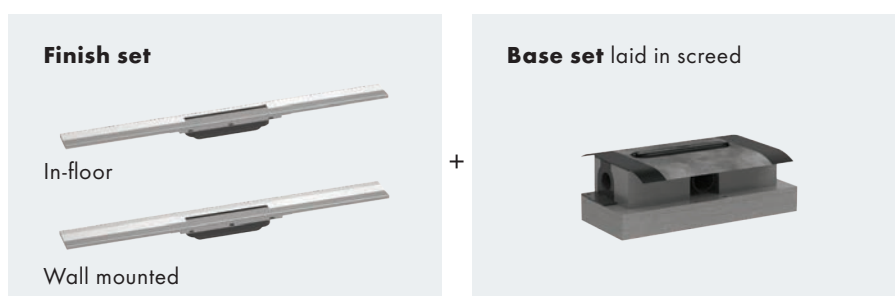



Simply scan the code and check out RainDrain Flex.

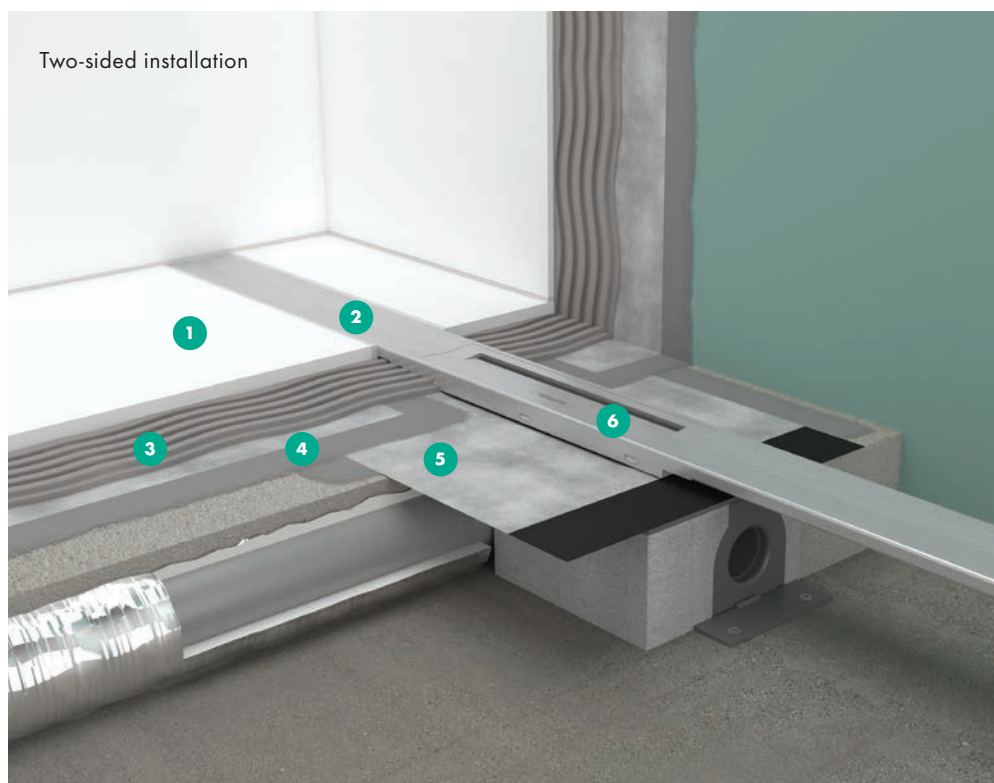

- 1 Tile thickness up to 18 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Removable cover

Specifications

Dimensions

700, 800, 900,
1000, 1200 mm

Tile thickness

up to 18 mm

uBox universal for flat installation

Minimum Installation height: 57 mm
Siphon drainage capacity: 33 l/min
Dryphon drainage capacity: 55 l/min

Connection

Horizontal
Vertical

Grate width


60 mm (In-floor)
76 mm (Wall mounted)

uBox universal for standard installation


Minimum Installation height: 75 mm
Siphon drainage capacity: 42 l/min (as per EN 1253)
Dryphon drainage capacity: up to 60 l/min

uBox universal for vertical installation

Minimum Installation height: -
Siphon drainage capacity: 42 l/min (as per EN 1253)
Dryphon drainage capacity: up to 60 l/min

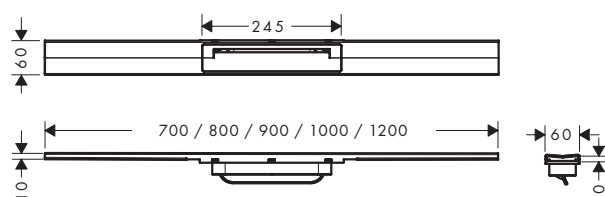


RainDrain Flex

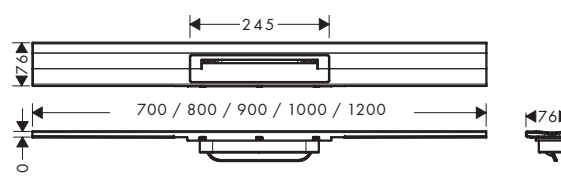

RainDrain Flex for wall mounting

RainDrain Match

Perfectly flush with the tile thickness

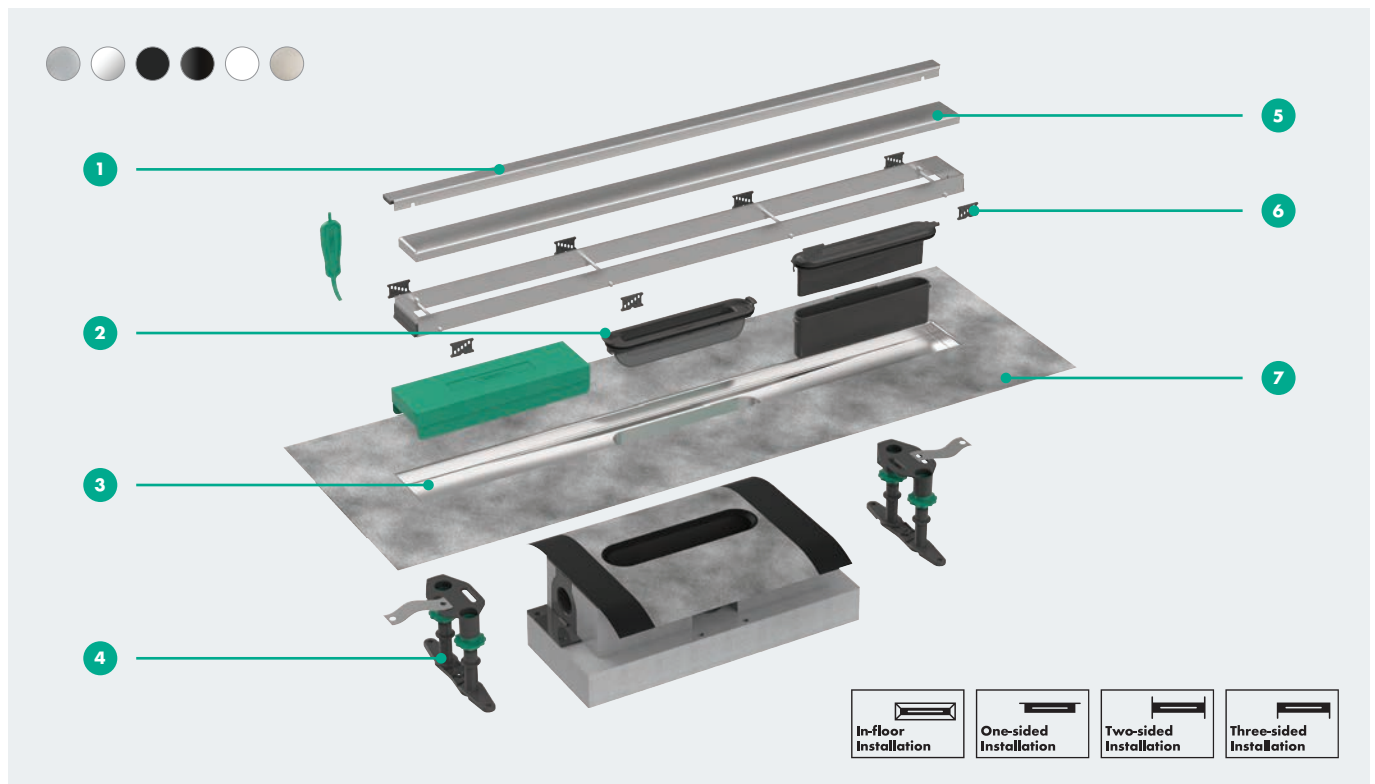

Features


- 1 Installation: wall-mounted or in-floor. Wall flange included
- 2 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 3 Installation set: stainless steel 304 (1.4301) with built-in slope
- 4 Height-adjustable feet: easy adjustment and fixing to the floor
- 5 Design grate: Chrome, Brushed Stainless Steel, Matt White, Matt Black, two glass surfaces (White, Black). Design grate can be tiled on the back (except glass surfaces)
- 6 Height-adjustable frame: easy adjustment to tile thickness 7-18 mm
- 7 Pre-assembled sealing membrane as per DIN 18534

Required sets





Simply scan the code and check out RainDrain Match.

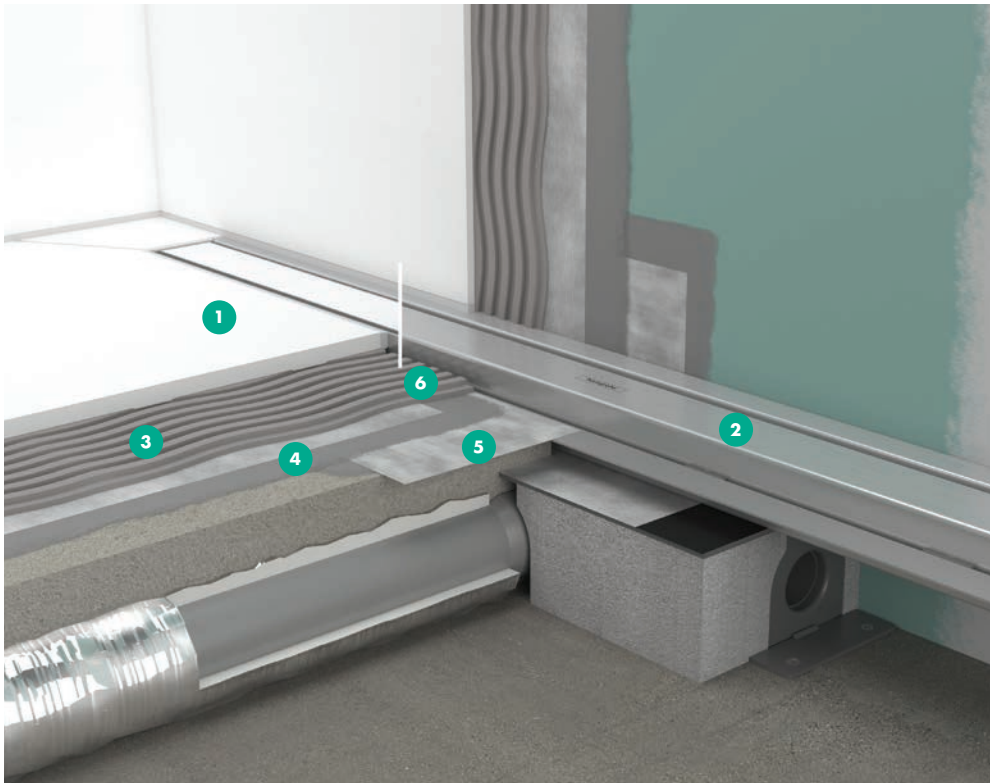

- 1 Tile thickness up to 18 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Secondary drainage possible

Specifications

Dimensions

600, 700, 800, 900, 1000, 1200 mm

Tile thickness

up to 18 mm

uBox universal for flat installation incl. installation set

Minimum Installation height: 77 mm
Drainage capacity 33 l/min
Dryphon drainage capacity: 55 l/min

Tile recess depth

12 mm

Grate width

46 mm

uBox universal for standard installation with installation set

Minimum Installation height: 95 mm
Drainage capacity 42 l/min (as per EN 1253)
Dryphon drainage capacity: up to 60 l/min

Connection



Horizontal
Vertical

Frame width

62 mm (In-floor)
81 mm (Wall flange included)

uBox universal for vertical installation with installation set


Minimum Installation height: -
Drainage capacity 42 l/min (as per EN 1253)
Dryphon drainage capacity: up to 60 l/min

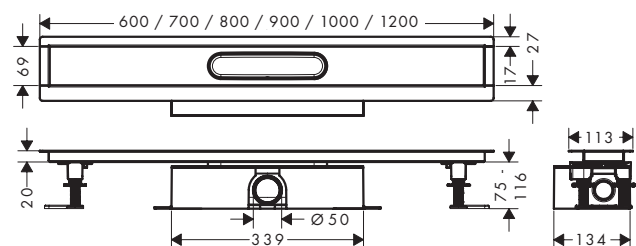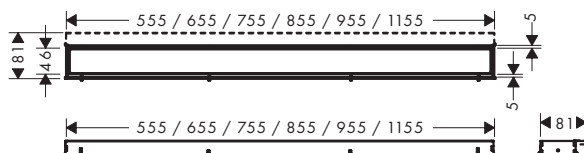

RainDrain Match

RainDrain Rock

Developed for use with natural stone

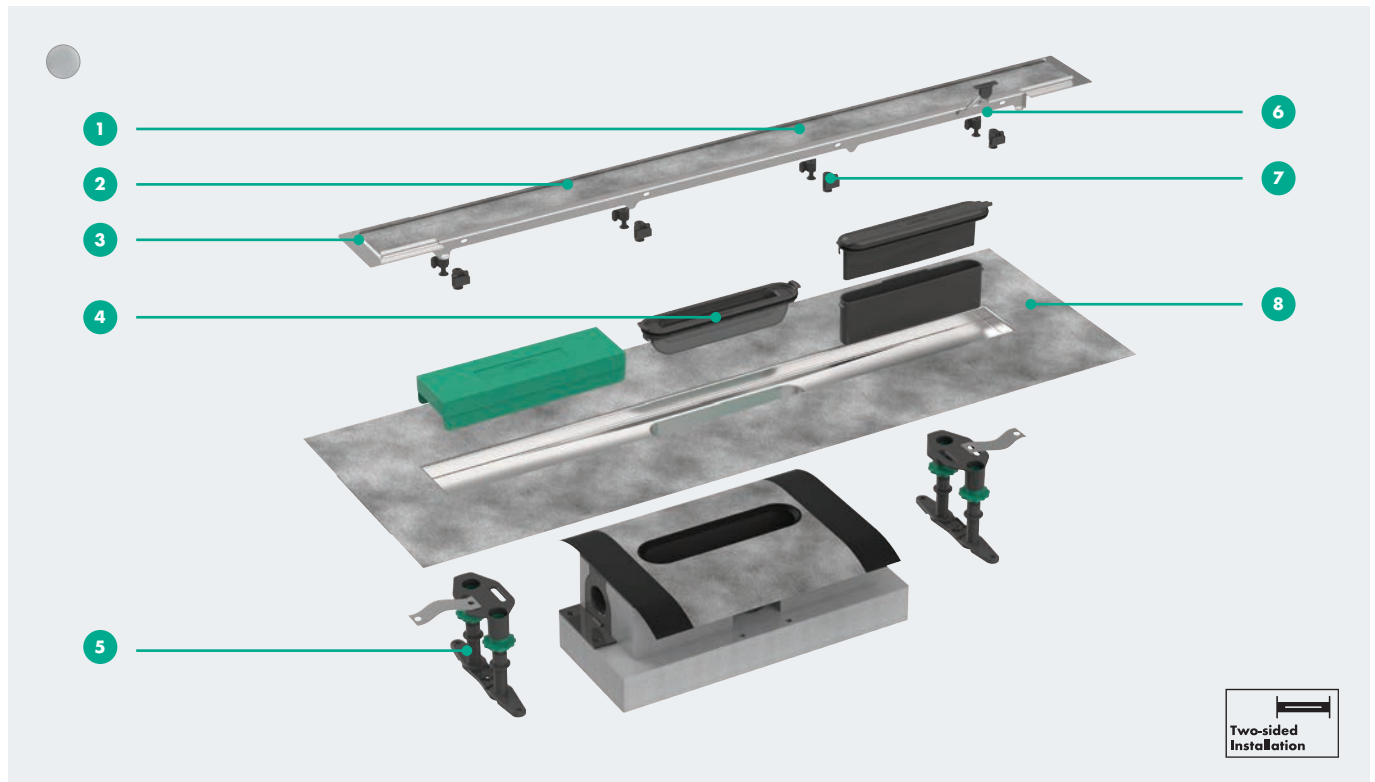

Features


- 1 Design grate can be tiled, with tiles up to 40 mm thick
- 2 304 stainless steel design grate with membrane for strong attachment to the tile adhesive
- 3 Cover: can be shortened on site, with 50 mm excess length on both sides
- 4 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 5 Height-adjustable feet: easy adjustment and fixing to the floor
- 6 Lifting tool for easy removal of the design grate
- 7 Height adjustment: easy to adjust the cover to the tile level
- 8 Pre-assembled sealing membrane as per DIN 18534

Required sets





Simply scan the code and check out RainDrain Rock.

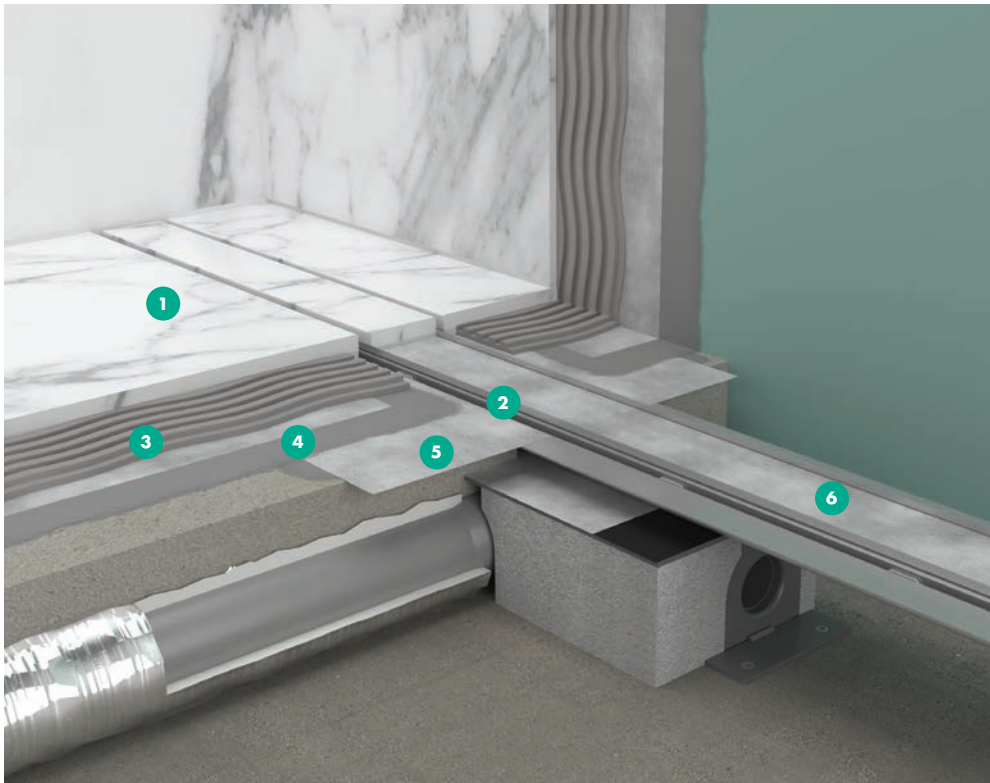

- 1 Tile thickness up to 40 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Tileable design grate

Specifications

Dimensions

600, 700, 800, 900, 1000, 1200 mm

Grate width

58 mm

Connection

Horizontal
Vertical

Tile thickness

up to 40 mm

uBox universal for flat installation incl. installation set



Minimum Installation height: 77 mm
Siphon drainage capacity: 33 l/min
Dryphon drainage capacity: 55 l/min

uBox universal for standard installation with installation set

Minimum Installation height: 95 mm
Siphon drainage capacity: 42 l/min (as per EN 1253)
Dryphon drainage capacity: up to 60 l/min


uBox universal for vertical installation with installation set

Minimum Installation height: -
Siphon drainage capacity: 42 l/min (as per EN 1253)
Dryphon drainage capacity: up to 60 l/min

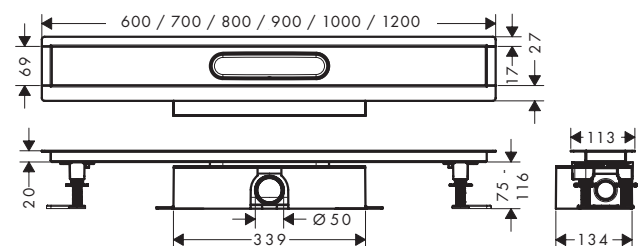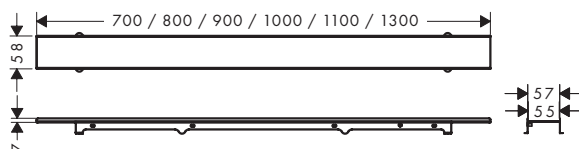

RainDrain Spot

Maximum placement flexibility

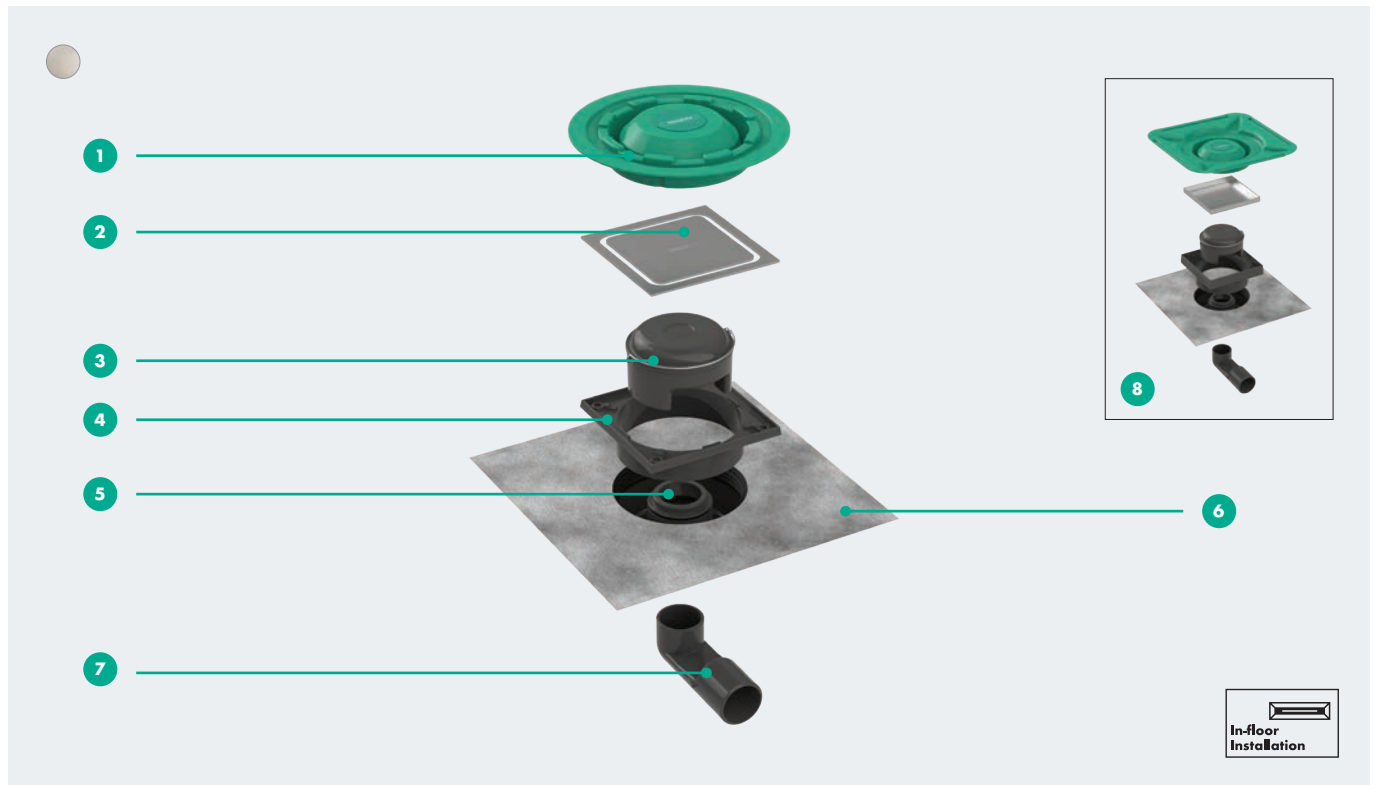


Features

- 1** Screed cover protects from dirt during shell construction
- 2** Design grate: brushed stainless steel with frameless design
- 3** Siphon: removable for easy cleaning
- 4** Height adjustment: easy to adjust the design grate to the tile level
- 5** Siphon body: rotatable and adjustable
- 6** Pre-assembled sealing membrane as per DIN 18534
- 7** Variable connection: both horizontal and vertical outlet in one shower drain
- 8** Rotatable grate: tileable or brushed stainless steel



Simply scan the code and check out RainDrain Spot.

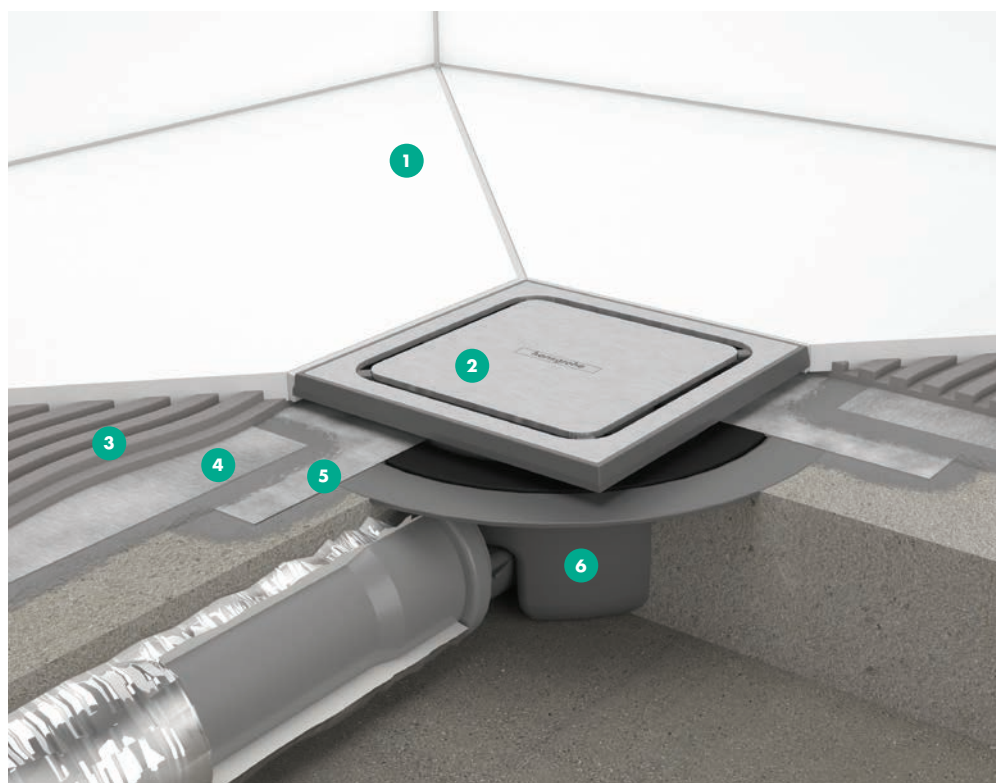

- 1 Tile thickness up to 18 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Siphon body ABS with mounting bracket

Specifications

Dimensions

150 x 150 mm

Minimum height

78 mm

Grate width

146 mm

Connection

Horizontal and vertical

Drainage capacity

39 l/min

Tile thickness


up to 18 mm

Water seal height


50 mm

Connection nominal diameter

DN50



RainDrain Spot



RainDrain Spot with tileable grate


Technology

Drainage reinvented: Dryphon

The design and high flow rate prevent dirt and hair from attaching, minimising cleaning efforts. The patented design offers a significant improvement in drainage capacity up to 60 litres per minute, exceeding all standard requirements and regulations.


The Dryphon system opens and closes with a flexible membrane. This membrane allows water to pass through when needed while blocking sewer gases when no water is flowing through. Also, because it does not rely on a traditional water seal to seal the connection to the sewer, it cannot dry out while still controlling pressure differences in the sewer.

Minimum cleaning
combined with higher
drainage capacity

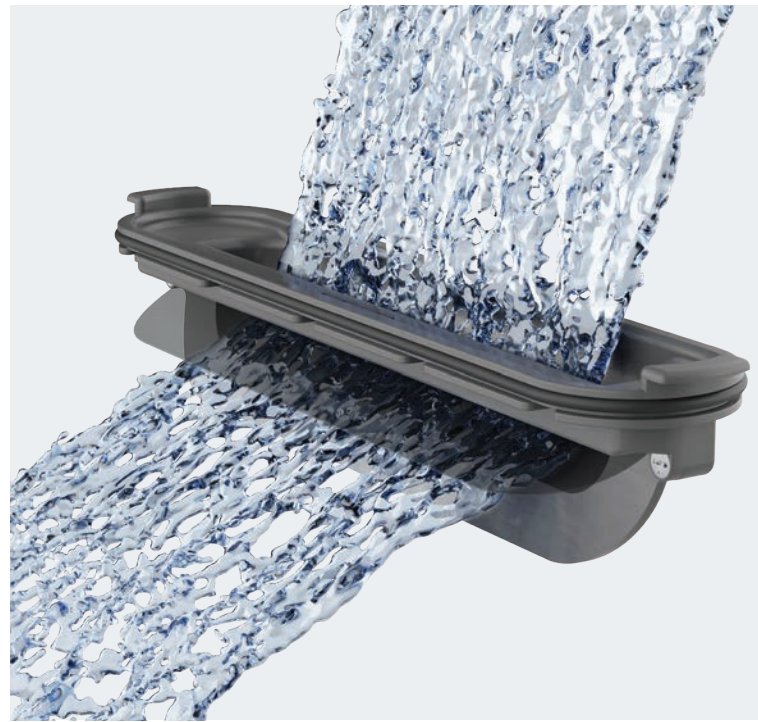


Hansgrohe Siphon technology


- High drainage capacity up to 42 l/min
- Low dirt adhesion, as manufactured without seams
- Easy to clean, as can be dismantled
- Removable
- Minimal installation depth

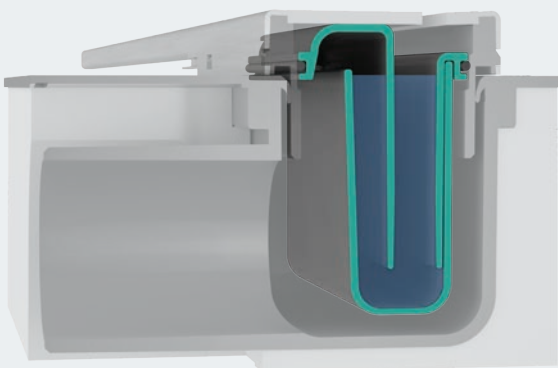

Hansgrohe Dryphon technology

- Significantly higher drainage capacity up to 60 l/min
- Durable and temperature-resistant membrane
- Minimal cleaning required, no siphon resistance
- Removable
- Minimal installation depth
- Full odour barrier

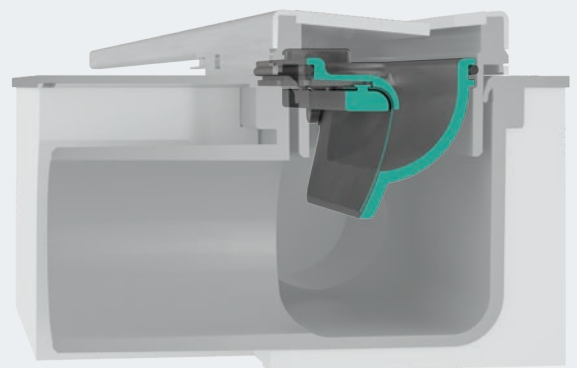

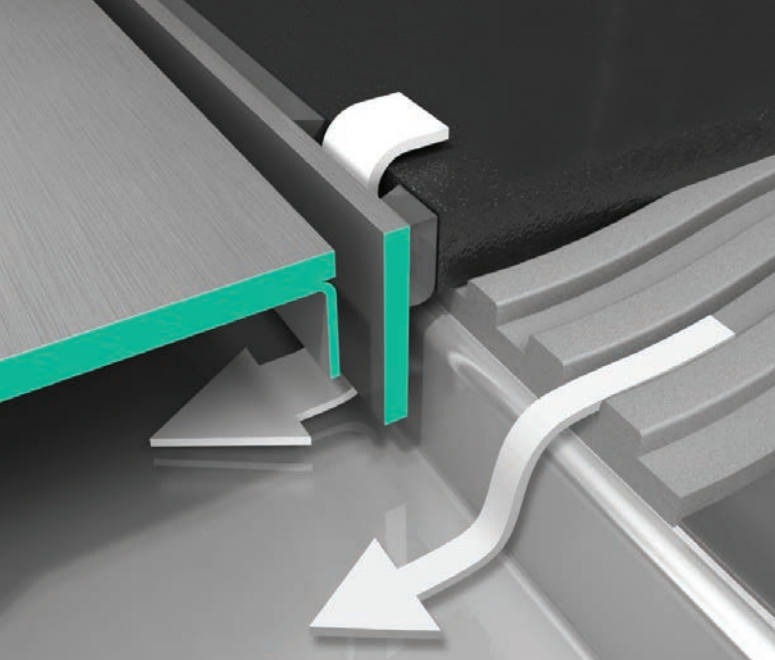


Secondary drainage

Not only can the height adjustable frame be used to the tile level but also to enable secondary drainage. With secondary drainage, water that penetrates through the sealing joints or defective tile joints will drain off to the shower channel thanks to its slope.

For secondary drainage, the entire wet area must be professionally sealed and no seal must be applied under the maintenance joint between the frame and the installation set.

Pre-assembled sealing membrane as per DIN 18534

Planners and contractors are required to comply with numerous works contract provisions. The pre-assembled sealing membrane was developed as a standard to prevent mistakes when installing shower drains in combination with waterproofing system.

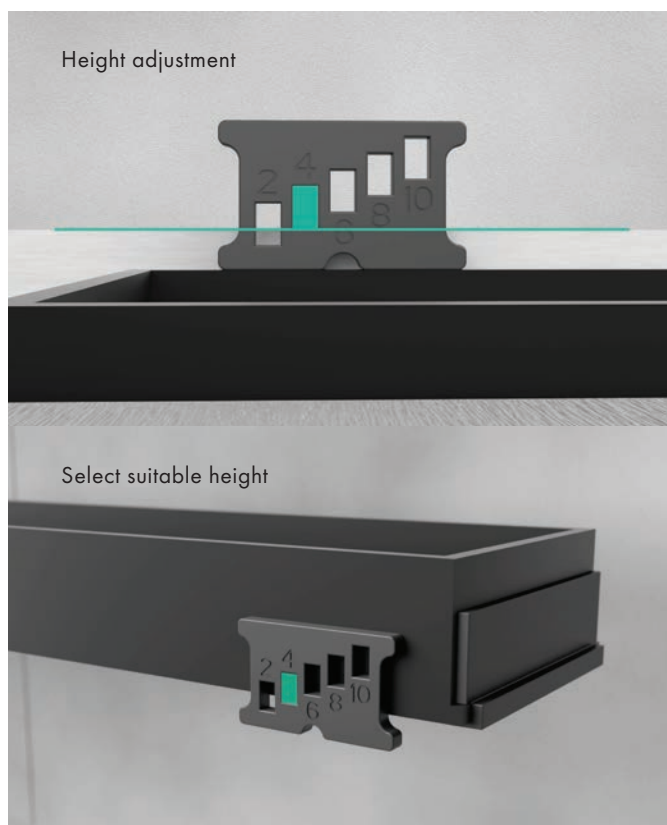

Height flexibility



The finish set can be easily fixed at different heights using the height-adjustable frame. The robust stainless steel frame adapts to tile thicknesses of 7-18 mm and makes installation easy and safe.

Modular


RainDrain is a modular system. When ordering a linear shower drain, there are only two article numbers:

1. Finish set
2. Base set (uBox) - with or without installation set.


Simply choose between the uBox for standard installation (50 mm water seal), uBox for flat installation (30 mm water) or uBox with vertical outlet.

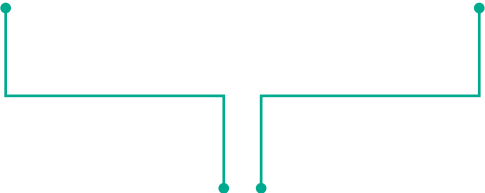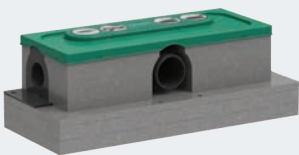		
RainDrain Flex Installation in thin bed 	RainDrain Match RainDrain Rock 	
		
uBox universal Installation in screed	uBox universal and installation set Installation in screed	

RainDrain Match wall mounted

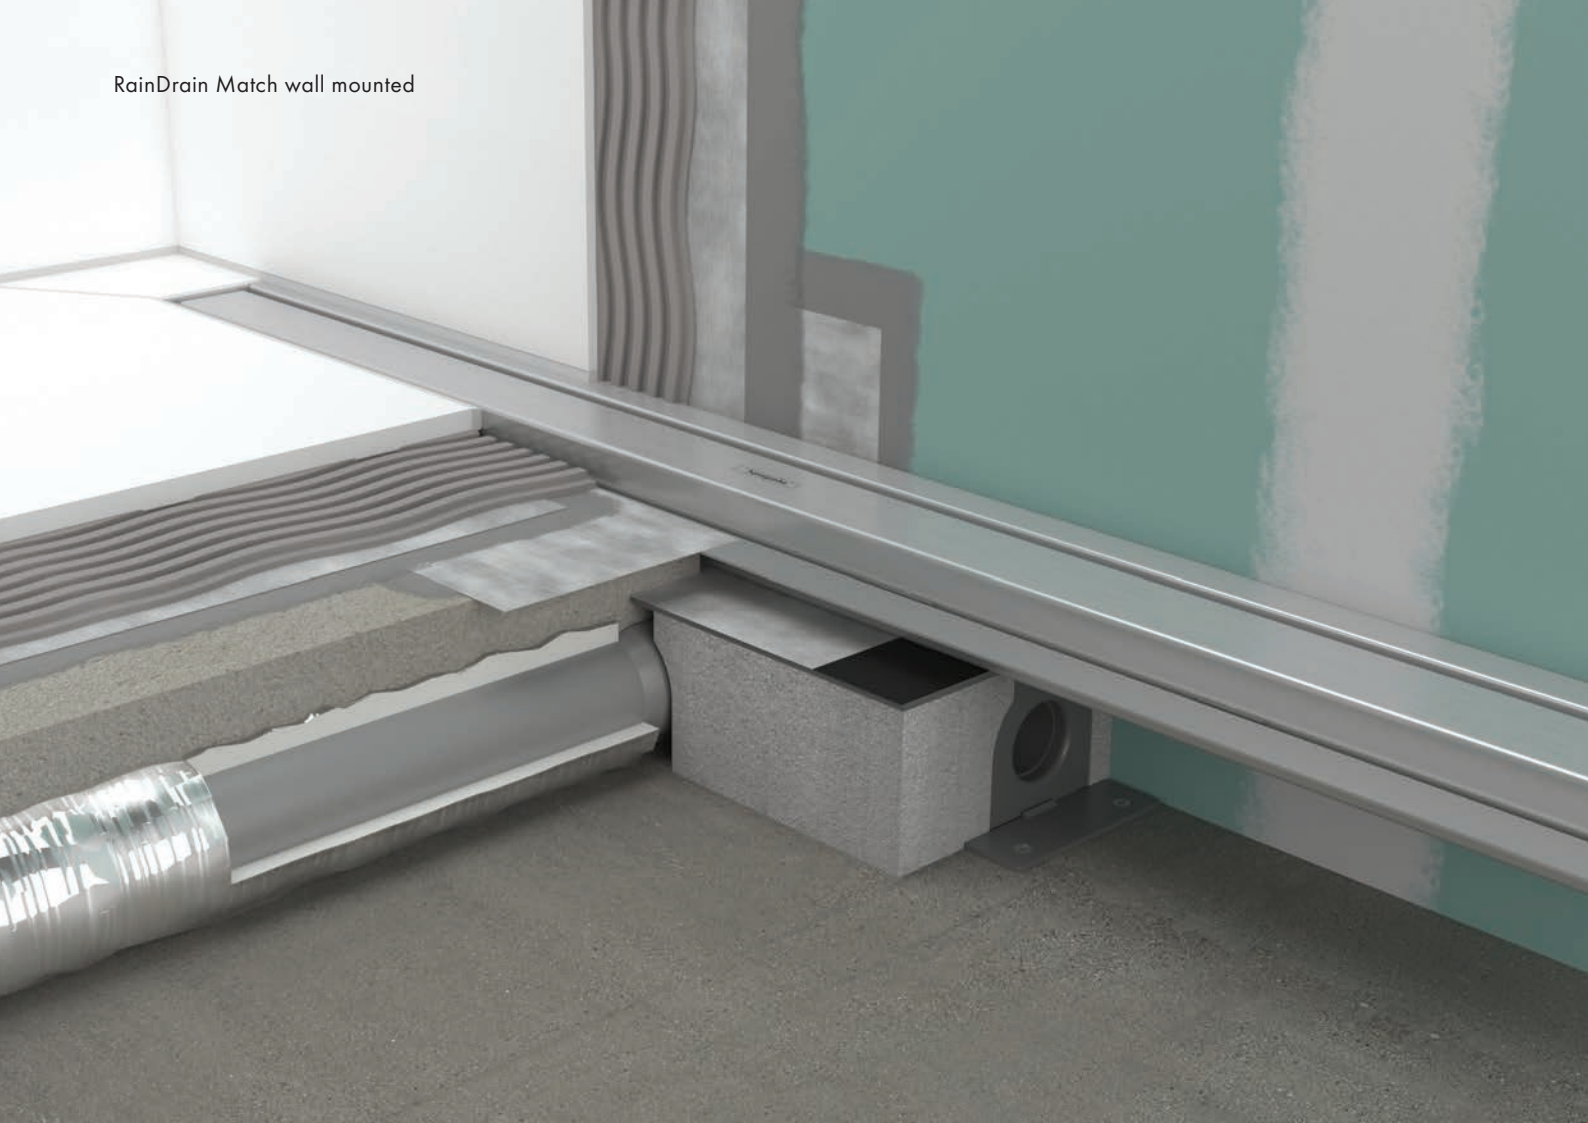

RainDrain Flex wall mounted

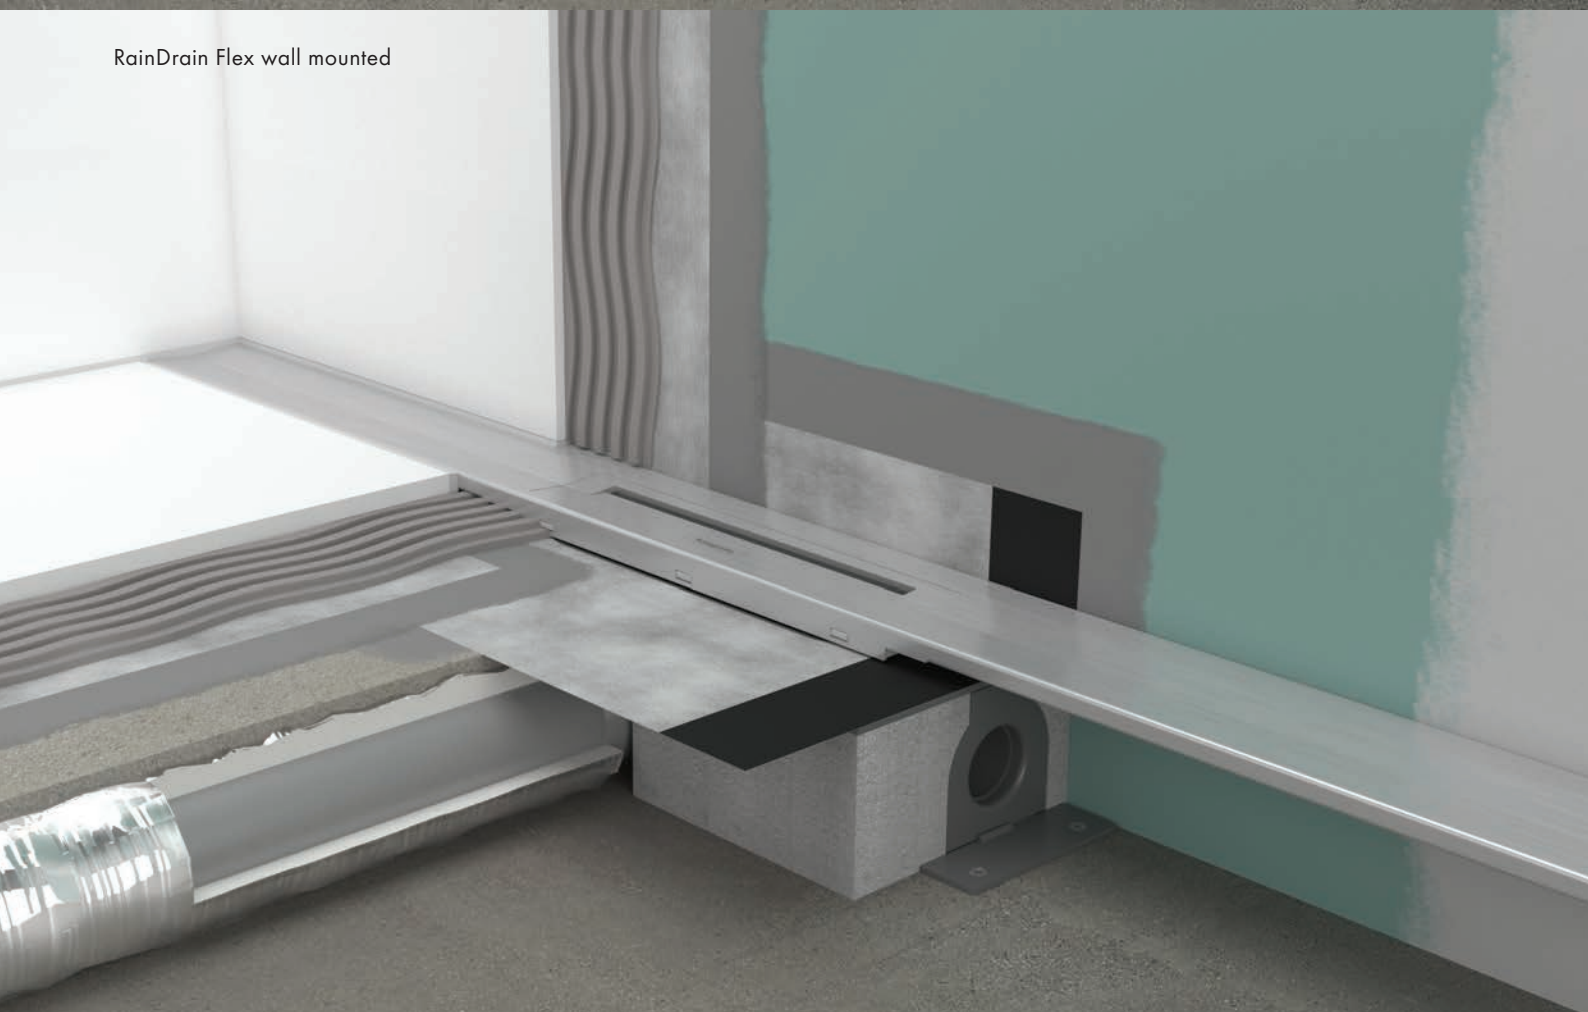

XtraStoris: storage space for your dream bathroom

XtraStoris complements the overall look of the shower place. This accessories range is all about high-quality materials and manufacturing processes. The wall housing niches are reliably protected against water damage thanks to the waterproof installation set and sealing membrane supplied.

XtraStoris Original: Wall niche with integrated frame up to 90 cm wide available in the colours Matt Black, Matt White and Stainless Steel Optic.

XtraStoris Minimalistic: Frameless wall niche available in various formats and finishes. This niche has a variable installation depth which means it can be installed flush with the tile or protruding as a design element.

XtraStoris Individual: The XtraStoris Individual body and frame finishes are to be combined individually. The design frames are available in Brushed Stainless Steel plus all hansgrohe FinishPlus surface finishes. The body is available in Matt Black, Matt White and Brushed Stainless Steel.

XtraStoris Rock: Tileable wall niche with push-open door. The installation depth can be adapted to the tile thickness. The storage space either merges almost seamlessly with the wall or is used as a design accent.

Time-saving and watertight installation






For brick-wall and
dry-wall construction

XtraStoris at a glance:

- Waterproof installation set that is safe and ensures comfortable showering in the long term.
- Simple, time-saving installation.
- Suitable for brick-wall and dry-wall construction.
- Easy-to-clean surface.
- Space-saving solution for design-conscious bathroom owners who appreciate optimum freedom of movement when showering.
- High-quality solution available in four versions, numerous surface finishes and dimensions.


XtraStoris Original

With integrated frame

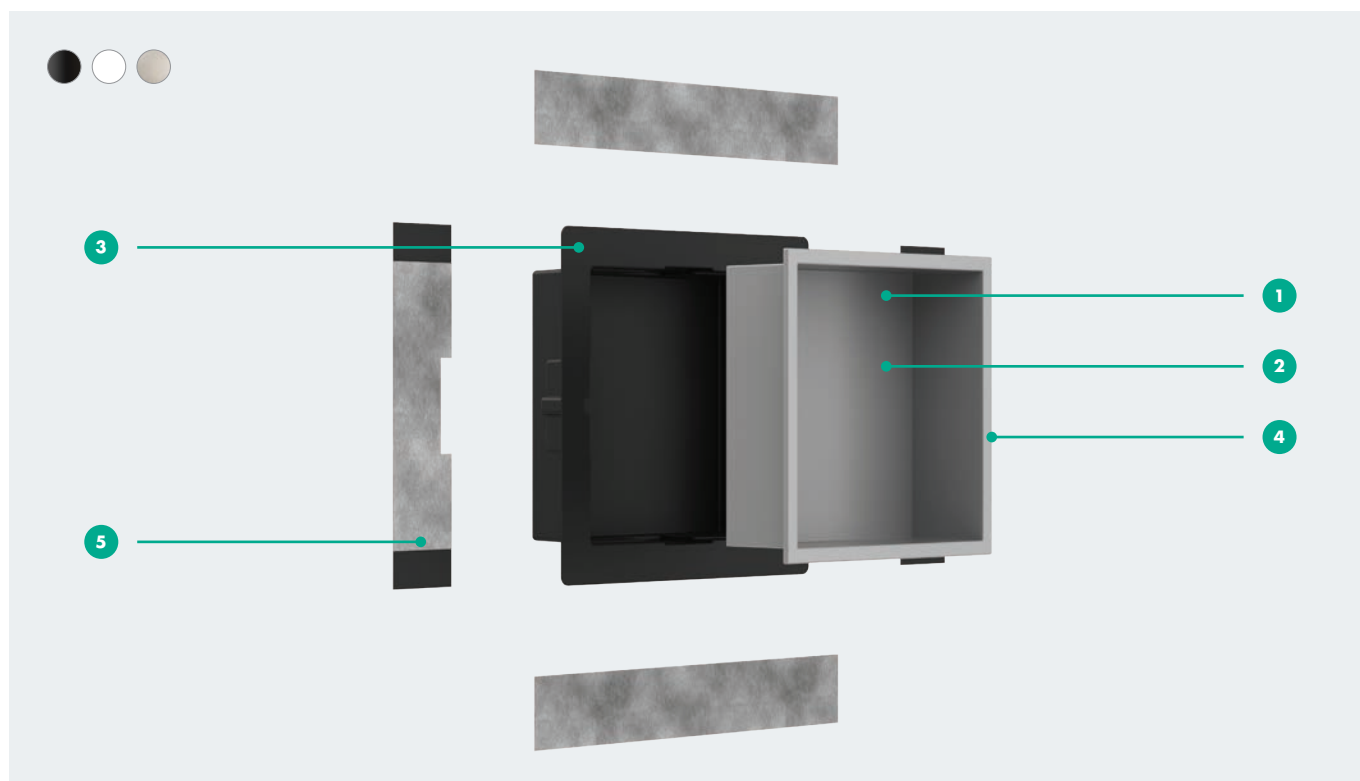


Features

- 1 Finish: Matt Black, Matt White, Stainless Steel Optic
- 2 Surface: the powder-coated stainless steel on the wall niche is easy to clean
- 3 Installation set: easy mounting installation element made of polystyrene (PS).
- 4 Integrated frame: seamless one-piece construction
- 5 Sealing membrane: straightforward sealing and protection from water damage (always included)

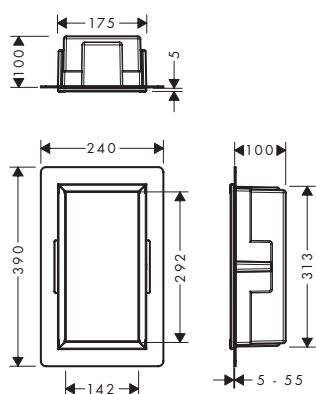


XtraStoris Original 300 x 150 x 100 mm

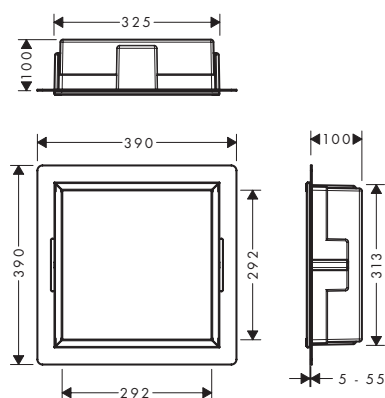

XtraStoris Original 300 x 300 x 100 mm



Simply scan the code and check out XtraStoris Original.

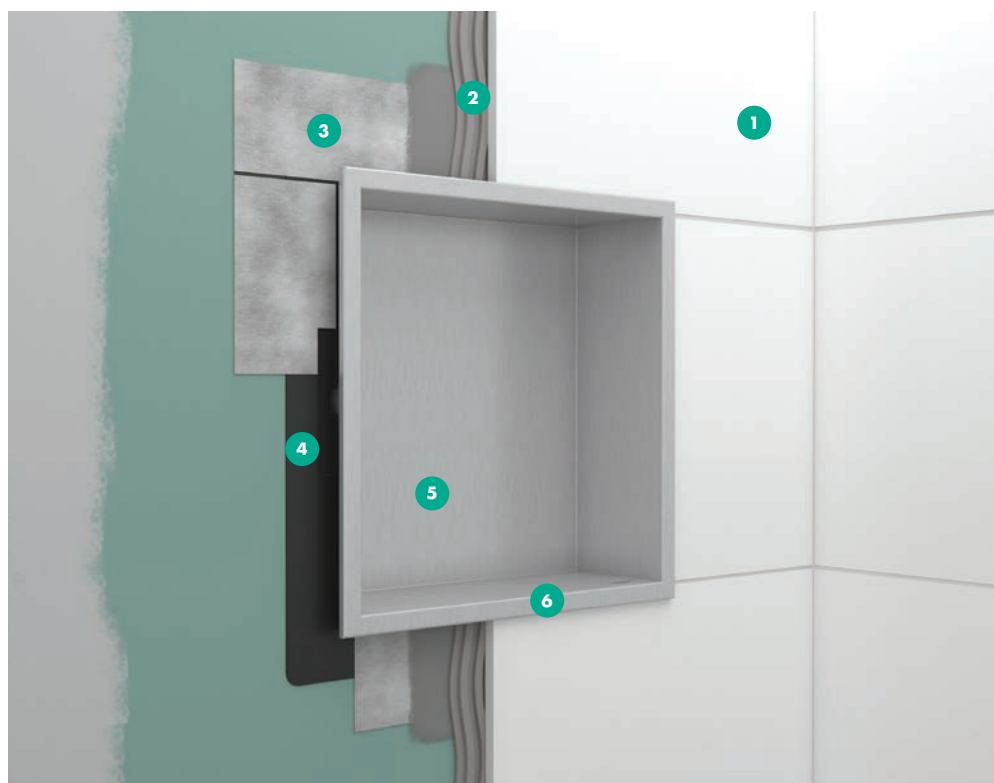

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Body stainless steel 304 (1.4301)
- 6 Frame

Specifications

Dimensions

300 x 150 x 100 mm
300 x 300 x 100 mm
300 x 600 x 100 mm
300 x 900 x 100 mm

Wall type


Brick-wall construction
Dry-wall construction

Installation depth


100 mm

Area of application

New build
Renovation

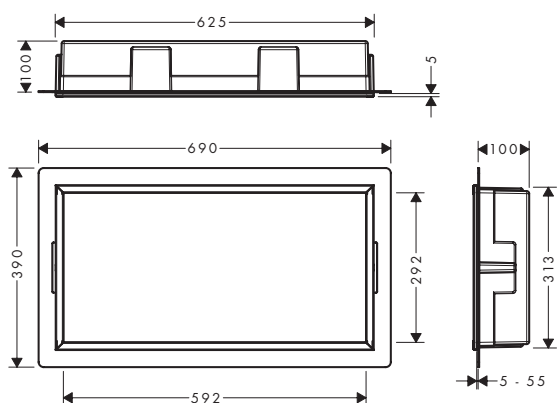


XtraStoris Original 300 x 600 x 100 mm

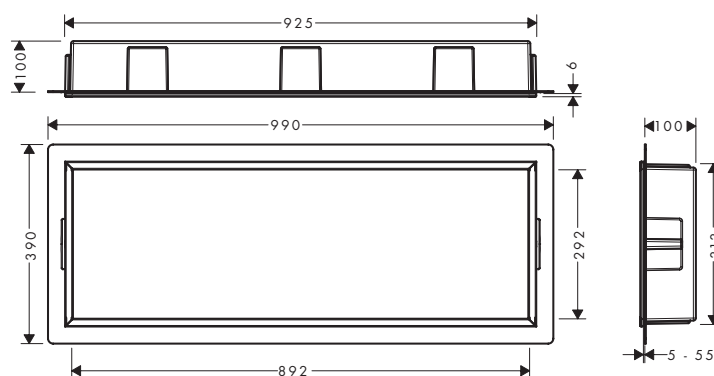

XtraStoris Original 300 x 900 x 100 mm


XtraStoris Minimalistic

Frameless design

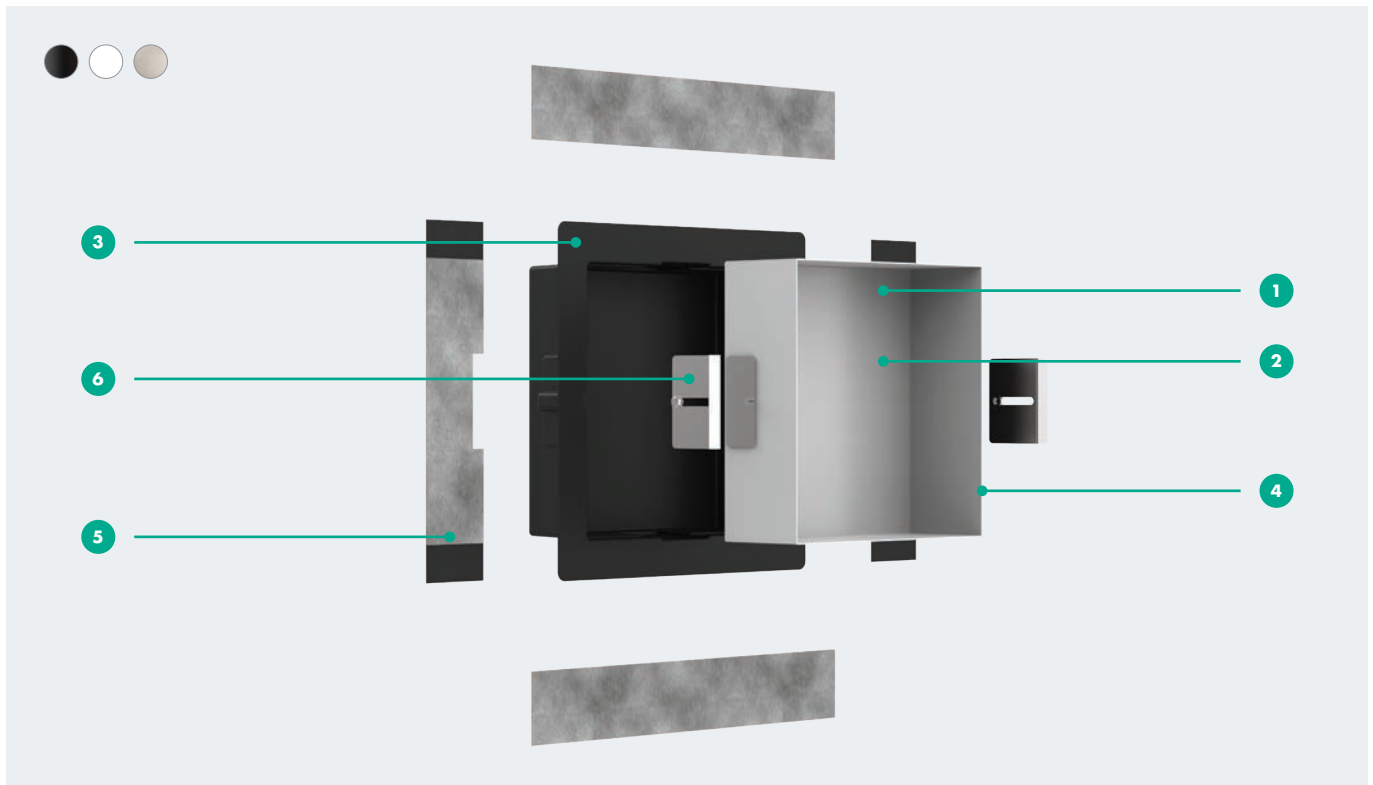


Features

- 1 Finish: Matt Black, Matt White, Stainless Steel Optic
- 2 Surface: the powder-coated stainless steel on the wall niche is easy to clean
- 3 Installation set: easy mounting installation element made of polystyrene (PS).
- 4 Frameless: minimalist design
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)
- 6 Mounting bracket: can be installed flush with the tile, or as a design element protruding up to 55 mm




XtraStoris Minimalistic 300 x 150 x 100 mm



XtraStoris Minimalistic 300 x 300 x 100 mm



Simply scan the code and check out XtraStoris Minimalistic.

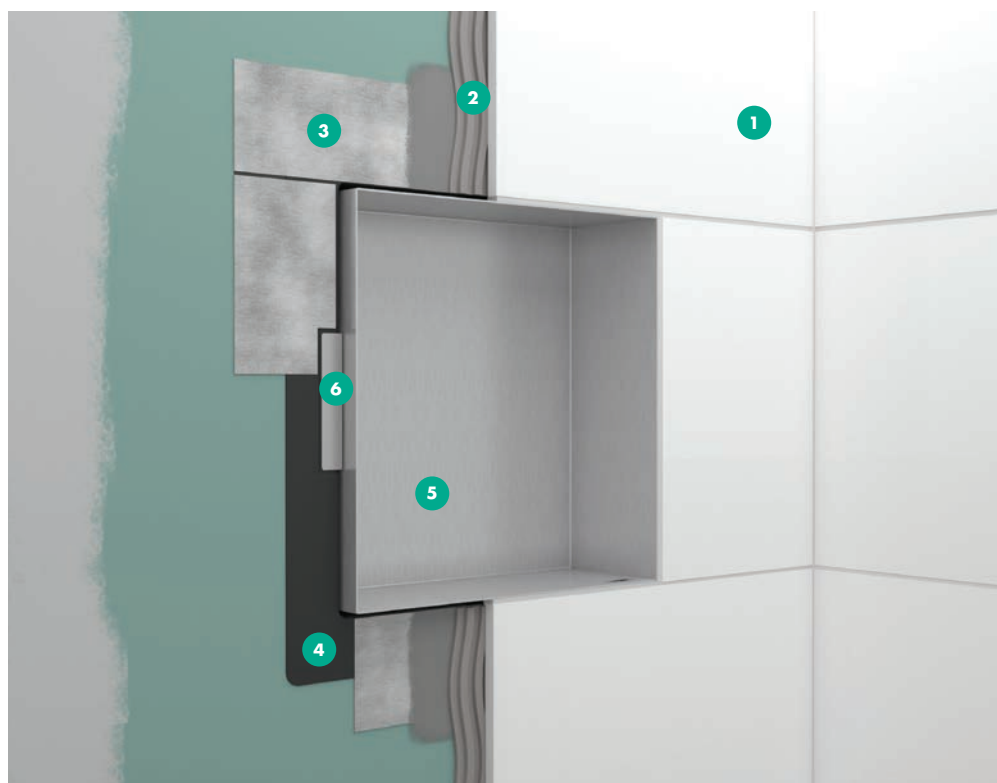

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Body stainless steel 304 (1.4301)
- 6 Mounting bracket

Specifications

Dimensions

300 x 150 x 100 mm
300 x 300 x 100 mm
300 x 150 x 140 mm
300 x 300 x 140 mm

Wall type

Brick-wall construction
Dry-wall construction

Area of application


New build
Renovation

Installation depth


100 mm
140 mm

Variable installation depth

protruding up to 55 mm




XtraStoris Minimalistic 300 x 150 x 140 mm



XtraStoris Minimalistic 300 x 300 x 140 mm

XtraStoris Individual

with design frame

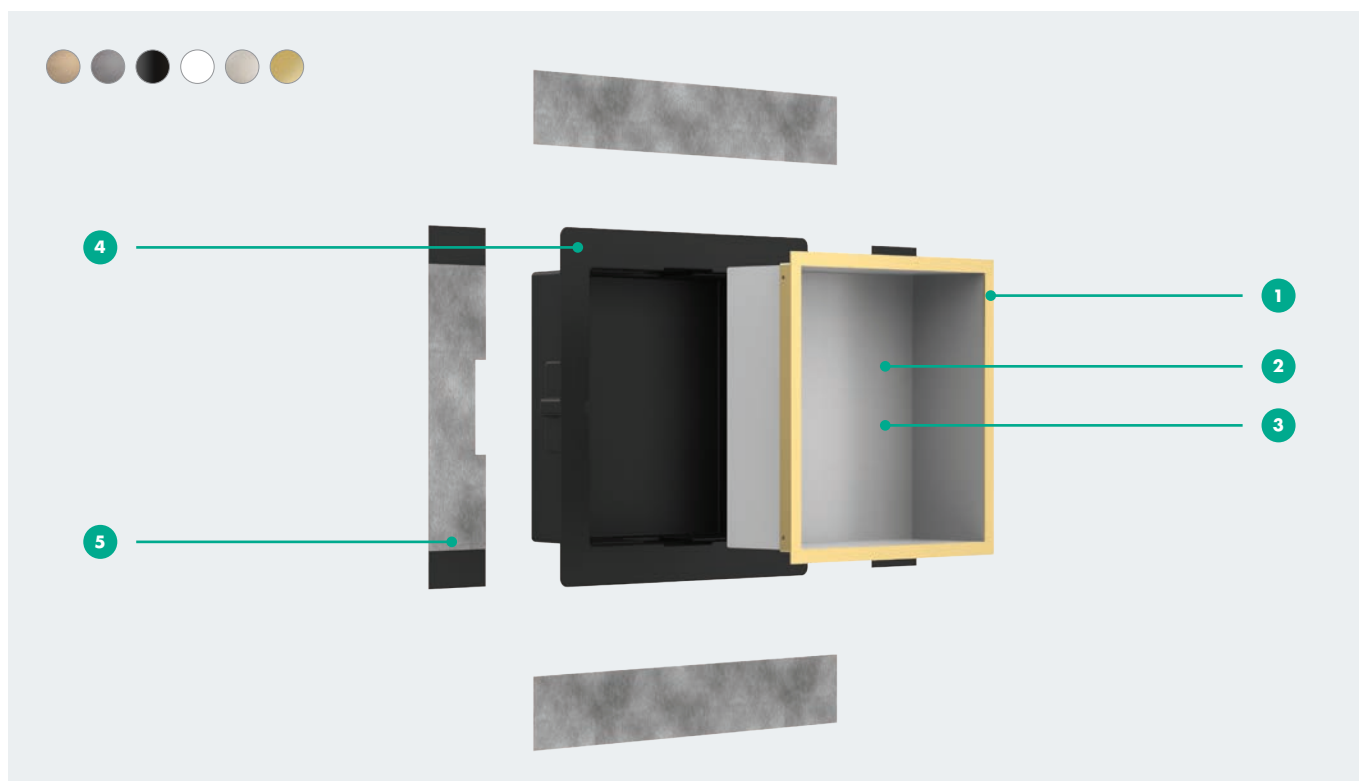


Features

- 1** Design frame finish: Brushed Bronze, Brushed Black Chrome, Matt Black, Matt White, Brushed Stainless Steel, Polished Gold Optic
- 2** Body finish: Matt black, Matt White, Brushed Stainless Steel
- 3** Surface: the powder-coated stainless steel on the wall niche is easy to clean
- 4** Installation set: easy mounting installation element made of polystyrene (PS).
- 5** Sealing membrane: straightforward sealing, protection from water damage (always included)



Simply scan the code and check out XtraStoris Individual.

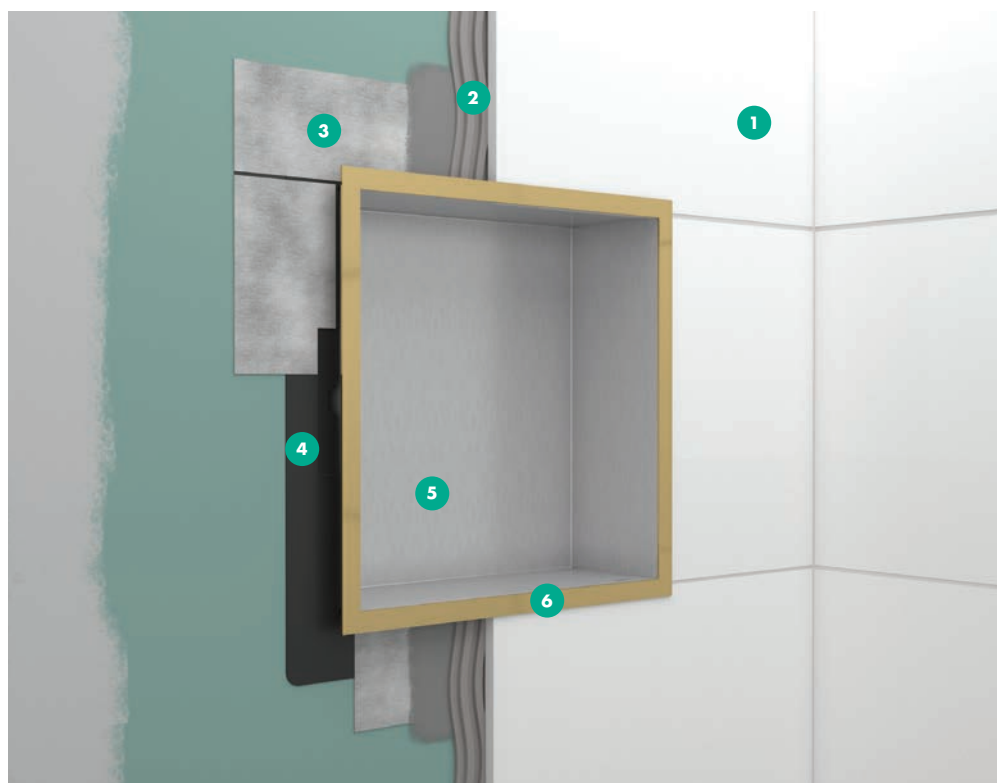

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Body stainless steel 304 (1.4301)
- 6 Frame

Specifications

Dimensions

300 x 150 x 100 mm
300 x 300 x 100 mm

Wall type


Brick-wall construction
Dry-wall construction

Installation depth


100 mm

Area of application

New build
Renovation




XtraStoris Individual 300 x 150 x 100 mm



XtraStoris Individual 300 x 300 x 100 mm


XtraStoris Rock

with tileable door

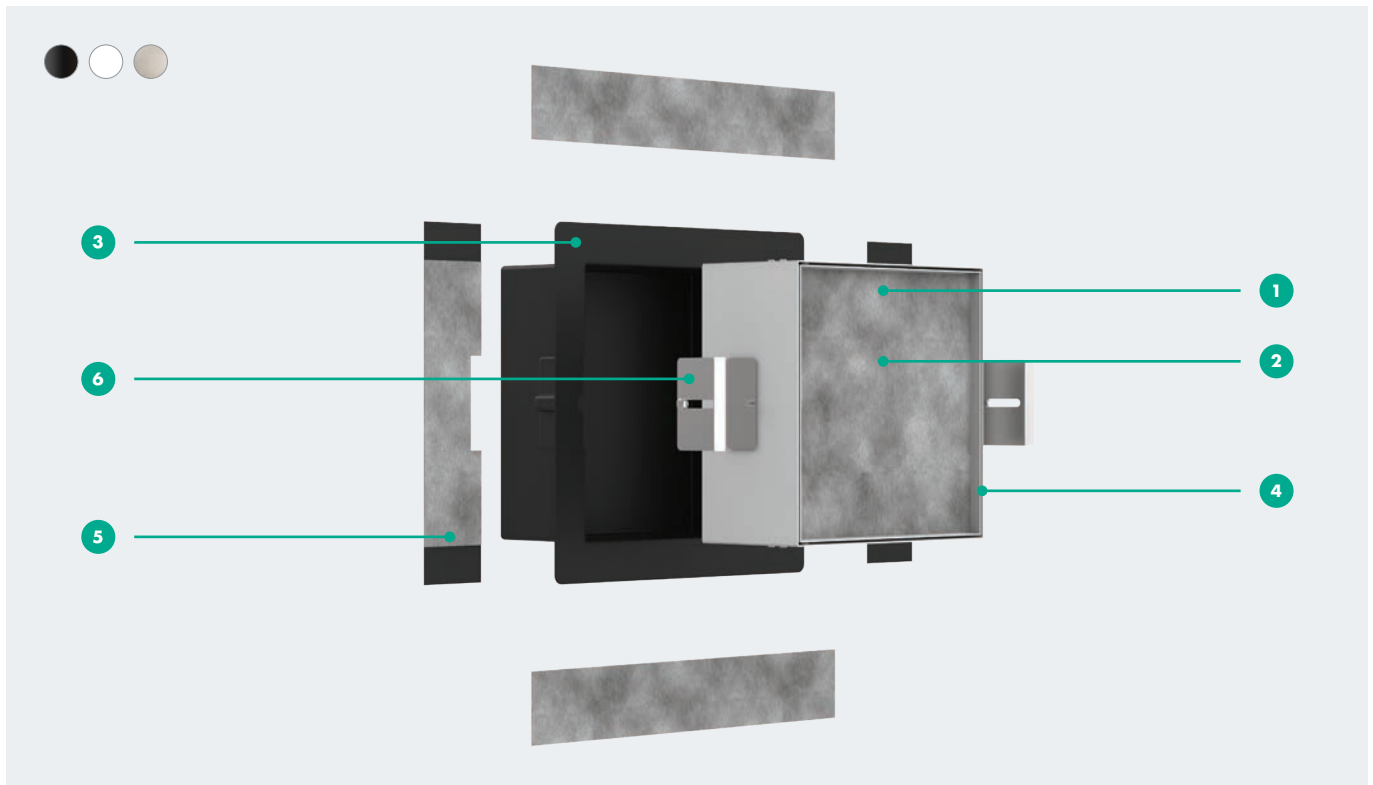


Features

- 1 Finish: Matt Black, Matt White, Stainless Steel Optic
- 2 Surface: the powder-coated stainless steel on the wall niche is easy to clean
- 3 Installation set: easy mounting installation element made of polystyrene (PS).
- 4 Tileable door: push-open technology
Tile thickness max. 12 mm
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)
- 6 Mounting bracket: can be installed flush with the tile, or as a design element protruding up to 55 mm




XtraStoris Rock 300 x 150 x 100 mm



XtraStoris Rock 300 x 300 x 100 mm



Simply scan the code and check out XtraStoris Rock.

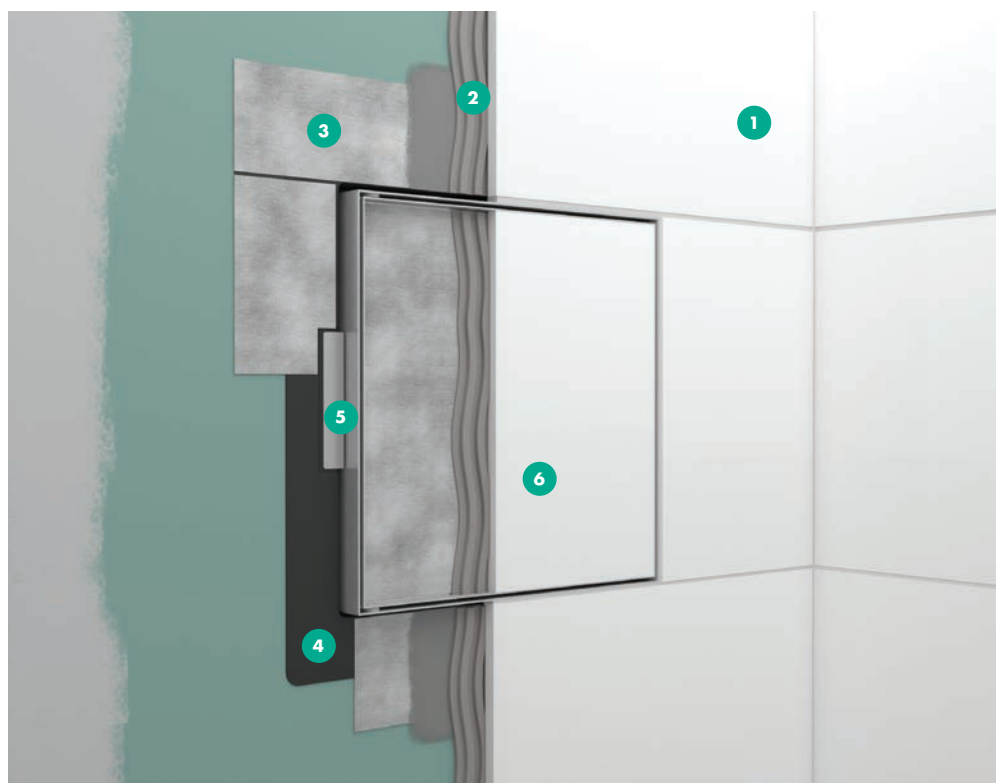

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Mounting bracket
- 6 Tileable door

Specifications

Dimensions

300 x 150 x 100 mm
300 x 300 x 100 mm
300 x 150 x 140 mm
300 x 300 x 140 mm

Wall type


Brick-wall construction
Dry-wall construction

Installation depth


100 mm

Area of application

New build
Renovation




XtraStoris Rock 300 x 150 x 140 mm



XtraStoris Rock 300 x 300 x 140 mm

RainDrain

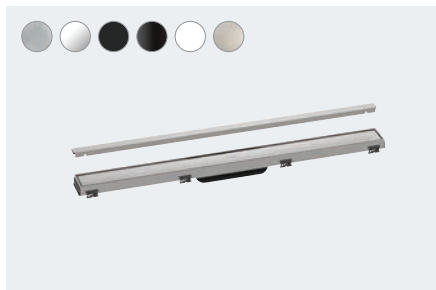

RainDrain Match

Finish set shower drain 600
with height adjustable frame
56036, -000, -450, -610, -670, -700, -800

Finish set shower drain 700
with height adjustable frame
56037, -000, -450, -610, -670, -700, -800
(not shown)

Finish set shower drain 800
with height adjustable frame
56038, -000, -450, -610, -670, -700, -800
(not shown)

Finish set shower drain 900
with height adjustable frame
56040, -000, -450, -610, -670, -700, -800
(not shown)

Finish set shower drain 1000
with height adjustable frame
56041, -000, -450, -610, -670, -700, -800
(not shown)

Finish set shower drain 1200
with height adjustable frame
56042, -000, -450, -610, -670, -700, -800
(not shown)



RainDrain Rock

Finish set shower drain 600 cut to size and tileable
56029, -000


Finish set shower drain 700 cut to size and tileable
56030, -000 (not shown)

Finish set shower drain 800 cut to size and tileable
56031, -000 (not shown)

Finish set shower drain 900 cut to size and tileable
56032, -000 (not shown)

Finish set shower drain 1000 cut to size and tileable
56033, -000 (not shown)

Finish set shower drain 1200 cut to size and tileable
56034, -000 (not shown)

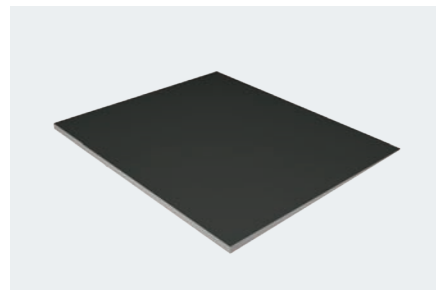

Installation accessories*

Easy Turn slope profile, left or right side
connection, 8 to 32 mm adjustable
07003348

Shower board 1000 x 1000 mm,
standard, height 6-22 mm
07003349

Shower board 1000 x 500 mm,
long extension, height 22-30 mm
07003350

Shower board 1000 x 350 mm,
Narrow Side Extension, height 22-6 mm
07003351

Shower board 1000 x 700mm,
broad side extension, height 22-6 mm
07003352

Shower board 1000 x 1000 mm,
2x correct gradient, height 22-6 mm
07003353

Pipe coupler to connect UK pipe to
European dimensions
07003354

*Only available in the United Kingdom



Complete set for flat installation

Complete set for flat installation -
600 for shower drains finish sets
56016180

Complete set for flat installation -
700 for shower drains finish sets
56017180 (not shown)

Complete set for flat installation -
800 for shower drains finish sets
56018180 (not shown)

Complete set for flat installation -
900 for shower drains finish sets
56019180 (not shown)

Complete set for flat installation -
1000 for shower drains finish sets
56020180 (not shown)

Complete set for flat installation -
1200 for shower drains finish sets
56021180 (not shown)



Complete set for standard installation

Complete set for standard installation -
600 for shower drains finish sets
56022180

Complete set for standard installation -
700 for shower drains finish sets
56023180 (not shown)

Complete set for standard installation -
800 for shower drains finish sets
56024180 (not shown)

Complete set for standard installation -
900 for shower drains finish sets
56025180 (not shown)

Complete set for standard installation -
1000 for shower drains finish sets
56026180 (not shown)

Complete set for standard installation -
1200 for shower drains finish sets
56027180 (not shown)




Waterproofing*

SEAL Set self-adhesive for bathrooms
with 5 m² floor surface
07003376

SEAL Set self-adhesive for bathrooms
with 7,5 m² floor surface
07003377

SEAL Set self-adhesive for bathrooms
with 10 m² floor surface
07003378

*Only available in the United Kingdom

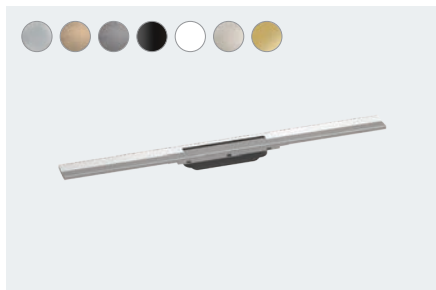

RainDrain Flex


Finish set shower drain 700 cuttable
56043, -000, -140, -340, -670, -700, -800, -990

Finish set shower drain 800 cuttable
56044, -000, -140, -340, -670, -700, -800, -990
(not shown)

Finish set shower drain 900 cuttable
56045, -000, -140, -340, -670, -700, -800, -990
(not shown)

Finish set shower drain 1000 cuttable
56046, -000, -140, -340, -670, -700, -800, -990
(not shown)

Finish set shower drain 1200 cuttable
56047, -000, -140, -340, -670, -700, -800, -990
(not shown)

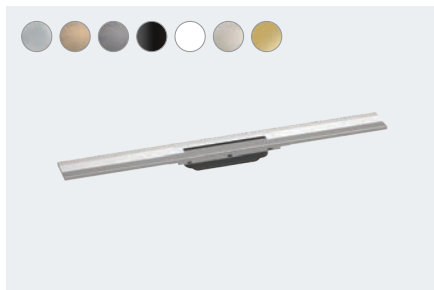

RainDrain Flex

Finish set shower drain 700 cuttable
for wall mounting
56050, -000, -140, -340, -670, -700, -800, -990

Finish set shower drain 800 cuttable
for wall mounting
56051, -000, -140, -340, -670, -700, -800, -990
(not shown)

Finish set shower drain 900 cuttable
for wall mounting
56052, -000, -140, -340, -670, -700, -800, -990
(not shown)

Finish set shower drain 1000 cuttable
for wall mounting
56053, -000, -140, -340, -670, -700, -800, -990
(not shown)

Finish set shower drain 1200 cuttable
for wall mounting
56054, -000, -140, -340, -670, -700, -800, -990
(not shown)



RainDrain Spot

Complete set 150/150 point drain and installation set
56055, -800

Complete set 150/150 point drain tileable rear cover
and installation set
56112, -800 (not shown)



uBox universal for flat installation

Base set for finish sets for flat installation
01000180



uBox universal for standard installation


Base set for finish sets for standard installation
01001180



uBox universal for vertical installation

Base set for finish sets for vertical installation
01002180

XtraStoris

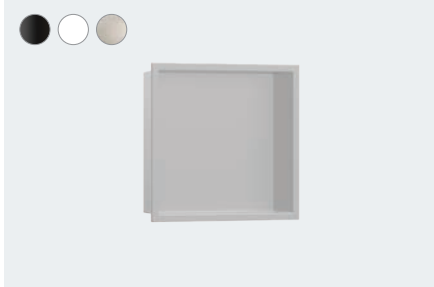


XtraStoris Original

Wall niche with frame 300/150/100
56057, -670, -700, -800

Wall niche with frame 300/300/100
56061, -670, -700, -800 (not shown)

Wall niche with frame 300/600/100
56064, -670, -700, -800 (not shown)

Wall niche with frame 300/900/100
56067, -670, -700, -800 (not shown)

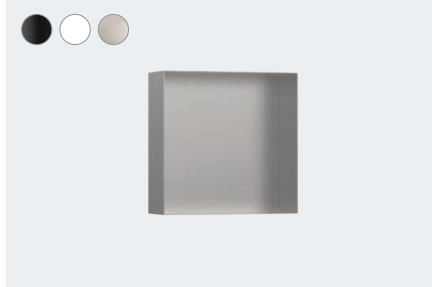


XtraStoris Minimalistic

Wall niche frameless 300/300/100
56073, -670, -700, -800

Wall niche frameless 300/300/140
56079, -670, -700, -800 (not shown)

Wall niche frameless 300/150/100
56070, -670, -700, -800 (not shown)

Wall niche frameless 300/150/140
56076, -670, -700, -800 (not shown)

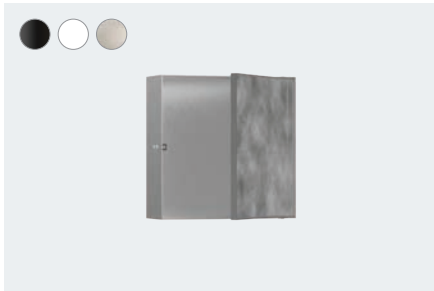


XtraStoris Rock

Wall niche with tileable door 300/300/100
56085, -670, -700, -800

Wall niche with tileable door 300/300/140
56091, -670, -700, -800 (not shown)

Wall niche with tileable door 300/150/100
56082, -670, -700, -800 (not shown)

Wall niche with tileable door 300/150/140
56088, -670, -700, -800 (not shown)

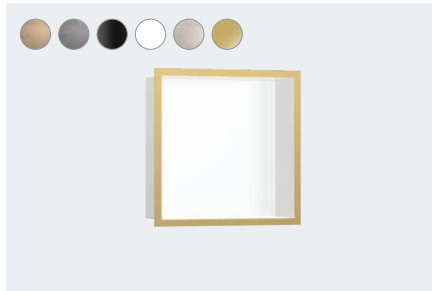

XtraStoris Individual

Wall niche Brushed Stainless Steel
with design frame 300/150/100
56094, -140, -340, -670, -700, -800, -990 (not shown)

Wall niche Brushed Stainless Steel
with design frame 300/300/100
56097, -140, -340, -670, -700, -800, -990 (not shown)

Wall niche Matt Black
with design frame 300/150/100
56095, -140, -340, -670, -700, -800, -990 (not shown)

Wall niche Matt Black
with design frame 300/300/100
56098, -140, -340, -670, -700, -800, -990 (not shown)

Wall niche Matt White
with design frame 300/150/100
56096, -140, -340, -670, -700, -800, -990 (not shown)

Wall niche Matt White
with design frame 300/300/100
56099, -140, -340, -670, -700, -800, -990 (not shown)



Headquarters

Hansgrohe SE · P.O. Box 1145 · D-77757 Schiltach
Tel. +49 7836 51-0 · Fax +49 7836 51-1300 · info@hansgrohe.com · pro.hansgrohe.com

Hansgrohe Baltics

Hansgrohe Eesti · Mäealuse 2/1 · 12618 Tallinn
Tel. +372 6826829 · info@hansgrohe.ee · hansgrohe.ee

Australia

Hansgrohe Pty Ltd · Unit 4/71 Victoria Crescent · Abbotsford · VIC 3067 · Australia
Tel. +61 03 8319 5753 · info@hansgrohe.com.au · hansgrohe.com.au

India

Hansgrohe India (Pvt.) Ltd. · Office No. 5 · 7th Floor · Phoenix Fountainhead Tower II
Nagar Road · Viman Nagar · Pune - 411 016 · Maharashtra · India
Tel. +91 20 6625 9500 · info@hansgrohe.in · pro.hansgrohe.com

Singapore

Hansgrohe Pte. Ltd. · 69 Mohamed Sultan Road · Singapore 239015
Tel. +65 6884 5060 · Fax +65 6884 5070 · info@hansgrohe.com.sg · hansgrohe.com.sg

United Kingdom

Hansgrohe · Units D1 · Sandown Park Trading Estate · Royal Mills · Esher · Surrey · KT10 8BL
Tel. +44 1372 472001 · Fax +44 1372 470670 · enquiries@hansgrohe.co.uk · hansgrohe.co.uk

Please note that we can only present a selection of our products in this brochure.
You can find our entire range at hansgrohe.co.uk



Find hansgrohe online and on social media.

