


EN Instructions for use / Assembly instructions

2

DE Gebrauchsanleitung / Montageanleitung

2




Tecturis S 80 CoolStart

73301XX3 / 73303XX9 / 73304009

Tecturis S 80

73380XX3



Tecturis S 110 CoolStart

73312XX3 / 73315XX9 / 73316009

Tecturis S 110

73381XX3



Safety Notes

- ⚠ Gloves should be worn during installation to prevent crushing and cutting injuries.
- ⚠ The product may only be used for bathing, hygienic and body cleaning purposes.
- ⚠ The hot and cold supplies must be of equal pressures.

Installation Instructions

- Prior to installation, inspect the product for transport damages. After it has been installed, no transport or surface damage will be honoured.
- The pipes and the fixture must be installed, flushed and tested as per the applicable standards.
- The plumbing codes applicable in the respective countries must be observed.

Technical Data

Operating pressure:	max. 1 MPa
Recommended operating pressure:	0,1 - 0,5 MPa
Test pressure:	1,6 MPa (1 MPa = 10 bar = 147 PSI)
Hot water temperature:	max. 60 °C
Thermal disinfection:	70 °C / 4 min
The product is exclusively designed for drinking water!	

Symbol description



Do not use silicone containing acetic acid!

Adjustment (see page 4)

To adjust the hot water limiter. Using a hot water limiter in combination with a continuous flow water heater is not recommended.



Dimensions (see page 6)

Flow diagram (see page 7)



Spare parts (see page 8)

XX = Colors
 00 = Chrome Plated
 14 = Brushed Bronze
 34 = Brushed Black Chrome
 67 = Matt Black
 70 = Matt White
 82 = Brushed Nickel



Cleaning (see page 5)



Operation (see page 5)

Hansgrohe recommends not to use as drinking water the first half liter of water drawn in the morning or after a prolonged period of non-use.

Assembly (see page 3)



Sicherheitshinweise

- ⚠ Bei der Montage müssen zur Vermeidung von Quetsch- und Schnittverletzungen Handschuhe getragen werden.
- ⚠ Das Produkt darf nur zu Bade-, Hygiene- und Körperreinigungszwecken eingesetzt werden.
- ⚠ Große Druckunterschiede zwischen den Kalt- und Warmwasseranschlüssen müssen ausgeglichen werden.

Montagehinweise

- Vor der Montage muss das Produkt auf Transportschäden untersucht werden. Nach dem Einbau werden keine Transport- oder Oberflächenschäden anerkannt.
- Die Leitungen und die Armatur müssen nach den gültigen Normen montiert, gespült und geprüft werden.
- Die in den Ländern jeweils gültigen Installationsrichtlinien sind einzuhalten.

Technische Daten

Betriebsdruck:	max. 1 MPa
Empfohlener Betriebsdruck:	0,1 - 0,5 MPa
Prüfdruck:	1,6 MPa (1 MPa = 10 bar = 147 PSI)
Heißwassertemperatur:	max. 60 °C
Thermische Desinfektion:	70 °C / 4 min
Das Produkt ist ausschließlich für Trinkwasser konzipiert!	

Symbolerklärung



Kein essigsäurehaltiges Silikon verwenden!



Justierung (siehe Seite 4)

Einstellen der Warmwasserbegrenzung. In Verbindung mit Durchlauferhitzern ist eine Warmwassersperre nicht zu empfehlen.



Maße (siehe Seite 6)

Durchflussdiagramm (siehe Seite 7)



Serviceteile (siehe Seite 8)

XX = Farbcodierung
 00 = Chrom
 14 = Brushed Bronze
 34 = Brushed Black Chrome
 67 = Mattschwarz
 70 = Mattweiß
 82 = Brushed Nickel



Reinigung (siehe Seite 5)










Bedienung (siehe Seite 5)

Hansgrohe empfiehlt, morgens oder nach längeren Stagnationszeiten den ersten halben Liter nicht als Trinkwasser zu verwenden.

Montage (siehe Seite 3)



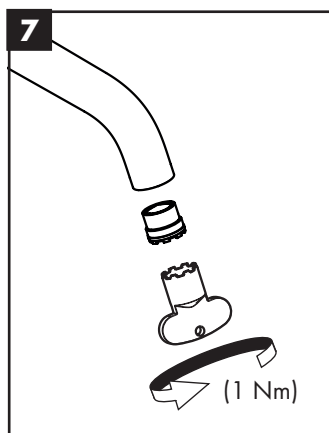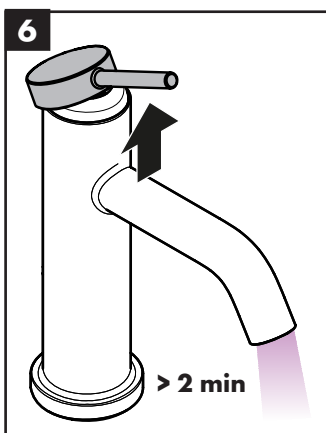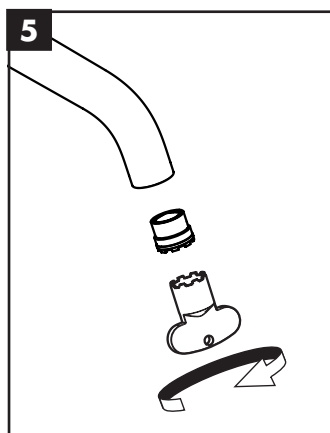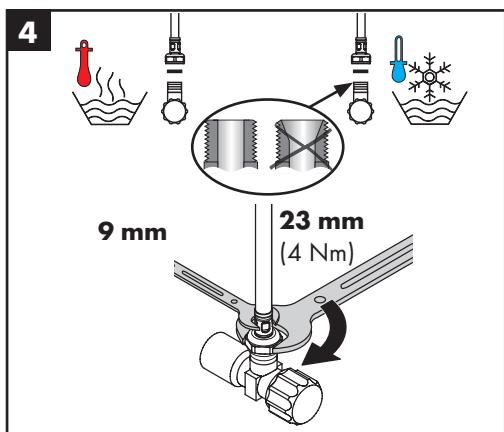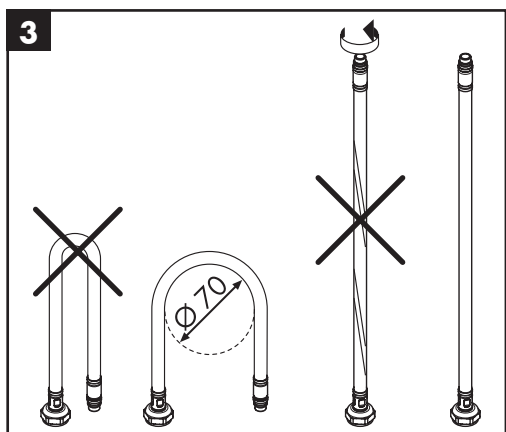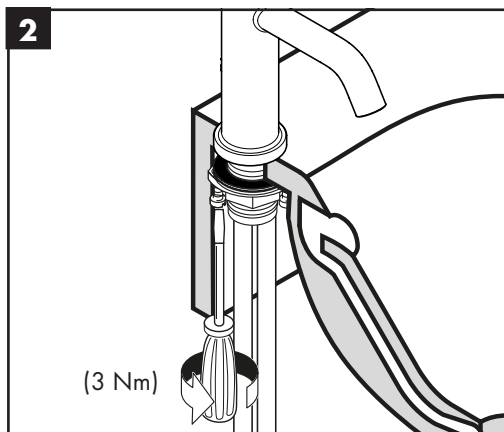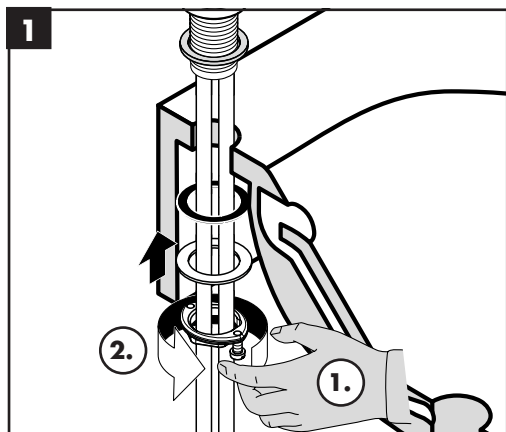









60 °C



10 °C




0,3 MPa

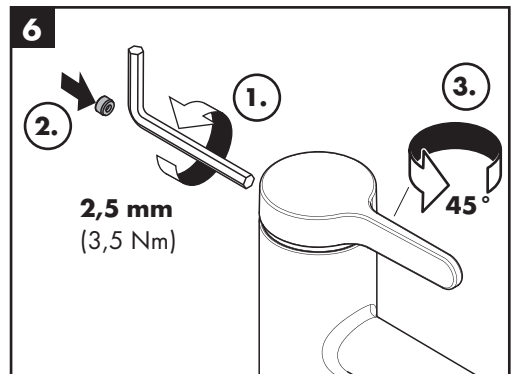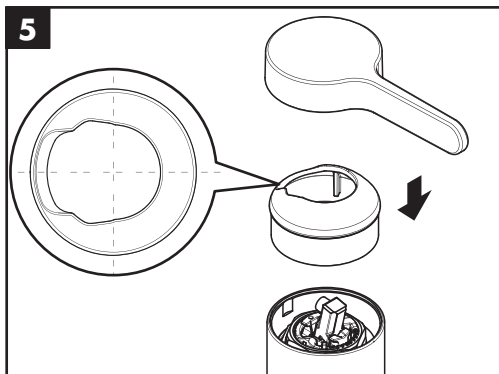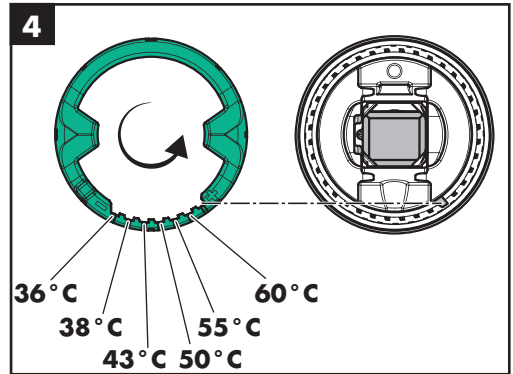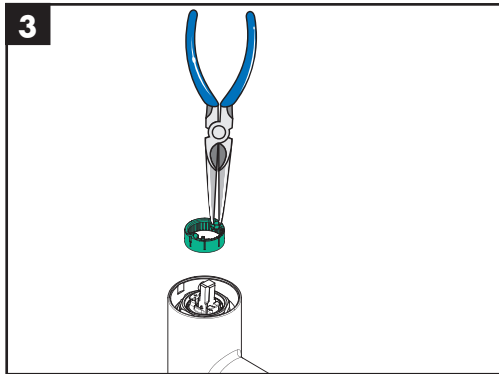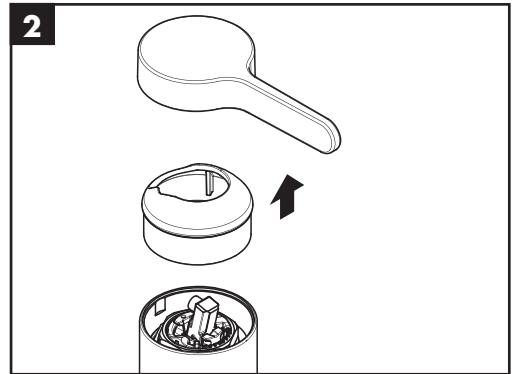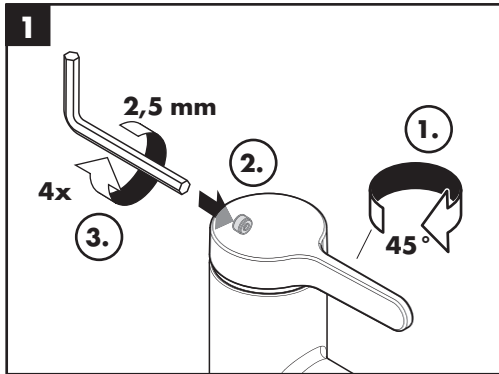



www.hansgrohe.com/cleaning-recommendation






*www.hansgrohe.com/warranty






EN Cleaning recommendation / Warranty / Contact





DE Reinigungsempfehlung / Garantie / Kontakt

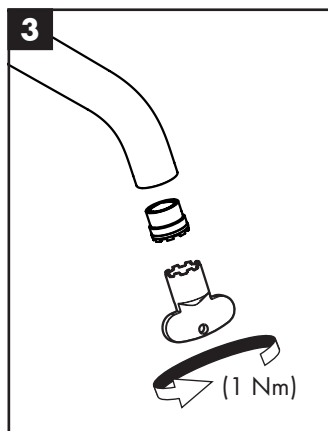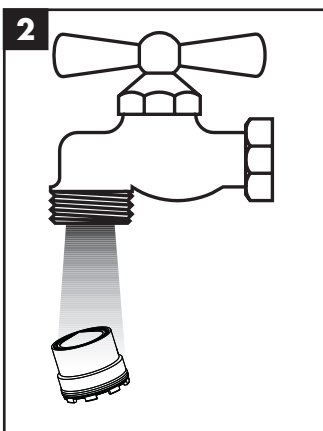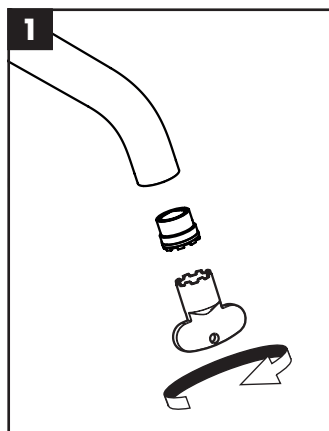

Tecturis S



Tecturis S CoolStart






Tecturis S 80 CoolStart

73301XX3 / 73303XX9 / 73304009

Tecturis S 80

73380XX3

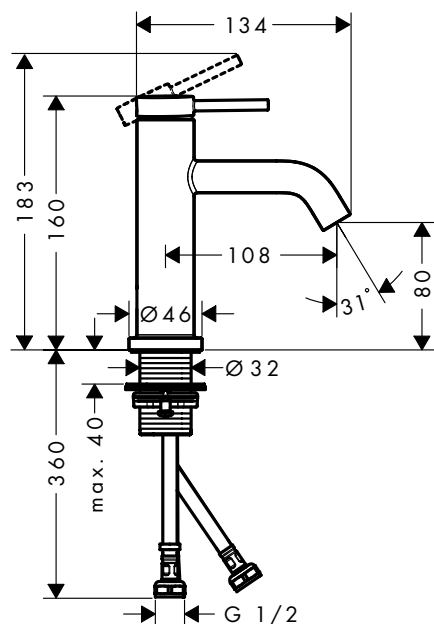


Tecturis S 110 CoolStart

73312XX3 / 73315XX9 / 73316009

Tecturis S 110

73381XX3

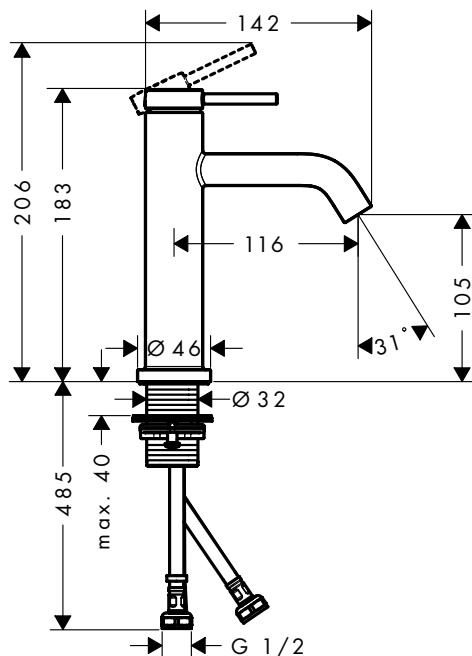


Tecturis S 80 CoolStart

73301XX3 / 73303XX9 / 73304009

Tecturis S 110 CoolStart

73312XX3 / 73315XX9 / 73316009





Tecturis S 80

73380XX0

Tecturis S 110

73381XX0





Tecturis S 80 CoolStart

73301XX3

Tecturis S 80


73380XX3

Tecturis S 110 CoolStart

73312XX3

Tecturis S 110

73381XX3

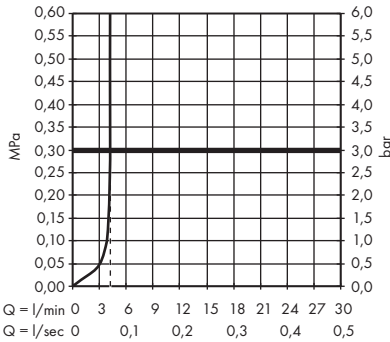


Tecturis S 80 CoolStart (2 tick)

73303XX9

Tecturis S 110 CoolStart (2 tick)

73315XX9

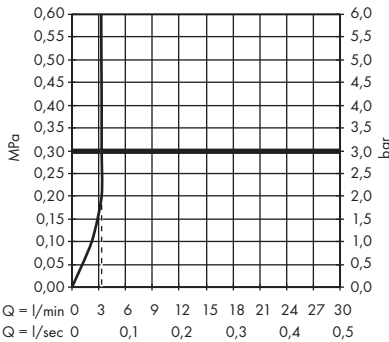


Tecturis S 80 CoolStart (3 tick)

73304009

Tecturis S 110 CoolStart (3 tick)

73316009

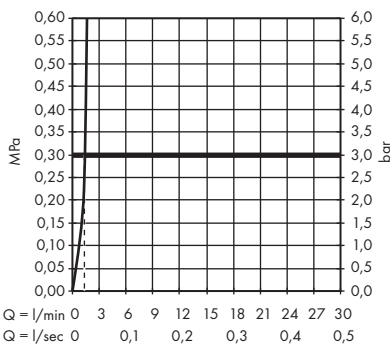



Tecturis S 80 CoolStart

73301XX3 / 73303XX9 / 73304009

Tecturis S 80

73380XX3

Tecturis S 110 CoolStart


73312XX3 / 73315XX9 / 73316009

Tecturis S 110

73381XX3

● 93735460 (Grey)

● 93735610 (Black)



93020000
(450 mm)
92482000
(600 mm)

