

hansgrohe

EN Assembly instructions
ZH 组装说明



MitaPura S 305
22431009



MitaPura Original S 305
22466009

BEFORE YOU BEGIN

- Please read these instructions carefully to familiarize yourself with the required tools, materials, and installation sequences. Follow the sections that pertain to your particular installation. This will help you avoid costly mistakes. In addition to proper installation, read all operating and safety instructions.
- All information in these instructions is based upon the latest product information available at the time of publication. Hansgrohe reserves the right to make changes in product characteristics, packaging, or availability at any time without notice.
- These instructions contain important care, cleaning, and warranty information - please leave instructions for the consumer.

安装之前

- 请小心详阅本指引。以便熟悉所需工具、材料及安装程序。请遵照适用的章节来安装你的坐便器，以避免由于安装不当而导致不必要的损失。除了有关正确的安装方法之外，还务请详阅所有操作及安全指引。
- 本指引所载之一切资料，均以印刷时所有之最新产品情况为基础，我司保留权利随时更改产品特性、包装或供应情况，恕不另行通知。
- 本指引也包含了有关护理、清洁及保养等重要资料 - 请交予用户保存。

ORDERING INFORMATION

MitaPura S

22431009

MitaPura S Floorstanding WC one piece with vertical outlet 305 rimless------

MitaPura S WC seat and cover sandwich and removable with soft-close------

MitaPura Original S

22466009

MitaPura S Floorstanding WC one piece with vertical outlet 305 rimless------

MitaPura S WC seat and cover sandwich and removable with soft-close------

定购信息

MitaPura S

22431009

谧境S连体坐便器(305mm坑距)；

配MitaPura S 加长型明式坐便器缓降盖板；

MitaPura Original S

22466009

谧境S连体坐便器(305mm坑距)；

配加长型暗式坐便器缓降盖板；

MitaPura S

22431009

用水量说明：
小档3.0L，大档4.5L，平均用水量 3.5L 为产品名义用水量，计算方法：两次小档加一次大档用水量总和除以3。

Water Consumption:
Small flushing: 3.0L, Big flushing: 4.5L, The nominal water consumption is 3.5L, it is calculated by the sum of water consumption of 2 small flushing and 1 big flush divided by 3.

MitaPura Original S


22466009

用水量说明：
小档3.0L，大档4.5L，平均用水量 3.5L 为产品名义用水量，计算方法：两次小档加一次大档用水量总和除以3。


Water Consumption:
Small flushing: 3.0L, Big flushing: 4.5L, The nominal water consumption is 3.5L, it is calculated by the sum of water consumption of 2 small flushing and 1 big flush divided by 3.

DIMENSION 尺寸

MitaPura S 305
22431009

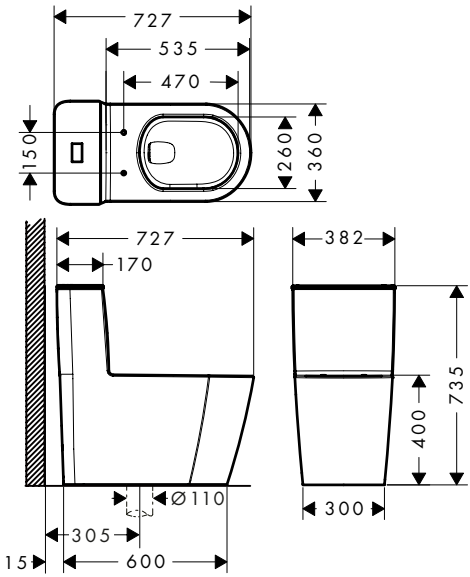

MitaPura Original S 305
22466009

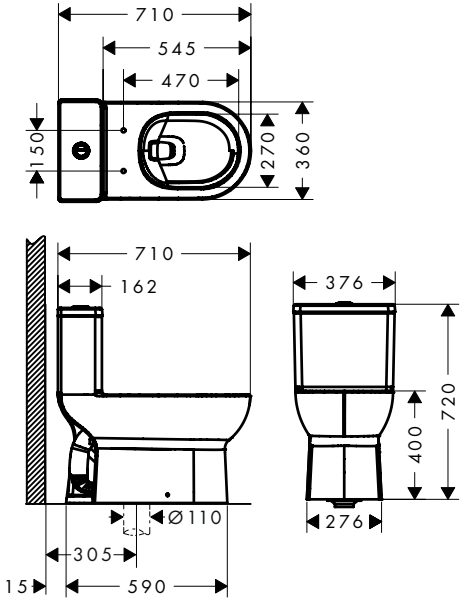

The size is for refernce only,please check the actual size before installation.
此尺寸仅供参考，安装前请仔细测量实际产品。

TOOLS AND MATERIALS REQUIRED (Not supplied)

- Metal file (file cut)
- Tape measure
- Tubing cutter
- Level
- Hacksaw
- Putty knife
- Screwdriver

所需工具及材料（不随货供应）


- 锉刀
- 卷尺
- 切管刀
- 水平尺
- 钢锯
- 涂油灰刀
- 螺丝刀

NOTICE: If the existing toilet does not have a supply shut-off valve below the tank, install one before installing the new toilet.

注意：如果现有坐便器的水箱下方没有角阀，须在安装新坐便器前装妥角阀。

INSTALLATION 安装说明


1. The center of supply valve keeps a distance of 200mm from the floor; Above the finished floor line, and 225mm to the Left of the closet flange centerline;
角阀中心距地200mm左右，水平方向向上，在左边，离法兰中心线225mm左右。
注：安装角阀之前务必试水，已确保管道的畅通。




2. If replacing a toilet, remove the old sealing flange.
如需拆除现有坐便器，请先刮除旧的蜡环。




3. Before your install
Use a pencil to trace out the position of the installation hole. Drill holes.
安装之前
将坐便器的排污孔对准地面的排污孔，调整好坐便器的位置，用铅笔在安装孔的地方做上标记，移开马桶，根据标记钻孔。



4. Install the sealing flange.
将法兰套在缸体底部。



5. Apply weight evenly.
Do not move after placement!
Sealing flange may be broken!
均匀的将坐便器下压。
放置后请勿移动！
否则会破坏防水层！




NOTE: Do not lift or rock the toilet when toilet is placed in position, otherwise, it lead to leakage due to flange wearing. Sealing flange must be replaced if it is damaged.

注意：坐便器放好后，不可再提起晃动，否则会损坏密封圈的防水效果，造成漏水。
如果密封法兰损坏，必须更换。

6. Install the Toilet
Install the bolts into the bracket and tighten evenly.
Do not overtighten!

如图所示，使用螺栓、垫圈和螺母将坐便器固定到地面上。
不要拧的太紧



7. Connect supply and turn on the water.

连接供水管，打开水源。




8. Flush several times and check for leaks.

冲水数次，检查进水管是否漏水。



9. Install the seat. Use the supplied seat bolts and washers. Periodically check for leaks for several days following the installation.
安装盖板。使用附带的盖板螺栓和垫圈。安装后定期检查漏水情况。



IMPORTANT CONSUMER INFORMATION 用户须知

CONSUMER RESPONSIBILITIES

If you live in a hard water area, make certain that the holes in the toilet rim are kept clean to ensure proper bowl flushing. Toilet bowl cleaners should be used at least once a week. Use a long-handled brush to clean the rim holes, and to clean as far into the trap as possible to prevent mineral deposits from forming.

Most toilet bowl cleaners are not harmful to the vitreous china surface of the toilet bowl. Please follow the bowl cleaner manufacturer's instructions carefully.

Do not use abrasive cleaners or solvents.

WARNING: Risk of property or product damage. Do not use in-tank cleaners. Products containing chlorine (calcium hypochlorite) can seriously damage fittings in the tank. This damage can cause leakage and property damage.

Hansgrohe shall not be responsible or liable for any damage to these tank fittings caused by the use of cleaners containing chlorine (calcium hypochlorite).

CAUTION: Don't use any cement while installing the toilet. Heat expansion of the toilet may damage the feet of the toilet. Hansgrohe will not be responsible for any damage because of using cement.

Precautions for use（Attentions）

1, Please don't rush the toilet with newsprints, paper diapers, sanitary napkins and other items easy to plug.
2, Please don't strike the ceramics to prevent damage to water leakage.
3, Please don't use it below 0℃

用户责任

如果你居住地方的水质是硬性，你必须保持冲水孔清洁，令坐便器冲水正常。每星期应最少使用坐便器清洁剂清洁一次，用长把手的刷子清洁冲水孔，并尽量伸入排污管洗刷，防止矿物质积聚。

大多数马桶清洁剂对坐便器表面是无害的。请认真遵循马桶清洁剂制造商的指示来操作。

请勿使用腐蚀性清洁剂或溶剂。

警告：提防楼宇受损或损坏产品。请勿使用水箱内用清洁剂。含氯（次氯酸钙）的清洁剂会严重破坏水箱配件，从而引起渗漏，或对楼宇结构造成损坏。

我司对此类因使用氯(次氯酸钙)而引致的水箱装置损毁，概不负责。

警告：在安装本坐便器时切勿使用任何水泥。因为水泥的热膨胀可能使坐便器的脚部挤破或损坏。我司对所有因为水泥安装而引起的坐便器破裂恕不负责。

使用注意事项


1, 请不要向便器内冲入新闻纸、纸尿垫、妇用卫生巾等容易堵塞的物品。

2, 请不要用重力撞击陶瓷，以防止破损漏水。

3, 不要在0℃以下环境中使用。

MitaPura 谧境

SERVICE PARTS PAGE
维修零件图
1PC TOILET
连体坐便器
S-TRAP 305mm 22431009

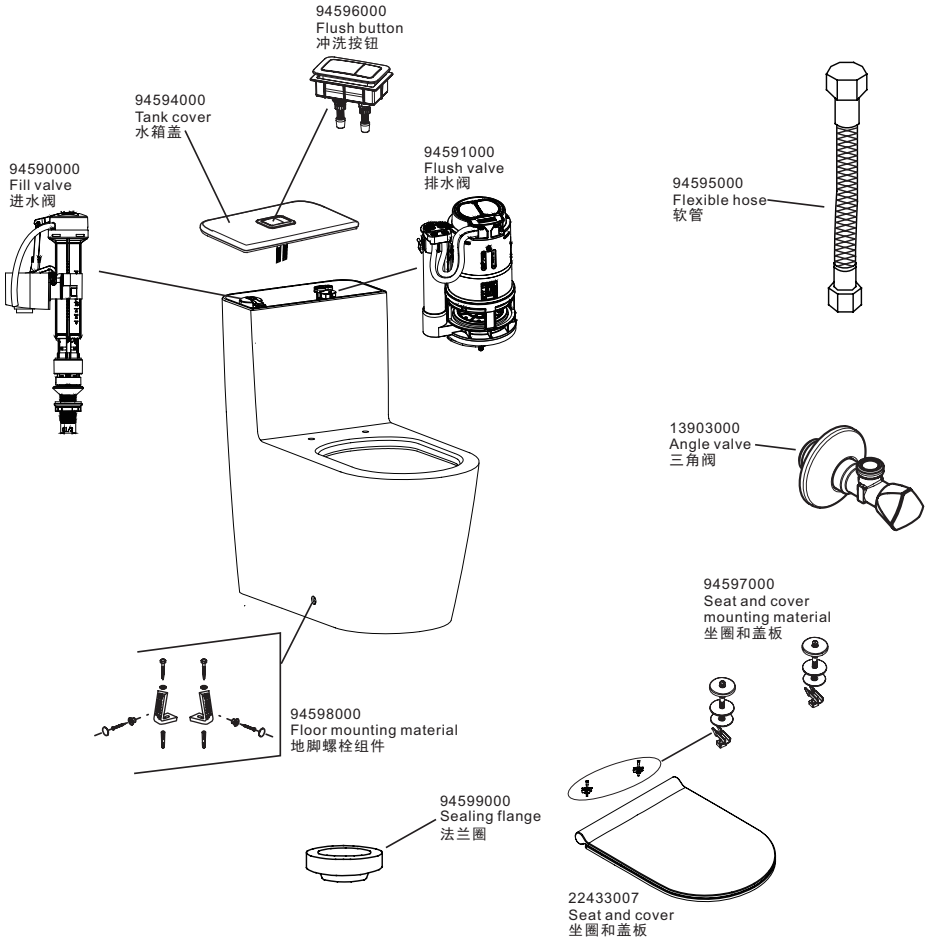


Please refer to service parts page packed with seat for detailed seat service parts.

盖板的维修零件请详见盖板的维修零件图。

MitaPura 谧境

SERVICE PARTS PAGE
维修零件图
1PC TOILET
连体坐便器
S-TRAP 305mm 22466009

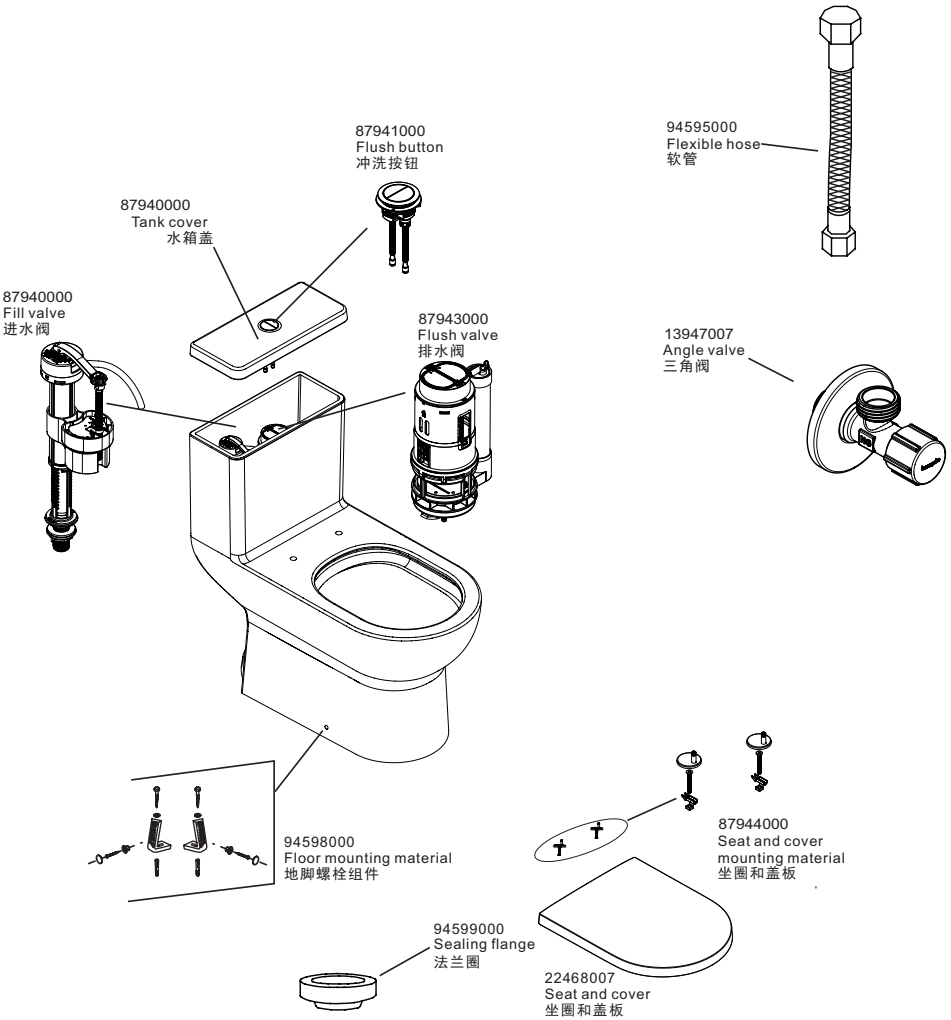

Please refer to service parts page packed with seat for detailed seat service parts.

盖板的维修零件请详见盖板的维修零件图。

Warranty Information

Hansgrohe offers a voluntary five-year manufacturer's warranty (exclude electronic parts) for:

- iframe concealed cistern
- WC Floor standing toilet
- Wall Hung WC toilet

which covers material, manufacturing, and design defects for Trade channel. All electronic parts are subjected to 2 year manufacturer's warranty. Project channel warranty will depends on defect liability period agreement as stated in the LOA agreement of the development.

Warranty Details

- Duration: The manufacturer's warranty is five years from the date of purchase for the first end consumer for private, residential use. All electronic parts are subjected to 2 year manufacturer's warranty. Above warranty apply to Trade channel.
- Coverage: The warranty covers defects in material, manufacturing, and design. Hansgrohe, at its discretion, will replace the defective product or part, or, in limited cases, refund the purchase price. The company is not responsible for labor charges, removal or installation costs, or other incidental/consequential costs.
- Exclusions: The warranty does not cover normal wear and tear, improper installation, abuse, neglect, use of abrasive cleaning agents, or damage from external factors.
- Transferability: The warranty is non-transferable and applies only to the original first end customer who purchased the product from Hansgrohe or an authorized dealer.

Making a Claim

To make a warranty claim, you must provide a written notification to Hansgrohe or the authorized dealer from whom the product was purchased.

- Required Documentation: You will need to provide proof of purchase, such as a sales receipt, that clearly shows the date and place of purchase, the store name, and the product designation/article number.
- Initial Defects: If cracks or surface defects are noticed upon receipt of the product, you must report them to Hansgrohe within 7 days of the delivery date with supporting documentation (invoices and images).
- Warranty claim: Always retain your original purchase receipt as it is essential for demonstrating that the warranty period has not expired when making a claim.
- Contact: The written notification should include a detailed description of the defect, your name, and address to technicalservice@hansgrohe.com.sg or through contact form at www.hansgrohe.com.sg