

**AXOR**

**Singapore  
Product Catalogue**

**AXOR assortment bath and kitchen  
Effective 1 January 2022**



SINGAPORE PRODUCT CATALOGUE 2022  
AXOR ASSORTMENT BATH AND KITCHEN  
EFFECTIVE 1 JANUARY 2022

# Contents

Errors and omissions excepted.

This Product Catalogue renders all preceding ones void. Measurements within scale drawings are in mm.

All products subject to availability. Availability may be temporarily affected by material shortages, supply chain disruption or other force majeure events. Please contact us for details.

The following general terms and conditions shall apply:  
<https://www.hansgrohe.com.sg/terms-of-conditions>



For us, rooms are more than spaces in a home. They are sources of inspiration that transform everyday actions into conscious rituals. The objects that are used reflect not only the taste, but also the personality, of their inhabitants.

# From personalities –

Our iconic objects for luxurious bathrooms and kitchens are created in collaboration with some of the world's leading designers, whose ideas challenge our perceptual habits and enhance our everyday life. They live individuality and understand design as an expression of personality.

# for personalities

Bathrooms and kitchens are among our most intimate living spaces. We often use them simply to take care of ourselves. Water, an element we use to accomplish this, is a precious resource. Through outstanding design, we give it a form that clearly recognizes and expresses its value.

FROM PERSONALITIES - FOR PERSONALITIES

## The AXOR success story

For almost 30 years, AXOR has been helping architects, interior designers and discerning customers to express their personality.

AXOR has changed the design and understanding of faucets and bathrooms like no other brand – from a functional sanitary room to an individual place of well-being.

In 1981, Klaus Grohe commissioned the first designer faucet for the Hansgrohe Group: Allegroh, designed by Esslinger Design, which went on to become the famous Frog Design studio. The first faucet collection in colour, UNO, was recognised as an innovative sensation by the market. In the 1990s, design became synonymous with prestige and Klaus Grohe recognised its potential for the sanitary industry. This began the AXOR success story as a design brand offering luxurious products – inspired and created by internationally renowned designers – that enhance the kitchen and the bathroom.



# 1993

Establishment of the AXOR Brand

# 2003

AXOR Citterio



- |      |   |
|------|---|
| 1994 | AXOR Starck: Presentation with Salon d'eau by Philippe Starck                           |
| 2000 | AXOR WaterDream with PHOENIX – an innovative concept bathroom                           |
| 2003 | AXOR Citterio   |
| 2004 | AXOR Starck: Redesign   |
| 2005 | AXOR WaterDream with Patricia Urquiola, Jean-Marie Massaud and Ronan & Erwan Bouroullec |



# 2014

AXOR Starck V,  
AXOR Citterio E and  
AXOR Universal Accessories



# 2017

AXOR Showers

- 2015 AXOR One shower products designed by Barber Osgerby and AXOR WaterDream with the ÉCAL design school 2016
- 2016 AXOR WaterDream „Create your own spout“
- 2017 AXOR Uno redesign and AXOR Showers – with the innovative PowderRain spray mode
- 2018 AXOR MyEdition



2019 AXOR Edge

# 2021



2021 AXOR One  
AXOR Citterio lever handle variants  
AXOR Universal Circular Accessories

# Philippe Starck

DESIGN-VISIONARY

Philippe Starck is one of the most famous designers and interior designers of our time. A free spirit with an unconventional style, he is both extroverted and surprising. Starck alters conventional perceptions and experiments with materials. Offering a vision of a better world, his creations reflect a deep responsibility towards society and the natural environment.



# Barber Osgerby


REPRESENTATIVES OF INTERACTION DESIGN

Barber Osgerby embody the philosophy of interaction design. They focus on the interaction between user and product—what he or she sees, hears and needs. This design approach has led to international public commissions and awards, including the titles, "Royal Designer for Industry" and, "Officer of the Order of the British Empire".

## Jean-Marie Massaud

DESIGN ART THAT CONNECTS PEOPLE AND SPACE

Massaud's unmistakable style sets trends – from product design right through to architecture. His creations are intended to connect with people while offering them better spaces to live in. Strongly influenced by the beauty and utility of nature, he forges synergies between people, design and space.

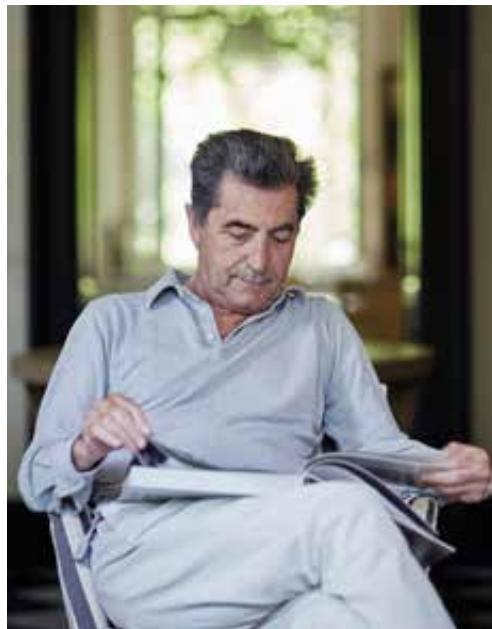

## Antonio Citterio

MASTER OF ELEGANCE

Few individuals have shaped Italian design as much as Antonio Citterio. The architect, designer and perfectionist creates luxurious objects, interiors and architectural concepts for leading international brands. His signature reveals an uncompromising combination of timeless forms and high-quality materials, guided by the credo of perfection and Italian elegance.



## Patricia Urquiola

MASTER OF ECLECTICISM

Spanish designer Patricia Urquiola enriches the international architecture and design scene with objects that skillfully combine styles, patterns and materials. Surprising with floral decorations and sensual haptics, she arouses curiosity with her creations.

## PHOENIX

DESIGN FOR REAL LIFE

Phoenix Design creates products that meet people's real needs and desires in their everyday lives. Touching and forward-looking, their designs are driven by logic, morality and magic.



# Nendo

POETIC DESIGN FROM JAPAN

Oki Sato's creations break with customary perceptions while remaining intuitively understandable. The name of his office roughly translates as, 'Dough', which indicates the playful approach behind his designs. This approach places him at the pinnacle of the international design scene.



# Front

THE AVANT-GARDISTES FROM SWEDEN

The work of Front Design is not considered typically Scandinavian. It is experimental – a visual effects game inspired by fashion, film, or science. Their trademark is an ironic point of view and the joy of surprise. Qualities that the international design scene is enthusiastic about. An expression of their ironic perspective and the pleasure of surprise.



# Why

SIX REASONS TO CHOOSE AXOR

## 01 Design diversity

AXOR works with internationally renowned designers. Each uses their individual signature to shape the rich stylistic diversity and product depth of the AXOR portfolio. Their design approaches set standards time and again with regard to their avant-garde forms, which are at once innovative and timeless. Within the framework of AXOR WaterDreams, designers from a broad range of disciplines envision bathrooms of the future, completely independent of product-oriented development. Their ideas provide new momentum for developing the space, understanding how it will be used and creating complementary products.

The following collections feature unique water designs that create extraordinary haptic and visual experiences, with innovative spray types and new ways of presenting water:

- AXOR Massaud with a natural-looking waterfall
- AXOR Starck Organic with a gentle shower jet—a first for a faucet
- AXOR Starck V with a powerful water vortex
- AXOR MyEdition with PowderRain, matching the faucet design



## 02 Individualization

The exclusive AXOR FinishPlus and AXOR Signature services provide individualization, meeting the increasing demands of customers for more options for personalizing bathroom products. With colored PVD surfaces and customized solutions, AXOR products become unmistakably one-of-a-kind.

## 03 Made in Germany

The outstanding products made in our AXOR factory in Schiltach, Germany, owe their excellence to German engineering quality and a deep commitment to precision in every detail. This expertise draws from over 118 years of collective experience from the Hansgrohe Group, as well as from the knowledge of each production specialist. AXOR is also one pioneer of innovative manufacturing technologies, including a cutting-edge diamond tooling machine that mills the ultra-precise surfaces of the AXOR Edge collection.



## 04 Worldwide presence

As part of the Hansgrohe Group, which has 32 subsidiaries and 22 sales offices, AXOR is represented worldwide and delivers its products to more than 140 countries. AXOR faucets, showers and kitchen faucets appear in top residences, hotels and restaurants around the world. International architects, planners and builders trust AXOR product quality and consultation with our experts.

## 05 Understanding sustainability

Using resources wisely is important to AXOR – from water-efficient products to resource-saving material usage in production to durability in design, function and quality. One example: the AXOR Starck Organic wash basin faucet with a remarkably low water consumption.



## 06 International Design Awards

Validation of our design achievements by independent, internationally renowned industry experts: The numerous awards for top quality product design that AXOR has received since its beginnings confirm the brand's excellence. Among others, these awards include:

- iF Design Award in Gold for AXOR One and AXOR Uno
- Red Dot Best of Best for AXOR Edge
- German Design Award for AXOR MyEdition
- Green Design Award for AXOR Starck Organic



# The maximum in services



## AXOR FINISHPLUS AND AXOR SIGNATURE

With these individualization services, AXOR fulfills individual customer wishes and the demand for inimitable design. Find out more at:  
<https://www.axor-design.com/asia/service/individualization>



## FIVE-YEAR MANUFACTURER'S GUARANTEE

The manufacturer's guarantee extends beyond the legally required period and thus underlines the AXOR commitment to quality. In addition, strict quality management is enforced throughout the manufacturing process, ensuring that the products comply with the stringent requirements of independent quality control institutes as well as with legal requirements. For further information, please refer to the warranty conditions at  
<https://www.axor-design.com/asia/service/product-guarantee>




## FIFTEEN-YEAR AVAILABILITY GUARANTEE

The 15-year guarantee ensures replacement components for AXOR products will be available for purchase, providing security for your investment. All of the products and related information can be found quickly and easily online in the spare parts catalog:  
[spares.hansgrohe.com](http://spares.hansgrohe.com)



## WEBSITE FOR PROFESSIONALS

In the "pro" portal, specialized dealers, architects and installers can find information, planning advice and prices for all products as well as practical tips and tools for professional bathroom planning and consultation. Find out more at:



## PLANNING INFORMATION

Assembly and service instructions, dimension drawings, BIM planning data and 3D data for optimum bathroom planning with AXOR products can also be found in the "pro" portal: [pro.hansgrohe.com.sg](http://pro.hansgrohe.com.sg)



#### COMFORTZONE-TEST

We use our in-house test center to determine the perfect combinations of faucets and washbasins. In addition, matching washbasins from leading manufacturers are tested with AXOR products for optimum functionality and appearance. All recommended combinations appear on the AXOR website under the corresponding collection page: [axor-design.com/asia](http://axor-design.com/asia)



#### MEISTERSERVICE

AXOR service specialists are certified experts in the sanitary trade and provide advice on technical questions by phone, e-mail or chat. In certain cases, a home technology specialist will provide on-site consultation. Local partners can be contacted by phone or e-mail: [service@axor-design.com](mailto:service@axor-design.com)



#### PROJECT CONSULTATION

AXOR offers professional support and advice for project bidding and planning worldwide. Please contact your local partner or send an e-mail to [service@axor-design.com](mailto:service@axor-design.com)



#### BATHROOM EXHIBITION

Experience AXOR worldwide, live: The WaterStudios, located in global architectural and design centers, provide a source of inspiration and a meeting point, as well as a design and training center for trade partners, architects and interior designers. In the Aquademie at the Hansgrohe Group headquarters in Schiltach, Germany, visitors and sales partners can explore a bathroom and kitchen landscape that extends across 1,000 square meters – with a museum covering bathroom, company and brand history, regular events, and a ShowerWorld with test showers.



#### ONLINE AQUADEMIE

The newly developed Hansgrohe Online Aquademie is accessible via the pro-website. Partners in the trades and crafts benefit from detailed knowledge on all aspects of product and sanitary technology as well as from non-specialist highlights. More information at: [aquademie-seminars.hansgrohe.com](http://aquademie-seminars.hansgrohe.com)

# Uncompromisingly innovative

Pioneering ideas. Shaping water into invigorating jets, enveloping cocoons and sensual flows. Intuitive systems. Simple to use, easy to clean and ecologically responsible. Promoting conscious and conscientious water use. The result of intensive research and development, AXOR technologies are made in Germany to the highest quality standards – our own. In pursuit of perfection.



## AIRPOWER-TECHNOLOGY:

Enriching water with air produces plump droplets for a velvety touch on the skin.



## POWDERRAIN-TECHNOLOGY:

The finest silicone nozzles, with several openings per nozzle, provide a uniquely fine mist of water.



## QUICKCLEAN-TECHNOLOGY:

Remove limescale deposits quickly and easily with flexible silicone nozzles.



## SELECT-TECHNOLOGY:

Use the Select button to switch spray modes or shower heads; turn the water on and off at the faucet.



## ECO-SMART-TECHNOLOGY:

Faucets and showers that consume up to 60% less water than conventional products.



## COOLSTART-TECHNOLOGY:

Cold water flows automatically when in the neutral handle position.



## COMFORTZONE:

Defines the space between the wash basin and faucet. The larger the ComfortZone, the greater the variety of uses.

# Design icons and style diversity

From classic to modern: AXOR faucets, showers, washbasins, bathtubs and accessories. Unique, avant-garde pieces and complete collections. Created with world-renowned designers. Uncompromising in quality. Full of pioneering innovations. In pursuit of perfection.



AXOR One



AXOR Edge



AXOR MyEdition



AXOR Starck



AXOR Starck Organic



AXOR Citterio



AXOR Citterio E



AXOR Citterio M



AXOR Urquiola



AXOR Massaud



AXOR Uno




AXOR Montreux



AXOR Showers



AXOR Accessories



AXOR Kitchen faucets



AXOR Basic sets, wastes and overflows

Brushed Brass

-950

Polished Gold Optic

-990

Brushed Gold Optic

-250

Brushed Bronze

-140

Polished Red Gold

-300

Brushed Red Gold

-310

Brushed Nickel

-820

Stainless Steel Optic

-800

Polished Black Chrome

-330

Brushed Black Chrome

-340

Polished Chrome

-020

Brushed Chrome

-260

Polished Nickel

-830

Polished Bronze

-130

Polished Brass

-930

AXOR Brand

AXOR FINISHPLUS

Available as a single unit

Available in quantities of 30 or more

# Refining the special

Exceptionally radiant, robust and resistant, AXOR FinishPlus surfaces offer outstanding color brilliance. The incomparable shine of the polished and brushed surfaces is the result of a state-of-the-art process for coating: Physical Vapor Deposition (PVD), the evaporation of Zirconium molecules in a vacuum.



Matt Black is a new lacquered surface exclusively available for AXOR One, AXOR Universal Circular Accessories and selected complementary products. It offers a smooth, soft finish that endows the product with a striking color and sleek elegance.

In addition to the exclusive AXOR FinishPlus surfaces, individual colors are available via AXOR Signature. The options are practically unlimited. To turn a special product into a truly unique piece, a feasibility test is first carried out by AXOR experts.

AVAILABLE AS A SINGLE UNIT



BRUSHED  
BRASS  
-950



POLISHED  
GOLD OPTIC  
-990



BRUSHED  
GOLD OPTIC  
-250



BRUSHED  
BRONZE  
-140



POLISHED  
RED GOLD  
-300



BRUSHED  
RED GOLD  
-310



BRUSHED  
NICKEL  
-820



STAINLESS  
STEEL OPTIC  
-800



POLISHED  
BLACK CHROME  
-330



BRUSHED  
BLACK CHROME  
-340



MATT BLACK  
-670

Matt Black is available exclusively for the  
AXOR One collection, AXOR Universal Circular  
Accessories and selected complementary products.

AVAILABLE IN QUANTITIES OF 30 OR MORE



POLISHED  
CHROME  
-020



BRUSHED  
CHROME  
-260



POLISHED  
NICKEL  
-830



POLISHED  
BRONZE  
-130




POLISHED  
BRASS  
-930



**"We were delighted by all of the wonderful finishes AXOR had to offer."**

Bjarne Hansen, co-founder  
and former CEO of MENU,  
and Jonas Bjerre-Poulsen,  
Norm Architects

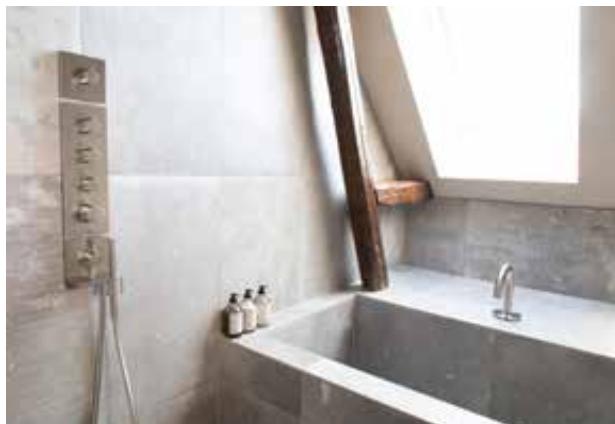

#### THE AUDO, COPENHAGEN

A hybrid space for hospitality and human connection

In Nordhavn, Copenhagen's old industrial harbor, a neo-baroque building from the early 20th Century has been given new life. The Audo celebrates and facilitates human connection in the global digital age. Bjarne Hansen, founder of Danish design company MENU, and Jonas Bjerre-Poulsen, co-founder of the Norm Architects, conceived of The Audo as a hybrid space, a platform for bringing local and international creatives together. But international visitors will most appreciate it as a one-of-a-kind hotel. Through choice of material and palette, each hotel room evokes a different mood, a different landscape. AXOR Uno harmonizes with all of them, whether in Brushed Black Chrome for a 'lunar' ambiance or in Brushed Bronze for a 'deep forest' atmosphere. Other finishes include Brushed Brass and Stainless Steel Optic.

## PRIVATE APARTMENT, PRAGUE

Modern Luxury in a Secluded Setting

Situated in Prague's residential sixth district, the 'Golden House', as it has been called in the media, offers modern luxury in a secluded setting. The designer Ivanka Kowalski created an intimate and at the same time opulent atmosphere through the delicate combination of different materials. The highlights of this house are the private wellness area and the en suite bathrooms. Several collections by AXOR grace these spaces, each providing a unique contribution to the overall aesthetic.

For the products in the bathrooms from the collections AXOR Urquiola and AXOR One, Kowalski chose from the multitude of the exclusive AXOR FinishPlus surfaces: Brushed Gold Optic, Polished Gold Optic and Brushed Bronze. At the washbasins, AXOR Urquiola faucets, with their artfully eclectic combination of forms, contrast vividly with traditional wood and stone, while the AXOR Urquiola floor-standing faucet makes an extravagant and sensuous statement at the bathtub.



**"With its incomparable choice of exclusive finishes, AXOR was the perfect partner for the bathroom and kitchen."**

Ivanka Kowalski, Interior Designer



# From the special to the unique


Laser engraving, labeling & 3D engraving



The addition of inscriptions such as emblems or signatures that identify the owner.

With AXOR Signature, a bathroom faucet, a design product, becomes a very unique object that is perfectly tailored to the customer's needs and taste. AXOR Signature's exclusive services include: Extending, shortening and labeling. Whether it's the distance from the wall to the washbasin which requires an adjustment, or the desire for a modification of the handles. For unique pieces in the bathroom as an expression of one's own personality, including one's own initials or one's own signature. Created by AXOR experts.

## Length adaptation




Extension of a faucet spout adapted to the height of the sink.

## New development



Developing a product according to the customer's specifications.

## Mix of components



Combination of different design and product components.



"It was a prestigious project where we could really show what we can create. In collaboration with the designers and our AXOR Signature department in Germany, we managed to produce the special handles almost perfectly."


Dan Rosendal,  
Sales Manager at Hansgrohe Denmark

#### HOTEL VILLA COPENHAGEN, COPENHAGEN Tailor-made, sustainable luxury

From a post office to a luxury hotel – this is the evolution that Hotel Villa Copenhagen underwent in the lead up to its opening in summer 2020. The 390-room charming building located right next to Copenhagen's Central Station has been renovated with a focus on quality and sustainability, in terms of consumption and materials, among other things. A vision that is also reflected in the choice of products in the bathrooms, where AXOR adorns the washbasins, bathtubs and shower areas. As an added luxury detail in the eight suites designed by jewelry company Shamballa Jewels, some of the AXOR faucets are specially designed with Shamballa diamond handles.



# Inspiration and Information

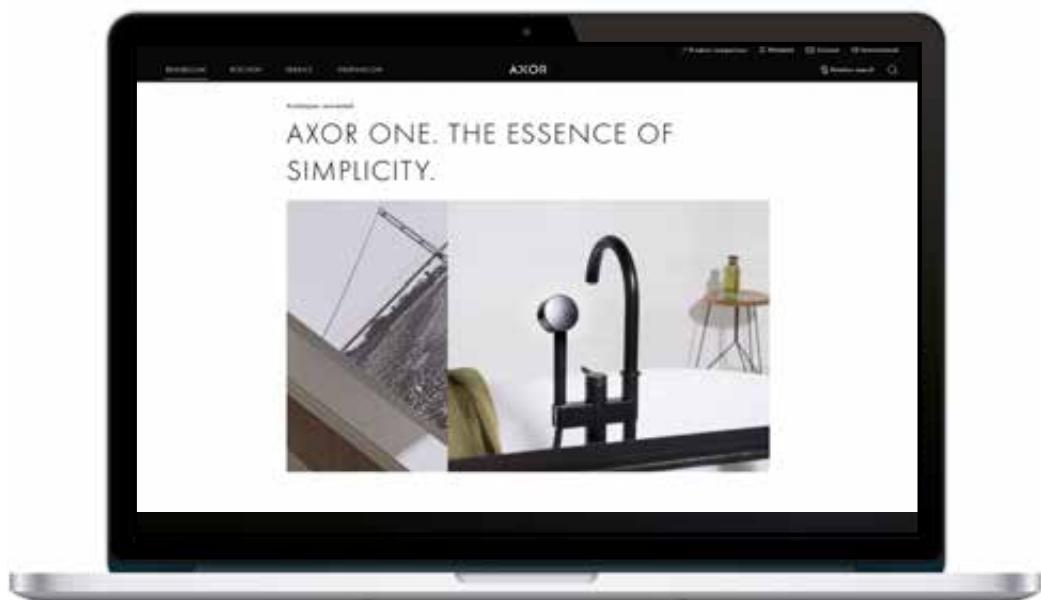

For AXOR, luxury means creating an experience of form and function. One that appeals to the senses and touches people. An experience that begins on the AXOR website. For impressions of and information about all products. For bathroom inspiration and planning. For individualization and refinement possibilities. For background about the brand, the design and the technology.



[axor-design.com/asia](http://axor-design.com/asia)



AXOR Design

AXOR

axordesign

AXOR

axor.design

	AXOR One	42	_____
	AXOR Edge	60	_____
<b>Collections</b>			
	AXOR MyEdition	80	_____
	AXOR Starck	94	_____
	AXOR Starck Organic	116	_____
	AXOR Citterio	132	_____
	AXOR Citterio E	158	_____
	AXOR Citterio M	178	_____
	AXOR Urquiola	190	_____
	AXOR Massaud	204	_____
	AXOR Uno	208	_____
	AXOR Montreux	228	_____

	<b>Code no.</b>	<b>available up to</b>		<b>Code no.</b>	<b>available up to</b>
<b>AXOR Accessories</b>					
<b>AXOR Starck</b>					
Bath towel rail 600 mm	40806000	06/30/2022	Bath towel rail 600 mm	41760000	06/30/2022
	40806XXX	06/30/2022		41760XXX	06/30/2022
Bath towel rail 800 mm	40808000	06/30/2022	Bath towel rail 800 mm	41780000	06/30/2022
	40808XXX	06/30/2022		41780XXX	06/30/2022
Liquid soap dispenser	40819000	06/30/2022	<b>AXOR Urquiola</b>		
	40819XXX	06/30/2022	Towel hook	42401000	06/30/2022
Towel holder twin-handle	40820000	06/30/2022		42401XXX	06/30/2022
	40820XXX	06/30/2022	Grab bar	42430000	06/30/2022
Towel ring	40821000	06/30/2022		42430XXX	06/30/2022
Grab bar	40830000	06/30/2022	Soap dish	42433000	06/30/2022
	40830XXX	06/30/2022		42433XXX	06/30/2022
Soap dish	40833000	06/30/2022	Toothbrush tumbler	42434000	06/30/2022
Toothbrush tumbler	40834000	06/30/2022		42434XXX	06/30/2022
Toilet brush holder wall-mounted	40835000	06/30/2022	Toilet brush holder wall-mounted	42435000	06/30/2022
				42435XXX	06/30/2022
Roll holder double	40836000	06/30/2022	Bath towel rail 600 mm	42460000	06/30/2022
	40836XXX	06/30/2022		42460XXX	06/30/2022
Towel hook	40837000	06/30/2022	Bath towel rail 800 mm	42480000	06/30/2022
	40837XXX	06/30/2022		42480XXX	06/30/2022
Toilet brush holder floor-standing	40840000	06/30/2022	<b>AXOR Uno</b>		
<b>AXOR Starck Organic</b>			Liquid soap dispenser	41519000	06/30/2022
Bath towel rail 600 mm	42706000	06/30/2022		41519820	06/30/2022
	42706XXX	06/30/2022		41519XXX	06/30/2022
Bath towel rail 800 mm	42708000	06/30/2022	Towel holder	41520000	06/30/2022
	42708XXX	06/30/2022		41520820	06/30/2022
Towel holder	42720000	06/30/2022		41520XXX	06/30/2022
	42720XXX	06/30/2022	Towel ring	41521000	06/30/2022
Grab bar	42730000	06/30/2022		41521820	06/30/2022
	42730XXX	06/30/2022	Roll holder without cover	41528000	06/30/2022
Soap dish	42733000	06/30/2022		41528820	06/30/2022
Toothbrush tumbler	42734000	06/30/2022		41528XXX	06/30/2022
Toilet brush holder wall-mounted	42735000	06/30/2022	Grab bar	41530000	06/30/2022
				41530820	06/30/2022
Roll holder	42736000	06/30/2022		41530XXX	06/30/2022
	42736XXX	06/30/2022	Soap dish	41533000	06/30/2022
Towel hook	42737000	06/30/2022		41533820	06/30/2022
	42737XXX	06/30/2022	Toothbrush tumbler	41533XXX	06/30/2022
<b>AXOR Citterio/ Citterio M</b>				41534000	06/30/2022
Liquid soap dispenser	41719000	06/30/2022		41534820	06/30/2022
	41719XXX	06/30/2022		41534XXX	06/30/2022
Towel ring	41721000	06/30/2022	Toilet brush holder wall-mounted	41535000	06/30/2022
	41721XXX	06/30/2022		41535820	06/30/2022
Grab bar	41730000	06/30/2022		41535XXX	06/30/2022
	41730XXX	06/30/2022	Toilet brush holder floor-standing	41536000	06/30/2022
Soap dish	41733000	06/30/2022		41536820	06/30/2022
	41733XXX	06/30/2022		41536XXX	06/30/2022
Toothbrush tumbler	41734000	06/30/2022	Towel hook	41537000	06/30/2022
	41734XXX	06/30/2022		41537820	06/30/2022
Toilet brush holder wall-mounted	41735000	06/30/2022		41537XXX	06/30/2022
	41735XXX	06/30/2022	Roll holder with cover	41538000	06/30/2022
Roll holder	41738000	06/30/2022		41538820	06/30/2022
	41738XXX	06/30/2022		41538XXX	06/30/2022
			Glass shelf	41550000	06/30/2022
				41550820	06/30/2022
				41550XXX	06/30/2022

**Code no. available up  
to**

---

**AXOR Accessories****AXOR Uno**

Bath towel rail 600 mm	41560000	06/30/2022
	41560820	06/30/2022
	41560XXX	06/30/2022
Bath towel rail 800 mm	41580000	06/30/2022
	41580820	06/30/2022
	41580XXX	06/30/2022

**Wastes and overflow****Wastes and overflow for bath tubs**

Finish set waste and overflow set	58311000	06/30/2022
	58311XXX	06/30/2022
Finish set waste and overflow set	58312000	06/30/2022
	58312820	06/30/2022
	51312XXX	06/30/2022
Complete set waste and overflow set for standard bath tubs	58315000	06/30/2022
	58315XXX	06/30/2022

**Traps**

Pipe trap standard model for bidet	51315000	06/30/2022
Pipe trap standard model	51320000	06/30/2022
Pipe trap easy to install	51321000	06/30/2022

	Code no.		Code no.
<b>AXOR One</b>		<b>AXOR One</b>	
Extension 25 mm for basic set basin mixer for concealed installation wall-mounted Select	13609000	<b>AXOR Complementary products in Matt Black</b>	
Extension element	13610000 13610670	Metal effect shower hose 1.25 m	28282670
Extension element 90 mm	13611000 13611670	Bath spout curved	38411670
Basic set for basin mixer for concealed installation wall-mounted Select	13625180	Bath spout curved floor-standing	38412670
Thermostatic module for concealed installation for 1 function	45711670	Design trap Flowstar S	51305670
Thermostatic module for concealed installation for 2 functions	45712670	Cover	51306670
Thermostatic module for concealed installation for 3 functions	45713670		
Hand shower 2jet	45720670	<b>AXOR Citterio</b>	
Porter unit	45723670	Single lever basin mixer 280 with lever handle for wash bowls with waste set	39021009
Shut-off valve for concealed installation	45771670	Single lever basin mixer 160 with lever handle and waste set	39024009
Basin mixer Select 170 with push-open waste set	48020009 48020679	Single lever basin mixer 160 with lever handle and pop-up waste set - rhombic cut	39071009
Basin mixer Select 260 for wash bowls with push-open waste set	48030009 48030679	Single lever basin mixer for concealed installation wall-mounted with lever handle, spout 220 mm and plate	39119009
3-hole basin mixer 170 with push-open waste set	48050009 48050679	Single lever basin mixer for concealed installation wall-mounted with lever handle, spout 220 mm and escutcheons	39121009
Basin mixer for concealed installation wall-mounted Select with spout 220 mm	48112009 48112679	Single lever basin mixer 280 with lever handle for wash bowls with waste set - rhombic cut	39151009
Single lever bidet mixer with pop-up waste set	48210000 48210670	Single lever basin mixer for concealed installation wall-mounted with lever handle, spout 220 mm and escutcheons - rhombic cut	39171009
Single lever bath mixer floor-standing	48440009 48440679	Single lever bidet mixer with lever handle and pop-up waste set - rhombic cut	39181009
Overhead shower 75 1jet EcoSmart with shower arm	48490000 48490670	Single lever bidet mixer with lever handle and pop-up waste set	39214000
Overhead shower 280 1jet with shower arm	48491000 48491670	Single lever bath mixer floor-standing with lever handle	39440009
Overhead shower 280 2jet with shower arm	48492000 48492670	Single lever bath mixer floor-standing with lever handle - rhombic cut	39471009
Overhead shower 280 1jet with ceiling connection	48493000 48493670		
Overhead shower 280 2jet with ceiling connection	48494000 48494670	<b>AXOR Accessories</b>	
Ceiling connector 300 mm for overhead shower 280 1jet	48495000 48495670	<b>AXOR Universal Circular</b>	
<b>AXOR One</b>		Toothbrush tumbler	42804000 42804670
Ceiling connector 300 mm for overhead shower 280 2jet	48496000 48496670	Soap dish	42805000 42805670
Hand shower 75 1jet EcoSmart	48651000 48651670	Liquid soap dispenser	42810000 42810670
Showerpipe 280 1jet for concealed installation	48790000 48790670	Towel hook	42811000 42811670
Shower set 75 1jet EcoSmart with wall connection	48791000 48791670	Towel hook double	42812000 42812670
Shower bar with wall connection and shower hose 1.60 m	48792000 48792670	Grab bar	42813000 42813670
Basic set for showerpipe	48798180	Towel holder twin-handle	42822000 42822670

**Code no.****AXOR Accessories****AXOR Universal Circular**

Towel ring	42823000 42823670
Towel holder	42826000 42826670
Towel rack with towel holder	42843000 42843670
Shelf	42844000 42844670
Wall mirror	42848000 42848670
Shaving mirror	42849000 42849670
Toilet brush holder wall-mounted	42855000 42855670
Toilet paper holder	42856000 42856670
Toilet paper holder double	42857000 42857670
Toilet paper holder with cover	42858000 42858670
Bath towel rail 600 mm	42860000 42860670
Waste bin	42872000 42872670
Tissue box	42873000 42873670
Bath towel rail 800 mm	42880000 42880670

**Wastes and overflow****Wastes and overflow for bath tubs**

Complete set waste and overflow set for standard bath tubs	58316000 58316670
Complete set waste and overflow set for special bath tubs	58318000 58318670

## Packaging units

Please consider the packaging units when placing your order.

code no.	Number Of Items Per PackingUnit	code no.	Number Of Items Per PackingUnit	code no.	Number Of Items Per PackingUnit	code no.	Number Of Items Per PackingUnit	code no.	Number Of Items Per PackingUnit
01		12231000	3	16930180	25	28282670	25	36411000	5
01700180	10	12232000	6	16970180	25	28284000	25	36425000	17
01750180	10	12626000	10	16973180	50	28286000	25	36702000	5
10		12680000	27	16974180	50	28464000	80	36703000	3
10303180	14	12711000	10	16982180	20	28469000	80	36704000	5
10410000	20	12715000	5	18		28470180	2	36705000	9
10414000	6	12716000	4	18310180	3	28474000	6	36706000	9
10416000	10	12717000	3	18311180	3	28486180	6	36707000	9
10452180	6	12771000	10	18355000	3	28487000	8	36708180	3
10480000	29	13		18356000	3	28489000	8	36711000	9
10531000	25	13089000	18	18357000	2	28491000	12	36712000	2
10614000	10	13586000	50	18358000	2	28494000	7	36714000	9
10616000	10	13587000	50	19		28532000	50	36715000	9
10650180	10	13601000	20	19418000	2	28622000	25	36716000	9
10651000	5	13623180	25	26		28624000	25	36717000	9
10700000	10	13625180	6	26022000	2	28626000	25	36718000	9
10710000	10	15		26023000	2	34		36721000	9
10715000	10	15480180	2	26025000	10	34410000	20	36722000	9
10720000	10	15484180	10	26032000	2	34425000	10	36723000	9
10750180	3	15485180	2	26034000	2	34625000	10	36724000	27
10751000	3	16		26035000	2	34705000	9	36725000	30
10754180	11	16320000	14	26050000	23	34715000	9	36726000	9
10755000	5	16320820	14	26051000	15	34716000	10	36727000	9
10820800	3	16325000	40	26431000	9	34725000	9	36731000	110
10823000	30	16325820	38	26432000	24	34960000	40	36732000	110
10823800	30	16541000	8	26433000	10	35		36733000	40
10921180	9	16541820	8	26909180	3	35286000	2	36734000	40
10924000	4	16544000	4	27		35296000	2	36735000	4
10930000	20	16544820	4	27348000	10	35297000	2	36770180	7
10932000	5	16546000	5	27419000	10	35298000	2	36771000	7
10941180	9	16546820	5	27451000	100	35300000	2	36772000	5
10942000	3	16800000	9	27515000	160	35301000	2	36773000	9
10970000	20	16800820	9	27830000	6	35302000	2	36822000	12
10971180	11	16801000	9	27980000	6	35303000	2	38	
10972000	5	16801820	9	27982000	6	35304000	2	38375000	10
11		16810000	10	27982820	6	35305000	2	38411000	25
11425000	7	16810820	10	27983000	6	35308000	2	38411670	25
11430000	10	16815000	10	27987000	3	35312000	2	38426000	6
11445000	2	16815820	10	27989000	6	35313000	2	38428000	6
11625000	10	16820000	10	27991000	3	35316000	2	38436000	6
11626000	20	16820820	10	28		35318000	2	38445000	6
11731000	10	16821000	6	28112000	10	35320000	2	38480000	40
11732000	10	16821820	6	28116000	15	35321000	2	38626000	6
11733000	10	16830000	20	28120000	10	35361180	6	38700000	9
11925000	10	16830820	20	28127000	25	35363180	9	38715000	10
11960000	25	16884000	100	28128000	28	36		38720000	10
12		16884820	80	28282000	30	36410000	5	38882000	37

code no.	Number Of Items Per PackingUnit	code no.	Number Of Items Per PackingUnit	code no.	Number Of Items Per PackingUnit	code no.	Number Of Items Per PackingUnit	code no.	Number Of Items Per PackingUnit
38933000	10	42066000	10	42843000	2	47410600	7	<b>97</b>	
<b>39</b>		42066820	10	42843670	2	47903000	16	97759000	100
39201000	5	42080000	5	42844000	4	47909000	16		
39214000	5	42080820	6	42844670	4	<b>48</b>			
39410000	9	42090000	10	42846000	10	48210000	13		
39441000	5	42090820	10	42849000	4	48210670	13		
39442000	6	42134000	15	42849670	4	48490000	21		
39455000	9	42134820	20	42855000	7	48490670	21		
39457000	9	42137000	160	42856000	25	48491000	2		
39525000	50	42137820	160	42856670	25	48491670	2		
39655000	10	42436000	10	42857000	9	48492000	2		
39700000	9	42801000	45	42857670	9	48492670	2		
39705000	9	42802000	9	42858000	6	48493000	2		
39711000	10	42803000	9	42858670	6	48493670	2		
39716000	10	42804000	10	42860000	6	48494000	2		
39720000	9	42804670	10	42860670	6	48494670	2		
39725000	9	42805000	10	42870000	28	48495000	5		
39920000	10	42805670	10	42871000	100	48495670	5		
39925000	10	42810000	10	42872670	2	48496000	3		
<b>40</b>		42810670	10	42873000	5	48496670	3		
40872000	5	42811000	40	42873670	5	48651000	21		
40873000	5	42811670	40	42880000	4	48651670	21		
40877180	10	42812000	24	42880670	4	48791000	3		
40878180	10	42812670	24	42890000	36	48791670	3		
<b>42</b>		42813000	10	42891000	22	48792000	3		
42018000	15	42813670	10	<b>45</b>		48792670	3		
42018800	15	42818000	15	45405000	6	48798180	4		
42019000	10	42818800	15	45407000	9	<b>51</b>			
42019820	10	42819000	9	45410000	25	51300000	30		
42020000	9	42821000	4	454444000	6	51300820	50		
42020820	9	42822000	8	45605000	6	51301000	80		
42021000	10	42822670	8	45710180	6	51303000	18		
42021820	10	42823000	10	45711000	2	51304000	20		
42028000	48	42823670	10	45711670	2	51305000	27		
42028820	48	42826000	9	45712670	2	51306670	36		
42030000	24	42826670	9	45713670	2	51307000	50		
42030820	8	42830000	18	45720000	10	51309000	100		
42033000	20	42832000	6	45720670	10	51310000	100		
42033820	20	42833000	8	45721000	40	51312000	100		
42035000	10	42834000	9	45722000	5	<b>58</b>			
42035820	10	42835000	4	45723000	29	58308000	20		
42036000	20	42836000	15	45723670	24	58316000	10		
42036820	20	42837000	10	45770180	5	58318000	10		
42060000	9	42838000	10	45771000	10	<b>93</b>			
42060820	9	42840000	11	45771670	13	93171000	30		
42065000	10	42841000	10	<b>47</b>		<b>96</b>			
42065820	10	42842000	6	47410000	7	96186000	400		

brand	code no.	EAN	page
01			
AX	01700180	4059625032343	66
AX	01750180	4059625032350	377
10			
AX	10303180	4011097342597	65
AX	10410000	4011097177939	100
AX	10414000	4011097815893	99
AX	10416000	4011097365893	99
AX	10418000	4011097381633	99
AX	10427000	4011097815886	99
AX	10444000	4011097180366	101
AX	10451000	4011097243641	102
AX	10452180	4011097254104	48
AX	10480000	4011097377728	100
AX	10495000	4011097189437	100
AX	10531000	4011097678016	108
AX	10614000	4011097815831	103
AX	10616000	4011097365916	103
AX	10621800	4011097585758	253
AX	10623800	4011097585765	253
AX	10625800	4011097585772	254
AX	10627800	4011097585789	254
AX	10628000	4059625029831	250
AX	10629000	4059625030196	251
AX	10637000	4059625030189	251
AX	10650180	4011097594309	311
AX	10651000	4011097594293	311
AX	10658000	4011097655406	311
AX	10700000	4011097338040	104
AX	10710000	4011097338064	104
AX	10715000	4011097478425	104
AX	10720000	4011097338101	105
AX	10750180	4011097594286	124
AX	10751000	4011097593760	307
AX	10754180	4011097625690	126
AX	10755000	4011097625706	308
AX	10790000	4011097625683	308
AX	10820800	4059625144817	365
AX	10823000	4011097693712	369
AX	10823800	4011097694566	369
AX	10921180	4011097678542	277
AX	10922180	4011097814186	251
AX	10924000	4011097677910	276
AX	10925000	4011097679747	276
AX	10929000	4011097679754	276
AX	10930000	4011097342061	106
AX	10932000	4011097594323	310
AX	10941180	4011097678535	277
AX	10942000	4011097678559	277
AX	10970000	4011097342085	105
AX	10971180	4011097594279	127
AX	10972000	4011097594316	309
AX	10981000	4011097270494	98
11			
AX	11050009	4059625274835	193
AX	11051009	4059625274828	193
AX	11060009	4059625277201	192
AX	11061009	4059625277218	192
AX	11300000	4011097598581	193
AX	11301000	4011097598598	193
AX	11302000	4011097619811	194
AX	11425000	4011097598604	195
AX	11430000	4011097598635	195
AX	11436000	4011097652641	196

brand	code no.	EAN	page
AX	11437009	4059625274811	194
AX	11438009	4059625274804	194
AX	11440000	4011097598659	197
AX	11443000	4011097637969	196
AX	11445000	4011097637976	197
AX	11625000	4011097598666	198
AX	11626000	4011097598673	184
AX	11731000	4011097598697	199
AX	11732000	4011097597546	199
AX	11733000	4011097597560	200
AX	11925000	4011097613178	201
AX	11960000	4011097598734	200
12			
AX	12000009	4059625277027	118
AX	12000149	4059625391440	118
AX	12001009	4059625276969	96
AX	12002009	4059625276976	96
AX	12003009	4059625277058	119
AX	12003149	4059625391464	119
AX	12003349	4059625391457	119
AX	12005009	4059625277034	118
AX	12005349	4059625391471	118
AX	12006009	4059625277041	118
AX	12103009	4059625276983	97
AX	12104009	4059625276990	97
AX	12131009	4059625277102	96
AX	12132009	4059625277126	96
AX	12148009	4059625277133	96
AX	12149009	4059625277140	96
AX	12152009	4059625277065	114
AX	12153009	4059625277072	114
AX	12231000	4011097789446	129
AX	12232000	4011097788081	123
AX	12408009	4059625277003	97
AX	12409009	4059625277010	97
AX	12415000	4011097700670	119
AX	12416000	4011097700687	119
AX	12417000	4011097703909	120
AX	12422000	4011097702322	120
AX	12425000	4011097704661	121
AX	12426000	4011097706320	122
AX	12452009	4059625275832	98
AX	12605000	4011097702339	122
AX	12612009	4059625275818	102
AX	12626000	4011097711102	150
AX	12680000	4011097776095	129
AX	12711000	4011097702353	124
AX	12712000	4011097703916	125
AX	12715000	4011097702360	124
AX	12716000	4011097702377	125
AX	12717000	4011097743752	123
AX	12731000	4011097702384	127
AX	12771000	4011097702391	126
AX	12790000	4011097712239	126
AX	12800000	4059625198131	364
AX	12800800	4059625311233	364
AX	12801000	4059625198148	364
AX	12801800	4059625311370	364
AX	12803000	4059625198476	365
AX	12803800	4059625312032	365
13			
AX	13089000	4059625032305	100
AX	13586000	4059625032220	87
AX	13587000	4059625032367	377

brand	code no.	EAN	page
HG	13601000	4011097783727	320
AX	13603000	4059625080078	252
AX	13609000	4059625329832	47
AX	13610000	4059625329825	47
AX	13610670	4059625329818	47
AX	13611000	4059625329801	47
AX	13611670	4059625329788	47
AX	13623180	4059625032213	87
AX	13625180	4059625329764	47
<b>14</b>			
AX	14960000	4011097759777	377
AX	14960820	4011097759784	377
AX	14961000	4011097759791	377
AX	14961820	4011097759807	377
AX	14962000	4011097759814	378
AX	14962820	4011097759821	378
AX	14963000	4011097759838	378
AX	14963820	4011097759845	378
AX	14964000	4011097759852	378
AX	14965000	4011097759869	378
AX	14966000	4011097759876	378
AX	14967000	4011097759883	378
AX	14968000	4011097759890	379
AX	14969000	4011097759906	379
AX	14970000	4011097759913	379
AX	14971000	4011097759920	379
AX	14972000	4011097759937	379
AX	14973000	4011097759944	379
AX	14974000	4011097759951	380
<b>15</b>			
AX	15480180	4059625077498	90
AX	15481180	4059625077528	102
AX	15482180	4059625077566	121
AX	15483180	4059625077580	122
AX	15484180	4059625077603	146
AX	15485180	4059625077627	218
AX	15486180	4059625077658	101
AX	15487180	4059625190241	68
AX	15490180	4059625202883	68
<b>16</b>			
AX	16320000	4011097518527	240
AX	16320820	4011097518534	240
AX	16325000	4011097515144	233
AX	16325820	4011097518558	233
AX	16401009	4059625289709	231
AX	16512009	4059625277232	230
AX	16537009	4059625289716	230
AX	16538009	4059625289723	230
AX	16541000	4011097509709	231
AX	16541820	4011097515526	231
AX	16544000	4011097509525	232
AX	16544820	4011097515571	232
AX	16546000	4011097509587	231
AX	16546820	4011097515595	231
AX	16550000	4011097785011	232
AX	16550820	4011097808420	232
AX	16554000	4011097784878	233
AX	16554820	4011097808383	233
AX	16575009	4059625289730	240
AX	16575149	4059625391488	240
AX	16585000	4059625198483	368
AX	16585800	4059625312179	368
AX	16800000	4011097515724	235
AX	16800820	4011097515731	235

brand	code no.	EAN	page
AX	16801000	4011097784861	236
AX	16801820	4011097808314	236
AX	16810000	4011097509570	234
AX	16810820	4011097515755	234
AX	16815000	4011097515779	234
AX	16815820	4011097515786	234
AX	16820000	4011097513935	236
AX	16820820	4011097515809	236
AX	16821000	4011097784854	237
AX	16821820	4011097808307	237
AX	16823000	4011097809687	235
AX	16823820	4011097809670	235
AX	16824000	4011097784847	235
AX	16824820	4011097808291	235
AX	16830000	4011097513928	238
AX	16830820	4011097515823	238
AX	16871000	4011097509518	237
AX	16871820	4011097515847	237
AX	16872000	4011097784823	238
AX	16872820	4011097808277	238
AX	16882000	4011097515885	234
AX	16882820	4011097515892	234
AX	16883000	4011097784816	234
AX	16883820	4011097808246	234
AX	16884000	4011097515915	233
AX	16884820	4011097515922	233
AX	16930180	4059625032190	106
AX	16970180	4059625032404	78
AX	16973180	4059625032381	78
AX	16974180	4059625032398	78
AX	16982180	4059625032183	106
<b>18</b>			
AX	18011009	4059625273654	206
AX	18021009	4059625273647	206
AX	18310180	4059625036082	71
AX	18311180	4059625036099	72
AX	18312180	4059625037805	73
AX	18313180	4059625037812	74
AX	18355000	4059625032879	304
AX	18356000	4059625032862	304
AX	18357000	4059625032855	305
AX	18358000	4059625032848	306
AX	18463009	4059625273630	207
<b>19</b>			
AX	19418000	4011097664637	101
<b>26</b>			
AX	26021000	4011097726052	279
AX	26022000	4011097726069	279
AX	26023000	4011097726076	288
AX	26025000	4011097726083	286
AX	26031000	4011097726090	278
AX	26032000	4011097726106	278
AX	26034000	4059625030165	275
AX	26034820	4059625030158	275
AX	26035000	4059625030134	275
AX	26035820	4059625030127	275
AX	26050000	4011097822846	287
AX	26051000	4011097822839	287
AX	26431000	4059625030103	282
AX	26431820	4059625030097	282
AX	26432000	4059625030073	281
AX	26432820	4059625030066	281
AX	26433000	4059625030042	282
AX	26433820	4059625030035	282

brand	code no.	EAN	page
AX	26434180	4059625032176	269
AX	26909180	4011097734224	279
<b>27</b>			
AX	27348000	4011097822822	282
AX	27419000	4011097401218	283
AX	27451000	4011097265377	294
AX	27515000	4011097245201	292
AX	27830000	4011097484914	109
AX	27831000	4011097484891	156
AX	27980000	4011097262574	108
AX	27982000	4011097523453	240
AX	27982820	4011097526539	240
AX	27983000	4011097678023	109
AX	27987000	4011097733098	290
AX	27989000	4011097398792	290
AX	27991000	4011097733104	155
<b>28</b>			
AX	28011000	4059625206683	382
AX	28012000	4059625203019	381
AX	28014000	4059625206669	382
AX	28022000	4059625202999	381
AX	28112000	4011097523835	297
AX	28116000	4011097525556	233
AX	28116820	4011097525563	233
AX	28120000	4011097525587	233
AX	28127000	4059625025659	297
AX	28128000	4059625025628	297
AX	28128820	4059625025611	297
AX	28282000	4011097239156	59
AX	28282670	4059625294888	59
AX	28284000	4011097239187	58
AX	28286000	4011097239163	58
AX	28464000	4011097554266	284
AX	28469000	4011097556963	284
AX	28470180	4011097601762	175
AX	28474000	4011097434902	239
AX	28486180	4011097603308	175
AX	28487000	4011097404905	239
AX	28489000	4011097400242	155
AX	28491000	4011097593784	283
AX	28494000	4011097434025	107
AX	28532000	4011097488516	107
AX	28622000	4059625032145	296
AX	28624000	4059625032169	150
AX	28626000	4059625032152	150
AX	28693000	4011097413433	290
<b>34</b>			
AX	34031009	4059625274286	180
AX	34103009	4059625274262	180
AX	34123009	4059625277188	180
AX	34312009	4059625277195	181
AX	34410000	4011097559476	182
AX	34425000	4011097559506	182
AX	34427000	4011097559513	182
AX	34454000	4011097559995	183
AX	34625000	4011097559537	184
AX	34705000	4011097559797	186
AX	34715000	4011097559544	185
AX	34716000	4011097559551	185
AX	34725000	4011097559803	186
AX	34823000	4059625198179	367
AX	34823800	4059625311776	367
AX	34824000	4059625198216	368
AX	34824800	4059625311875	368

brand	code no.	EAN	page
AX	34920000	4011097559810	187
AX	34960000	4011097559827	187
<b>35</b>			
AX	35274000	4059625003671	273
AX	35275000	4059625003664	272
AX	35276000	4059625003657	271
AX	35277000	4059625003640	273
AX	35278000	4059625003626	273
AX	35279000	4059625003602	272
AX	35280000	4059625003589	272
AX	35281000	4059625003565	271
AX	35282000	4059625003541	270
AX	35283000	4059625003527	270
AX	35284000	4059625184684	265
AX	35286000	4059625184967	265
AX	35287000	4059625185209	266
AX	35288000	4059625033296	274
AX	35296000	4059625184691	263
AX	35297000	4059625184974	264
AX	35298000	4059625185216	264
AX	35300000	4059625184707	259
AX	35301000	4059625184981	259
AX	35302000	4059625185223	260
AX	35303000	4059625184950	257
AX	35304000	4059625184998	258
AX	35305000	4059625185230	258
AX	35306000	4059625185247	268
AX	35308000	4059625185285	268
AX	35309000	4059625185322	269
AX	35310000	4059625185254	266
AX	35312000	4059625185292	267
AX	35313000	4059625185339	267
AX	35314000	4059625185261	262
AX	35316000	4059625185308	262
AX	35317000	4059625185346	263
AX	35318000	4059625185278	260
AX	35320000	4059625185315	261
AX	35321000	4059625185353	261
AX	35361180	4059625184639	269
AX	35363180	4059625184646	270
<b>36</b>			
AX	36131009	4059625274798	160
AX	36131149	4059625391600	160
AX	36131309	4059625391617	160
AX	36131349	4059625391495	160
AX	36132009	4059625274781	160
AX	36133009	4059625274774	162
AX	36134009	4059625274767	162
AX	36141009	4059625277164	164
AX	36141149	4059625391624	164
AX	36141309	4059625391631	164
AX	36143009	4059625277157	162
AX	36143149	4059625391648	162
AX	36145009	4059625277171	163
AX	36145309	4059625391662	163
AX	36150009	4059625274750	160
AX	36150149	4059625391679	160
AX	36150309	4059625391686	160
AX	36151009	4059625274743	160
AX	36152009	4059625274736	161
AX	36153009	4059625274729	161
AX	36154009	4059625274712	161
AX	36154309	4059625391693	161
AX	36155009	4059625274705	161

brand	code no.	EAN	page
AX	36156009	4059625274699	160
AX	36157009	4059625274682	160
AX	36410000	4011097751429	168
AX	36411000	4011097751412	167
AX	36412000	4011097751405	166
AX	36425000	4011097751382	164
AX	36431009	4059625274675	165
AX	36431149	4059625391716	165
AX	36431309	4059625391723	165
AX	36455000	4011097815800	165
AX	36457000	4011097815794	165
AX	36655000	4011097815770	168
AX	36701180	4011097755588	169
AX	36702000	4011097755571	171
AX	36703000	4011097755564	169
AX	36704000	4011097755557	170
AX	36705000	4011097755540	314
AX	36706000	4011097755533	313
AX	36707000	4011097755526	315
AX	36708180	4011097755519	170
AX	36711000	4011097755502	313
AX	36712000	4011097790268	320
AX	36714000	4011097779416	319
AX	36715000	4011097779409	320
AX	36716000	4011097779393	318
AX	36717000	4011097779386	319
AX	36718000	4011097779379	318
AX	36721000	4011097779362	315
AX	36721820	4011097906539	315
AX	36722000	4011097779355	317
AX	36722820	4011097906683	317
AX	36723000	4011097779348	317
AX	36723820	4011097841458	317
AX	36724000	4011097755496	175
AX	36725000	4011097755489	175
AX	36726000	4011097779331	316
AX	36726820	4011097906980	316
AX	36727000	4011097779324	316
AX	36727820	4011097907130	316
AX	36731000	4059625031490	293
AX	36732000	4059625031919	294
AX	36733000	4059625031957	294
AX	36734000	4059625031933	294
AX	36735000	4011097755472	176
AX	36736000	4011097789330	176
AX	36770180	4011097755465	128
AX	36771000	4011097755458	172
AX	36772000	4011097755441	173
AX	36773000	4011097755434	314
AX	36822000	4011097755427	174
<b>38</b>			
AX	38041009	4059625275597	211
AX	38050009	4059625275573	211
AX	38055009	4059625275559	211
AX	38057009	4059625289310	214
AX	38124009	4059625275535	212
AX	38125009	4059625275528	212
AX	38126009	4059625275511	213
AX	38127009	4059625275504	213
AX	38375000	4011097345154	222
AX	38411000	4011097849317	59
AX	38411670	4059625331781	59
AX	38411820	4011097989556	220
AX	38412000	4011097849300	59

brand	code no.	EAN	page
AX	38412670	4059625331774	59
AX	38412820	4011097989518	219
AX	38423009	4059625275498	214
AX	38426000	4011097849287	216
AX	38426820	4011097983349	216
AX	38428000	4011097849270	216
AX	38428820	4011097983363	216
AX	38436000	4011097849263	218
AX	38436820	4011097983226	218
AX	38440009	4059625289358	215
AX	38445000	4011097849232	219
AX	38445820	4011097983264	219
AX	38480000	4011097377742	217
AX	38480820	4011097911731	217
AX	38622009	4059625275474	221
AX	38626000	4011097849218	221
AX	38626820	4011097983189	221
AX	38700000	4011097345116	223
AX	38715000	4011097478456	222
AX	38720000	4011097345130	223
AX	38882000	4011097331188	225
AX	38933000	4011097331164	225
AX	38951009	4059625289372	212
AX	38959000	4011097705101	46
AX	38976000	4011097331133	224
<b>39</b>			
AX	39011009	4059625274248	136
AX	39012009	4059625274231	136
AX	39021009	4059625329306	136
AX	39024009	4059625329238	136
AX	39071009	4059625360712	136
AX	39114009	4059625277225	139
AX	39114309	4059625391730	139
AX	39119009	4059625329207	138
AX	39121009	4059625329177	138
AX	39130009	4059625274224	137
AX	39141009	4059625275634	137
AX	39151009	4059625360729	136
AX	39171009	4059625360736	138
AX	39181009	4059625360743	138
AX	39201000	4059625358726	140
AX	39214000	4059625329160	140
AX	39410000	4011097400761	145
AX	39436000	4011097650852	146
AX	39437009	4059625274200	141
AX	39438009	4059625274194	141
AX	39440009	4059625329115	140
AX	39441000	4011097488769	143
AX	39442000	4011097488783	143
AX	39445000	4011097400785	147
AX	39446000	4011097400808	147
AX	39447000	4011097488806	144
AX	39448000	4011097488820	144
AX	39449000	4011097486079	196
AX	39453000	4011097399638	148
AX	39454000	4011097400846	148
AX	39455000	4011097400501	142
AX	39457000	4011097400525	142
AX	39471009	4059625360750	140
AX	39480000	4011097488844	145
AX	39482000	4011097488868	145
AX	39525000	4011097488882	150
AX	39655000	4011097400891	149
AX	39671009	4059625276235	156

brand	code no.	EAN	page
AX	39700000	4011097400983	151
AX	39705000	4011097400969	151
AX	39710000	4011097478388	151
AX	39716000	4011097478470	150
AX	39720000	4011097401027	152
AX	39725000	4011097401003	152
AX	39831009	4059625281857	367
AX	39832000	4059625196779	367
AX	39832800	4059625304105	367
AX	39853000	4059625195949	367
AX	39853800	4059625311578	367
AX	39864000	4059625196724	366
AX	39864800	4059625311677	366
AX	39866009	4059625281833	365
AX	39867009	4059625289969	366
AX	39867809	4059625289976	366
AX	39882000	4011097401140	155
AX	39883000	4011097401126	154
AX	39920000	4011097401102	154
AX	39925000	4011097401089	153
AX	39960000	4011097401065	153
AX	39965000	4011097401041	153
<b>40</b>			
AX	40872000	4011097594002	312
AX	40873000	4011097594217	312
AX	40877180	4011097601755	312
AX	40878180	4011097601748	312
<b>42</b>			
AX	42018000	4059625131640	368
AX	42018330	4059625297421	368
AX	42018340	4059625297414	368
AX	42018800	4059625131657	368
AX	42019000	4011097516127	355
AX	42019820	4011097516134	355
AX	42020000	4011097516158	356
AX	42020820	4011097516165	356
AX	42021000	4011097516189	356
AX	42021820	4011097516196	356
AX	42028000	4011097516219	357
AX	42028820	4011097516226	357
AX	42030000	4011097516240	355
AX	42030820	4011097516257	355
AX	42033000	4011097516271	355
AX	42033820	4011097516288	355
AX	42035000	4011097516332	357
AX	42035820	4011097516349	357
AX	42036000	4011097516363	356
AX	42036820	4011097516370	356
AX	42060000	4011097516400	356
AX	42060820	4011097516417	356
AX	42065000	4011097516431	355
AX	42065820	4011097516448	355
AX	42066000	4011097516462	355
AX	42066820	4011097516479	355
AX	42080000	4011097516493	356
AX	42080820	4011097516509	356
AX	42090000	4011097516523	357
AX	42090820	4011097516530	357
AX	42134000	4011097516554	355
AX	42134820	4011097516561	355
AX	42137000	4011097516585	356
AX	42137820	4011097516592	356
AX	42300000	4011097535302	206
AX	42305000	4011097535319	206

brand	code no.	EAN	page
AX	42436000	4011097598789	344
AX	42801000	4011097752396	343
AX	42802000	4011097752389	342
AX	42803000	4011097752372	340
AX	42804000	4059625367643	350
AX	42804670	4059625367650	350
AX	42805000	4059625367612	350
AX	42805670	4059625367629	350
AX	42810000	4059625367674	350
AX	42810670	4059625367681	350
AX	42811000	4059625367285	351
AX	42811670	4059625367292	351
AX	42812000	4059625367315	351
AX	42812670	4059625367322	351
AX	42813000	4059625367438	350
AX	42813670	4059625367445	350
AX	42818000	4059625182840	369
AX	42818330	4059625297407	369
AX	42818340	4059625297391	369
AX	42818800	4059625182857	369
AX	42819000	4011097755601	340
AX	42821000	4011097752365	343
AX	42822000	4059625367551	351
AX	42822670	4059625367568	351
AX	42823000	4059625367407	351
AX	42823670	4059625367414	351
AX	42826000	4059625367469	351
AX	42826670	4059625367476	351
AX	42830000	4011097752358	342
AX	42832000	4011097752341	342
AX	42833000	4011097752334	343
AX	42834000	4011097752327	340
AX	42835000	4011097752310	344
AX	42836000	4011097752303	344
AX	42837000	4059625026915	343
AX	42838000	4011097752198	341
AX	42840000	4059625026694	341
AX	42841000	4011097755595	345
AX	42842000	4059625026908	343
AX	42843000	4059625367582	351
AX	42843670	4059625367599	351
AX	42844000	4059625368510	352
AX	42844670	4059625368503	352
AX	42846000	4059625026922	344
AX	42848000	4059625368480	353
AX	42848670	4059625368473	353
AX	42849000	4059625368459	353
AX	42849670	4059625368442	353
AX	42855000	4059625367704	352
AX	42855670	4059625367711	352
AX	42856000	4059625367346	352
AX	42856670	4059625367353	352
AX	42857000	4059625367377	352
AX	42857670	4059625367384	352
AX	42858000	4059625368428	352
AX	42858670	4059625368411	352
AX	42860000	4059625367490	350
AX	42860670	4059625367506	350
AX	42870000	4011097753706	345
AX	42871000	4011097753690	176
AX	42872000	4059625367735	353
AX	42872670	4059625367742	353
AX	42873000	4059625367766	353
AX	42873670	4059625367773	353


brand	code no.	EAN	page
AX	42880000	4059625367520	350
AX	42880670	4059625367537	350
AX	42890000	4011097789323	345
AX	42891000	4011097789316	346
<b>45</b>			
AX	45006009	4059625274651	210
AX	45006149	4059625391785	210
AX	45006349	4059625391778	210
AX	45007009	4059625274644	210
AX	45030009	4059625275450	210
AX	45030149	4059625391808	210
AX	45030349	4059625391792	210
AX	45031009	4059625275443	210
AX	45032009	4059625275436	210
AX	45033009	4059625275429	210
AX	45057009	4059625289334	213
AX	45057149	4059625391815	213
AX	45134009	4059625289181	211
AX	45405000	4011097849461	216
AX	45405820	4011097983387	216
AX	45407000	4011097849454	216
AX	45407820	4011097983400	216
AX	45410000	4011097849430	220
AX	45410820	4011097989570	220
AX	45412000	4011097849423	220
AX	45412820	4011097989532	220
AX	45417009	4059625275412	215
AX	45444000	4011097849393	218
AX	45444820	4011097983240	218
AX	45601009	4059625274637	221
AX	45602009	4059625274620	221
AX	45605000	4011097849379	222
AX	45605820	4011097983202	222
AX	45710180	4011097789309	50
AX	45711000	4011097788999	49
AX	45711670	4059625331767	49
AX	45712000	4011097788982	49
AX	45712670	4059625331743	49
AX	45713000	4011097788975	50
AX	45713670	4059625331712	50
AX	45720000	4011097790022	58
AX	45720670	4059625331682	58
AX	45721000	4011097788968	293
AX	45722000	4011097790039	288
AX	45723000	4011097789910	58
AX	45723670	4059625331675	58
AX	45770180	4011097789903	51
AX	45771000	4011097789798	51
AX	45771670	4059625331644	51
AX	45790000	4011097807980	50
<b>46</b>			
AX	46012009	4059625281314	64
AX	46022009	4059625281321	64
AX	46032009	4059625281338	64
AX	46052009	4059625281345	65
AX	46062009	4059625281352	65
AX	46410000	4059625190081	69
AX	46411000	4059625190074	69
AX	46420000	4059625190067	66
AX	46421000	4059625190050	66
AX	46430000	4059625149232	67
AX	46431000	4059625149225	67
AX	46432009	4059625281369	67
AX	46442009	4059625281376	69

brand	code no.	EAN	page
AX	46450000	4059625149195	66
AX	46451000	4059625149188	66
AX	46470000	4059625203958	68
AX	46520000	4059625149171	70
AX	46521000	4059625149164	70
AX	46650000	4059625189962	70
AX	46651000	4059625189955	70
AX	46700000	4059625149157	71
AX	46701000	4059625149140	71
AX	46710000	4059625149133	72
AX	46711000	4059625149126	72
AX	46720000	4059625149119	73
AX	46721000	4059625189948	73
AX	46730000	4059625149102	74
AX	46731000	4059625149096	74
AX	46740000	4059625189931	75
AX	46741000	4059625189924	75
AX	46750000	4059625149089	76
AX	46751000	4059625149072	76
AX	46760000	4059625149065	77
AX	46761000	4059625149058	77
AX	46770000	4059625189917	78
AX	46771000	4059625189900	78
<b>47</b>			
AX	47013009	4059625289167	86
AX	47013609	4059625289211	86
AX	47015009	4059625289228	86
AX	47025009	4059625289143	86
AX	47055009	4059625289907	88
AX	47056009	4059625289914	88
AX	47065009	4059625289273	87
AX	47066009	4059625289297	87
AX	47410000	4059625161296	90
AX	47410600	4059625161449	90
AX	47412000	4059625186169	91
AX	47430000	4059625161289	89
AX	47430600	4059625161432	89
AX	47432000	4059625186176	90
AX	47445009	4059625289945	88
AX	47900000	4059625189023	91
AX	47900600	4059625189030	91
AX	47901000	4059625189047	91
AX	47901600	4059625189054	91
AX	47902000	4059625189061	91
AX	47902600	4059625189221	91
AX	47903000	4059625189214	91
AX	47904000	4059625189207	91
AX	47905000	4059625189191	91
AX	47906000	4059625189184	91
AX	47907000	4059625189177	91
AX	47908000	4059625189160	91
AX	47909000	4059625189153	91
AX	47910000	4059625189146	91
AX	47911000	4059625189139	91
AX	47913000	4059625189122	92
AX	47914000	4059625189115	92
AX	47915000	4059625189108	92
AX	47916000	4059625189092	92
AX	47917000	4059625189085	92
AX	47918000	4059625189078	92
<b>48</b>			
AX	48020009	4059625329573	46
AX	48020679	4059625414330	46
AX	48030009	4059625329566	46

brand	code no.	EAN	page
AX	48030679	4059625414323	46
AX	48050009	4059625329559	46
AX	48050679	4059625414347	46
AX	48112009	4059625329528	47
AX	48112679	4059625414354	47
AX	48210000	4059625330944	48
AX	48210670	4059625330920	48
AX	48440009	4059625329450	48
AX	48440679	4059625399767	48
AX	48490000	4059625330722	54
AX	48490670	4059625330708	54
AX	48491000	4059625330685	55
AX	48491670	4059625330678	55
AX	48492000	4059625330661	55
AX	48492670	4059625330647	55
AX	48493000	4059625330623	56
AX	48493670	4059625330616	56
AX	48494000	4059625322680	57
AX	48494670	4059625330593	57
AX	48495000	4059625330579	56
AX	48495670	4059625330562	56
AX	48496000	4059625330555	57
AX	48496670	4059625330531	57
AX	48651000	4059625330456	58
AX	48651670	4059625330432	58
AX	48790000	4059625330371	53
AX	48790670	4059625330357	53
AX	48791000	4059625330333	54
AX	48791670	4059625330326	54
AX	48792000	4059625330319	54
AX	48792670	4059625328897	54
AX	48798180	4059625329368	53
<b>51</b>			
AX	51300000	4059625077788	383
AX	51300820	4059625130049	383
AX	51301000	4059625032244	383
AX	51302000	4059625032237	383
AX	51303000	4059625077795	383
AX	51303820	4059625147863	383
AX	51304000	4059625077801	384
AX	51304820	4059625147887	384
AX	51305000	4059625077818	59
AX	51305670	4059625339817	59
AX	51305820	4059625147900	384
AX	51306000	4059625077689	59
AX	51306670	4059625339824	59
AX	51307000	4059625079263	384
AX	51307820	4059625147924	384
AX	51308000	4059625077696	384
AX	51309000	4059625077719	385
AX	51310000	4059625077726	385
AX	51312000	4059625077702	385
<b>58</b>			
AX	58308000	4059625032299	100
AX	58316000	4059625077474	382
AX	58316670	4059625389522	382
AX	58316820	4059625147986	382
AX	58318000	4059625385258	383
AX	58318670	4059625389508	383
<b>92</b>			
AX	92990000	4059625032206	78
<b>93</b>			
AX	93171000	4059625032374	380
AX	93307000	4059625163368	306

brand	code no.	EAN	page
AX	93308000	4059625163375	306
AX	93309000	4059625163382	306
AX	93310000	4059625163399	307
AX	93311000	4059625164303	307
AX	93312000	4059625164310	307
HG	93571610	4059625142684	321
HG	93572610	4059625142691	321
HG	93573610	4059625142714	321
HG	93574610	4059625142721	321
HG	93575610	4059625142738	321
HG	93576610	4059625142745	321
HG	93577610	4059625142752	321
HG	93578610	4059625142769	322
HG	93579610	4059625142776	321
AX	93663000	4059625261323	306
<b>96</b>			
HG	96186000	4011097161754	109
AX	96380000	4011097344997	155
AX	96383000	4011097350707	66
AX	96397000	4011097369570	290
HG	96500000	4011097380018	100
<b>97</b>			
AX	97686000	4011097502779	48
HG	97759000	4011097517490	66



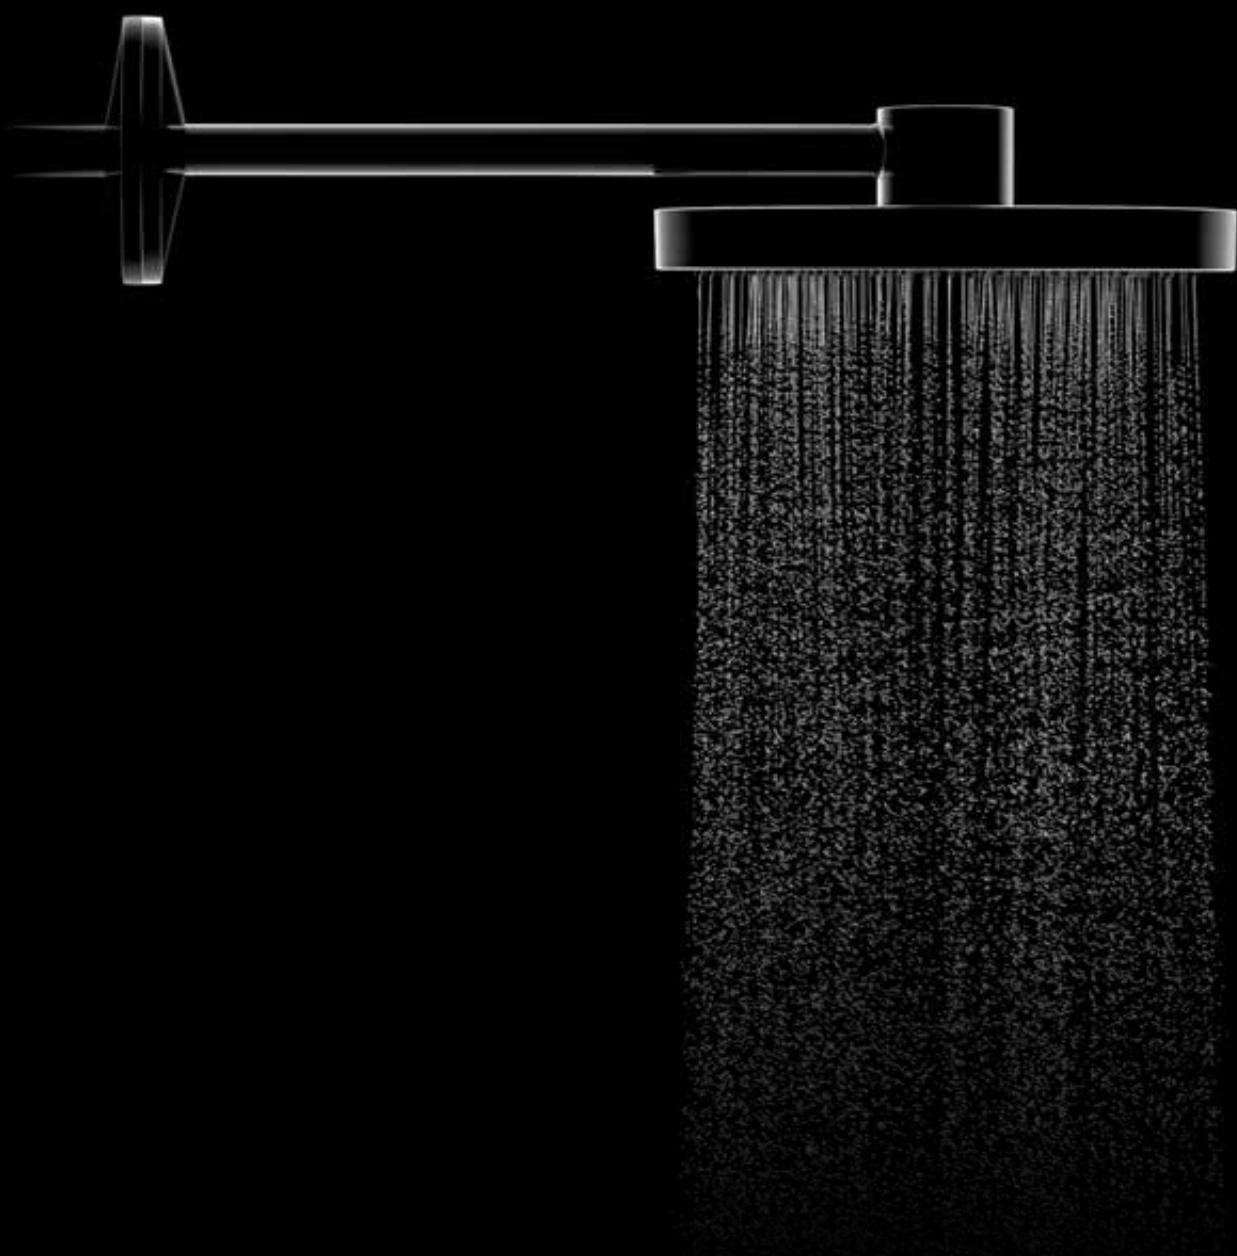

# AXOR One

Basin	46
Bidet	48
Bath	48
Thermostatic module	49
Valve	51
Showerpipe	53
Shower sets	54
Overhead showers	54
Hand showers	58
Porter	58
AXOR Complementary products in Matt Black	59



# **AXOR One**

## **The Essence of Simplicity**

AXOR One. A bathroom collection so elegant, elemental and pure, it could be realized only through radical innovation. Whether at the wash basin, bathtub or shower, familiar archetypes have been reinvented for greater clarity, enhanced function and superior control. Powered by advanced Select technology, the mixer establishes a new mode of interaction: Press down on its all-in-one controller to start or stop the water; swivel

clockwise to increase the temperature. The action is effortless, intuitive and ultra-precise, and this same inventive design thinking characterizes the entire collection. Timeless by design, and available in Chrome, Matt Black and an array of exclusive AXOR FinishPlus surfaces, AXOR One brings exquisite beauty to any bathroom.

Design: Barber Osgerby

# The Essence of simplicity with new interaction

A collection of elegant archetypes for the wash basin, bathtub and shower, AXOR One is unified by a holistic design language of slender silhouettes, flat surfaces, soft corners and balanced proportions. The iconic mixers feature a gentle taper to their curved spouts, a subtle detail that signals exceptional quality of design and manufacturing. Utilizing Select technology, the mechanical mixer handles enable precise, water-saving on/off and temperate control. Positioning the cartridge underneath the wash basin makes the exceptionally slim silhouette possible. At the same time, it allows for fast and easy installation as well as easy service and maintenance: Only the waterpipe needs to be removed, while the cartridge can be easily released thanks to a bayonet clasp.

## Familiar Archetype

With its archetypal round arch, the product looks familiar but is enhanced through innovation



## Matt black

New lacquered surface finish Matt Black, exclusively available for AXOR One

## Gentle tapered spout

A subtle detail that signals both precision and exceptional quality of design and manufacturing

## Minimalist Design

Reduced to the minimum, the product is simple in form and function

## Select Technology

### with CoolStart function

The mechanical Select handle enables effortless, intuitive and ultra-precise control and includes a preset CoolStart function

## Bayonet clasp

Easy and fast installation of cartridge underneath the wash basin

## Waterpipe connection

Ensures water flow from cartridge to mixer above the wash basin




## On / Off:

Press down on its all-in-one controller - the Select handle – to start or stop the water.



## Temperature control:

The handle includes a preset CoolStart function, an environmentally friendly technology that helps conserve resources.

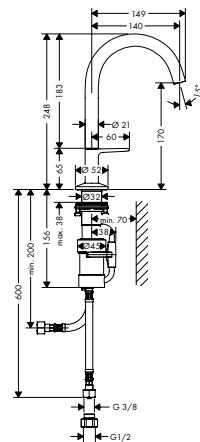
**Basin****NEW**
**Basin mixer Select 170  
with push-open waste set 2 ticks**

- / consists of: Basin mixer, waste set
- / ComfortZone 170
- / projection: 140 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,5 l/min
- / Select cartridge with temperature control
- / temperature limitation adjustable
- / suitable for continuous flow water heaters
- / push-open waste set G 1 1/4
- / material waste set: metal
- / connection type: G 1/2 connections
- / connection dimension: DN15
- / cold water in middle position

finish


 Chrome  
 Matt Black  
 AXOR FinishPlus\*

code no.

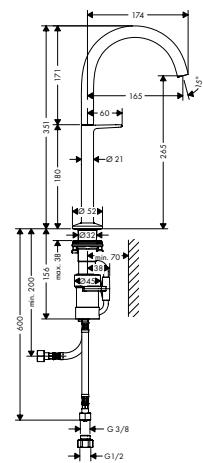 48020009  
 48020679  
 48020XXX
**NEW**
**Basin mixer Select 260  
for wash bowls with push-open  
waste set 2 ticks**

- / consists of: Basin mixer, waste set
- / ComfortZone 260
- / projection: 165 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,5 l/min
- / Select cartridge with temperature control
- / temperature limitation adjustable
- / suitable for continuous flow water heaters
- / push-open waste set G 1 1/4
- / material waste set: metal
- / connection type: G 1/2 connections
- / connection dimension: DN15
- / cold water in middle position

 Chrome  
 Matt Black  
 AXOR FinishPlus\*

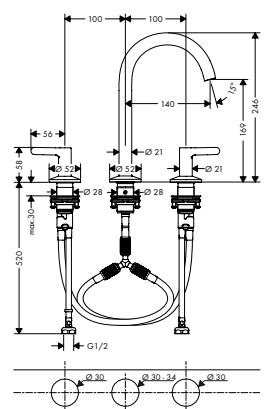 48030009  
 48030679  
 48030XXX
**NEW**
**3-hole basin mixer 170  
with push-open waste set 2 ticks**


- / consists of: 3-hole basin mixer, waste set
- / ComfortZone 170
- / projection: 140 mm
- / swivel range 120°
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,5 l/min
- / ceramic valves hot/ cold 90°
- / suitable for continuous flow water heaters
- / push-open waste set G 1 1/4
- / material waste set: metal
- / connection type: G 1/2 connections
- / connection dimension: DN15

 Chrome  
 Matt Black  
 AXOR FinishPlus\*

 48050009  
 48050679  
 48050XXX
**Optional parts:**

- / Hose extension set for 3-hole basin mixer


38959000


**Hose extension set for 3-hole  
basin mixer**

38959000

- / length of hoses 700 mm
- / for free positioning of spout and handles

Measurements within scale drawings are in mm.



### Basin mixer for concealed installation wall-mounted Select with spout 220 mm 2 ticks

- / consists of: basin mixer for concealed installation wall-mounted, waste set
- / projection: 220 mm
- / spray type: normal spray
- / Select cartridge with temperature control
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: basic set
- / connection dimension: DN15

#### Required parts:

- NEW** / Basic set for basin mixer for concealed installation wall-mounted Select

13625180

#### Optional parts:

- NEW** / Extension element


Chrome 13610000

AXOR FinishPlus\* 13610XXX

- NEW** / Extension element 90 mm

Chrome 13611000

AXOR FinishPlus\* 13611XXX



### Basic set for basin mixer for concealed installation wall-mounted Select


13625180

- / sound-decoupled installation
- / connection dimension: G 1/2

#### Optional parts:

- NEW** / Extension 25 mm for basic set basin mixer for concealed installation wall-mounted Select


13609000



### Extension 25 mm for basic set basin mixer for concealed installation wall-mounted Select

13609000

- / extension for basic set
- / extension length: 25 mm




### Extension element

Chrome 13610000

Matt Black 13610670

AXOR FinishPlus\* 13610XXX

- / for situations of limited depth for concealed installation
- / material: metal escutcheon



### Extension element 90 mm

Chrome 13611000

Matt Black 13611670


AXOR FinishPlus\* 13611XXX

- / for larger tile coverage
- / diameter: 90 mm
- / material: metal escutcheon



**Bidet**

NEW

**Single lever bidet mixer  
with pop-up waste set**

- / consists of: single lever bidet mixer, waste set
- / projection 113 mm
- / aerator with ball pivot
- / spray type: normal spray
- / maximum flow rate at 3 bar: 5 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / suitable for continuous flow water heaters
- / pop-up waste set G 1 1/4
- / material waste set: metal
- / connection type: G 3/8 connections
- / connection dimension: DN15

finish


Chrome  
Matt Black  
AXOR FinishPlus\*

code no.

48210000  
48210670  
48210XXX

**Bath**

NEW

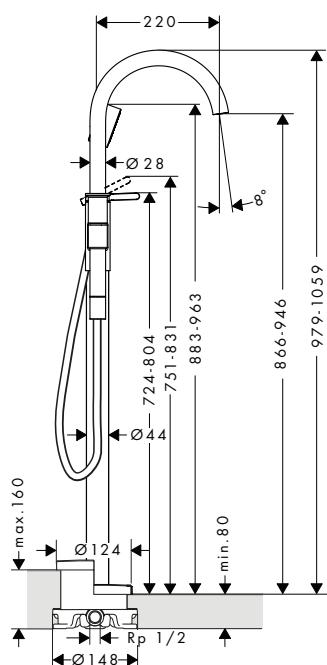**Single lever bath mixer  
floor-standing 2 ticks**

- / consists of: single lever bath mixer floor standing, hand shower, shower hose, shower holder
- / projection 220 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: PowderRain
- / flow rate for bath spout at 3 bar: 20,7 l/min
- / flow rate of hand shower at 3 bar: 5,7 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

Chrome  
Matt Black  
AXOR FinishPlus\*

48440009  
48440679  
48440XXX

**Required parts:**


- / Basic set for mixers floor-standing

10452180

**Optional parts:**


- / Extension 60 mm for pipe

97686000

**Basic set for mixers  
floor-standing**

- / for mounting on unfinished floor
- / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- / connection dimension: DN15

10452180


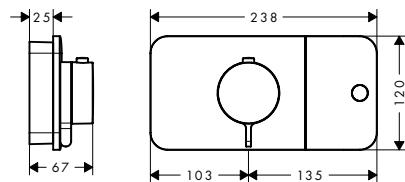
**Thermostatic module**
**Thermostatic module  
for concealed installation  
for 1 function**

- / Eco-Function: flow rate regulation via lever handle
- / depending on volume flow and installation situation approx. 50% flow rate reduction
- / 1 function and 1 additional outlet
- / comfortable turning on / off of consumers with large Select-paddle
- / maximum flow rate at 3 bar: 24 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / the thermostat offers the possibility for thermal disinfection
- / non-return valve
- / connection type: basic set
- / min. operating pressure: 1 bar
- / Thermostat is delivered with button hand shower

finish

 Chrome  
 Matt Black  
 AXOR FinishPlus\*

code no.

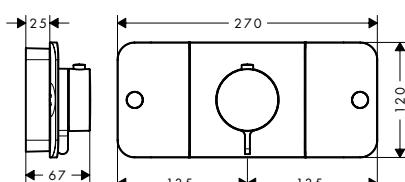 45711000  
 45711670  
 45711XXX

**Thermostatic module  
for concealed installation  
for 2 functions**


- / Eco-Function: flow rate regulation via lever handle
- / depending on volume flow and installation situation approx. 50% flow rate reduction
- / 2 functions and 1 additional outlet
- / comfortable turning on / off of consumers with large Select-paddle
- / simultaneous use of several outlets
- / flow rate per outlet: 24 l/min
- / flow rate by simultaneous use of all outlets: 30 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / the thermostat offers the possibility for thermal disinfection
- / non-return valve
- / connection type: basic set
- / min. operating pressure: 1 bar
- / Thermostat is delivered with buttons hand shower and Rain large

 Chrome  
 Matt Black  
 AXOR FinishPlus\*

 45712000  
 45712670  
 45712XXX
**Required parts:**

- / Basic set for thermostatic module for concealed installation

45710180

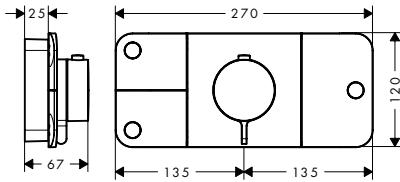

### Thermostatic module for concealed installation for 3 functions

- / Eco-Function: flow rate regulation via lever handle
- / depending on volume flow and installation situation approx. 50% flow rate reduction
- / 3 functions and 1 additional outlet
- / comfortable turning on / off of consumers with large Select-paddle
- / simultaneous use of several outlets
- / flow rate per outlet: 24 l/min
- / flow rate by simultaneous use of all outlets: 30 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / the thermostat offers the possibility for thermal disinfection
- / non-return valve
- / connection type: basic set
- / min. operating pressure: 1 bar
- / Thermostat is delivered with buttons handshower, Rain large and Body spray

finish

Chrome  
Matt Black  
AXOR FinishPlus\*

code no.

45713000  
45713670  
45713XXX



### Basic set for thermostatic module for concealed installation


45710180

- / 2 inlets / 4 outlets
- / all outlets can be used simultaneously
- / connection thread Rp 1/2
- / installation depth: from 80 to 108 mm
- / sound-decoupled installation

#### Optional parts:

- / Extension set 25 mm for basic set thermostatic module

45790000

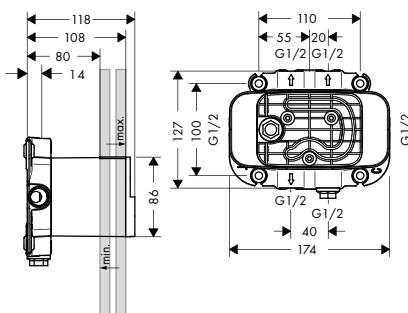

### Extension set 25 mm for basic set thermostatic module

45790000

- / extension for basic set
- / extension length: 25 mm



#### Required parts:

- / Basic set for thermostatic module for concealed installation

45710180




Measurements within scale drawings are in mm.

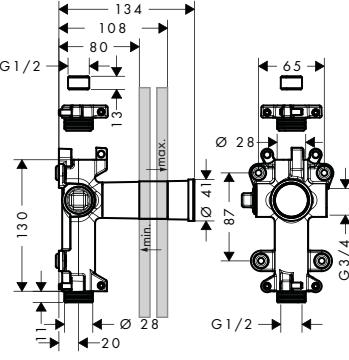Valve	finish	code no.
	Shut-off valve for concealed installation	Chrome Matt Black AXOR FinishPlus*
	/ comfortable turning on / off of consumers with large Select-paddle / connection type: basic set / 1 function / connection dimension: DN15 / material: metal	45771000 45771670 45771XXX
	<b>Required parts:</b> / Basic set for shut-off valve for concealed installation	45770180
	<b>Basic set for shut-off valve for concealed installation</b>	45770180
	/ connection from left or right / flow rate at free through-flow: 30 l/min / sound-decoupled installation / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning / connection dimension: DN15	

# Monolithic design for the shower

The AXOR One overhead showers and hand showers feature monolithic forms and an innovative organization of Rain and PowderRain spray types, reflected in the distinctive graphic language of the showerhead's spray disc. The AXOR One showerpipe is the perfect all-in-one combination of overhead shower, hand shower, wall bar and wall outlet. The showerpipe and shower set offer a clean appearance thanks to their integrated wall outlet. The entire collection can be personalized in Matt Black or an exclusive AXOR FinishPlus surface.

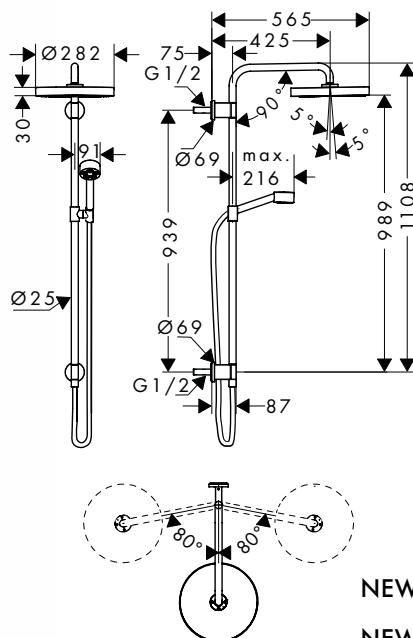

**Showerpipe****NEW****Showerpipe 280 1jet  
for concealed installation**

finish

code no.

Chrome	48790000
Matt Black	48790670
AXOR FinishPlus*	48790XXX



- / consists of: overhead shower, hand shower, wall connector, shower hose, hand shower holder, shower bar
- / overhead shower AXOR One 280 1jet
- / shower head size overhead shower: 280 mm
- / spray type overhead shower: PowderRain and Rain in combination
- / ball-joint: overhead shower angle adjustable
- / spray type hand shower: PowderRain
- / shower holder inclination angle can be adjusted continuously
- / requires a mixer for 2 functions
- / maximum flow rate at 3 bar: 12,7 l/min
- / flow rate of hand shower at 3 bar: 8,3 l/min
- / minimum flow pressure: 2 bar
- / mounting type: concealed
- / shower bar diameter: 25 mm
- / height-adjustable hand shower holder
- / swivelling shower arm
- / connection dimension: DN15
- / min. operating pressure: 1,5 bar
- / max. operating pressure: 10 bar

**Consisting of:**


- NEW** / Overhead shower 280 1jet with shower arm (# 48491XXX)
- NEW** / Hand shower 75 1jet EcoSmart (# 48651XXX)
- NEW** / Shower bar with wall connection and shower hose 1.60 m (# 48792XXX)

**Required parts:**

- NEW** / Basic set for showerpipe 48798180


**Optional parts:**

- / Thermostatic module for concealed installation for 2 functions Chrome 45712000
- Matt Black 45712670
- AXOR FinishPlus\* 45712XXX

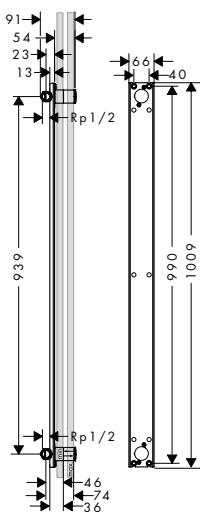**NEW****Basic set for showerpipe**

48798180


- / suitable for AXOR One Showerpipe 48490XXX
- / sound-decoupled installation
- / AXOR One Showerpipe 48490XXX
- / connection dimension: G 1/2

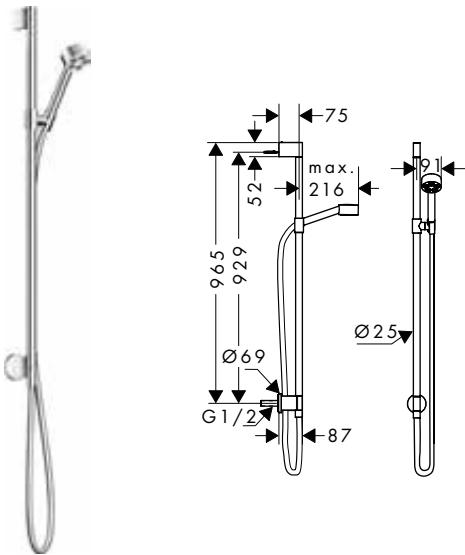**Shower sets****NEW****NEW**  
**NEW****Shower set 75 1jet EcoSmart with wall connection**

- / consists of: hand shower, shower bar, shower hose, slider, wall connector
- / shower head size: 73 mm
- / spray type: PowderRain
- / maximum flow rate at 3 bar: 9,1 l/min
- / shower hose with conical nut on both ends
- / pivot connector prevent hose from tangling
- / wall mounting: screw fastening
- / wall supports of metal
- / stand pipe length: 965 mm
- / shower bar diameter: 25 mm
- / profile stand pipe: round
- / drilling distance 929 mm
- / metal hand shower holder

**Consisting of:**


- / Hand shower 75 1jet EcoSmart (# 48651XXX)
- / Shower bar with wall connection and shower hose 1.60 m (# 48792XXX)

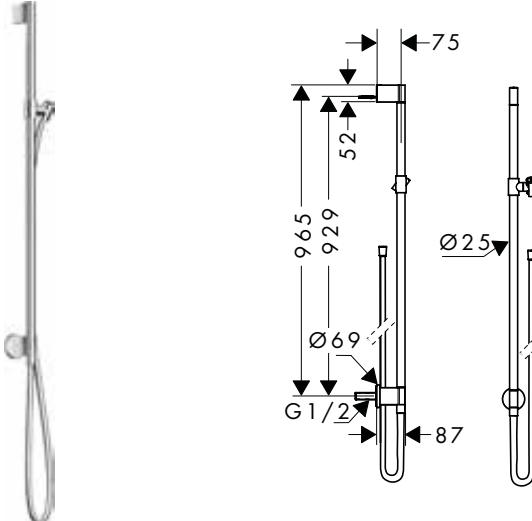**finish**Chrome  
Matt Black  
AXOR FinishPlus\***code no.**48791000  
48791670  
48791XXX**NEW****Shower bar with wall connection and shower hose 1.60 m**Chrome  
Matt Black  
AXOR FinishPlus\*48792000  
48792670  
48792XXX

- / consists of: shower bar, slider, wall connector, shower hose
- / pivot connector prevent hose from tangling
- / hose nut: for shower hoses with conical nut on both sides
- / profile stand pipe: round
- / shower bar diameter: 25 mm
- / metal hand shower holder
- / slider steplessly adjustable
- / wall supports of metal


**Consisting of:**

- / Shower hose 1.60 m (# 28626000)

**Overhead showers****NEW****Overhead shower 75 1jet EcoSmart with shower arm**Chrome  
Matt Black  
AXOR FinishPlus\*48490000  
48490670  
48490XXX

- / consists of: overhead shower, shower arm
- / shower head size: 73 mm
- / spray type: PowderRain
- / projection 116 mm
- / ball joint: overhead shower angle adjustable
- / material spray disc: metal
- / shower arm length 85 mm
- / maximum flow rate at 3 bar: 8,7 l/min
- / flow rate PowderRain spray (at 3 bar): 8,7 l/min
- / minimum function point for proper function: 6,3 l/min
- / minimum flow pressure: 1 bar
- / overhead shower removable for cleaning
- / installation: wall
- / connection thread G 1/2
- / connection dimension: DN15

Measurements within scale drawings are in mm.

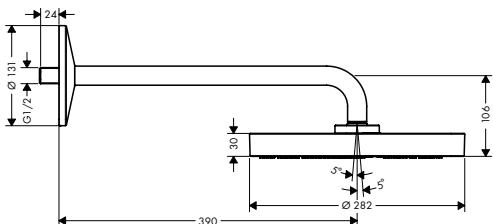

### Overhead shower 280 1jet with shower arm

finish

code no.


Chrome 48491000  
Matt Black 48491670  
AXOR FinishPlus\* 48491XXX



- / consists of: overhead shower, shower arm
- / shower head size: 280 mm
- / spray type: PowderRain and Rain in combination
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / shower arm length 390 mm
- / maximum flow rate at 3 bar: 12,3 l/min
- / flow rate PowderRain and Rain spray in combination (at 3 bar): 12,3 l/min
- / minimum function point for proper function: 8,7 l/min
- / minimum flow pressure: 1,2 bar
- / overhead shower removable for cleaning
- / installation: wall
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters with an output of 18 kW

#### Alternative products:

NEW	Overhead shower 280 2jet with shower arm	Chrome Matt Black AXOR FinishPlus*	48492000 48492670 48492XXX
-----	--	--	----------------------------------

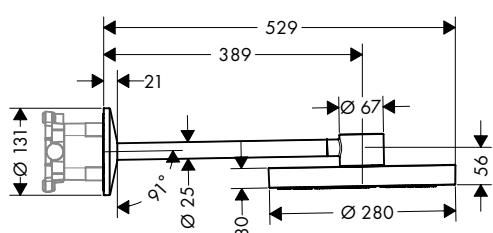

### Overhead shower 280 2jet with shower arm

Chrome 48492000  
Matt Black 48492670  
AXOR FinishPlus\* 48492XXX




- / consists of: overhead shower, shower arm
- / shower head size: 280 mm
- / spray type: PowderRain, Rain
- / material spray disc: metal
- / shower arm length 389 mm
- / maximum flow rate at 3 bar: 12 l/min
- / flow rate PowderRain spray (at 3 bar): 7,2 l/min
- / flow rate Rain spray (at 3 bar): 12 l/min
- / minimum function point for proper function: 6,7 l/min
- / minimum flow pressure: 1,5 bar
- / connection of overhead shower: bayonet fixation
- / overhead shower removable for cleaning
- / installation: wall
- / connection dimension: DN15
- / connection type: basic set
- / suitable for continuous flow water heaters with an output of 18 kW
- / not included: basic set

#### Alternative products:

NEW	Overhead shower 280 1jet with shower arm	Chrome Matt Black AXOR FinishPlus*	48491000 48491670 48491XXX
-----	--	--	----------------------------------

#### Required parts:

- / Basic set for overhead shower 2jet with shower arm 35361180



### Overhead shower 280 1jet with ceiling connection

- / consists of: overhead shower, ceiling connector
- / shower head size: 280 mm
- / spray type: PowderRain and Rain in combination
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 120 mm
- / maximum flow rate at 3 bar: 12,2 l/min
- / flow rate PowderRain and Rain spray in combination (at 3 bar): 12,2 l/min
- / minimum function point for proper function: 9,2 l/min
- / minimum flow pressure: 1,4 bar
- / overhead shower removable for cleaning
- / installation: ceiling
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters with an output of 18 kW

finish

code no.

Chrome 48493000  
Matt Black 48493670  
AXOR FinishPlus\* 48493XXX



NEW

#### Alternative products:

- / Overhead shower 280 2jet with ceiling connection


Chrome 48494000  
Matt Black 48494670  
AXOR FinishPlus\* 48494XXX

NEW

#### Optional parts:

- / Ceiling connector 300 mm for overhead shower 280 1jet

Chrome 48495000  
Matt Black 48495670  
AXOR FinishPlus\* 48495XXX

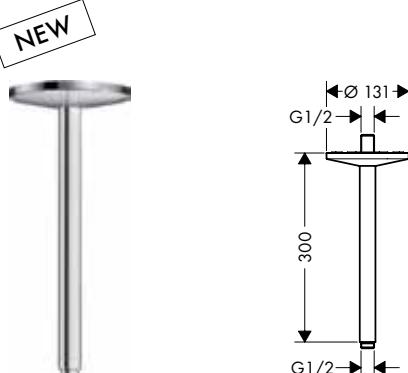

NEW

### Ceiling connector 300 mm for overhead shower 280 1jet


- / length: 300 mm
- / installation type: exposed installation
- / material: solid brass
- / connection type: G 1/2

Chrome 48495000  
Matt Black 48495670  
AXOR FinishPlus\* 48495XXX

#### Optional parts:

- / Overhead shower 280 1jet with ceiling connection

Chrome 48493000  
Matt Black 48493670  
AXOR FinishPlus\* 48493XXX



### Overhead shower 280 2jet with ceiling connection

- / consists of: overhead shower, ceiling connector
- / shower head size: 280 mm
- / spray type: PowderRain, Rain
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 211 mm
- / maximum flow rate at 3 bar: 12,5 l/min
- / flow rate PowderRain spray (at 3 bar): 7,5 l/min
- / flow rate Rain spray (at 3 bar): 12,5 l/min
- / minimum function point for proper function: 1,5 l/min
- / minimum flow pressure: 1,5 bar
- / connection of overhead shower: bayonet fixation
- / overhead shower removable for cleaning
- / installation: ceiling
- / connection dimension: DN15
- / connection type: basic set
- / suitable for continuous flow water heaters with an output of 18 kW
- / not included: basic set

finish

code no.

Chrome 48494000  
Matt Black 48494670  
AXOR FinishPlus\* 48494XXX



**Alternative products:**  
NEW / Overhead shower 280 1jet with ceiling connection


Chrome 48493000  
Matt Black 48493670  
AXOR FinishPlus\* 48493XXX

**Required parts:**

- / Basic set for overhead shower with ceiling connector

**Optional parts:**  
NEW / Ceiling connector 300 mm for overhead shower 280 2jet


Chrome 48496000  
Matt Black 48496670  
AXOR FinishPlus\* 48496XXX



### Ceiling connector 300 mm for overhead shower 280 2jet

- / length: 300 mm
- / installation type: on a basic set
- / material: solid brass
- / connection type: G 1/2

Chrome 48496000  
Matt Black 48496670  
AXOR FinishPlus\* 48496XXX

**Hand showers****NEW****Hand shower 75 1jet EcoSmart**

- / shower head size: 73 mm
- / spray type: PowderRain
- / maximum flow rate at 3 bar: 9,1 l/min
- / material: metal
- / with internal water conduction
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters


**finish**

	code no.
Chrome	48651000
Matt Black	48651670
AXOR FinishPlus*	48651XXX

**Optional parts:**

- / Metal effect shower hose 1.25 m
- / Metal effect shower hose 1.60 m
- / Metal effect shower hose 2.00 m

Chrome	28282000
Matt Black	28282670
AXOR FinishPlus*	28282XXX
Chrome	28286000
AXOR FinishPlus*	28286XXX
Chrome	28284000
AXOR FinishPlus*	28284XXX

**Hand shower 2jet**


- / shower head size: 124 x 24 mm
- / spray type: Rain, flood spray
- / convenient diversion via Select button
- / maximum flow rate at 3 bar: 12 l/min
- / flow rate Mono spray (at 3 bar): 12 l/min
- / flow rate Rain spray (at 3 bar): 12 l/min
- / minimum flow pressure: 2,4 bar
- / with internal water conduction
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters
- / not recommended for rim-/ tile-mounted mixers

Chrome	45720000
Matt Black	45720670
AXOR FinishPlus*	45720XXX

**Optional parts:**

- / Metal effect shower hose 1.25 m
- / Metal effect shower hose 1.60 m
- / Metal effect shower hose 2.00 m

Chrome	28282000
Matt Black	28282670
AXOR FinishPlus*	28282XXX
Chrome	28286000
AXOR FinishPlus*	28286XXX
Chrome	28284000
AXOR FinishPlus*	28284XXX

**Porter****Porter unit**


- / for hoses with cylindrical nuts
- / integrated support function
- / metal
- / non-return valve
- / connection type: G 1/2

Chrome	45723000
Matt Black	45723670
AXOR FinishPlus*	45723XXX

**Optional parts:**

- / Metal effect shower hose 1.25 m
- / Metal effect shower hose 1.60 m
- / Metal effect shower hose 2.00 m

Chrome	28282000
Matt Black	28282670
AXOR FinishPlus*	28282XXX
Chrome	28286000
AXOR FinishPlus*	28286XXX
Chrome	28284000
AXOR FinishPlus*	28284XXX


**Bath****Bath spout curved**

- / 1 function
- / with escutcheon
- / projection 178 mm
- / wall-mounted
- / maximum flow rate at 3 bar: 19 l/min
- / connection dimension: DN20
- / spray type: normal spray

finish

code no.

Chrome 38411000  
 Matt Black 38411670  
 AXOR FinishPlus\* 38411XXX

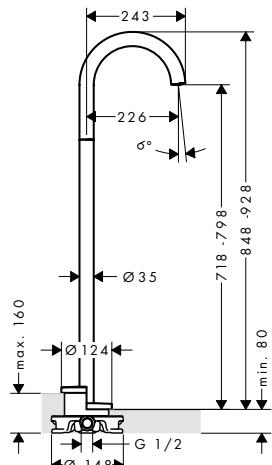**Bath spout curved floor-standing**


- / 1 function
- / connection type: basic set
- / projection 226 mm
- / free-standing installation
- / maximum flow rate at 3 bar: 18 l/min
- / spray type: normal spray

Chrome 38412000  
 Matt Black 38412670  
 AXOR FinishPlus\* 38412XXX

**Required parts:**

- / Basic set for mixers floor-standing

10452180


**Shower hose****Metal effect shower hose 1.25 m**

- / high-quality shower hose with metal effect
- / with plastic coating, easy to clean
- / shower hose length: 1.25 m
- / pivot connector prevent hose from tangling
- / kink-protected
- / nuts shower hose: cylindrical nut on both ends

Chrome 28282000  
 Matt Black 28282670  
 AXOR FinishPlus\* 28282XXX


**Alternative sizes:**

- / Metal effect shower hose 1.60 m Chrome 28286000  
 AXOR FinishPlus\* 28286XXX
- / Metal effect shower hose 2.00 m Chrome 28284000  
 AXOR FinishPlus\* 28284XXX

**Traps****Design trap Flowstar S**


- / adjustment distance 60 - 165 mm
- / distance to wall 330 mm
- / odour trap - backwater height is 70 mm
- / connection dimension entry: G 1 1/4

Chrome 51305000  
 Matt Black 51305670  
 AXOR FinishPlus\* 51305XXX

**Cover**


- / for angle valve
- / packaging unit: 1 piece

Chrome 51306000  
 Matt Black 51306670  
 AXOR FinishPlus\* 51306XXX

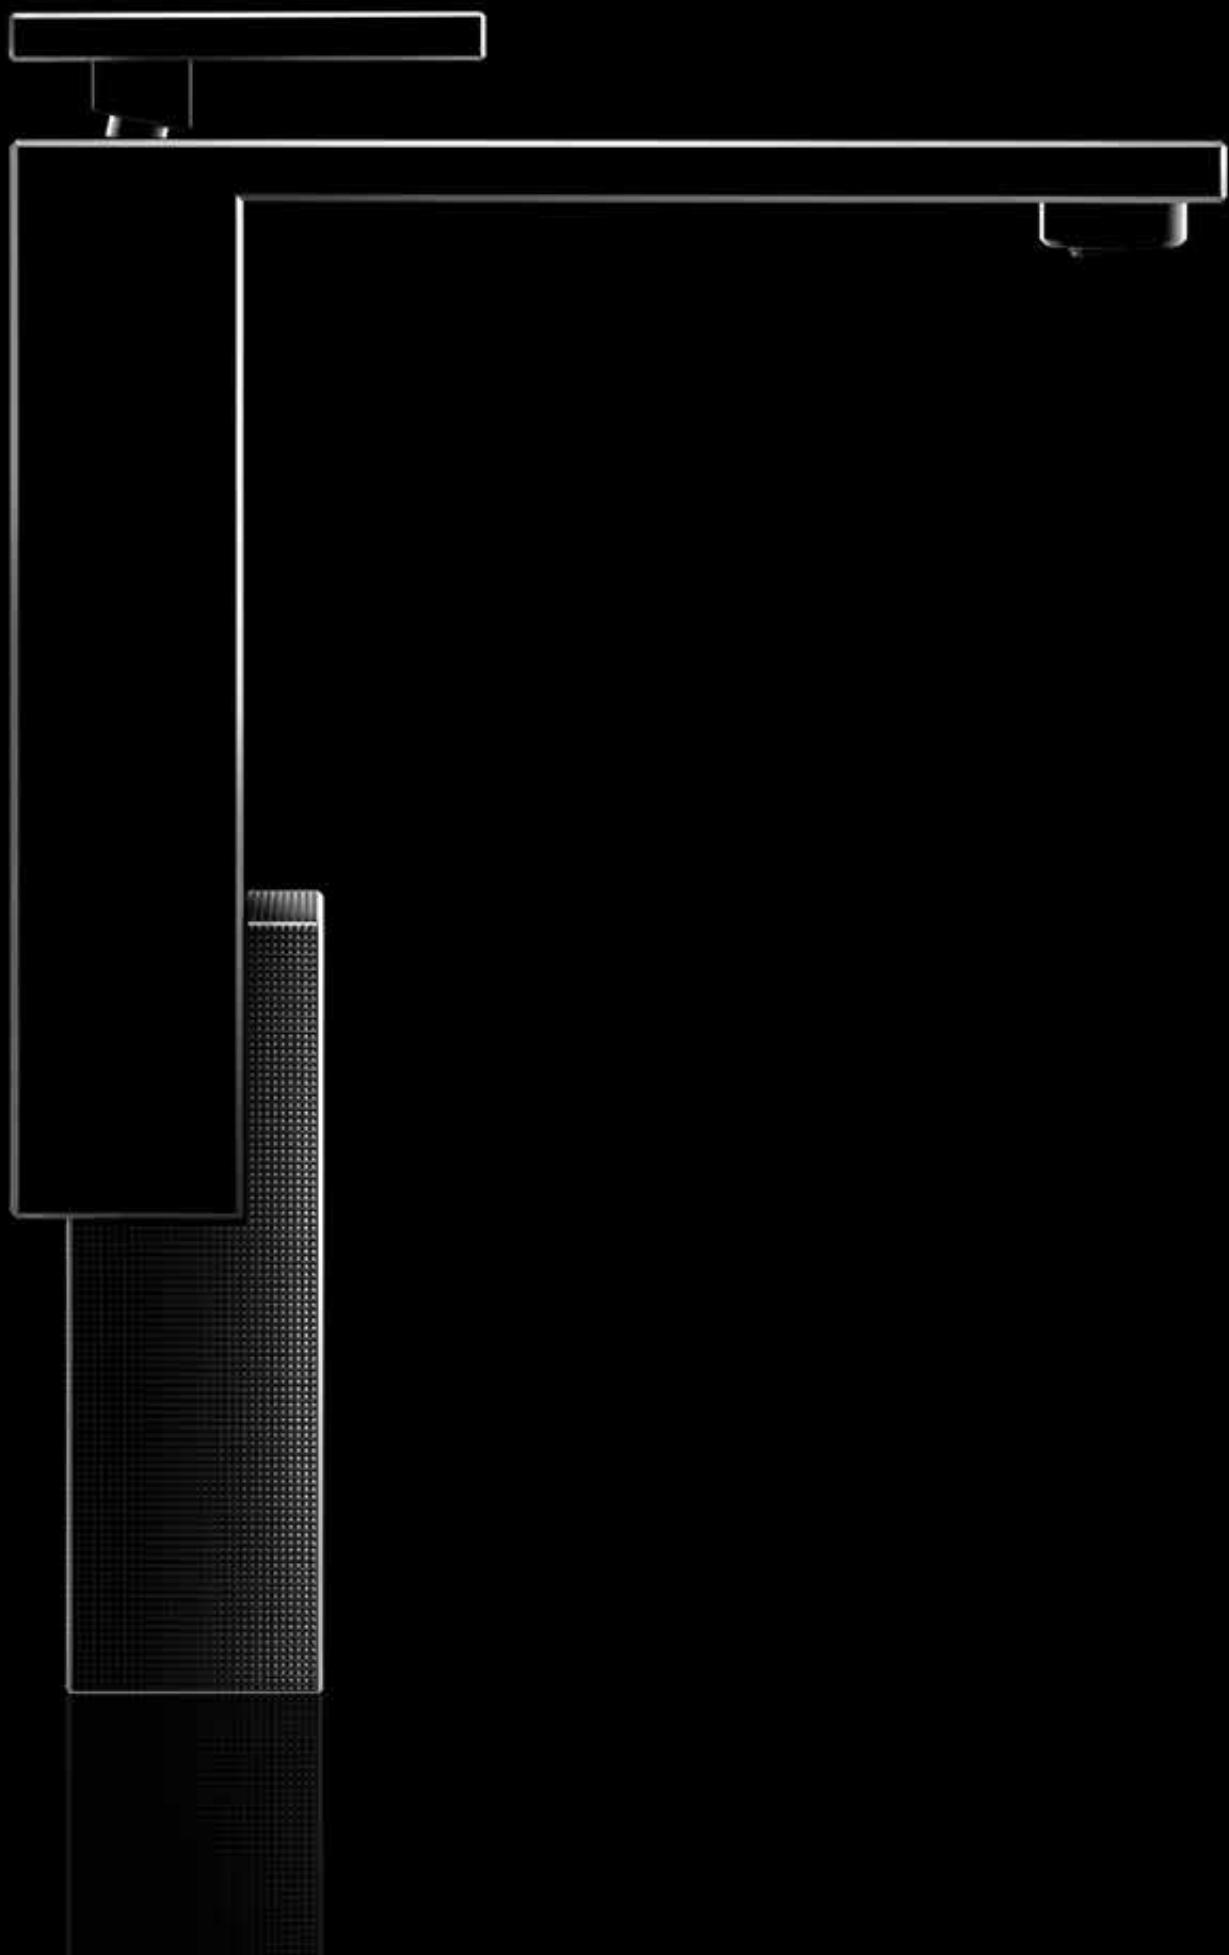

# AXOR Edge

<b>Basin</b>	64
Bath	66
Shower	70
Thermostatic mixers / valves / diverters	71

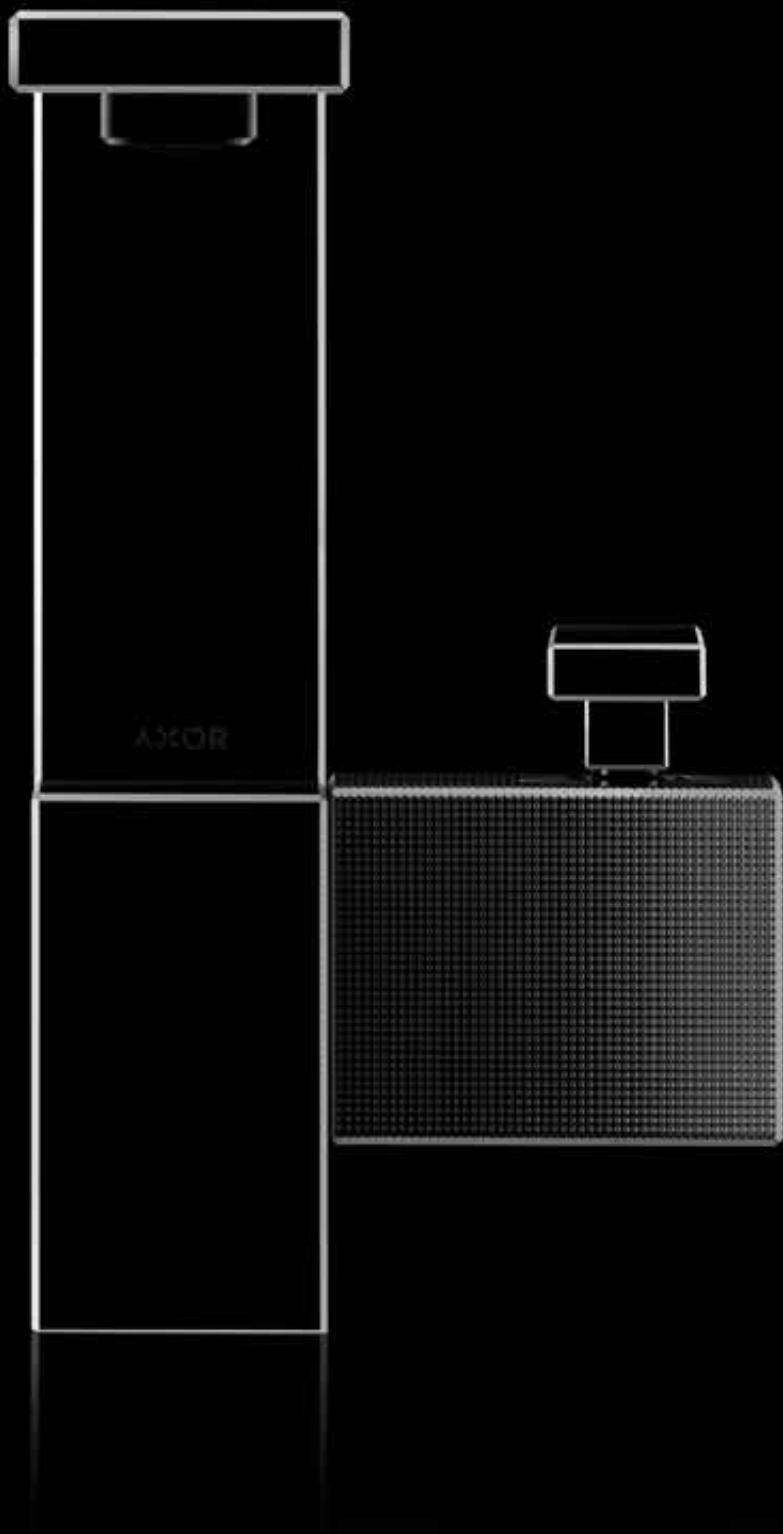

## AXOR Edge

### Architectonics In perfection

The cube. Ushered into art by the avant-garde of the early 20th century. Taken to a new level by AXOR Edge. An asymmetrical arrangement of rectangular prisms, crafted with ultra-precision. A masterpiece through and through. Cube by cube. Transcending aesthetic and technical boundaries. Cut with diamonds, for edges and surfaces that verge on perfection.

AXOR Edge takes exclusivity to new heights. Bold yet refined. With flawlessly smooth surfaces that reflect light evenly. Intensely. Enlivened with structured surfaces that act as a counterpart. Enhancing the effect

of the high-gloss surfaces. Creating fascinating contrasts. Expressing individual personality. With a level of precision achieved only with state-of-the-art diamond-cutting technology.


With AXOR FinishPlus, the collection becomes an even more personal statement. A testimony to the discerning taste of its owner. Particular in Polished Black Chrome or Polished Gold Optic. AXOR Edge consists of 25 products. For the washbasin. For the bathtub. For the shower. In perfection.

Design: Jean-Marie Massaud



Refinement finds its personal expression in the choice of exclusive AXOR FinishPlus surfaces. Four lustrous finishes enhance the natural brilliance of AXOR Edge. From Polished Gold Optic to Polished Black Chrome. Manufactured to the highest technical standards. Finished

using PVD (Physical Vapor Deposition) in AXOR's vacuum chambers. Cutting-edge technology that gives the finish more resistance, greater longevity and, above all, unprecedented brilliance and color. Ultra-radiance for an ultra-luxurious bathroom.

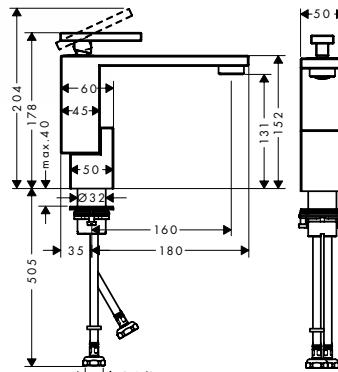**Basin**
**Single lever basin mixer 130  
with push-open waste set -  
diamond cut 2 ticks**


- / consists of: single lever basin mixer, waste set
- / ComfortZone 130
- / projection: 160 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / suitable for continuous flow water heaters
- / push-open waste set G 1 1/4
- / material waste set: metal
- / connection type: G 1/2 connections
- / connection dimension: DN15

This product is not available in brushed AXOR FinishPlus surfaces.

finish



Chrome  
AXOR FinishPlus\*

code no.

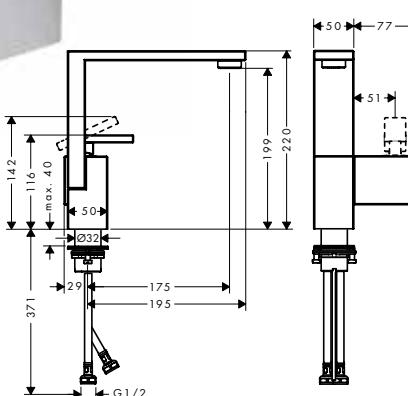46012009  
46012XXX
**Single lever basin mixer 190  
with push-open waste set -  
diamond cut 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 190
- / projection: 175 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / suitable for continuous flow water heaters
- / push-open waste set G 1 1/4
- / material waste set: metal
- / connection type: G 1/2 connections
- / connection dimension: DN15

This product is not available in brushed AXOR FinishPlus surfaces.



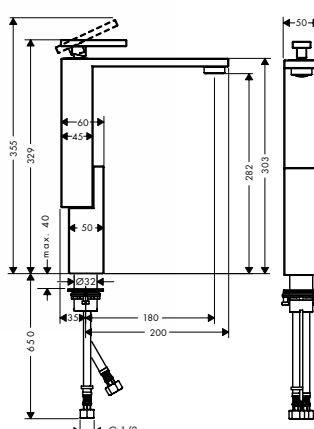
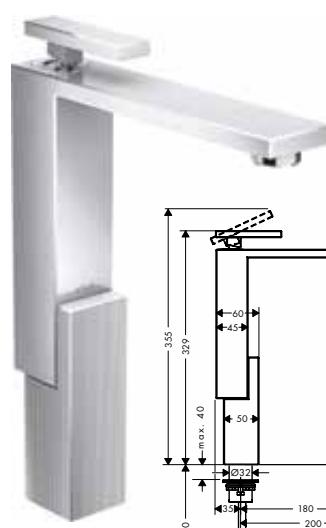
Chrome  
AXOR FinishPlus\*46022009  
46022XXX
**Single lever basin mixer 280  
with push-open waste set -  
diamond cut 2 ticks**


- / consists of: single lever basin mixer, waste set
- / ComfortZone 280
- / projection: 180 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / suitable for continuous flow water heaters
- / push-open waste set G 1 1/4
- / material waste set: metal
- / connection type: G 1/2 connections
- / connection dimension: DN15

This product is not available in brushed AXOR FinishPlus surfaces.

Chrome  
AXOR FinishPlus\*46032009  
46032XXX

Measurements within scale drawings are in mm.

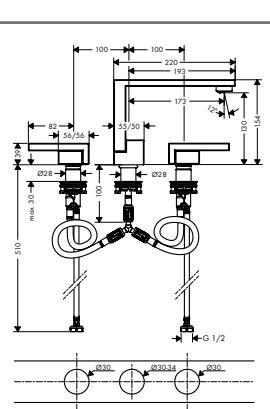
	finish	code no.
 	<b>3-hole basin mixer 130 with push-open waste set - diamond cut 2 ticks</b> Chrome AXOR FinishPlus* 46052009 46052XXX	  
	<ul style="list-style-type: none"> <li>/ consists of: 3-hole basin mixer, waste set</li> <li>/ ComfortZone 130</li> <li>/ projection: 173 mm</li> <li>/ spray type: normal spray</li> <li>/ maximum flow rate at 3 bar: 3 l/min</li> <li>/ ceramic valves hot/ cold 90°</li> <li>/ suitable for continuous flow water heaters</li> <li>/ push-open waste set G 1 1/4</li> <li>/ material waste set: metal</li> <li>/ connection type: G 1/2 connections</li> <li>/ connection dimension: DN15</li> </ul>	
	<p>This product is not available in brushed AXOR FinishPlus surfaces.</p>	
	<b>Optional parts:</b> / Hose extension set for 3-hole basin mixer	38959000
 	<b>Hose extension set for 3-hole basin mixer</b> 38959000	
 	<b>3-hole basin mixer for concealed installation wall-mounted with spout 190 mm - diamond cut 2 ticks</b> Chrome AXOR FinishPlus* 46062009 46062XXX	 
	<ul style="list-style-type: none"> <li>/ consists of: 3-hole basin mixer, waste set</li> <li>/ projection: 190 mm</li> <li>/ spray type: normal spray</li> <li>/ maximum flow rate at 3 bar: 3 l/min</li> <li>/ ceramic valves hot/ cold 90°</li> <li>/ suitable for continuous flow water heaters</li> <li>/ push-open waste set G 1 1/4</li> <li>/ material waste set: metal</li> <li>/ connection type: basic set</li> <li>/ connection dimension: DN15</li> </ul>	
	<p>This product is not available in brushed AXOR FinishPlus surfaces.</p>	
	<b>Required parts:</b> / Basic set for 3-hole basin mixer for concealed installation wall-mounted	10303180
	<b>Optional parts:</b> / Seal	96383000
 	<b>Basic set for 3-hole basin mixer for concealed installation wall-mounted</b> 10303180	
	<ul style="list-style-type: none"> <li>/ suitable for all 3-hole wash basin mixers for wall mounting</li> <li>/ connection dimension: DN15/DN20</li> <li>/ connection from above or below</li> </ul>	
	<b>Optional parts:</b> / Seal	96383000

**Seal**

finish

code no.

96383000

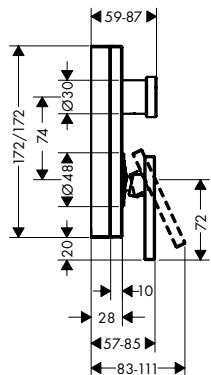**Bath****Single lever bath mixer for concealed installation**

- / 2 functions
- / connection type: basic set
- / flow rate upper outlet: 20 l/min
- / flow rate lower outlet: 28 l/min
- / maximum flow rate at 3 bar: 28 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / with silencer
- / suitable for continuous flow water heaters

Chrome  
AXOR FinishPlus\*46450000  
46450XXX

This product is not available in brushed AXOR FinishPlus surfaces.

**Alternative products:**

- / Single lever bath mixer for concealed installation - diamond cut

Chrome  
AXOR FinishPlus\*46451000  
46451XXX

This product is not available in brushed AXOR FinishPlus surfaces.

- / Single lever bath mixer for concealed installation with integrated security combination according to EN1717

Chrome  
AXOR FinishPlus\*46420000  
46420XXX

This product is not available in brushed AXOR FinishPlus surfaces.

- / Single lever bath mixer for concealed installation with integrated security combination according to EN1717 - diamond cut

Chrome  
AXOR FinishPlus\*46421000  
46421XXX

This product is not available in brushed AXOR FinishPlus surfaces.

**Required parts:**

- / Basic set iBox universal


01700180

**Optional parts:**

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

13587000

93171000

**Basic set iBox universal**

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

**Optional parts:**


- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal

13587000

93171000

97759000

Measurements within scale drawings are in mm.

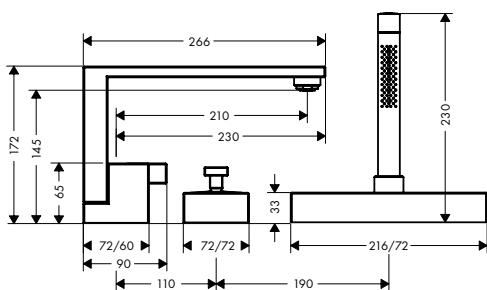

### 3-hole rim mounted bath mixer - diamond cut 2 ticks

- / consists of: 3-hole rim mounted single lever bath mixer, baton hand shower, shower holder
- / 2 functions
- / projection 210 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum pull-out length of hand shower: 1.45 m
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / non-return valve
- / suitable for continuous flow water heaters
- / connection dimension: DN15


This product is not available in brushed AXOR FinishPlus surfaces.

finish

code no.

Chrome  
AXOR FinishPlus\*

46432009  
46432XXX

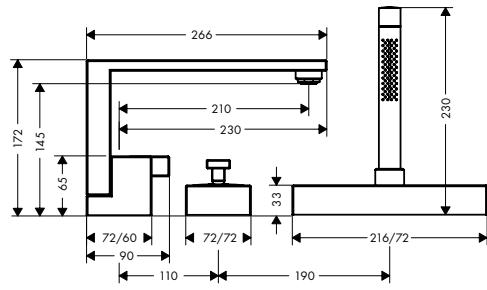

### 3-hole rim mounted bath mixer

- / consists of: 3-hole rim mounted single lever bath mixer, baton hand shower, shower holder
- / 2 functions
- / projection 210 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum pull-out length of hand shower: 1.45 m
- / sBox for quiet, smooth and protected hose guidance
- / maximum flow rate at 3 bar: 20 l/min
- / flow rate for bath spout at 3 bar: 20 l/min
- / flow rate of hand shower at 3 bar: 9 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / non-return valve
- / suitable for continuous flow water heaters
- / connection dimension: DN15
- / removable for service at any time
- / no additional maintenance opening required

This product is not available in brushed AXOR FinishPlus surfaces.

Chrome  
AXOR FinishPlus\*

46430000  
46430XXX



#### Consisting of:

- / Baton hand shower 2jet (# 28532000)

#### Alternative products:

- / 3-hole rim mounted bath mixer - diamond cut

Chrome  
AXOR FinishPlus\*


46431000  
46431XXX

This product is not available in brushed AXOR FinishPlus surfaces.

#### Required parts:

- / Basic set for 3-hole rim mounted single lever bath mixer


15487180



### Basic set for 3-hole rim mounted single lever bath mixer

- / sBox for quiet, smooth and protected hose guidance
- / drilling diameter: 35 mm, 50 mm
- / clamping range: 0 - 30 mm
- / maximum pull-out length of hand shower: 1,45 m
- / suitable for suitable for installation on bath rim
- / connection thread: G 1/2
- / connection hose length: 600 mm
- / connection dimension: DN15
- / bath rim width at least 100 mm
- / drilling diameter on bath tub: two drilled holes Ø 50/51 mm and connection by sawing out required (consider template)

15487180

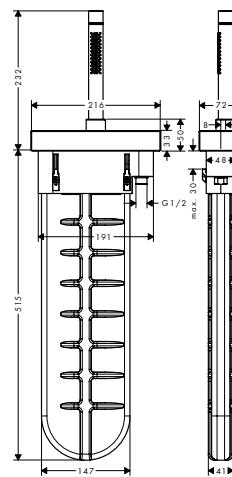

### Rim mounted bath set

- / consists of: baton hand shower, escutcheon, hose box, shower hose
- / suitable for suitable for installation on bath rim
- / sBox for quiet, smooth and protected hose guidance
- / connection thread G 1/2
- / no additional maintenance opening required
- / connection dimension: DN15
- / maximum pull-out length of hand shower 1.45 m
- / removable for service at any time
- / maximum flow rate at 3 bar: 10 l/min

Chrome AXOR FinishPlus\* 46470000  
46470XXX

This product is not available in brushed AXOR FinishPlus surfaces.

#### Consisting of:


- / Baton hand shower 2jet (# 28532000)

#### Required parts:

- / Rim and tile mounted bath basic set 15490180

#### Optional parts:

- / Installation plate for tile mounted installation 28014000
- / Mounting angle set for installation plate for tile mounted installation 28011000

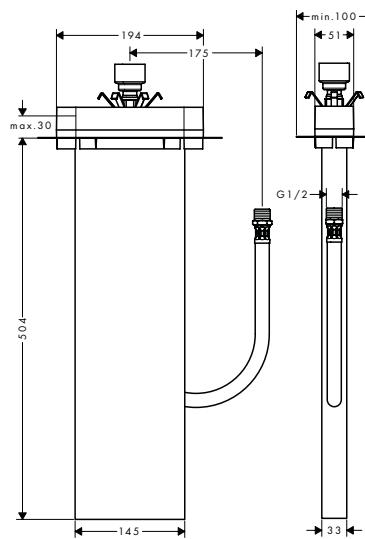




### Rim and tile mounted bath basic set


15490180

- / suitable for rim or tile mounted installation
- / 1 function
- / connection thread R 1/2
- / connection hose length: 600 mm
- / bath rim width at least 100 mm
- / drilling diameter on bath tub: two drilled holes Ø 50/51 mm and connection by sawing out required (consider template)
- / clamping range: 0 - 30 mm
- / connection dimension: DN15

#### Optional parts:

- / Installation plate for tile mounted installation 28014000
- / Mounting angle set for installation plate for tile mounted installation 28011000

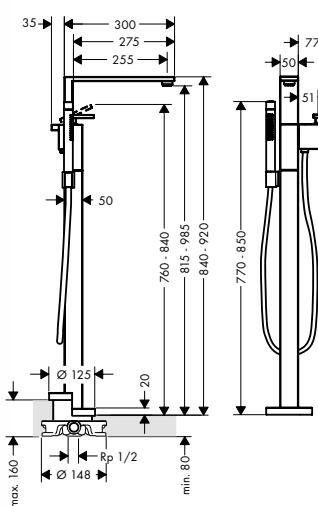	finish	code no.	
 	<b>Single lever bath mixer floor-standing - diamond cut 2 ticks</b> Chrome AXOR FinishPlus*	46442009 46442XXX	
			
	<ul style="list-style-type: none"> <li>/ consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder</li> <li>/ 2 functions</li> <li>/ projection 255 mm</li> <li>/ connection type: basic set</li> <li>/ spray type mixer: normal spray</li> <li>/ spray type hand shower: Rain, Mono</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> <li>/ ceramic cartridge</li> <li>/ temperature limitation adjustable</li> <li>/ diverter with automatic resetting</li> <li>/ non-return valve</li> <li>/ suitable for continuous flow water heaters</li> <li>/ connection dimension: DN15</li> </ul> <p>This product is not available in brushed AXOR FinishPlus surfaces.</p>		
	<b>Required parts:</b> / Basic set for mixers floor-standing	10452180	
	<b>Optional parts:</b> / Extension 60 mm for pipe	97686000	
 	<b>Basic set for mixers floor-standing</b> <ul style="list-style-type: none"> <li>/ for mounting on unfinished floor</li> <li>/ suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing</li> <li>/ connection dimension: DN15</li> </ul>	10452180	
	<b>Bath spout</b> <ul style="list-style-type: none"> <li>/ 1 function</li> <li>/ projection 190 mm</li> <li>/ wall-mounted</li> <li>/ maximum flow rate at 3 bar: 23 l/min</li> <li>/ connection dimension: G 1/2</li> <li>/ spray type: normal spray</li> </ul> <p>This product is not available in brushed AXOR FinishPlus surfaces.</p>	Chrome AXOR FinishPlus*	46410000 46410XXX
			
	<b>Alternative products:</b> / Bath spout diamond cut	Chrome AXOR FinishPlus*	46411000 46411XXX
	<p>This product is not available in brushed AXOR FinishPlus surfaces.</p>		

**Shower****Single lever shower mixer for concealed installation**

- / 1 function
- / connection type: basic set
- / maximum flow rate at 3 bar: 29 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / with silencer
- / suitable for continuous flow water heaters

This product is not available in brushed AXOR FinishPlus surfaces.

**Alternative products:**

- |  |                         |          |
|--|-------------------------|----------|
| / Single lever shower mixer for concealed installation - diamond cut | Chrome AXOR FinishPlus* | 46651000 |
|  | 46651XXX                |          |


This product is not available in brushed AXOR FinishPlus surfaces.

**Required parts:**

- |                            |          |
|----------------------------|----------|
| / Basic set iBox universal | 01700180 |
|----------------------------|----------|

**Optional parts:**

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |


**Basic set iBox universal**

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

**Optional parts:**

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |
| / Reduction coupling iBox universal            | 97759000 |

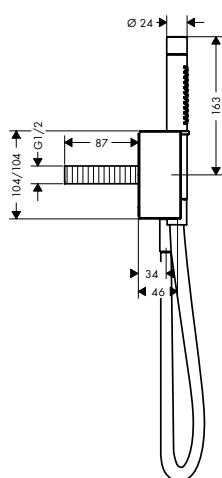**Porter unit with baton hand shower 2jet and shower hose**

Chrome AXOR FinishPlus\*

46520000

46520XXX

- / consists of: baton hand shower, porter unit, shower holder, shower hose
- / integrated support function
- / maximum flow rate at 3 bar: 17,7 l/min
- / non-return valve
- / minimum flow pressure: 1 bar
- / for shower hoses with cylindrical nut on both sides

This product is not available in brushed AXOR FinishPlus surfaces.

**Consisting of:**

- / Metal effect shower hose 1.25 m (# 28282000)

**Alternative products:**

- |   |                         |          |
|---|-------------------------|----------|
| / Porter unit with baton hand shower 2jet and shower hose - diamond cut | Chrome AXOR FinishPlus* | 46521000 |
|   | 46521XXX                |          |

This product is not available in brushed AXOR FinishPlus surfaces.

finish code no.




Chrome AXOR FinishPlus\*

46650000

46650XXX

Measurements within scale drawings are in mm.

## Thermostatic mixers/ valves/ diverters

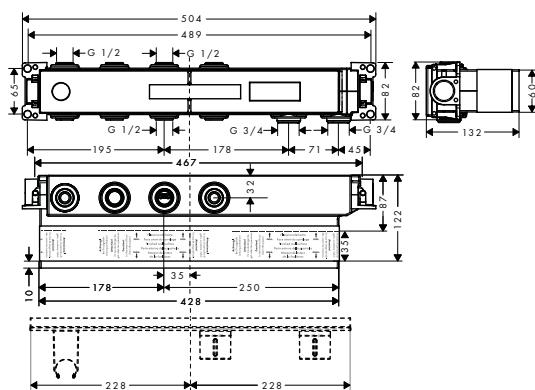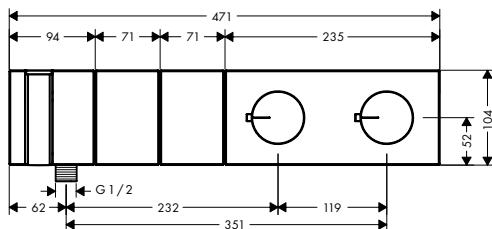
**Thermostatic module Select  
470/100 for concealed  
installation for 2 functions**

- / consists of: Thermostatic module, shower holder, baton hand shower, shower hose
- / depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- / 2 functions
- / Select push-button on/off control for 2 outlets
- / simultaneous use of several outlets
- / maximum flow rate at 3 bar: 35 l/min
- / flow rate hand shower connection at 3 bar: 14 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / hose nut: for shower hoses with cylindrical nut on both sides
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / Thermostat is delivered with buttons hand shower and Rain large

This product is not available in brushed AXOR FinishPlus surfaces.

**Consisting of:**

- / Metal effect shower hose 1.25 m (# 28282000)

**Alternative products:**

- |   |                         |                      |
|---|-------------------------|----------------------|
| / Thermostatic module Select 470/100 for concealed installation for 2 functions - diamond cut | Chrome AXOR FinishPlus* | 46701000<br>46701XXX |
|---|-------------------------|----------------------|

This product is not available in brushed AXOR FinishPlus surfaces.

**Required parts:**

- / Basic set for thermostatic module Select for 2 functions



18310180

**Basic set for thermostatic  
module Select for 2 functions**

18310180

- / 2 functions
- / connection thread Rp 3/4
- / installation depth: 87 - 122 mm
- / horizontal installation
- / sound-decoupled installation
- / connection dimension: DN15/DN20



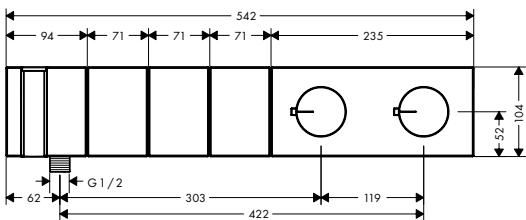

## Thermostatic module Select 540/100 for concealed installation for 3 functions

- / consists of: Thermostatic module, shower holder, baton hand shower, shower hose
- / depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- / 3 functions
- / Select push-button on/off control for 3 outlets
- / simultaneous use of several outlets
- / maximum flow rate at 3 bar: 38 l/min
- / flow rate hand shower connection at 3 bar: 14 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / hose nut: for shower hoses with cylindrical nut on both sides
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / Thermostat is delivered with buttons handshower, PowderRain, Rain large

finish

Chrome  
AXOR FinishPlus\*

code no.

46710000  
46710XXX

This product is not available in brushed AXOR FinishPlus surfaces.

### Consisting of:

- / Metal effect shower hose 1.25 m (# 28282000)

### Alternative products:

- / Thermostatic module Select 540/100 for concealed installation for 3 functions - diamond cut

Chrome  
AXOR FinishPlus\*

46711000  
46711XXX

This product is not available in brushed AXOR FinishPlus surfaces.

### Required parts:


- / Basic set for thermostatic module Select for 3 functions

18311180



## Basic set for thermostatic module Select for 3 functions


18311180

- / 3 functions
- / connection thread Rp 3/4
- / installation depth: 87 - 122 mm
- / horizontal installation
- / sound-decoupled installation
- / connection dimension: DN15/DN20

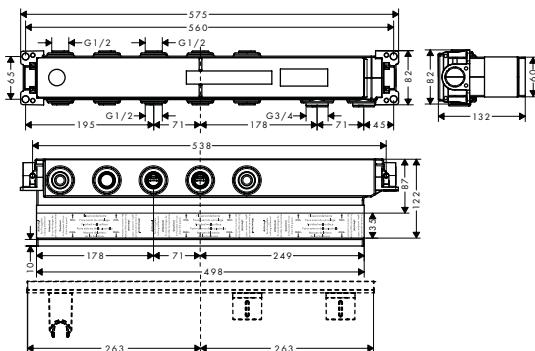

Measurements within scale drawings are in mm.

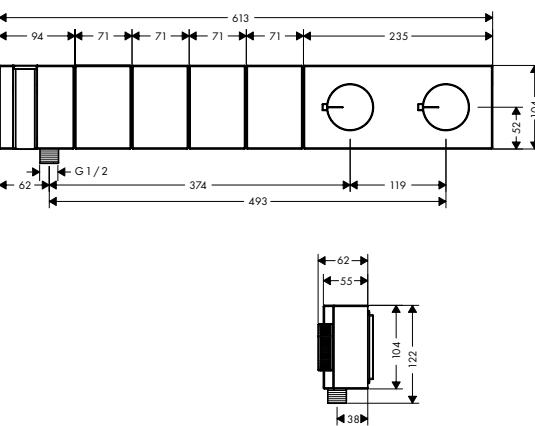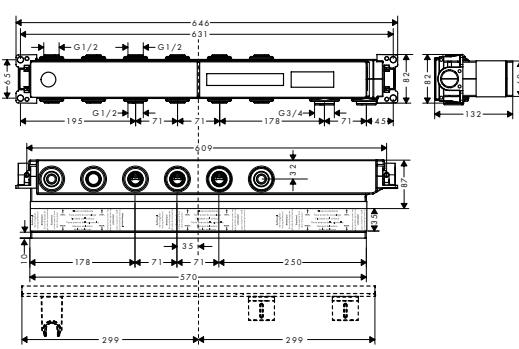	finish	code no.
 	<b>Thermostatic module Select 610/100 for concealed installation for 4 functions</b> Chrome AXOR FinishPlus* 46720000 46720XXX 	
	<ul style="list-style-type: none"> <li>/ consists of: Thermostatic module, shower holder, baton hand shower, shower hose</li> <li>/ depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function</li> <li>/ 4 functions</li> <li>/ Select push-button on/off control for 4 outlets</li> <li>/ simultaneous use of several outlets</li> <li>/ maximum flow rate at 3 bar: 39 l/min</li> <li>/ flow rate hand shower connection at 3 bar: 14 l/min</li> <li>/ thermostat cartridge, Start/stop valve to operate the functions</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ hose nut: for shower hoses with cylindrical nut on both sides</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> <li>/ Thermostat is delivered with buttons hand shower, Waterfall, Rain large, Mono</li> </ul>	
	<p>This product is not available in brushed AXOR FinishPlus surfaces.</p>	
	<b>Consisting of:</b> <ul style="list-style-type: none"> <li>/ Metal effect shower hose 1.25 m (# 28282000)</li> </ul>	
	<b>Alternative products:</b> <ul style="list-style-type: none"> <li>/ Thermostatic module Select 610/100 for concealed installation for 4 functions - diamond cut</li> </ul>	Chrome AXOR FinishPlus* 46721000 46721XXX
	<p>This product is not available in brushed AXOR FinishPlus surfaces.</p>	
	<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for thermostatic module Select for 4 functions</li> </ul>	18312180
 	<b>Basic set for thermostatic module Select for 4 functions</b> 18312180	
	<ul style="list-style-type: none"> <li>/ 4 functions</li> <li>/ connection thread Rp 3/4</li> <li>/ installation depth: 87 - 122 mm</li> <li>/ horizontal installation</li> <li>/ sound-decoupled installation</li> <li>/ connection dimension: DN15/DN20</li> </ul>	

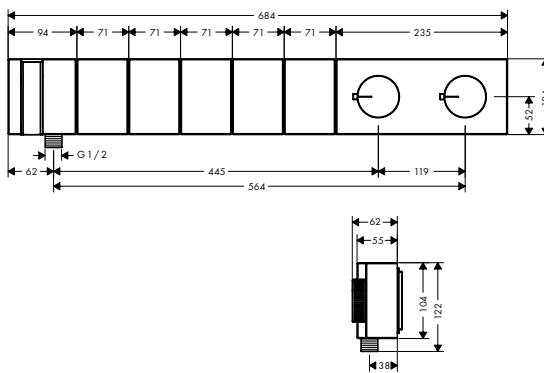

### Thermostatic module Select 680/100 for concealed installation for 5 functions

- / consists of: Thermostatic module, shower holder, baton hand shower, shower hose
- / depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- / 5 functions
- / Select push-button on/off control for 5 outlets
- / simultaneous use of several outlets
- / maximum flow rate at 3 bar: 38 l/min
- / flow rate hand shower connection at 3 bar: 14 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / hose nut: for shower hoses with cylindrical nut on both sides
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / Thermostat is delivered with buttons Rain large, handshower, Mono, PowderRain small and PowderRain large

finish

Chrome  
AXOR FinishPlus\*

code no.

46730000  
46730XXX

This product is not available in brushed AXOR FinishPlus surfaces.

#### Consisting of:

- / Metal effect shower hose 1.25 m (# 28282000)

#### Alternative products:

- / Thermostatic module Select 680/100 for concealed installation for 5 functions - diamond cut

Chrome  
AXOR FinishPlus\*46731000  
46731XXX

This product is not available in brushed AXOR FinishPlus surfaces.

#### Required parts:

- / Basic set for thermostatic module Select for 5 functions


18313180




### Basic set for thermostatic module Select for 5 functions

18313180

- / 5 functions
- / connection thread Rp 3/4
- / installation depth: 87 - 122 mm
- / horizontal installation
- / sound-decoupled installation
- / connection dimension: DN15/DN20

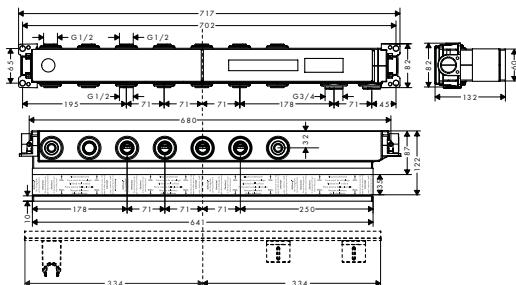

Measurements within scale drawings are in mm.



### Thermostat HighFlow for concealed installation

- / maximum flow rate at 3 bar: 59 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

This product is not available in brushed AXOR FinishPlus surfaces.

#### Alternative products:

- / Thermostat HighFlow for concealed installation - diamond cut

finish

Chrome  
AXOR FinishPlus\*

code no.

46740000  
46740XXX

Chrome  
AXOR FinishPlus\*

46741000  
46741XXX

This product is not available in brushed AXOR FinishPlus surfaces.

#### Required parts:

- / Basic set iBox universal


01700180

#### Optional parts:

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

13587000

93171000



### Basic set iBox universal

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20


#### Optional parts:

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal

13587000

93171000

97759000



### Thermostat for concealed installation with shut-off valve

- / 1 function
- / maximum flow rate at 3 bar: 26 l/min
- / thermostat cartridge, ceramic valves 90°
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

This product is not available in brushed AXOR FinishPlus surfaces.

finish

Chrome  
AXOR FinishPlus\*

code no.

46750000  
46750XXX

#### Alternative products:

- / Thermostat for concealed installation with shut-off valve - diamond cut

Chrome  
AXOR FinishPlus\*46751000  
46751XXX

This product is not available in brushed AXOR FinishPlus surfaces.

#### Required parts:

- / Basic set iBox universal


01700180

#### Optional parts:

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

13587000

93171000



### Basic set iBox universal

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:


- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal

13587000

93171000

97759000

Measurements within scale drawings are in mm.



### Thermostat for concealed installation with shut-off/diverter valve

finish  
Chrome  
AXOR FinishPlus\*

code no.  
46760000  
46760XXX

- / 2 functions
- / maximum flow rate at 3 bar: 29 l/min
- / flow rate upper outlet: 25 l/min
- / flow rate lower outlet: 29 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

This product is not available in brushed AXOR FinishPlus surfaces.

#### Alternative products:

- / Thermostat for concealed installation with shut-off/diverter valve - diamond cut Chrome  
AXOR FinishPlus\*

46761000  
46761XXX


This product is not available in brushed AXOR FinishPlus surfaces.

#### Required parts:

- / Basic set iBox universal 01700180

#### Optional parts:

- / Extension 25 mm for basic set iBox universal 13587000
- / Fastening rail set for iBox universal 93171000




### Basic set iBox universal

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- / Extension 25 mm for basic set iBox universal 13587000
- / Fastening rail set for iBox universal 93171000
- / Reduction coupling iBox universal 97759000



### Shut-off valve for concealed installation

- / connection type: DN15/DN20
- / 1 function

This product is not available in brushed AXOR FinishPlus surfaces.

#### Alternative products:

- / Shut-off valve for concealed installation - diamond cut Chrome AXOR FinishPlus\* 46771000  
46771XXX


This product is not available in brushed AXOR FinishPlus surfaces.

#### Required parts:

- / Basic set 52 l/min for shut-off valve for concealed installation spindle 16973180
- / Basic set 40 l/min for concealed installation for shut-off valve ceramic 16974180
- / Basic set 130 l/min for shut-off valve for concealed installation spindle 16970180

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 92990000



### Basic set 52 l/min for shut-off valve for concealed installation spindle

16973180

- / connection type: DN15
- / suitable for all shut-off valves finish sets
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 52 l/min

#### Alternative products:

- / Basic set 40 l/min for concealed installation for shut-off valve ceramic 16974180
- / Basic set 130 l/min for shut-off valve for concealed installation spindle 16970180

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 92990000

## Showers

For matching shower products, refer to the AXOR Showers chapter.




## Accessories

For matching accessories, refer to the AXOR Accessories chapter.



Measurements within scale drawings are in mm.



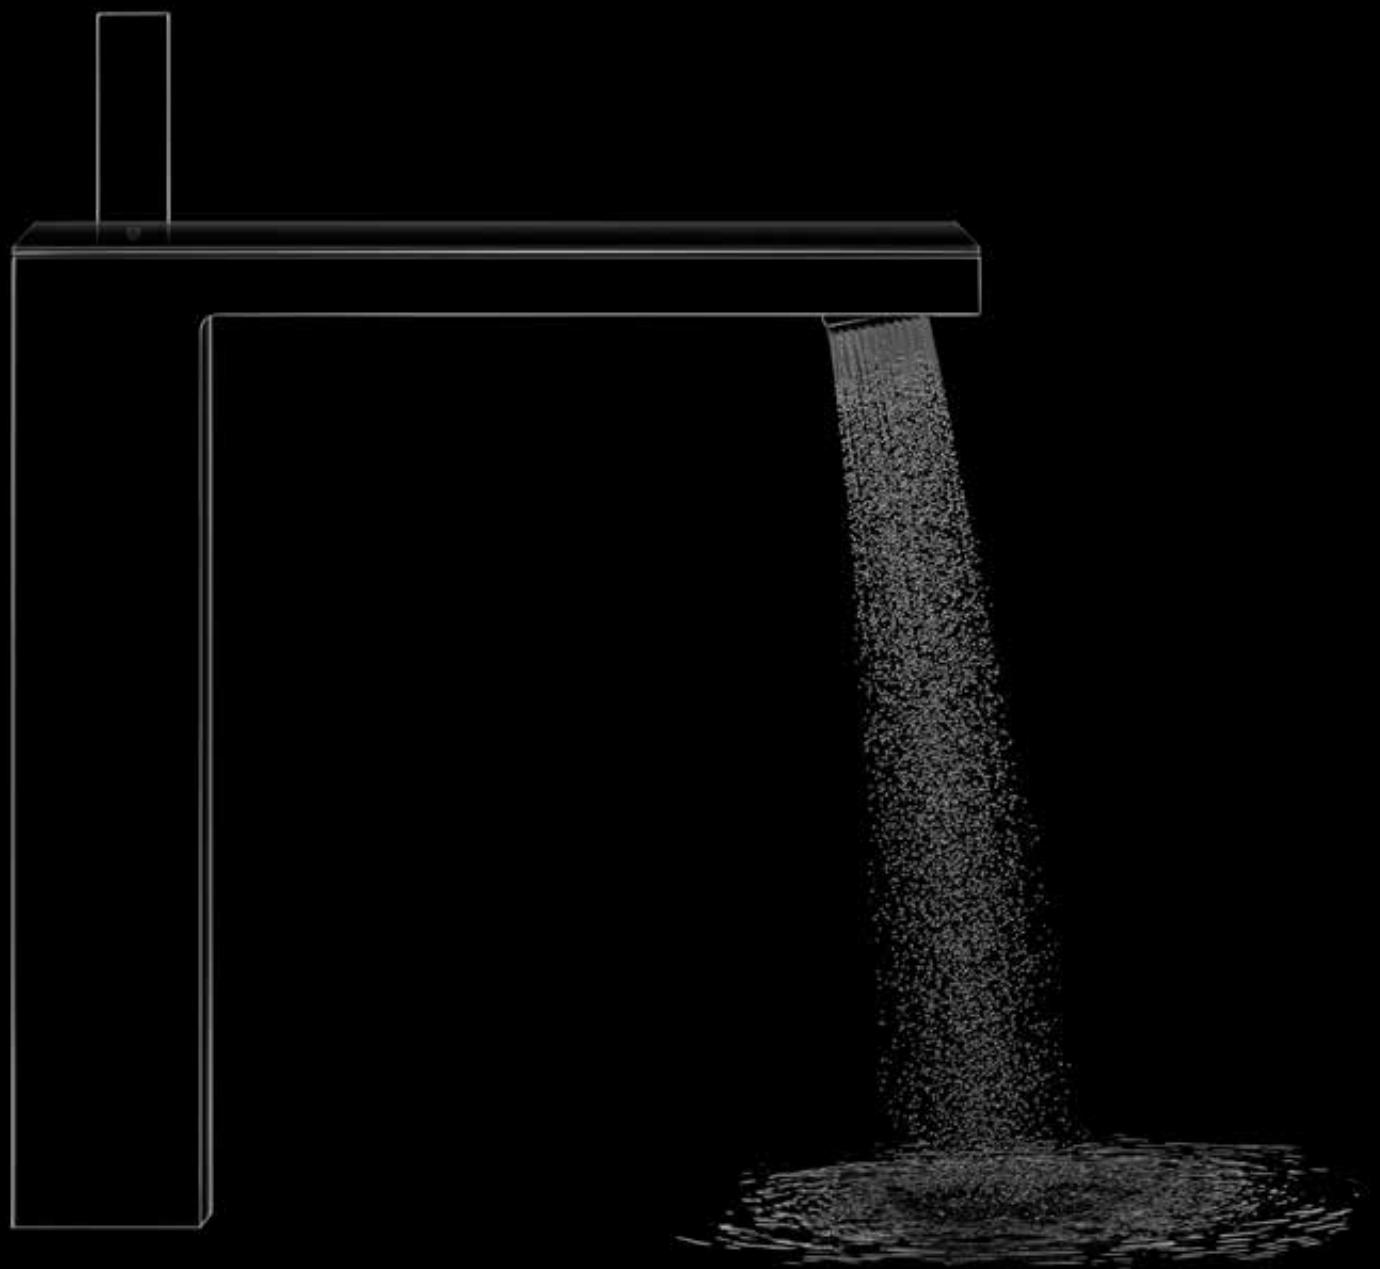

# AXOR MyEdition

Basin	86
Bath	88
Plates	91



# AXOR MyEdition

Setting oneself apart from the masses. Gratifying the need for uniqueness. Striking out in a new direction. This is the mission statement of AXOR MyEdition. Clear, linear design sets the stage for personal fulfilment. For one's own creativity. With a wide range of plates. Upon request available in exclusive materials. Individualisation. In perfection.

True luxury is all about fulfilling personal dreams. The exclusive PVD surfaces of AXOR FinishPlus set new standards. Surfaces of exceptional lustre, robustness and durability. Manufactured with state-of-the-art engineering. From unique specimens to large-scale production. From Polished Gold Optic to Brushed Black Chrome. Uni or bicolour. Brushed or polished. Numerous ways to express one's own personality. Individualisation par excellence.

An avant-garde concept and an ingenious connection: a metal body, chrome-plated or with one of different AXOR FinishPlus surfaces. Crowned with a fascinating plate: with an exclusive portfolio of materials, AXOR Signature opens the door to path-breaking possibilities. Glass, metal, wood, marble, leather. More radiance. New sensual experiences. Thanks to special materials from Mother Nature. A new concept for mixers. Premiere for AXOR MyEdition.

Black Walnut

Black Marble

(Nero Marquina)

from the Basque region

Plate in Black Glass


Plate in Mirror Glass



## Assortment logic

The versions Chrome (body) / Mirror Glass (plate) and Chrome / Black Glass are available as standard with own article number for all 9 AXOR MyEdition products. Additionally to the standard versions the products can be configured individually and ordered with separate article number for the product body and the plate.  
(see next page)

## Collection overview and combination options


			Product Plates												
Product body				Mirror Glass			Black Glass			Chrome			15 PVD surfaces		
				Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150
		Single lever basin mixer 70	Standard product Chrome	47013009			47013609								
		Single lever basin mixer 70 without plate	Chrome	47015009 47900000			47015009 47900600			47015009 47903000			47015009 47903XXX		
		Single lever basin mixer 230	Standard product Chrome												
		Single lever basin mixer 230 without plate	Chrome		47025009 47901000			47025009 47901600			47025009 47904000			47025009 47904XXX	
		3-hole basin mixer 70	Standard product Chrome												
		3-hole basin mixer 70 without plate	Chrome	47055009 47900000			47055009 47900600			47055009 47903000			47055009 47903XXX		
		Single lever basin mixer for concealed installation	Standard product Chrome												
		Single lever basin mixer for concealed installation without plate	Chrome	47065009 47901000			47065009 47901600			47065009 47904000			47065009 47904XXX		
		4-hole rim-mounted bath mixer	Standard product Chrome	47430000			47430600								
		4-hole rim-mounted bath mixer without plate	Chrome	47432000 47900000			47432000 47900600			47432000 47903000			47432000 47903XXX		
		Single lever bath mixer floor-standing	Standard product Chrome												
		Single lever bath mixer floor-standing without plate	Chrome		47445009 47901000			47445009 47901600			47445009 47904000			47445009 47904XXX	
		Tub filler	Standard product Chrome	47410000			47410600								
		Tub filler without plate	Chrome	47412000 47900000			47412000 47900600			47412000 47903000			47412000 47903XXX		
			15 PVD surfaces	47412XXX 47900000			47412XXX 47900600			47412XXX 47903000			47412XXX 47903XXX		

AXOR MyEdition products are available with surfaces in Chrome / Mirror Glass -000, Chrome / Black Glass -600 as well as in AXOR FinishPlus -xxx surfaces.

## Product Plates

Product Plates														
Wood: Black Walnut			White marble: Lasa Covelano Vena Oro			Black Marble: Nero Marquina			Leather: grey Nappa leather			Mounting plate for individual material		
Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150	Plate 200	Plate 245	Plate 150
47015009 47906000			47015009 47909000			47015009 47913000			47015009 47916000			47015009 47921000*		
47015XX9 47906000			47015XX9 47909000			47015XX9 47913000			47015XX9 47916000			47015XX9 47921000*		
47025009 47907000			47025009 47910000			47025009 47914000			47025009 47917000			47025009 47922000*		
47025XX9 47907000			47025XX9 47910000			47025XX9 47914000			47025XX9 47917000			47025XX9 47922000*		
47055009 47906000			47055009 47909000			47055009 47913000			47055009 47916000			47055009 47921000*		
47055XX9 47906000			47055XX9 47909000			47055XX9 47913000			47055XX9 47916000			47055XX9 47921000*		
47065009 47907000			47065009 47910000			47065009 47914000			47065009 47917000			47065009 47922000*		
47065XX9 47907000			47065XX9 47910000			47065XX9 47914000			47065XX9 47917000			47065XX9 47922000*		
47432000 47906000			47432000 47909000			47432000 47913000			47432000 47916000			47432000 47921000*		
47432XXX 47906000			47432XXX 47909000			47432XXX 47913000			47432XXX 47916000			47432XXX 47921000*		
47445009 47907000			47445009 47910000			47445009 47914000			47445009 47917000			47445009 47922000*		
47445XX9 47907000			47445XX9 47910000			47445XX9 47914000			47445XX9 47917000			47445XX9 47922000*		
47412000 47906000			47412000 47909000			47412000 47913000			47412000 47916000			47412000 47921000*		
47412XXX 47906000			47412XXX 47909000			47412XXX 47913000			47412XXX 47916000			47412XXX 47921000*		

\* For the exact positioning of the individual material on the AXOR MyEdition mounting plate the corresponding template is needed as optional part.

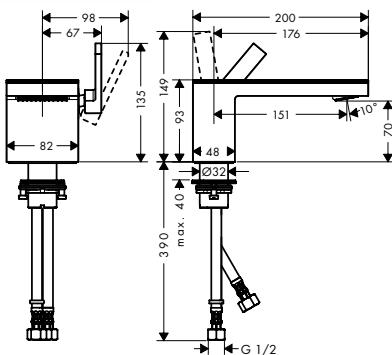**Basin**
**Single lever basin mixer 70  
with push-open waste set 2 ticks**

- / consists of: single lever basin mixer, plate, waste set
- / ComfortZone 70
- / projection: 151 mm
- / plate of glass made of safety glass
- / spray type: PowderRain
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / with isolated water conduction - without contact with nickel and lead
- / push-open waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15


finish

Chrome


code no.

47013009

Chrome/Black Glass 47013609


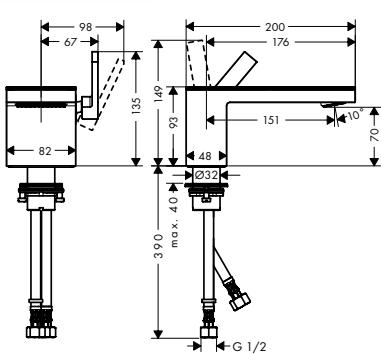

**Single lever basin mixer 70  
with push-open waste set  
without plate 2 ticks**




- / consists of: single lever basin mixer, waste set
- / ComfortZone 70
- / projection: 151 mm
- / spray type: PowderRain
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / with isolated water conduction - without contact with nickel and lead
- / push-open waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

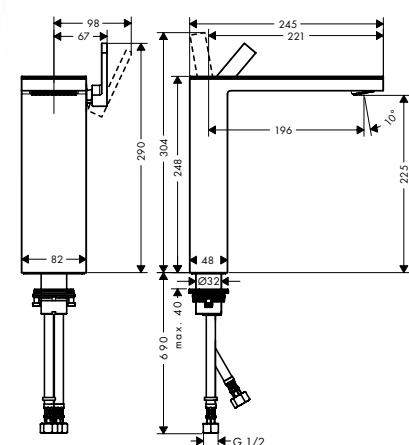Chrome  
AXOR FinishPlus\*47015009  
47015XXX
**Single lever basin mixer 230  
with push-open waste set  
without plate 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 230
- / projection: 196 mm
- / spray type: PowderRain
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / with isolated water conduction - without contact with nickel and lead
- / push-open waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15
- / handle position on the side: top-side at the spout (generally suitable for wash bowls)

Chrome  
AXOR FinishPlus\*47025009  
47025XXX

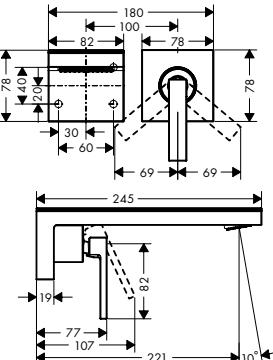
	finish	code no.
	<b>Single lever basin mixer for concealed installation wall-mounted with spout 221 mm without plate 2 ticks</b>  <ul style="list-style-type: none"> <li>/ consists of: single lever basin mixer for concealed installation wall-mounted, waste set</li> <li>/ projection: 221 mm</li> <li>/ spray type: PowderRain</li> <li>/ maximum flow rate at 3 bar: 3,8 l/min</li> <li>/ ceramic cartridge</li> <li>/ temperature limitation adjustable</li> <li>/ with isolated water conduction - without contact with nickel and lead</li> <li>/ non-closing waste set</li> <li>/ connection type: basic set</li> <li>/ connection dimension: DN15</li> <li>/ handle can be positioned on the right or left, depends on the basic set installation</li> </ul>	Chrome AXOR FinishPlus* 47065009 47065XXX   
	<b>Alternative products:</b> <ul style="list-style-type: none"> <li>/ Single lever basin mixer for concealed installation wall-mounted with spout 221 mm without plate 3 ticks</li> </ul>	Chrome AXOR FinishPlus* 47066009 47066XXX
	<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for single lever basin mixer for concealed installation wall-mounted</li> </ul>	13623180
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension set 25 mm for single lever basin mixer wall-mounted</li> </ul>	13586000
	<b>Basic set for single lever basin mixer for concealed installation wall-mounted</b>  <ul style="list-style-type: none"> <li>/ installation depth: 44 - 72 mm</li> <li>/ variable positioning of the mixer system, can be left or right of the spout</li> <li>/ easy orientation due to support surfaces for the spirit level</li> <li>/ with building protection cover against contamination during assembly</li> <li>/ with dimension indication for exact determination of the installation depth</li> <li>/ with pre-mounted fastening lugs for mounting in drywall and solidwall</li> <li>/ sound-decoupled installation</li> <li>/ connection dimension: DN15</li> </ul>	13623180
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension set 25 mm for single lever basin mixer wall-mounted</li> </ul>	13586000
	<b>Extension set 25 mm for single lever basin mixer wall-mounted</b>  <ul style="list-style-type: none"> <li>/ extension length: 25 mm</li> </ul>	13586000

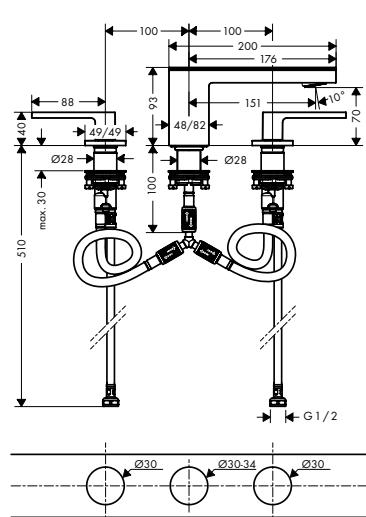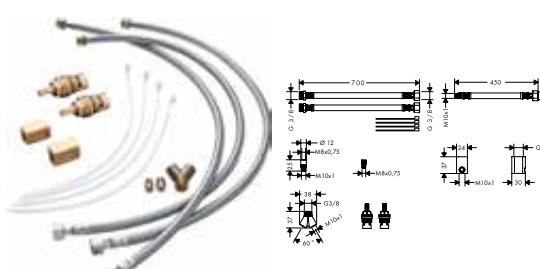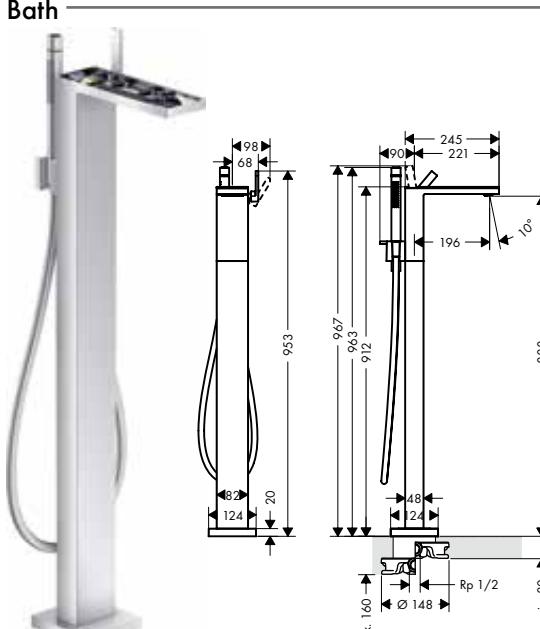	finish	code no.
 	<b>3-hole basin mixer 70 with push-open waste set without plate 2 ticks</b> Chrome AXOR FinishPlus*    <ul style="list-style-type: none"> <li>/ consists of: 3-hole basin mixer, waste set</li> <li>/ ComfortZone 70</li> <li>/ projection: 151 mm</li> <li>/ spray type: PowderRain</li> <li>/ maximum flow rate at 3 bar: 3 l/min</li> <li>/ ceramic valves hot/ cold 90°</li> <li>/ with isolated water conduction - without contact with nickel and lead</li> <li>/ push-open waste set G 1 1/4</li> <li>/ connection type: G 1/2 connections</li> <li>/ connection dimension: DN15</li> </ul>	47055009 47055XXX
	<b>Alternative products:</b> <ul style="list-style-type: none"> <li>/ 3-hole basin mixer 70 with push-open waste set without plate 3 ticks</li> </ul>	Chrome AXOR FinishPlus* 47056009 47056XXX
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Hose extension set for 3-hole basin mixer</li> </ul>	38959000
	<b>Hose extension set for 3-hole basin mixer</b> <ul style="list-style-type: none"> <li>/ length of hoses 700 mm</li> <li>/ for free positioning of spout and handles</li> </ul>	38959000
<b>Bath</b> 	<b>Single lever bath mixer floor-standing without plate 2 ticks</b> <ul style="list-style-type: none"> <li>/ consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder</li> <li>/ 2 functions</li> <li>/ projection 196 mm</li> <li>/ connection type: basic set</li> <li>/ spray type mixer: normal spray</li> <li>/ spray type hand shower: Rain, Mono</li> <li>/ maximum flow rate at 3 bar: 19,7 l/min</li> <li>/ flow rate for bath spout at 3 bar: 19,7 l/min</li> <li>/ flow rate of hand shower at 3 bar: 5 l/min</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> <li>/ ceramic cartridge</li> <li>/ temperature limitation adjustable</li> <li>/ diverter with automatic resetting</li> <li>/ non-return valve</li> <li>/ connection dimension: DN15</li> </ul>	Chrome AXOR FinishPlus* 47445009 47445XXX 
	<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for mixers floor-standing</li> </ul>	10452180

Measurements within scale drawings are in mm.

finish


code no.



### Basic set for mixers floor-standing

- / for mounting on unfinished floor
- / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- / connection dimension: DN15

10452180

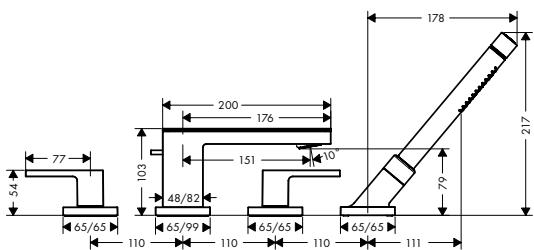

### 4-hole rim mounted bath mixer

- / consists of: 4-hole rim mounted bath mixer, plate, baton hand shower, Secuflex hose set, shower holder
- / 2 functions
- / projection 150 mm
- / connection type: basic set
- / plate of glass made of safety glass
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum pull-out length of hand shower: 1.10 m
- / flow rate for bath spout at 3 bar: 22 l/min
- / flow rate of hand shower at 3 bar: 16 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / diverter with automatic resetting
- / connection dimension: DN15

Chrome/Mirror 47430000  
Glass  
Chrome/Black Glass 47430600



#### Consisting of:

- / Baton hand shower 2jet (# 28532000)

#### Required parts:

- / Basic set for 4-hole rim mounted bath mixer

15480180

finish

code no.

### 4-hole rim mounted bath mixer without plate

Chrome  
AXOR FinishPlus\*

47432000  
47432XXX



- / consists of: 4-hole rim mounted bath mixer, baton hand shower, shower holder
- / 2 functions
- / projection 150 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum pull-out length of hand shower: 1.10 m
- / flow rate for bath spout at 3 bar: 22 l/min
- / flow rate of hand shower at 3 bar: 16 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / diverter with automatic resetting
- / connection dimension: DN15

#### Consisting of:

- / Baton hand shower 2jet (# 28532000)

#### Required parts (choose one)

/ Plate 200 Metal	Chrome AXOR FinishPlus*	47903000 47903XXX
/ Plate 200 Glass	Mirror Black	47900000 47900600
/ Plate 200 Black Walnut		47906000
/ Plate 200 Marble Lasa Covelo Vena Oro		47909000
/ Plate 200 Marble Nero Marquina		47913000
/ Plate 200 Leather	Grey	47916000

#### Required parts:


- / Basic set for 4-hole rim mounted bath mixer

15480180

### Basic set for 4-hole rim mounted bath mixer

15480180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15



### Bath spout


Chrome/Mirror  
Glass  
Chrome/Black Glass 47410600




- / consists of: bath spout, plate
- / 1 function
- / projection 176 mm
- / wall-mounted
- / plate of metal
- / maximum flow rate at 3 bar: 24 l/min
- / connection dimension: DN15
- / spray type: normal spray

#### Consisting of:

- / Bath spout without plate (# 47412000)
- / Plate 200 Glass (# 47900XXX)




Measurements within scale drawings are in mm.

	finish	code no.
	<b>Bath spout without plate</b> / 1 function / projection 176 mm / wall-mounted / maximum flow rate at 3 bar: 24 l/min / connection dimension: DN15 / spray type: normal spray	Chrome AXOR FinishPlus* 47412000 47412XXX
	<b>Required parts (choose one)</b> / Plate 200 Metal / Plate 200 Glass / Plate 200 Black Walnut / Plate 200 Marble Lasa Covelo Vena Oro / Plate 200 Marble Nero Marquina / Plate 200 Leather	Chrome AXOR FinishPlus* 47903000 47903XXX Mirror 47900000 Black 47900600 47906000 47909000 47913000 Grey 47916000
<b>Plates</b> 	<b>Plate 200 Metal</b> / length 200 mm / material: metal / removable	Chrome AXOR FinishPlus* 47903000 47903XXX
	<b>Alternative sizes:</b> / Plate 245 Metal / Plate 150 Metal	Chrome AXOR FinishPlus* 47904000 47904XXX Chrome AXOR FinishPlus* 47905000 47905XXX
	<b>Plate 200 Glass</b> / length 200 mm / material: glass / removable	Mirror 47900000 Black 47900600
	<b>Alternative sizes:</b> / Plate 245 Glass / Plate 150 Glass	Mirror 47901000 Black 47901600 Mirror 47902000 Black 47902600
	<b>Plate 200 Black Walnut</b> / length 200 mm / material: walnut / removable / since wood is a natural material, each piece is unique, and wood markings may vary	47906000
	<b>Alternative sizes:</b> / Plate 245 Black Walnut / Plate 150 Black Walnut	47907000 47908000
	<b>Plate 200 Marble Lasa Covelo Vena Oro</b> / length 200 mm / material: marble / removable / since marble is a natural material, each piece is unique, and marbling markings may vary	47909000
	<b>Alternative sizes:</b> / Plate 245 Marble Lasa Covelo Vena Oro / Plate 150 Marble Lasa Covelo Vena Oro	47910000 47911000



finish

code no.

**Plate 200 Marble Nero****Marquina**

- / length 200 mm
- / material: marble
- / removable
- / since marble is a natural material, each piece is unique, and marbling markings may vary

**Alternative sizes:**

- / Plate 245 Marble Nero Marquina
- / Plate 150 Marble Nero Marquina

47913000


47914000

47915000

**Plate 200 Leather**

Grey

47916000



- / length 200 mm
- / material: leather
- / removable

**Alternative sizes:**

- / Plate 245 Leather
- / Plate 150 Leather


Grey

47917000


Grey

47918000




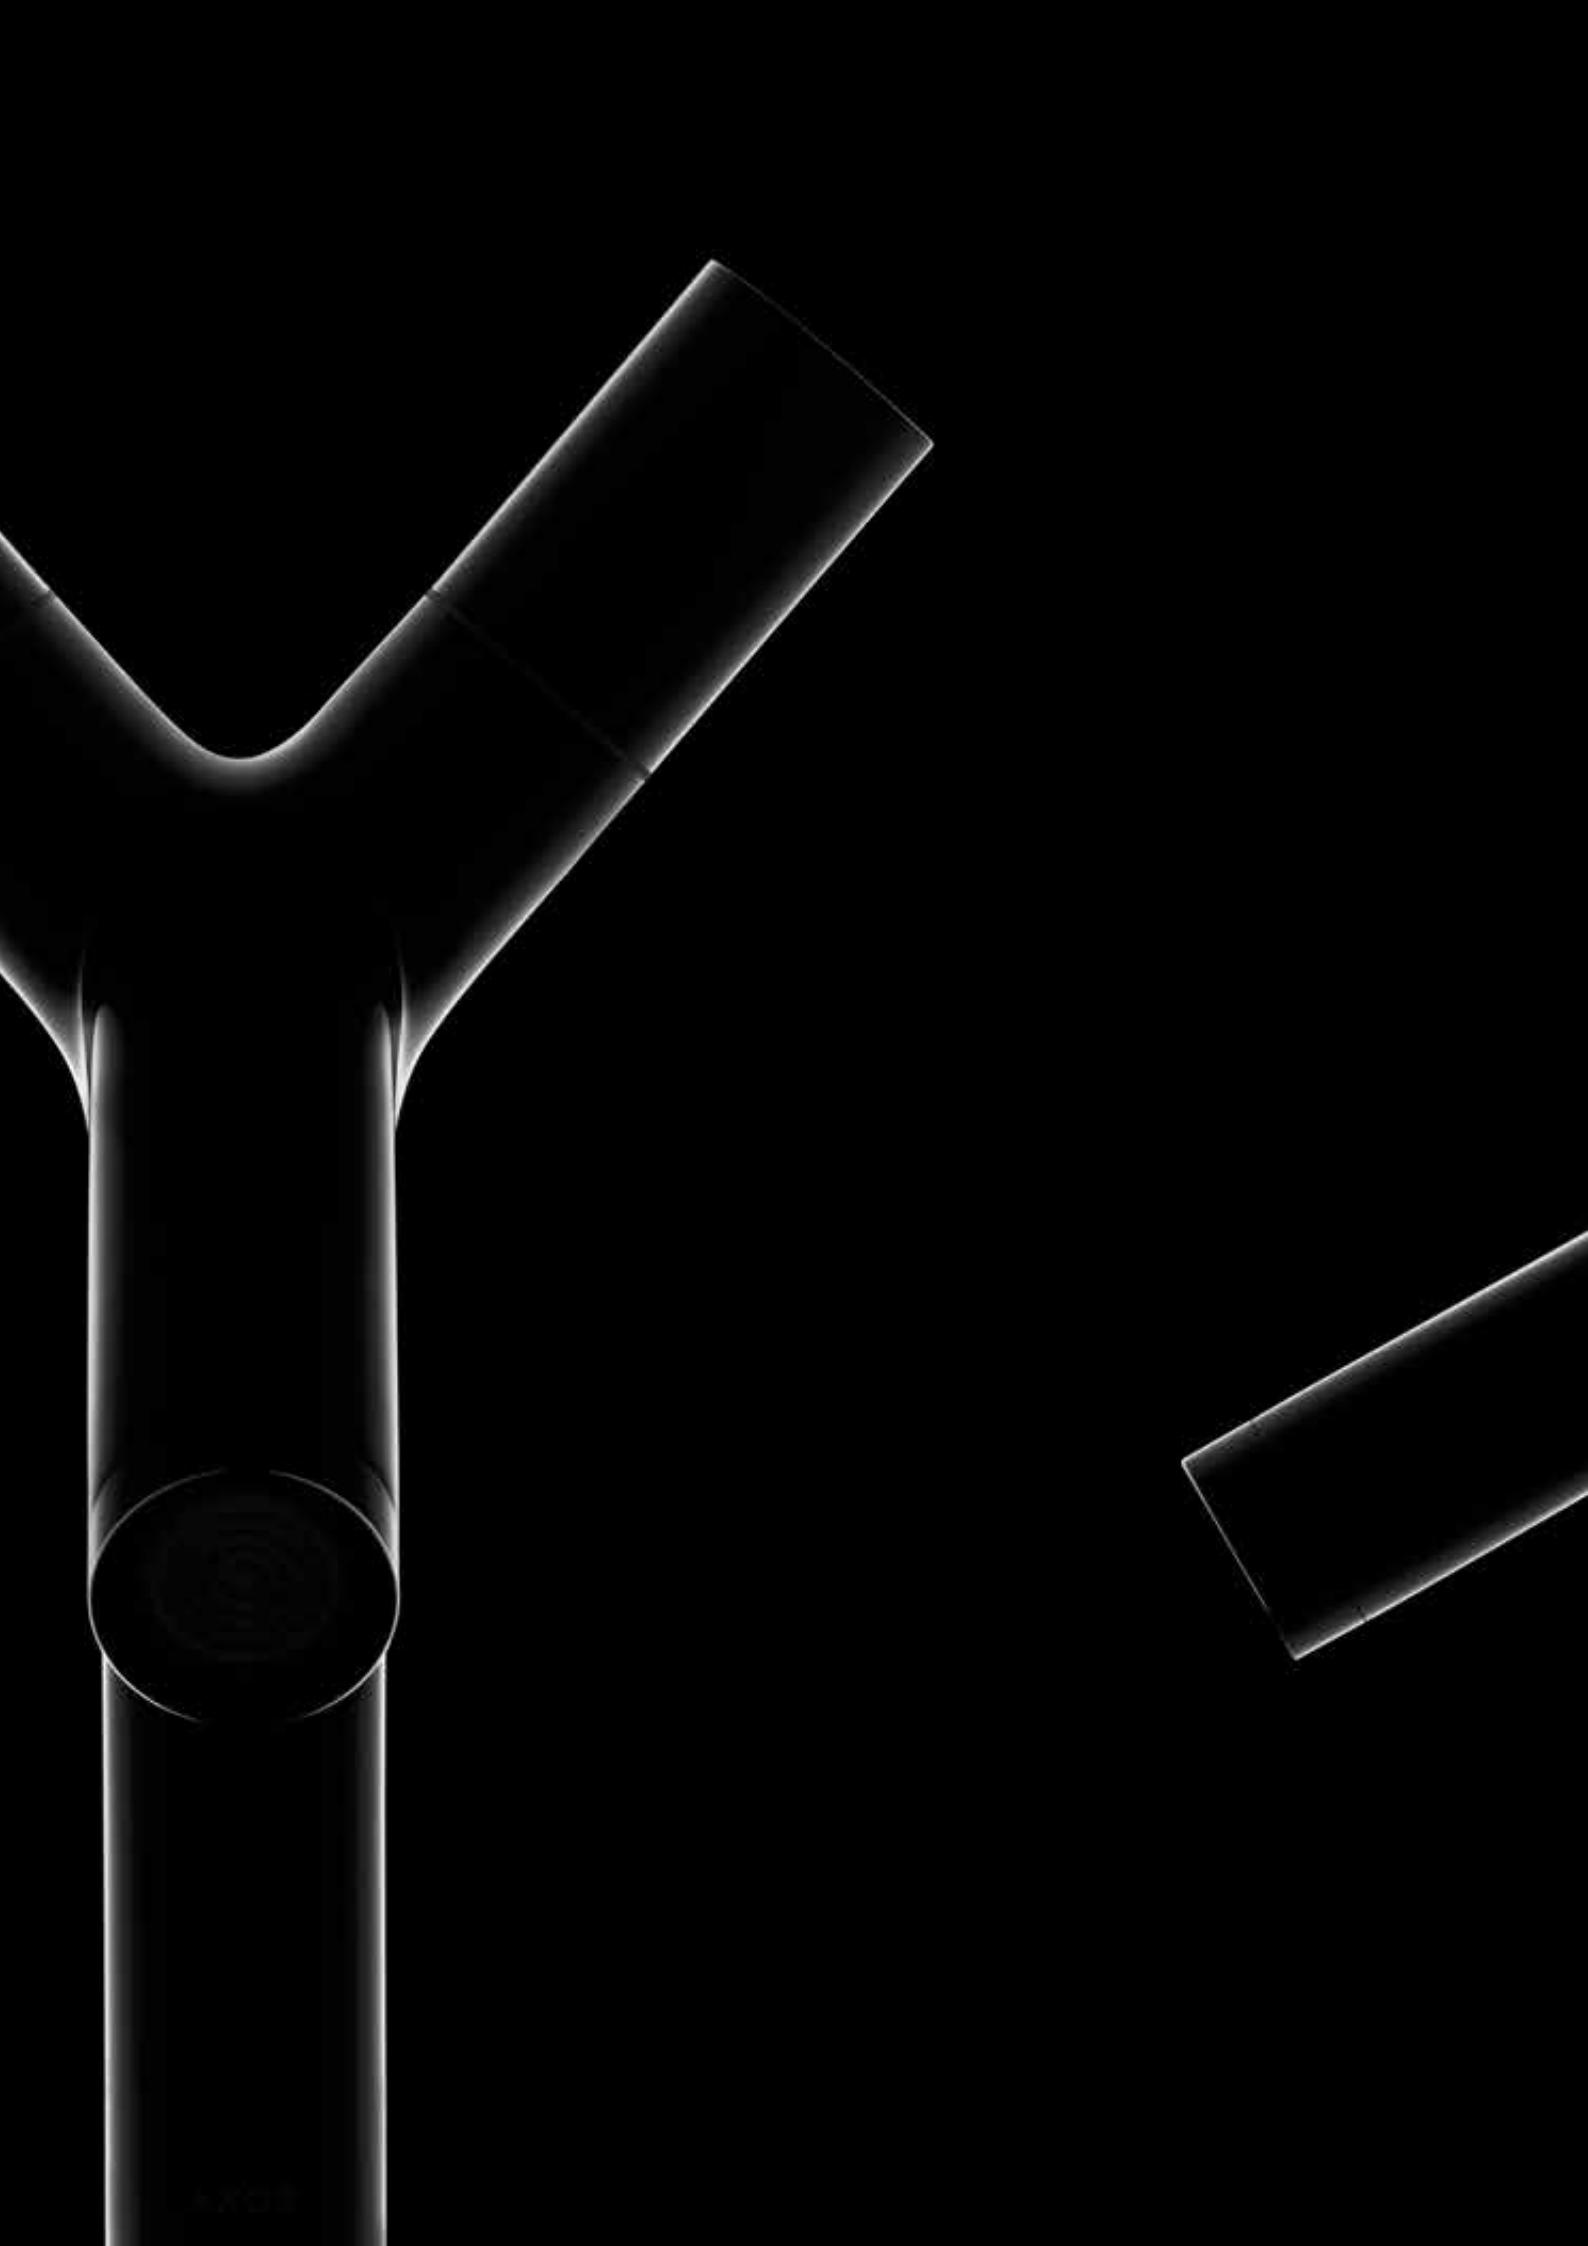

# AXOR Starck

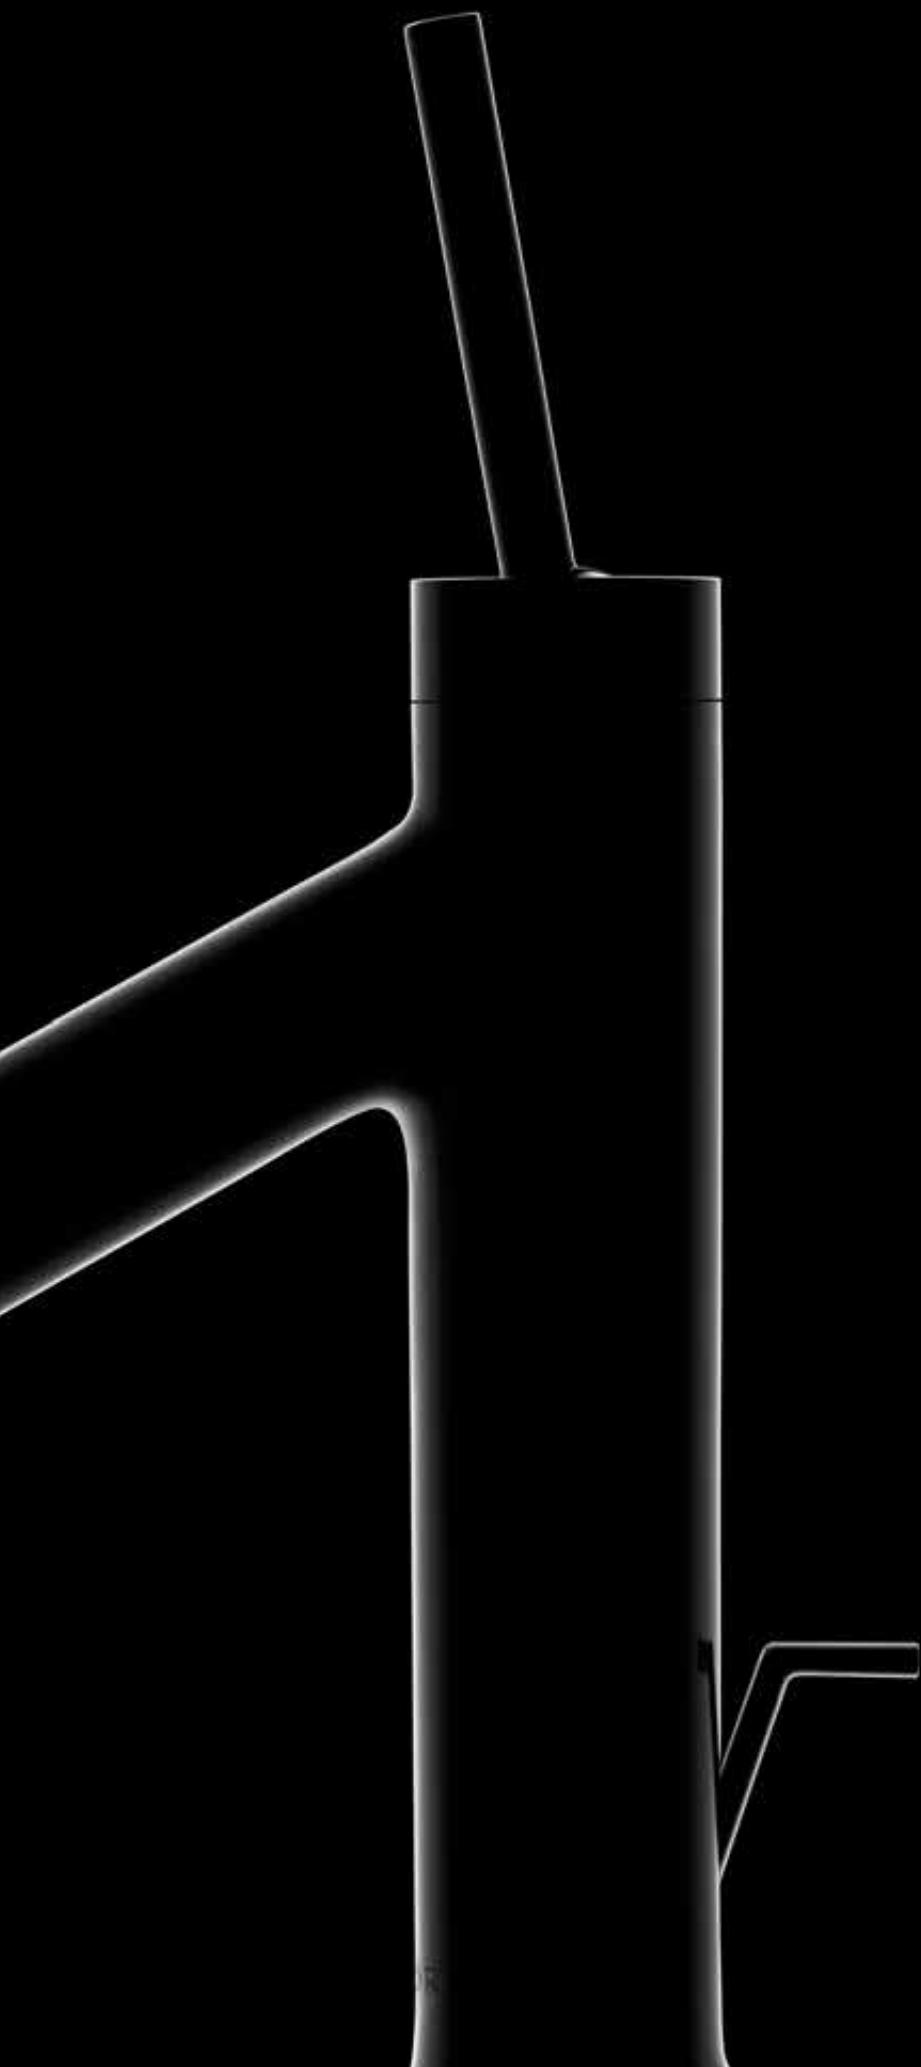


Basin	96
Bath	97
Shower	102
Thermostatic mixers / valves / diverters	104
Overhead showers	107
Hand showers	107
Shower sets	108
AXOR Starck V	114

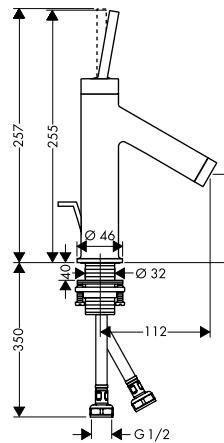**Basin**
**Single lever basin mixer 90  
with pin handle and pop-up  
waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 90
- / projection: 112 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

**Alternative products:**


- / Single lever basin mixer 90 with pin handle and pop-up waste set 3 ticks

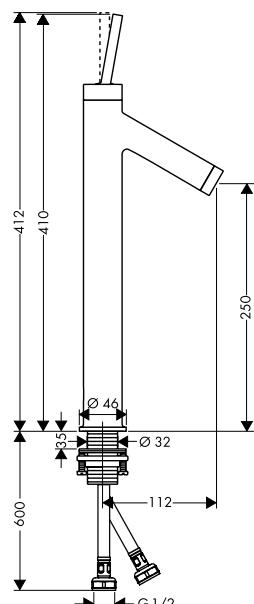**finish**Chrome  
AXOR FinishPlus\***code no.**12131009  
12131XXX
**Single lever basin mixer 250  
with pin handle for wash bowls  
with waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 250
- / projection: 112 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 1,9 l/min, 1,9 l/min
- / joystick ceramic cartridge
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

**Alternative products:**

- / Single lever basin mixer 250 with pin handle for wash bowls with waste set 3 ticks

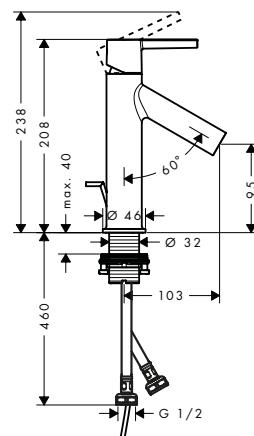
Chrome  
AXOR FinishPlus\*12148009  
12148XXX
**Single lever basin mixer 100  
with lever handle and pop-up  
waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 100
- / projection: 103 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

**Alternative products:**

- / Single lever basin mixer 100 with lever handle and pop-up waste set 3 ticks

Chrome  
AXOR FinishPlus\*12001009  
12001XXX

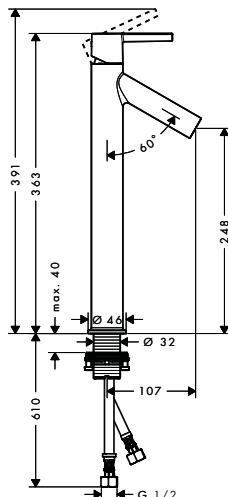

### Single lever basin mixer 250 with lever handle for wash bowls with waste set 2 ticks

- / consists of: single lever basin mixer, waste set
- / ComfortZone 250
- / projection: 107 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

#### Alternative products:

- / Single lever basin mixer 250 with lever handle for wash bowls with waste set 3 ticks


finish

Chrome  
AXOR FinishPlus\*

code no.

12103009  
12103XXX

### Bath

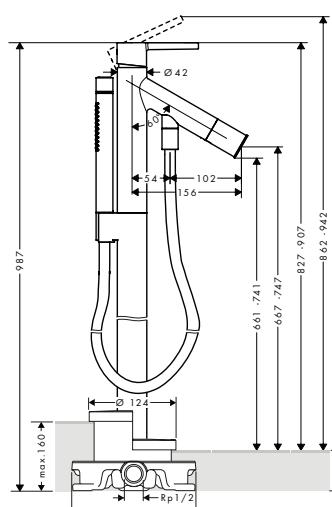

### Single lever bath mixer floor-standing with flat lever handle 2 ticks

- / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder
- / 2 functions
- / projection 156 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum flow rate at 3 bar: 18,1 l/min
- / flow rate for bath spout at 3 bar: 18,1 l/min
- / flow rate of hand shower at 3 bar: 5,6 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15
- / matching handle design for the AXOR Starck basin mixers with lever handles

#### Alternative products:




- / Single lever bath mixer floor-standing with flat lever handle 3 ticks

Chrome  
AXOR FinishPlus\*12408009  
12408XXXChrome  
AXOR FinishPlus\*12409009  
12409XXX


Required parts:

- / Basic set for mixers floor-standing

10452180

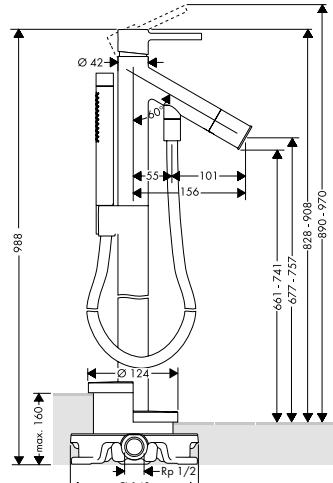	finish	code no.
 	<b>Single lever bath mixer floor-standing with round lever handle 2 ticks</b> Chrome AXOR FinishPlus* 	12452009 12452XXX
<b>Required parts:</b> / Basic set for mixers floor-standing		10452180
 	<b>Basic set for mixers floor-standing</b>	10452180
 	<b>Extension 60 mm for spout</b> / extension length: 60 mm	Chrome AXOR FinishPlus* 10981000 10981XXX

Measurements within scale drawings are in mm.



### Single lever bath mixer for concealed installation with pin handle

- / 2 functions
- / connection type: basic set
- / flow rate upper outlet: 21 l/min
- / flow rate lower outlet: 29 l/min
- / maximum flow rate at 3 bar: 29 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / suitable for continuous flow water heaters

#### Alternative products:

- / Single lever bath mixer for concealed installation with pin handle and integrated security combination according to EN1717

finish

code no.

Chrome  
AXOR FinishPlus\*

10416000  
10416XXX

This product is only available in the AXOR FinishPlus surface Polished Gold Optic via AXOR Signature.

#### Required parts:

- / Basic set iBox universal


01700180

#### Optional parts:

- / Extension element round 2-hole
- / Extension 25 mm for basic set iBox universal

Chrome  
AXOR FinishPlus\*

14961000  
14961XXX  
13587000



### Single lever bath mixer for concealed installation with lever handle

- / 2 functions
- / connection type: basic set
- / flow rate upper outlet: 21 l/min
- / flow rate lower outlet: 29 l/min
- / maximum flow rate at 3 bar: 29 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / suitable for continuous flow water heaters
- / matching handle design for the AXOR Starck basin mixers with lever handles

#### Alternative products:

- / Single lever bath mixer for concealed installation with lever handle and integrated security combination according to EN1717

Chrome  
AXOR FinishPlus\*

10414000  
10414XXX

#### Required parts:

- / Basic set iBox universal

01700180

#### Optional parts:


- / Extension element round 2-hole
- / Extension 25 mm for basic set iBox universal

Chrome  
AXOR FinishPlus\*

14961000  
14961XXX  
13587000

finish

code no.



### Basic set iBox universal

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:


- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |
| / Reduction coupling iBox universal            | 97759000 |



### Extension set 2.5 cm

96500000

- / extension length: 25 mm




### Bath spout

Chrome AXOR FinishPlus\* 10410000  
10410XXX

- / 1 function
- / projection 122 mm
- / maximum flow rate at 3 bar: 20 l/min
- / connection dimension: device connection DN20
- / spray type: normal spray

#### Optional parts:

- |                                  |                         |                      |
|----------------------------------|-------------------------|----------------------|
| / Extension 50 mm for bath spout | Chrome AXOR FinishPlus* | 10495000<br>10495XXX |
|----------------------------------|-------------------------|----------------------|




### Extension 50 mm for bath spout

Chrome AXOR FinishPlus\* 10495000  
10495XXX

#### Optional parts:

- |              |                         |                      |
|--------------|-------------------------|----------------------|
| / Bath spout | Chrome AXOR FinishPlus* | 10410000<br>10410XXX |
|--------------|-------------------------|----------------------|



### 2-hole rim mounted thermostatic bath mixer with zero handles

Chrome AXOR FinishPlus\* 10480000  
10480XXX

- / 2 functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / suitable for remote spout
- / connection type: basic set
- / connection dimension: DN15

#### Required parts:

- |  |          |
|--|----------|
| / Basic set for 2-hole rim mounted thermostatic bath mixer | 15486180 |
|--|----------|


#### Optional parts:

- |  |          |
|--|----------|
| / Flexible connection tube 800 mm                                    | 58308000 |
| / Connection tube set for 2-hole rim mounted thermostatic bath mixer | 13089000 |

Measurements within scale drawings are in mm.

finish

code no.




### Basic set for 2-hole rim mounted thermostatic bath mixer

15486180

- / suitable for remote spout
- / connection thread: G 1/2
- / connection dimension: DN15
- / flow rate upper outlet: 31 l/min
- / flow rate lower outlet: 31 l/min

#### Optional parts:

- |   |                  |          |
|---|------------------|----------|
| / Rim mounted bath set with hand shower | Chrome           | 19418000 |
|   | AXOR FinishPlus* | 19418XXX |
| / Finish set square                     | Chrome           | 28012000 |
|   | AXOR FinishPlus* | 28012XXX |
| / Finish set oval                       | Chrome           | 28022000 |
|   | AXOR FinishPlus* | 28022XXX |
| / Rim and tile mounted bath basic set   | Chrome           | 15490180 |




### Rim mounted bath set with hand shower

Chrome  
19418000  
AXOR FinishPlus\*  
19418XXX

- / consists of: hand shower, shower holder, shower hose, Secubox, Secuflex hose brake, hose insert
- / suitable for installation on bath rim or tile surround (no mounting plate available)
- / drilling diameter on bath tub: Ø 50 mm
- / connection dimension: DN15
- / maximum pull-out length of hand shower 1.10 m

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

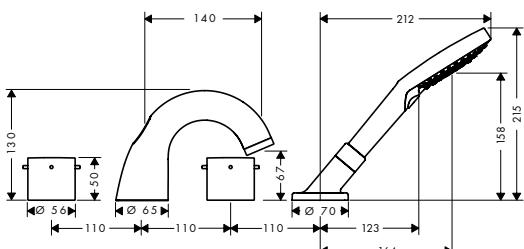

### 4-hole rim mounted bath mixer with zero handles

Chrome  
10444000  
AXOR FinishPlus\*  
10444XXX


- / consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 140 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 22 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 180°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

#### Required parts:


- |   |          |
|---|----------|
| / Basic set for 4-hole rim mounted bath mixer | 15480180 |
|---|----------|



### Basic set for 4-hole rim mounted bath mixer

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

15480180

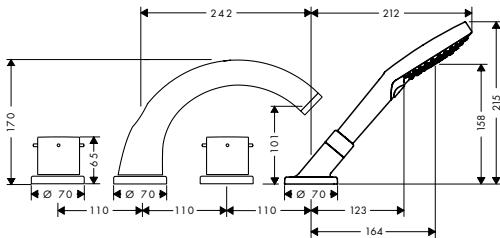

### 4-hole tile mounted bath mixer with zero handles

Chrome  
AXOR FinishPlus\*  
10451000  
10451XXX



- / consists of: 4-hole tile mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 242 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / flow rate for bath spout at 3 bar: 21 l/min
- / flow rate of hand shower at 3 bar: 19 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 180°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15


#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

#### Required parts:

- / Basic set for 4-hole tile mounted bath mixer

15481180




### Basic set for 4-hole tile mounted bath mixer

15481180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

### Shower

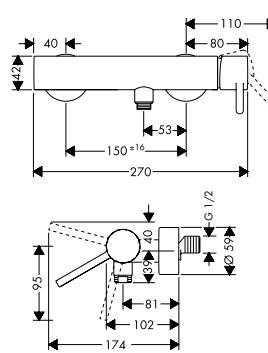


### Single lever shower mixer for exposed installation with round lever handle 2 ticks

Chrome  
AXOR FinishPlus\*  
12612009  
12612XXX

- / consists of: single lever shower mixer
- / 1 function
- / connection type: s-shaped connections
- / centre distance:  $150 \pm 16$  mm
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / suitable for continuous flow water heaters
- / hose connection DN15
- / connection dimension: DN15

Measurements within scale drawings are in mm.



### Single lever shower mixer for concealed installation with pin handle

- / 1 function
- / connection type: basic set
- / maximum flow rate at 3 bar: 29 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / with silencer
- / suitable for continuous flow water heaters

#### Required parts:


- / Basic set iBox universal

01700180

#### Optional parts:

- / Extension element round 1-hole
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome AXOR FinishPlus\*  
14960000  
14960XXX  
13587000  
93171000



### Single lever shower mixer for concealed installation with lever handle

- / 1 function
- / connection type: basic set
- / maximum flow rate at 3 bar: 29,3 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / with silencer
- / suitable for continuous flow water heaters
- / matching handle design for the AXOR Starck basin mixers with lever handles

This product is only available in the AXOR FinishPlus surface Brushed Red Gold via AXOR Signature.

#### Required parts:


- / Basic set iBox universal

01700180

#### Optional parts:

- / Extension element round 1-hole
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome AXOR FinishPlus\*  
14960000  
14960XXX  
13587000  
93171000



### Basic set iBox universal

01700180


- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4"
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal

13587000  
93171000  
97759000

## Thermostatic mixers/ valves/ diverters

**Thermostat HighFlow  
for concealed installation**

- / maximum flow rate at 3 bar: 59 l/min
- / flow rate upper outlet: 42 l/min
- / flow rate lower outlet: 42 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

finish

Chrome  
AXOR FinishPlus\*

code no.

10715000  
10715XXX**Alternative products:**

- / Thermostat for concealed installation

Chrome  
AXOR FinishPlus\*10710000  
10710XXX**Required parts:**

- / Basic set iBox universal


01700180

**Optional parts:**

- / Extension element round 1-hole
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
AXOR FinishPlus\*14960000  
14960XXX  
13587000

93171000

**Thermostat for concealed  
installation with shut-off valve**

- / 1 function
- / maximum flow rate at 3 bar: 25 l/min
- / thermostat cartridge, ceramic valves 90°
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

Chrome  
AXOR FinishPlus\*10700000  
10700XXX**Required parts:**

- / Basic set iBox universal

01700180




**Optional parts:**


- / Extension element round 2-hole arrow
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
AXOR FinishPlus\*14963000  
14963XXX  
13587000

93171000

Measurements within scale drawings are in mm.

	finish	code no.
 	<b>Thermostat for concealed installation with shut-off/diverter valve</b> Chrome AXOR FinishPlus* 10720000 10720XXX	
<ul style="list-style-type: none"> <li>/ 2 functions</li> <li>/ flow rate upper outlet: 25 l/min</li> <li>/ flow rate lower outlet: 29 l/min</li> <li>/ thermostat cartridge, shut-off valve</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ non-return valve</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> </ul>		
<b>Required parts:</b> / Basic set iBox universal		01700180
<b>Optional parts:</b> / Extension element round 2-hole 0-1-2	Chrome AXOR FinishPlus*	14962000 14962XXX 13587000
/ Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		93171000
 	<b>Basic set iBox universal</b> 01700180	
<ul style="list-style-type: none"> <li>/ suitable for all shower, bath tub and thermostat finish sets for concealed installation</li> <li>/ connection thread Rp 3/4"</li> <li>/ rotationally-symmetric installation</li> <li>/ sound-decoupled installation</li> <li>/ connection dimension: DN20</li> </ul>		
<b>Optional parts:</b> / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal / Reduction coupling iBox universal		13587000 93171000 97759000
 	<b>Shut-off valve for concealed installation</b> Chrome AXOR FinishPlus* 10970000 10970XXX	
<ul style="list-style-type: none"> <li>/ connection type: DN15/DN20</li> </ul>		
<b>Required parts:</b> / Basic set 52 l/min for shut-off valve for concealed installation spindle / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle		16973180 16974180 16970180
<b>Optional parts:</b> / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro		92990000



### Basic set 52 l/min for shut-off valve for concealed installation spindle

- / connection type: DN15
- / suitable for all shut-off valves finish sets
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 52 l/min

#### Alternative products:

- |   |          |
|---|----------|
| / Basic set 40 l/min for concealed installation for shut-off valve ceramic  | 16974180 |
| / Basic set 130 l/min for shut-off valve for concealed installation spindle | 16970180 |


#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|

finish

code no.

16973180



### Shut-off/ diverter valve Trio/ Quattro for concealed installation


Chrome AXOR FinishPlus\* 10930000  
10930XXX

#### Required parts:

- |  |          |
|--|----------|
| / Basic set for Quattro four-way diverter valve for concealed installation | 16930180 |
| / Basic set for shut-off/ diverter valve Trio for concealed installation   | 16982180 |

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|




### Basic set for shut-off/ diverter valve Trio for concealed installation

16982180

- / 2 functions
- / simultaneous utilization of 2 functions
- / suitable for all Trio finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|



### Basic set for Quattro four-way diverter valve for concealed installation


16930180

- / requires volume control
- / 3 functions
- / simultaneous utilization of 2 functions
- / suitable for all Quattro finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:


- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|

Measurements within scale drawings are in mm.

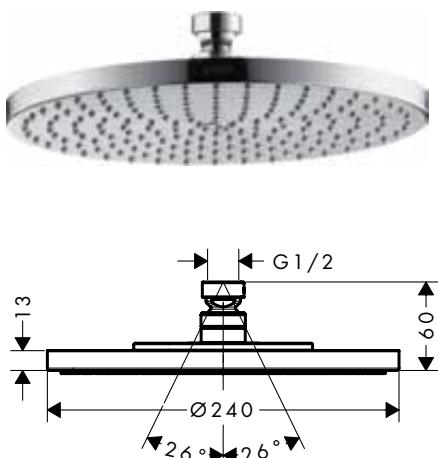**Overhead showers****Overhead shower 240 1jet**

- / shower head size: 240 mm
- / spray type: RainAir
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / maximum flow rate at 3 bar: 19 l/min
- / flow rate RainAir spray (at 3 bar): 19 l/min
- / minimum flow pressure: 1,5 bar
- / spray disc removable for cleaning
- / installation: ceiling or wall
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters with an output of 18 kW

finish

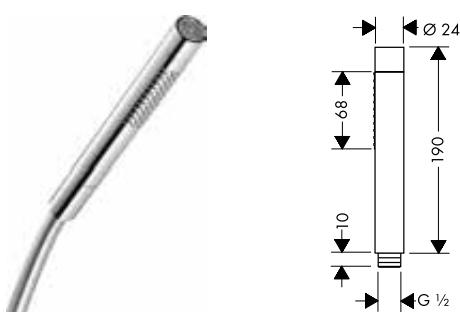Chrome  
AXOR FinishPlus\*code no.  
28494000  
28494XXX**Hand showers****Baton hand shower 2jet**

- / spray type: Rain, Mono
- / spray type adjustment by turning spray disc
- / grey spray disc
- / maximum flow rate at 3 bar: 16,2 l/min
- / flow rate Mono spray (at 3 bar): 12,4 l/min
- / flow rate Rain spray (at 3 bar): 16,2 l/min
- / minimum flow pressure: 1 bar
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters


Chrome  
AXOR FinishPlus\*code no.  
28532000  
28532XXX**Alternative products:**

- / Baton hand shower 1jet

Chrome  
AXOR FinishPlus\*code no.  
10531000  
10531XXX**Optional parts:**

- / Metal effect shower hose 1.25 m
- / Metal effect shower hose 1.60 m
- / Metal effect shower hose 2.00 m

Chrome  
AXOR FinishPlus\*  
Chrome  
AXOR FinishPlus\*  
Chrome  
AXOR FinishPlus\*code no.  
28282000  
28282XXX  
28286000  
28286XXX  
28284000  
28284XXX

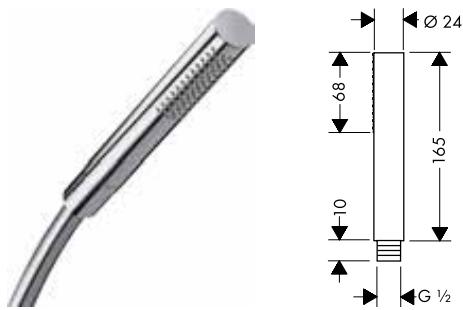**Baton hand shower 1jet**

- / shower head size: 68 x 24 mm
- / spray type: Rain
- / maximum flow rate at 3 bar: 8 l/min
- / flow rate Rain spray (at 3 bar): 8 l/min
- / minimum flow pressure: 1 bar
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters

finish

Chrome  
AXOR FinishPlus\*

code no.

10531000  
10531XXX**Alternative products:**


- / Baton hand shower 2jet

Chrome  
AXOR FinishPlus\*28532000  
28532XXX**Optional parts:**

- / Metal effect shower hose 1.25 m
- / Metal effect shower hose 1.60 m
- / Metal effect shower hose 2.00 m

Chrome  
AXOR FinishPlus\*28282000  
28282XXX  
28286000  
AXOR FinishPlus\*28286XXX  
28284000  
AXOR FinishPlus\*

28284XXX

**Shower sets****Shower set 0.90 m with baton hand shower 2jet**

- / consists of: baton hand shower, shower bar, shower hose, slider
- / shower head size: 70 mm
- / spray type: Rain, Mono
- / spray type adjustment by turning spray disc
- / maximum flow rate at 3 bar: 16,2 l/min
- / minimum flow pressure: 1 bar
- / shower hose with cylindrical nut on both ends
- / pivot connector prevent hose from tangling
- / wall supports of plastic

Chrome  
AXOR FinishPlus\*27980000  
27980XXX**Consisting of:**

- / Baton hand shower 2jet (# 28532000)
- / Metal effect shower hose 1.60 m (# 28286000)

**Alternative products:**

- / Shower set 0.90 m with baton hand shower 1jet



Chrome  
AXOR FinishPlus\*27983000  
27983XXX**Optional parts:**

- / Wall bar spacer for Unica wall bar D

Chrome

96186000

Measurements within scale drawings are in mm.

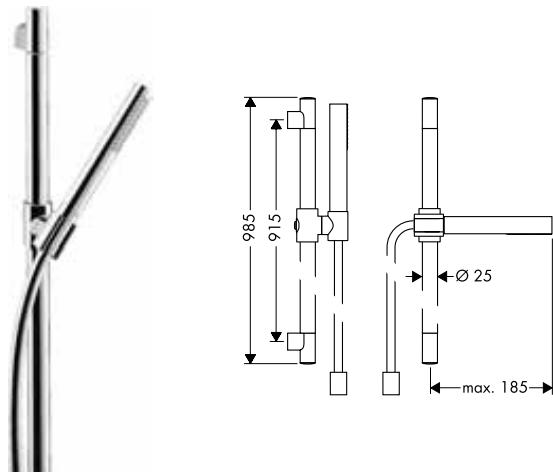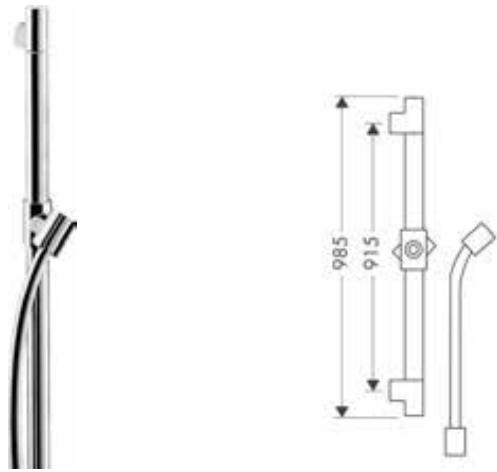	finish	code no.
	<b>Shower set 0.90 m with baton hand shower 1jet</b> Chrome AXOR FinishPlus*  / consists of: baton hand shower, shower bar, shower hose, slider / shower head size: 70 mm / spray type: Rain / maximum flow rate at 3 bar: 8 l/min / minimum flow pressure: 1 bar / shower hose with cylindrical nut on both ends / pivot connector prevent hose from tangling / wall supports of plastic  <b>Consisting of:</b> / Baton hand shower 1jet (# 10531000) / Metal effect shower hose 1.60 m (# 28286000)  <b>Optional parts:</b> / Wall bar spacer for Unica wall bar D Chrome 96186000	27983000 27983XXX   
	<b>Shower bar 0.90 m with shower hose 1.60 m</b> Chrome AXOR FinishPlus*  / consists of: shower bar, shower hose, slider / profile stand pipe: round / shower bar diameter: 25 mm / metal hand shower holder / slider steplessly adjustable  <b>Consisting of:</b> / Metal effect shower hose 1.60 m (# 28286000)  <b>Optional parts:</b> / Wall bar spacer for Unica wall bar D Chrome 96186000	27830000 27830XXX
<b>Thermostatic mixers</b> 	<b>For matching thermostatic mixers, refer to the AXOR Showers chapter.</b>	
<b>Showers</b> 	<b>For matching shower products, refer to the AXOR Showers chapter.</b>	

Accessories



For matching accessories, refer to the AXOR Accessories chapter.

Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.



# AXOR Starck V

## The vitality of water



Water releases energy. Boldness channels it into a spectacular form.  
AXOR Starck V sets the water free, revealing an extraordinary natural  
spectacle: a vortex. In all its strength and glory. Vital and elemental.  
A daring idea.

Design: Philippe Starck



AXOR Starck V has received numerous awards:



**DESIGN PLUS**  
powered by: **ISH**


**Basin**
**Single lever basin mixer 140  
with glass spout and waste set  
2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 140
- / projection: 125 mm
- / swivel range adjustable in 2 steps to 120° or 145°
- / spray type: laminar spray
- / EasyClick connection between body and spout with SafetyStop-function
- / Spout is dishwasher safe
- / material spout: crystal glass
- / maximum flow rate at 3 bar: 2,8 l/min
- / joystick ceramic cartridge
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15
- / handle can be positioned on the right or left
- / handle position on the side: bottom-side at the base body (not suitable for wash bowls)


finish

Chrome  
AXOR FinishPlus\*

code no.

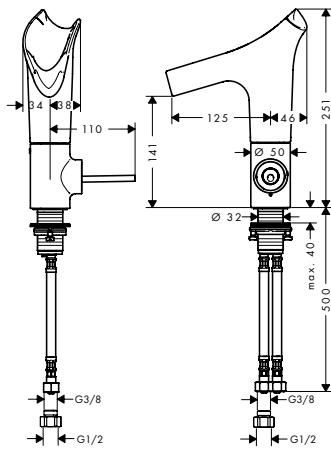12152009  
12152XXX
**Single lever basin mixer 220  
with glass spout for wash bowls  
with waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 220
- / projection: 125 mm
- / swivel range adjustable in 2 steps to 120° or 145°
- / spray type: laminar spray
- / EasyClick connection between body and spout with SafetyStop-function
- / Spout is dishwasher safe
- / material spout: crystal glass
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15
- / handle can be positioned on the right or left
- / not recommended for the public and semi-public area

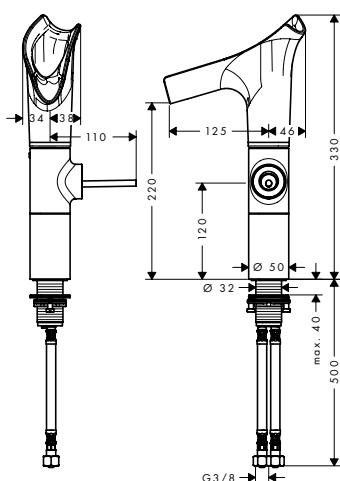Chrome  
AXOR FinishPlus\*12153009  
12153XXX

Measurements within scale drawings are in mm.






# AXOR Starck Organic



Basin	118
Bath	119
Shower	122
Thermostatic mixers / valves / diverters	124
Hand showers	129
Shower sets	129

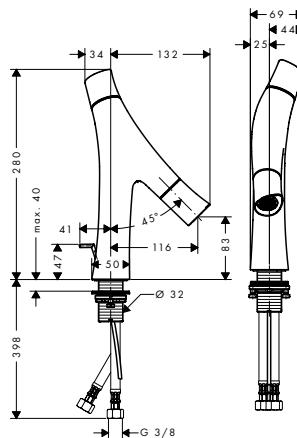**Basin**


## 2-handle basin mixer 80 with pop-up waste set 2 ticks

- / consists of: 2-handle basin mixer, waste set
- / ComfortZone 80
- / projection: 116 mm
- / spray type: shower spray
- / ceramic cartridge for temperature control
- / ceramic valve for volume control
- / temperature limitation adjustable
- / separation of temperature and volume control
- / with isolated water conduction - without contact with nickel and lead
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

finish


Chrome  
AXOR FinishPlus\*

code no.

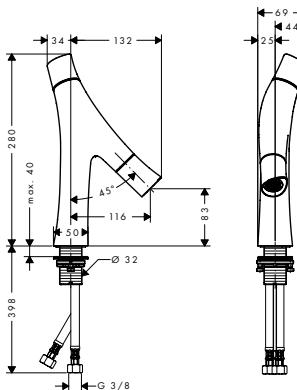12006009  
12006XXX

## 2-handle basin mixer 80 with waste set 2 ticks

- / consists of: 2-handle basin mixer, waste set
- / ComfortZone 80
- / projection: 116 mm
- / spray type: shower spray
- / ceramic cartridge for temperature control
- / ceramic valve for volume control
- / temperature limitation adjustable
- / separation of temperature and volume control
- / with isolated water conduction - without contact with nickel and lead
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

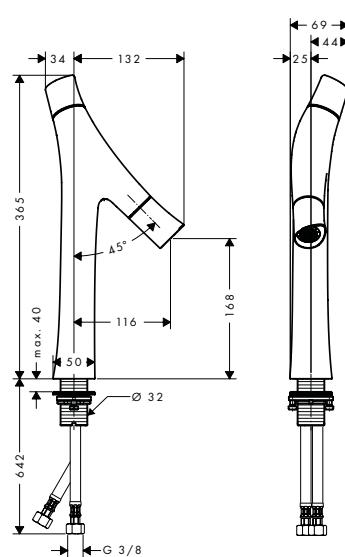
Chrome  
Brushed Bronze  
AXOR FinishPlus\*12000009  
12000149  
12000XXX

## 2-handle basin mixer 170 for wash bowls with waste set 2 ticks

- / consists of: 2-handle basin mixer, waste set
- / ComfortZone 170
- / projection: 116 mm
- / spray type: shower spray
- / ceramic cartridge for temperature control
- / ceramic valve for volume control
- / temperature limitation adjustable
- / separation of temperature and volume control
- / with isolated water conduction - without contact with nickel and lead
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

Chrome  
Brushed Black  
Chrome  
AXOR FinishPlus\*12005009  
12005349  
12005XXX

Measurements within scale drawings are in mm.

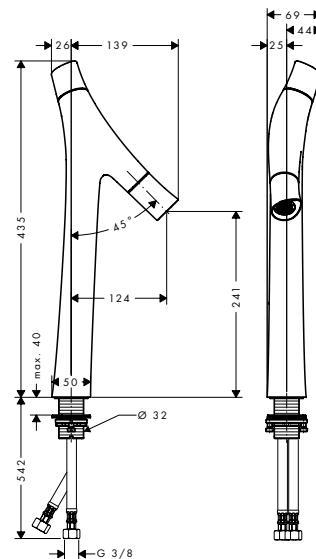


## 2-handle basin mixer 240 for wash bowls with waste set 2 ticks

- / consists of: 2-handle basin mixer, waste set
- / ComfortZone 240
- / projection: 124 mm
- / spray type: shower spray
- / ceramic cartridge for temperature control
- / ceramic valve for volume control
- / temperature limitation adjustable
- / separation of temperature and volume control
- / with isolated water conduction - without contact with nickel and lead
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: G 3/8 connections
- / connection dimension: DN15

finish

Chrome 12003009  
Brushed Bronze 12003149  
Brushed Black 12003349  
Chrome AXOR FinishPlus\* 12003XXX

**Bath**

## Single lever bath mixer for concealed installation

- / 2 functions
- / connection type: basic set
- / flow rate upper outlet: 20 l/min
- / flow rate lower outlet: 29 l/min
- / maximum flow rate at 3 bar: 29 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / with silencer
- / suitable for continuous flow water heaters

Chrome 12415000  
AXOR FinishPlus\* 12415XXX

**Alternative products:**

- / Single lever bath mixer for concealed installation with integrated security combination according to EN1717

Chrome 12416000  
AXOR FinishPlus\* 12416XXX

**Required parts:**


- / Basic set iBox universal

01700180

**Optional parts:**

- / Extension element square 2-hole red/blue
- / Fastening rail set for iBox universal
- / Extension 25 mm for basic set iBox universal

Chrome 14968000  
AXOR FinishPlus\* 14968XXX  
93171000  
13587000



## Basic set iBox universal


01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4"
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

**Optional parts:**

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal

13587000  
93171000  
97759000

**Bath spout**

- / 1 function
- / projection 160 mm
- / maximum flow rate at 3 bar: 27 l/min
- / connection dimension: device connection DN20
- / spray type: laminar spray

finish


Chrome  
AXOR FinishPlus\*code no.  
12417000  
12417XXX**2-hole rim mounted thermostatic bath mixer**Chrome  
AXOR FinishPlus\*code no.  
12422000  
12422XXX

- / 2 functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / suitable for remote spout
- / connection type: basic set
- / connection dimension: DN15

**Required parts:**

- / Basic set for 2-hole rim mounted thermostatic bath mixer

15486180

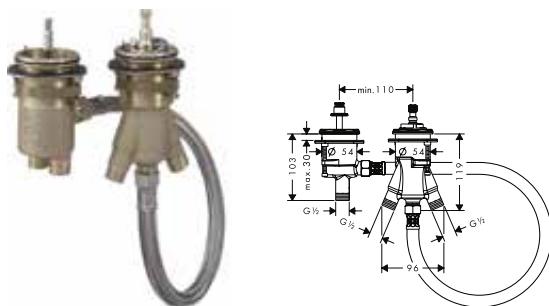
**Basic set for 2-hole rim mounted thermostatic bath mixer**

15486180

- / suitable for remote spout
- / connection thread: G 1/2
- / connection dimension: DN15
- / flow rate upper outlet: 31 l/min
- / flow rate lower outlet: 31 l/min

**Optional parts:**


- |   |                            |                      |
|---|----------------------------|----------------------|
| / Rim mounted bath set with hand shower | Chrome<br>AXOR FinishPlus* | 19418000<br>19418XXX |
| / Finish set square                     | Chrome<br>AXOR FinishPlus* | 28012000<br>28012XXX |
| / Finish set oval                       | Chrome<br>AXOR FinishPlus* | 28022000<br>28022XXX |
| / Rim and tile mounted bath basic set   | Chrome<br>AXOR FinishPlus* | 15490180             |

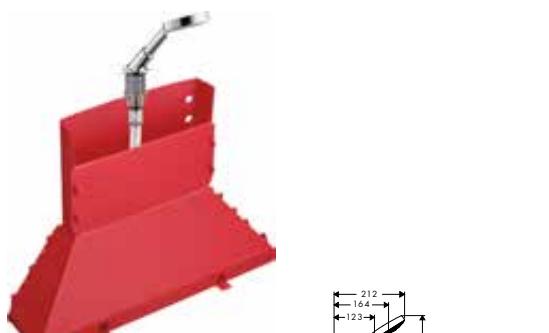**Rim mounted bath set with hand shower**Chrome  
AXOR FinishPlus\*code no.  
19418000  
19418XXX



- / consists of: hand shower, shower holder, shower hose, Secubox, Secuflex hose brake, hose insert
- / suitable for installation on bath rim or tile surround (no mounting plate available)
- / drilling diameter on bath tub: Ø 50 mm
- / connection dimension: DN15
- / maximum pull-out length of hand shower 1.10 m


**Consisting of:**

- / Hand shower 120 3jet (# 26050000)

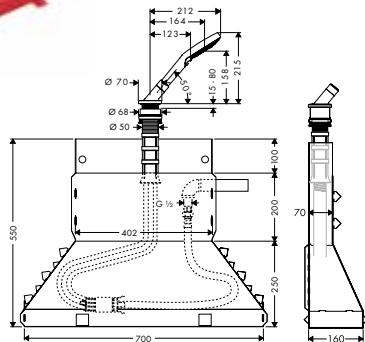

Measurements within scale drawings are in mm.

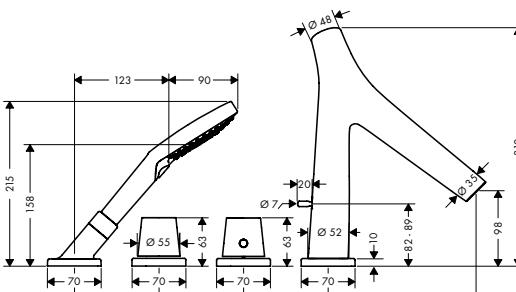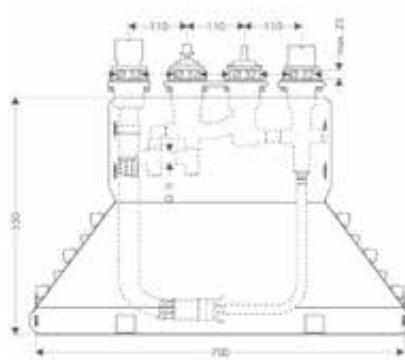	finish	code no.
	<b>4-hole rim mounted thermostatic bath mixer</b>	
	Chrome AXOR FinishPlus*	12425000 12425XXX
	<ul style="list-style-type: none"> <li>/ consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder</li> <li>/ projection 190 mm</li> <li>/ 2 functions</li> <li>/ spray type mixer: laminar spray</li> <li>/ spray type hand shower: Rain, RainAir, WhirlAir</li> <li>/ maximum pull-out length of hand shower: 1.10 m</li> <li>/ maximum flow rate at 3 bar: 18 l/min</li> <li>/ flow rate for bath spout at 3 bar: 18 l/min</li> <li>/ flow rate of hand shower at 3 bar: 16 l/min</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> <li>/ thermostat cartridge</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ non-return valve</li> <li>/ with automatic resetting</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ connection dimension: DN15</li> </ul>	
	<b>Consisting of:</b>	
	/ Hand shower 120 3jet (# 26050000)	
	<b>Required parts:</b>	
	/ Basic set for 4-hole rim mounted thermostatic bath mixer	15482180
	<b>Basic set for 4-hole rim mounted thermostatic bath mixer</b>	15482180
	<ul style="list-style-type: none"> <li>/ maximum pull-out length of hand shower: 1.10 m</li> <li>/ connection dimension: DN15</li> </ul>	

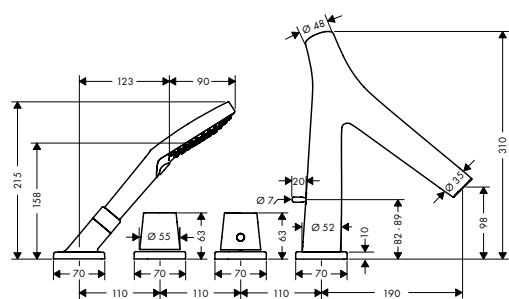

### 4-hole tile mounted thermostatic bath mixer

finish Chrome  
code no. 12426000  
AXOR FinishPlus\* 12426XXX


- / consists of: 4-hole tile mounted bath mixer, hand shower, Secuflex hose set
- / projection 190 mm
- / 2 functions
- / spray type mixer: laminar spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 17 l/min
- / flow rate for bath spout at 3 bar: 17 l/min
- / flow rate of hand shower at 3 bar: 16 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with automatic resetting
- / with silencer
- / connection type: basic set
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

#### Required parts:

- |   |          |
|---|----------|
| / Basic set for 4-hole tile mounted thermostatic bath mixer | 15483180 |
|---|----------|




### Basic set for 4-hole tile mounted thermostatic bath mixer

15483180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

## Shower



### Single lever shower mixer for concealed installation

Chrome  
AXOR FinishPlus\*  
12605000  
12605XXX

- / 1 function
- / connection type: basic set
- / maximum flow rate at 3 bar: 29,3 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / with silencer
- / suitable for continuous flow water heaters




#### Required parts:


- |                            |          |
|----------------------------|----------|
| / Basic set iBox universal | 01700180 |
|----------------------------|----------|

#### Optional parts:

- |  |  |
|--|--|
| / Extension element square 1-hole red blue     | Chrome<br>AXOR FinishPlus*<br>14965000<br>14965XXX |
| / Extension 25 mm for basic set iBox universal | 13587000   |
| / Fastening rail set for iBox universal        | 93171000   |

Measurements within scale drawings are in mm.

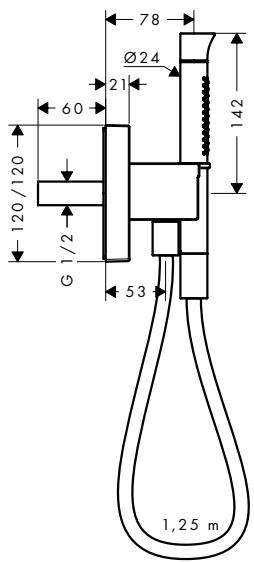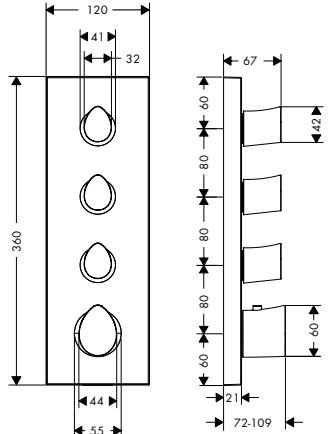	finish	code no.
 		01700180
<b>Basic set iBox universal</b>		
/ suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread Rp 3/4 / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20		
<b>Optional parts:</b>		
/ Extension 25 mm for basic set iBox universal	13587000	
/ Fastening rail set for iBox universal	93171000	
/ Reduction coupling iBox universal	97759000	
 		
<b>Porter unit 120/120 with baton hand shower 2jet and shower hose</b>	Chrome AXOR FinishPlus*	12232000 12232XXX
/ consists of: porter unit, baton hand shower, shower holder, shower hose / integrated support function / spray type: Rain, Mono / maximum flow rate at 3 bar: 13 l/min / minimum flow pressure: 1 bar / nuts shower hose: for shower hoses with conical or cylindrical nut on both sides / with non-return valve / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation / in a joined installation (10 mm distance), the basic set # 28486180 must be used / in a freely-arranged installation (distance greater than 10 mm), no basic set is required / rinseable screen seal		
<b>Consisting of:</b>		
/ Metal effect shower hose 1.25 m (# 28282000)		
<b>Optional parts:</b>		
/ Basic set for shower module 120/120 for concealed installation	28486180	
 		
<b>Thermostatic module</b>		
<b>Thermostatic module 360/120 for concealed installation</b>	Chrome AXOR FinishPlus*	12717000 12717XXX
/ 3 functions / simultaneous use of several outlets / thermostat cartridge / safety lock at 40 °C / temperature limitation adjustable / non-return valve / connection type: basic set / connection dimension: DN20 / min. operating pressure: 1.5 bar / max. operating pressure: 10 bar		
<b>Required parts:</b>		
/ Basic set for thermostatic module 360/120 for concealed installation	10750180	
<b>Optional parts:</b>		
/ Extension set 25 mm	Chrome AXOR FinishPlus*	12790000 12790XXX

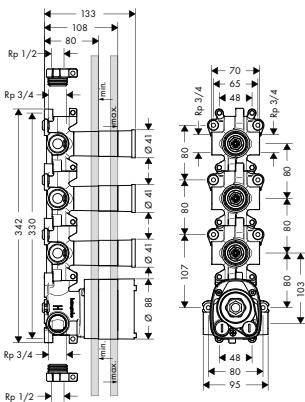

## Basic set for thermostatic module 360/120 for concealed installation

- / connection from left or right
- / 3 outlets can be used simultaneously
- / flow rate at free through-flow: 59 l/min
- / spindle valves
- / horizontal or vertical installation
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN20

finish


code no.

10750180

### Required parts:

- |   |                         |                      |
|---|-------------------------|----------------------|
| / Thermostatic module 360/120 for concealed installation square for 3 functions | Chrome AXOR FinishPlus* | 10751000<br>10751XXX |
| / Thermostatic module 360/120 for concealed installation                        | Chrome AXOR FinishPlus* | 12717000<br>12717XXX |

## Thermostatic mixers/ valves/ diverters

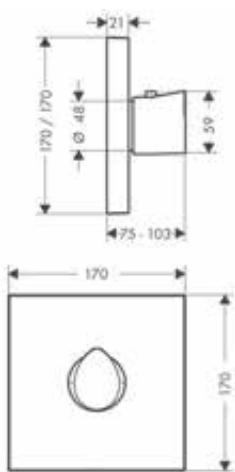

## Thermostat HighFlow for concealed installation


- / flow rate upper outlet: 42 l/min
- / flow rate lower outlet: 42 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

Chrome  
AXOR FinishPlus\*

12711000  
12711XXX

### Required parts:

- |                            |          |
|----------------------------|----------|
| / Basic set iBox universal | 01700180 |
|----------------------------|----------|



### Optional parts:

- |  |                            |                                  |
|--|----------------------------|----------------------------------|
| / Extension element square 1-hole arrow        | Chrome<br>AXOR FinishPlus* | 14966000<br>14966XXX<br>13587000 |
| / Extension 25 mm for basic set iBox universal |                            |                                  |
| / Fastening rail set for iBox universal        |                            | 93171000                         |



## Thermostat for concealed installation with shut-off valve

- / 1 function
- / maximum flow rate at 3 bar: 25 l/min
- / thermostat cartridge, ceramic valves 90°
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

Chrome  
AXOR FinishPlus\*

12715000  
12715XXX

### Required parts:




- |                            |          |
|----------------------------|----------|
| / Basic set iBox universal | 01700180 |
|----------------------------|----------|





### Optional parts:




- |  |                            |                                  |
|--|----------------------------|----------------------------------|
| / Extension element square 2-hole arrow        | Chrome<br>AXOR FinishPlus* | 14970000<br>14970XXX<br>13587000 |
| / Extension 25 mm for basic set iBox universal |                            |                                  |
| / Fastening rail set for iBox universal        |                            | 93171000                         |


Measurements within scale drawings are in mm.

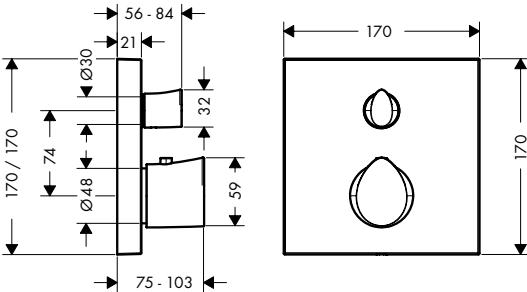	finish	code no.
 	<b>Thermostat for concealed installation with shut-off/diverter valve</b> <ul style="list-style-type: none"> <li>/ 2 functions</li> <li>/ flow rate upper outlet: 25 l/min</li> <li>/ flow rate lower outlet: 29 l/min</li> <li>/ thermostat cartridge, shut-off/ diverter valve</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ non-return valve</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> </ul> <p><b>Required parts:</b></p> <ul style="list-style-type: none"> <li>/ Basic set iBox universal</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Extension element square 2-hole 0-1-2</li> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> </ul>	Chrome AXOR FinishPlus* 12716000 12716XXX 01700180 Chrome AXOR FinishPlus* 14969000 14969XXX 13587000 93171000
 	<b>Basic set iBox universal</b> <ul style="list-style-type: none"> <li>/ suitable for all shower, bath tub and thermostat finish sets for concealed installation</li> <li>/ connection thread Rp 3/4</li> <li>/ rotationally-symmetric installation</li> <li>/ sound-decoupled installation</li> <li>/ connection dimension: DN20</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> <li>/ Reduction coupling iBox universal</li> </ul>	01700180 13587000 93171000 97759000
 	<b>Thermostat HighFlow 120/120 for concealed installation</b> <ul style="list-style-type: none"> <li>/ maximum flow rate at 3 bar: 59 l/min</li> <li>/ thermostat cartridge</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> </ul> <p><b>Required parts:</b></p> <ul style="list-style-type: none"> <li>/ Basic set for thermostatic module 120/120 for concealed installation</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Extension set 25 mm</li> </ul>	Chrome AXOR FinishPlus* 12712000 12712XXX 10754180 Chrome AXOR FinishPlus* 12790000 12790XXX

	finish	code no.
  <p><b>Extension set 25 mm</b></p> <ul style="list-style-type: none"> <li>/ extension for basic set</li> <li>/ extension length: 25 mm</li> </ul>	Chrome AXOR FinishPlus*	12790000 12790XXX
  <p><b>Basic set for thermostatic module 120/120 for concealed installation</b></p> <ul style="list-style-type: none"> <li>/ flow rate at free through-flow: 59 l/min</li> <li>/ horizontal or vertical installation</li> <li>/ sound-decoupled installation</li> <li>/ in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning</li> <li>/ connection dimension: DN20</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Thermostat HighFlow 120/120 for concealed installation</li> <li>/ Thermostatic module 120/120 for concealed installation square</li> <li>/ Thermostat 120/120 for concealed installation</li> </ul>		10754180
  <p><b>Shut-off valve 120/120 for concealed installation</b></p> <ul style="list-style-type: none"> <li>/ connection type: DN15/DN20</li> <li>/ in a freely arranged installation, basic sets # 15973180, # 15974180 or # 15970180 can also be used</li> </ul> <p><b>Required parts:</b></p> <ul style="list-style-type: none"> <li>/ Basic set for shut-off valve 120/120 for concealed installation</li> <li>/ Basic set 52 l/min for shut-off valve for concealed installation spindle</li> <li>/ Basic set 40 l/min for concealed installation for shut-off valve ceramic</li> <li>/ Basic set 130 l/min for shut-off valve for concealed installation spindle</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro</li> </ul>	Chrome AXOR FinishPlus*	12771000 12771XXX

Measurements within scale drawings are in mm.

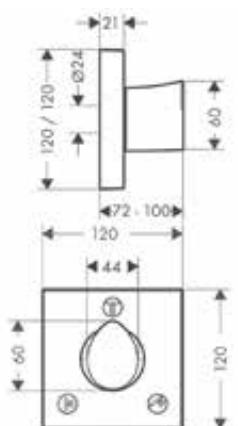	finish	code no.
 	<b>Basic set for shut-off valve 120/120 for concealed installation</b> <ul style="list-style-type: none"> <li>/ suitable for all shut-off valves finish sets</li> <li>/ connection from left or right</li> <li>/ flow rate at free through-flow: 55 l/min</li> <li>/ sound-decoupled installation</li> <li>/ in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning</li> <li>/ connection dimension: DN15</li> </ul> <b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro</li> </ul>	10971180
 	<b>Basic set 52 l/min for shut-off valve for concealed installation spindle</b> <ul style="list-style-type: none"> <li>/ connection type: DN15</li> <li>/ suitable for all shut-off valves finish sets</li> <li>/ connection dimension: DN15</li> <li>/ maximum flow rate at 3 bar: 52 l/min</li> </ul> <b>Alternative products:</b> <ul style="list-style-type: none"> <li>/ Basic set 40 l/min for concealed installation for shut-off valve ceramic</li> <li>/ Basic set 130 l/min for shut-off valve for concealed installation spindle</li> </ul> <b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro</li> </ul>	16973180
 	<b>Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation</b> <b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation</li> <li>/ Basic set for shut-off/ diverter valve Trio for concealed installation</li> <li>/ Basic set for Quattro four-way diverter valve for concealed installation</li> </ul>	Chrome AXOR FinishPlus* 12731000 12731XXX
		36770180 16982180 16930180

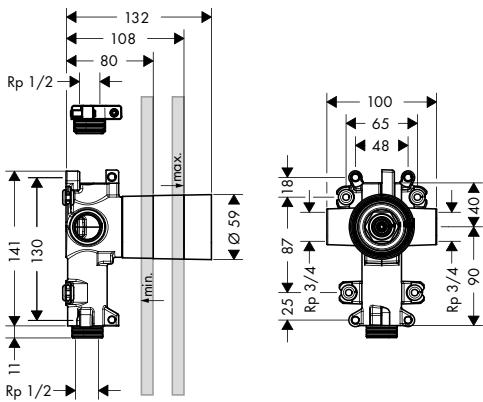

### Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation

- / 2 functions
- / 1 inlet/ 2 outlets
- / 2 outlets can be used simultaneously
- / connection thread Rp 3/4
- / horizontal or vertical installation
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN20

Chrome	36772000
AXOR FinishPlus*	36772XXX
Chrome	10932000
AXOR FinishPlus*	10932XXX
Chrome	12731000
AXOR FinishPlus*	12731XXX

#### Required parts:


- / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation
- / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation
- / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation

92990000

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000



### Basic set for shut-off/ diverter valve Trio for concealed installation


16982180

- / 2 functions
- / simultaneous utilization of 2 functions
- / suitable for all Trio finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/ min

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000



### Basic set for Quattro four-way diverter valve for concealed installation


16930180

- / requires volume control
- / 3 functions
- / simultaneous utilization of 2 functions
- / suitable for all Quattro finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/ min

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000


**Hand showers****Baton hand shower 2jet**

- / spray type: Rain, Mono
- / spray type adjustment by turning spray disc
- / grey spray disc
- / maximum flow rate at 3 bar: 13 l/min
- / flow rate Mono spray (at 3 bar): 11 l/min
- / flow rate Rain spray (at 3 bar): 13 l/min
- / minimum flow pressure: 1 bar
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters

finish

code no.

Chrome 12680000  
AXOR FinishPlus\* 12680XXX

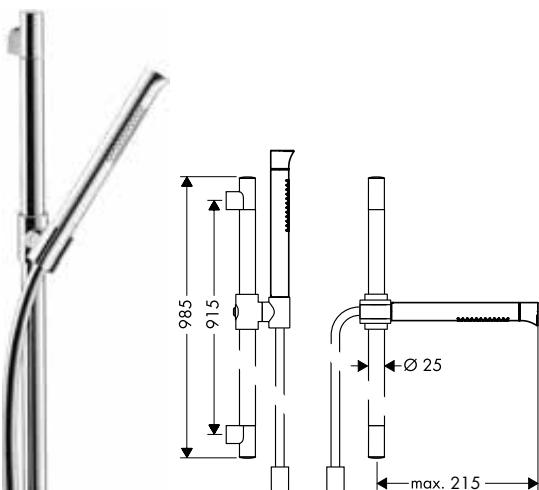**Shower sets****Shower set 0.90 m with baton hand shower 2jet**

- / consists of: baton hand shower, shower bar, shower hose, slider
- / shower head size: 70 mm
- / spray type: Rain, Soft spray
- / spray type adjustment by turning spray disc
- / maximum flow rate at 3 bar: 13 l/min
- / minimum flow pressure: 1 bar
- / shower hose with cylindrical nut on both ends
- / pivot connector prevent hose from tangling
- / wall supports of plastic
- / profile stand pipe: round

**Consisting of:**

- / Baton hand shower 2jet (# 12680000)
- / Metal effect shower hose 1.60 m (# 28286000)

Chrome 12231000  
AXOR FinishPlus\* 12231XXX

**Optional parts:**

- / Wall bar spacer for Unica wall bar D Chrome 96186000

**Thermostatic mixers**

For matching thermostatic mixers, refer to the AXOR Showers chapter.

**Showers**

For matching shower products, refer to the AXOR Showers chapter.

Accessories



For matching accessories, refer to the AXOR Accessories chapter.

Measurements within scale drawings are in mm.


Technical specifications and units of measure are subject to change.





# AXOR Citterio

Basin	136
Bidet	140
Bath	140
Shower	149
Thermostatic mixers / valves / diverters	150
Overhead showers	155
Shower sets	155
Shower systems	156

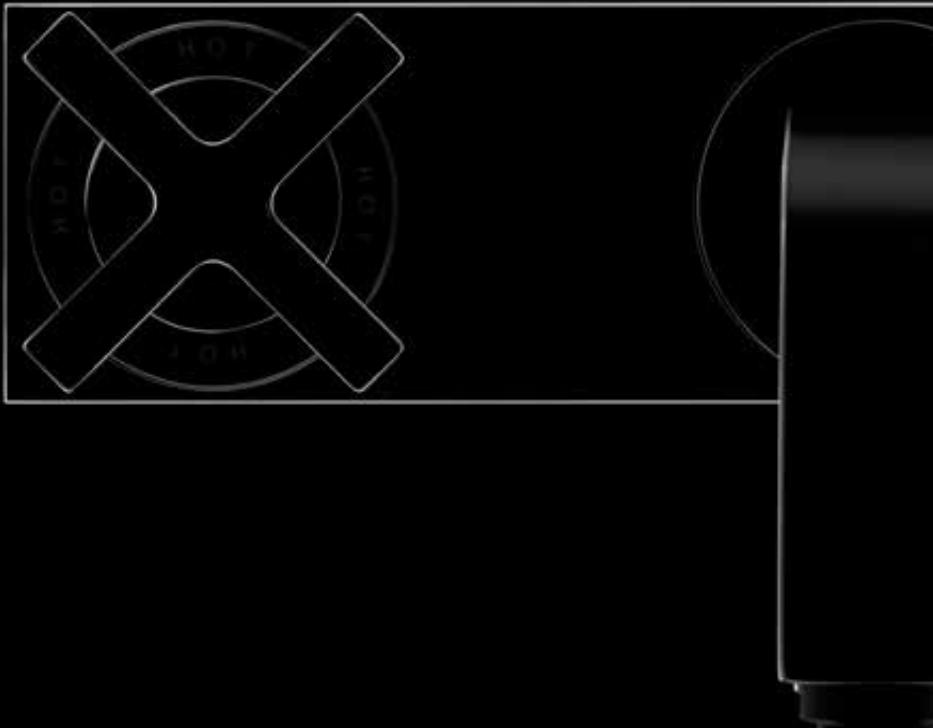

# **AXOR Citterio**

## **A contemporary classic**

AXOR Citterio. An icon of modern bathroom design. Understated yet unmistakably luxurious, with distinctive flat surfaces that brilliantly reflect the light, AXOR Citterio celebrates the preciousness of water itself. With its balanced proportions and elegant geometries, the collection is perfectly suited to any bathroom ambience. It comprises an exceptionally wide range of products and options, including mixers in different handle styles – pin, cross handle, original lever handle and a

new lever handle that is even more precise, intuitive and easy to use. The extensive array allows for endless individual solutions within a consistent, geometric design language. AXOR Citterio comes in classic chrome and an array of exclusive AXOR Finish-Plus PVD surfaces, including Polished Black Chrome and Brushed Gold Optic. As an option, the new lever handle is available in the luxurious 3D surface pattern „rhombic cut“.


Design: Antonio Citterio

# A monument at the wash basin

The AXOR Citterio collection offers a variety of product variants: pin, cross and lever handles as well as products with cover plates and escutcheons. Various installation types and divers spout lenghts and mixer heights cover nearly every installation situation. In its geometric precision and monumentality, AXOR Citterio conveys the spirit of Italian neoclassical architecture. The comprehensive product range for wash basin, shower and bathtub enables endless individual solutions, all within a consistent design language.



- New lever handle:
- / „Floating“ form continues the architectural design language
  - / Even more ergonomic, intuitive and easy to use
  - / Offers precise control of water temperature and volume
  - / Optional available with exclusive „rhombic cut“

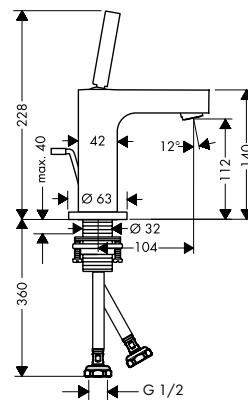
**Basin**
**Single lever basin mixer 110  
with pin handle and pop-up  
waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 110
- / projection: 104 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*


code no.

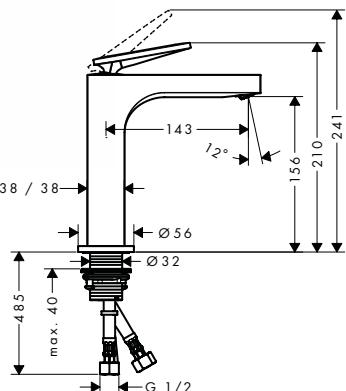39011009  
39011XXX**NEW****NEW**
**Single lever basin mixer 160  
with lever handle and waste set  
2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 160
- / projection: 143 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,5 l/min
- / ceramic cartridge
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\*39024009  
39024XXX**Alternative products:**

- / Single lever basin mixer 160 with lever handle and pop-up waste set 2 ticks - rhombic cut

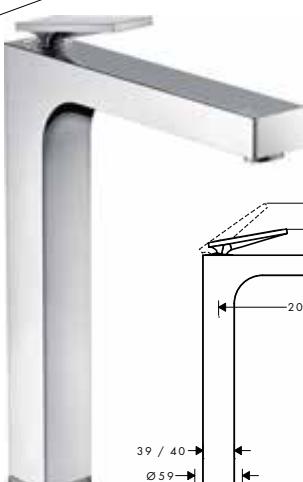Chrome  
AXOR FinishPlus\*39071009  
39071XXX**NEW****NEW**
**Single lever basin mixer 280  
with lever handle for wash  
bowls with waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 280
- / projection: 200 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,5 l/min
- / ceramic cartridge
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15


Chrome  
AXOR FinishPlus\*39021009  
39021XXX**Alternative products:**

- / Single lever basin mixer 280 with lever handle for wash bowls with waste set 2 ticks - rhombic cut

Chrome  
AXOR FinishPlus\*39151009  
39151XXX

finish

code no.

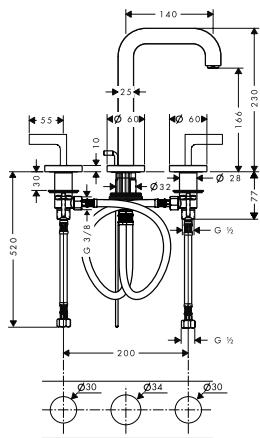


### 3-hole basin mixer 170 with spout 140 mm, lever handles, escutcheons and pop-up waste set 2 ticks

- / consists of: 3-hole basin mixer, waste set
- / ComfortZone 170
- / projection: 140 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic valves hot/ cold 90°
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

#### Optional parts:

- / Hose extension set for 3-hole basin mixer

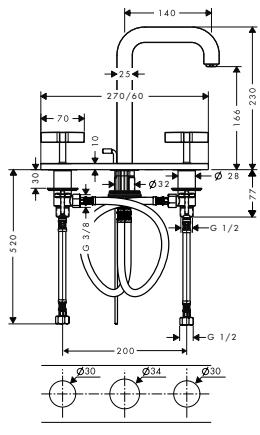Chrome  
AXOR FinishPlus\*39141009  
39141XXX

### 3-hole basin mixer 170 with spout 140 mm, cross handles, plate and pop-up waste set 2 ticks

- / consists of: 3-hole basin mixer, waste set
- / ComfortZone 170
- / projection: 140 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 2,8 l/min
- / ceramic valves hot/ cold 180°
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15
- / for use only at flat, plain surfaces

#### Optional parts:


- / Hose extension set for 3-hole basin mixer

Chrome  
AXOR FinishPlus\*39130009  
39130XXX

### Hose extension set for 3-hole basin mixer


38959000

- / length of hoses 700 mm
- / for free positioning of spout and handles

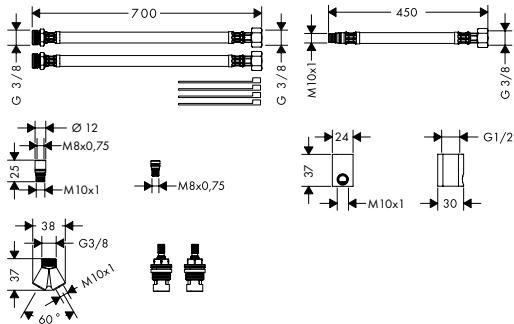



NEW

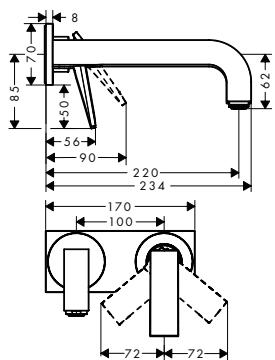

### Single lever basin mixer for concealed installation wall-mounted with lever handle, spout 220 mm and plate 2 ticks

- / consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- / projection: 220 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,5 l/min
- / ceramic cartridge
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: basic set
- / connection dimension: DN15
- / handle can be positioned on the right or left, depends on the basic set installation

NEW

#### Alternative products:

- / Single lever basin mixer for concealed installation wall-mounted with lever handle, spout 220 mm and plate 2 ticks - rhombic cut


finish

Chrome  
AXOR FinishPlus\*

code no.

39119009  
39119XXX

NEW

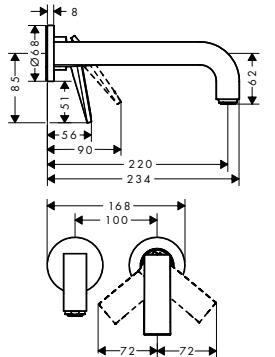

### Single lever basin mixer for concealed installation wall-mounted with lever handle, spout 220 mm and escutcheons 2 ticks


- / consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- / projection: 220 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,5 l/min
- / ceramic cartridge
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: basic set
- / connection dimension: DN15
- / handle can be positioned on the right or left, depends on the basic set installation

NEW

#### Alternative products:

- / Single lever basin mixer for concealed installation wall-mounted with lever handle, spout 220 mm and escutcheons 2 ticks - rhombic cut

Chrome  
AXOR FinishPlus\*39121009  
39121XXX

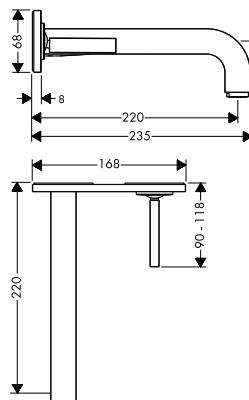

**Single lever basin mixer  
for concealed installation  
wall-mounted with pin handle,  
spout 220 mm and plate 2 ticks**

- / consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- / projection: 220 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / non-closing waste set
- / connection type: basic set
- / connection dimension: DN15
- / handle can be positioned on the right or left, depends on the basic set installation


**Required parts:**

- / Basic set for single lever basin mixer for concealed installation wall-mounted

finish

code no.

Chrome 39114009  
Polished Red Gold 39114309  
AXOR FinishPlus\* 39114XXX



**Basic set for single lever basin  
mixer for concealed installation  
wall-mounted**


13623180

- / installation depth: 44 - 72 mm
- / variable positioning of the mixer system, can be left or right of the spout
- / easy orientation due to support surfaces for the spirit level
- / with building protection cover against contamination during assembly
- / with dimension indication for exact determination of the installation depth
- / with pre-mounted fastening lugs for mounting in drywall and solidwall
- / sound-decoupled installation
- / connection dimension: DN15

**Optional parts:**

- / Extension set 25 mm for single lever basin mixer wall-mounted


13586000



**Extension set 25 mm for single  
lever basin mixer wall-mounted**

13586000


- / extension length: 25 mm

**Bidet****NEW**
**Single lever bidet mixer  
with lever handle and pop-up  
waste set**

- / consists of: single lever bidet mixer, waste set
- / projection 110 mm
- / aerator with ball pivot
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 7,5 l/min
- / ceramic cartridge
- / suitable for continuous flow water heaters
- / pop-up waste set G 1 1/4
- / connection type: G 3/8 connections
- / connection dimension: DN15

**NEW****Alternative products:**

- / Single lever bidet mixer with lever handle and pop-up waste set - rhombic cut Chrome AXOR FinishPlus\* 39201000 39201XXX

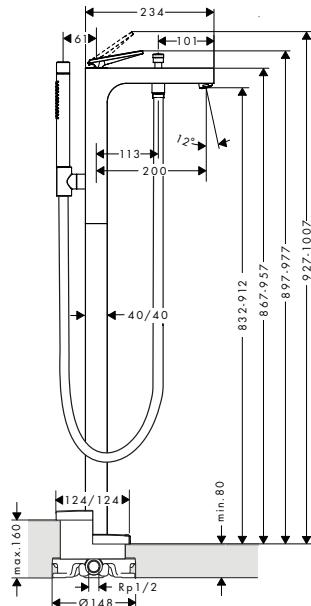**Bath****NEW**
**Single lever bath mixer  
floor-standing with lever handle  
2 ticks**

- / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder
- / 2 functions
- / projection 200 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum flow rate at 3 bar: 20 l/min
- / flow rate for bath spout at 3 bar: 20 l/min
- / flow rate of hand shower at 3 bar: 5,5 l/min
- / Ceramic cartridge
- / diverter with automatic resetting
- / protected against backflow, according to DIN EN1717
- / connection dimension: DN15

**Consisting of:**

- / Baton hand shower 2jet (# 28532000)
- / Metal effect shower hose 1.25 m (# 28282000)

**Alternative products:**

- / Single lever bath mixer floor-standing with lever handle 2 ticks - rhombic cut Chrome AXOR FinishPlus\* 39471009 39471XXX

**Required parts:**



- / Basic set for mixers floor-standing 10452180


**Optional parts:**

- / Extension 60 mm for pipe 97686000

**finish**Chrome  
AXOR FinishPlus\***code no.**39214000  
39214XXX

Measurements within scale drawings are in mm.

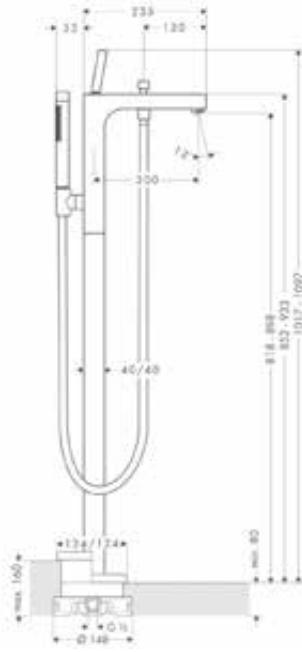	finish	code no.
 	<b>Single lever bath mixer floor-standing with pin handle 2stick</b> Chrome AXOR FinishPlus*  	39437009 39437XXX
<ul style="list-style-type: none"> <li>/ consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder</li> <li>/ 2 functions</li> <li>/ projection 200 mm</li> <li>/ connection type: basic set</li> <li>/ spray type mixer: normal spray</li> <li>/ spray type hand shower: Rain, Mono</li> <li>/ maximum flow rate at 3 bar: 19 l/min</li> <li>/ flow rate for bath spout at 3 bar: 19 l/min</li> <li>/ flow rate of hand shower at 3 bar: 4,5 l/min</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> <li>/ joystick ceramic cartridge</li> <li>/ diverter with automatic resetting</li> <li>/ protected against backflow, according to DIN EN1717</li> <li>/ connection dimension: DN15</li> </ul>		
<b>Alternative products:</b> <ul style="list-style-type: none"> <li>/ Single lever bath mixer floor-standing with pin handle 3stick</li> </ul>	Chrome AXOR FinishPlus*	39438009 39438XXX
<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for mixers floor-standing</li> </ul>		10452180
<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension 60 mm for pipe</li> </ul>		97686000
 	<b>Basic set for mixers floor-standing</b> <ul style="list-style-type: none"> <li>/ for mounting on unfinished floor</li> <li>/ suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing</li> <li>/ connection dimension: DN15</li> </ul>	10452180



### Single lever bath mixer for concealed installation with lever handle

- / 2 functions
- / connection type: basic set
- / flow rate upper outlet: 21 l/min
- / flow rate lower outlet: 29 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / with silencer
- / suitable for continuous flow water heaters

finish

Chrome  
AXOR FinishPlus\*

code no.

39455000  
39455XXX

#### Alternative products:

- / Single lever bath mixer for concealed installation with lever handle and integrated security combination according to EN1717

Chrome  
AXOR FinishPlus\*39457000  
39457XXX

#### Required parts:

- / Basic set iBox universal


01700180

#### Optional parts:

- / Extension element square 2-hole
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
AXOR FinishPlus\*14967000  
14967XXX  
13587000

93171000



### Basic set iBox universal

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:


- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal

13587000

93171000

97759000

Measurements within scale drawings are in mm.

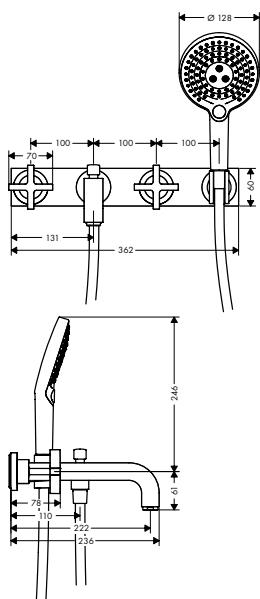

### 3-hole bath mixer for concealed installation wall-mounted with cross handles and plate

- / consists of: 3-hole bath mixer, hand shower, shower holder, shower hose
- / 2 functions
- / projection 222 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / flow rate for bath spout at 3 bar: 22,5 l/min
- / flow rate of hand shower at 3 bar: 20 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 180°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)
- / Shower hose 1.25 m (# 28622000)
- / Shower holder round (# 39525000)

#### Required parts:


- / Basic set for 3-hole basin mixer for concealed installation wall-mounted

10303180

#### Optional parts:

- / Seal

96383000

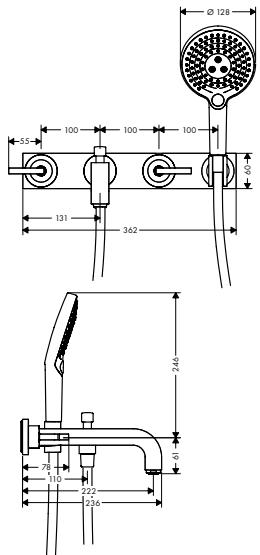

### 3-hole bath mixer for concealed installation wall-mounted with lever handles and plate

- / consists of: 3-hole bath mixer, hand shower, shower holder, shower hose
- / 2 functions
- / projection 222 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / flow rate for bath spout at 3 bar: 22,5 l/min
- / flow rate of hand shower at 3 bar: 20 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)
- / Shower hose 1.25 m (# 28622000)
- / Shower holder round (# 39525000)

#### Required parts:

- / Basic set for 3-hole basin mixer for concealed installation wall-mounted

10303180

#### Optional parts:

- / Seal


96383000

finish

Chrome  
AXOR FinishPlus\*

code no.

39441000  
39441XXX

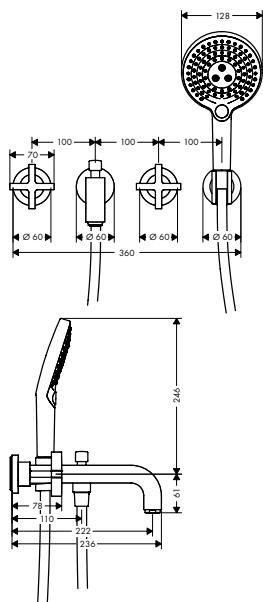

### 3-hole bath mixer for concealed installation wall-mounted with cross handles and escutcheons

- / consists of: 3-hole bath mixer, hand shower, shower holder, shower hose
- / 2 functions
- / projection 222 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / flow rate for bath spout at 3 bar: 22,5 l/min
- / flow rate of hand shower at 3 bar: 20 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 180°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)
- / Shower holder round (# 39525000)
- / Shower hose 1.25 m (# 28622000)

#### Required parts:


- / Basic set for 3-hole basin mixer for concealed installation wall-mounted

10303180

#### Optional parts:

- / Seal

96383000

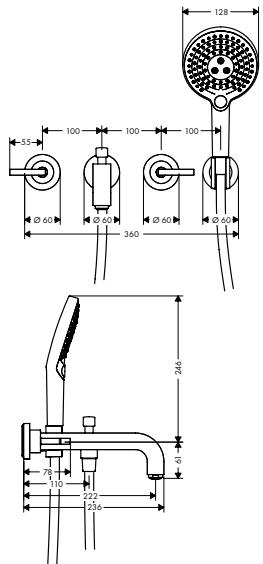

### 3-hole bath mixer for concealed installation wall-mounted with lever handles and escutcheons

- / consists of: 3-hole bath mixer, hand shower, shower holder, shower hose
- / 2 functions
- / projection 222 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / flow rate for bath spout at 3 bar: 22,5 l/min
- / flow rate of hand shower at 3 bar: 20 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)
- / Shower hose 1.25 m (# 28622000)
- / Shower holder round (# 39525000)

#### Required parts:

- / Basic set for 3-hole basin mixer for concealed installation wall-mounted

10303180

#### Optional parts:

- / Seal

96383000




finish

Chrome  
AXOR FinishPlus\*

code no.


39447000  
39447XXX

Measurements within scale drawings are in mm.

	finish	code no.
	<b>Basic set for 3-hole basin mixer for concealed installation wall-mounted</b>	10303180
	/ suitable for all 3-hole wash basin mixers for wall mounting / connection dimension: DN15/DN20 / connection from above or below	
	<b>Optional parts:</b>	
	/ Seal	96383000
	<b>Bath spout</b>	Chrome AXOR FinishPlus*
	/ 1 function / projection 165 mm / maximum flow rate at 3 bar: 21 l/min / connection dimension: device connection DN20 / spray type: normal spray	39410000 39410XXX
	<b>2-hole rim mounted thermostatic bath mixer with cross handles</b>	Chrome AXOR FinishPlus*
	/ 2 functions / safety lock at 40 °C / temperature limitation adjustable / suitable for remote spout / connection type: basic set / connection dimension: DN15	39480000 39480XXX
	<b>Required parts:</b>	
	/ Basic set for 2-hole rim mounted thermostatic bath mixer	15486180
	<b>Optional parts:</b>	
	/ Flexible connection tube 800 mm / Connection tube set for 2-hole rim mounted thermostatic bath mixer	58308000 13089000
	<b>2-hole rim mounted thermostatic bath mixer with lever handles</b>	Chrome AXOR FinishPlus*
	/ 2 functions / safety lock at 40 °C / temperature limitation adjustable / suitable for remote spout / connection type: basic set / connection dimension: DN15	39482000 39482XXX
	<b>Required parts:</b>	
	/ Basic set for 2-hole rim mounted thermostatic bath mixer	15486180
	<b>Optional parts:</b>	
	/ Flexible connection tube 800 mm / Connection tube set for 2-hole rim mounted thermostatic bath mixer	58308000 13089000

finish

code no.




### Basic set for 2-hole rim mounted thermostatic bath mixer

- / suitable for remote spout
- / connection thread: G 1/2
- / connection dimension: DN15
- / flow rate upper outlet: 31 l/min
- / flow rate lower outlet: 31 l/min

#### Optional parts:

- / Rim mounted bath set with hand shower
- / Finish set square
- / Finish set oval
- / Rim and tile mounted bath basic set

15486180




### Rim mounted bath set with hand shower

Chrome 19418000  
AXOR FinishPlus\* 19418XXX

- / consists of: hand shower, shower holder, shower hose, Secubox, Secuflex hose brake, hose insert
- / suitable for for installation on bath rim or tile surround (no mounting plate available)
- / drilling diameter on bath tub: Ø 50 mm
- / connection dimension: DN15
- / maximum pull-out length of hand shower 1.10 m

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)



### 3-hole rim mounted bath mixer with cross handles

Chrome 39436000  
AXOR FinishPlus\* 39436XXX




- / 1 function
- / projection 190 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / maximum flow rate at 3 bar: 21,5 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / connection dimension: DN15

#### Required parts:

- / Basic set for 3-hole rim mounted bath mixer

15484180




### Basic set for 3-hole rim mounted bath mixer

15484180

- / maintenance opening required
- / connection thread: G 1/2
- / connection dimension: DN15
- / ceramic valves hot/ cold 90°

Measurements within scale drawings are in mm.

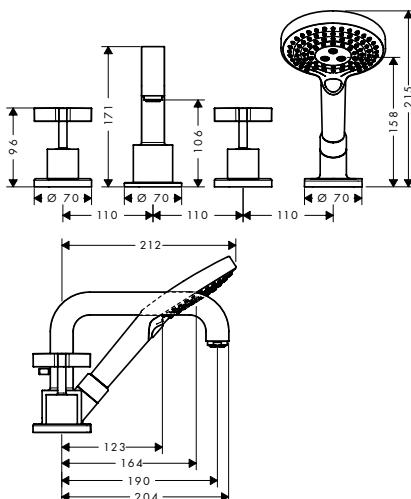

### 4-hole rim mounted bath mixer with cross handles

finish Chrome  
code no. 39445000  
AXOR FinishPlus\*  
39445XXX



- / consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 190 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 180°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15


#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

#### Required parts:

- / Basic set for 4-hole rim mounted bath mixer

15480180

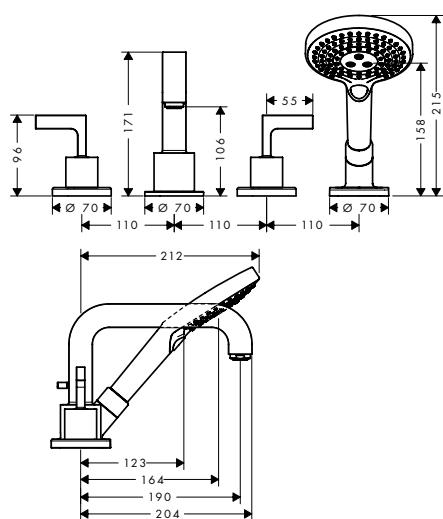

### 4-hole rim mounted bath mixer with lever handles

finish Chrome  
code no. 39446000  
AXOR FinishPlus\*  
39446XXX



- / consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 190 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15



#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

#### Required parts:

- / Basic set for 4-hole rim mounted bath mixer


15480180



### Basic set for 4-hole rim mounted bath mixer

15480180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

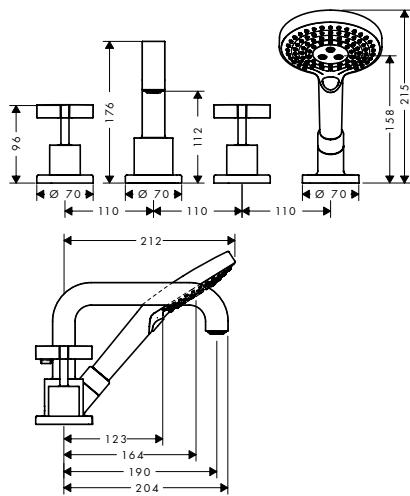

### 4-hole tile mounted bath mixer with cross handles and escutcheons

- / consists of: 4-hole tile mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 190 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 21 l/min
- / flow rate for bath spout at 3 bar: 21 l/min
- / flow rate of hand shower at 3 bar: 18 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 180°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)


#### Required parts:

- / Basic set for 4-hole tile mounted bath mixer

finish

Chrome  
AXOR FinishPlus\*

code no.

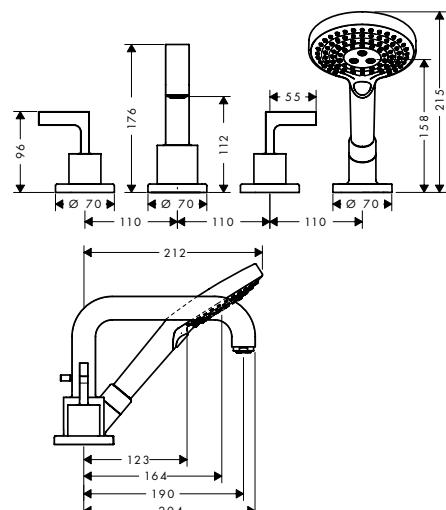39453000  
39453XXX

### 4-hole tile mounted bath mixer with lever handles and escutcheons

- / consists of: 4-hole tile mounted bath mixer, hand shower, Secuflex hose set
- / 2 functions
- / projection 190 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)


#### Required parts:

- / Basic set for 4-hole tile mounted bath mixer

Chrome  
AXOR FinishPlus\*39454000  
39454XXX

Measurements within scale drawings are in mm.

	finish	code no.
 	<b>Basic set for 4-hole tile mounted bath mixer</b> <ul style="list-style-type: none"> <li>/ maximum pull-out length of hand shower: 1.10 m</li> <li>/ connection dimension: DN15</li> </ul>	15481180
<b>Shower</b>  	<b>Single lever shower mixer for concealed installation with lever handle</b> <ul style="list-style-type: none"> <li>/ 1 function</li> <li>/ connection type: basic set</li> <li>/ maximum flow rate at 3 bar: 29 l/min</li> <li>/ ceramic cartridge</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> <li>/ temperature limitation adjustable</li> <li>/ with silencer</li> <li>/ suitable for continuous flow water heaters</li> </ul>	Chrome AXOR FinishPlus* 39655000 39655XXX
	<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set iBox universal</li> </ul>	01700180
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension element square 1-hole red/blue</li> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> </ul>	Chrome AXOR FinishPlus* 14965000 14965XXX 13587000 93171000
 	<b>Basic set iBox universal</b> <ul style="list-style-type: none"> <li>/ suitable for all shower, bath tub and thermostat finish sets for concealed installation</li> <li>/ connection thread Rp 3/4"</li> <li>/ rotationally-symmetric installation</li> <li>/ sound-decoupled installation</li> <li>/ connection dimension: DN20</li> </ul>	01700180
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> <li>/ Reduction coupling iBox universal</li> </ul>	13587000 93171000 97759000

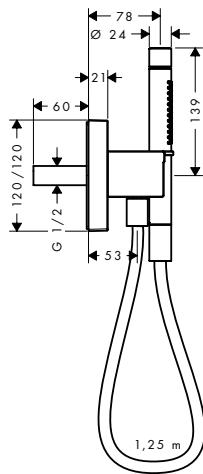

### Porter unit 120/120 with baton hand shower 2jet and shower hose

- / consists of: porter unit, baton hand shower, shower holder, shower hose
- / integrated support function
- / spray type: Rain, Mono
- / maximum flow rate at 3 bar: 16,2 l/min
- / minimum flow pressure: 1 bar
- / nuts shower hose: for shower hoses with conical or cylindrical nut on both sides
- / with non-return valve
- / in a joined installation (10 mm distance), the basic set # 28486180 must be used
- / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation
- / in a freely-arranged installation (distance greater than 10 mm), no basic set is required
- / rinseable screen seal

#### Consisting of:


- / Metal effect shower hose 1.25 m (# 28282000)

#### Optional parts:

- |  |          |
|--|----------|
| / Basic set for shower module 120/120 for concealed installation | 28486180 |
|--|----------|

finish

code no.

Chrome  
AXOR FinishPlus\*12626000  
12626XXX

### Shower holder round


- / consists of: shower holder, escutcheon
- / fixed holding position
- / for hoses with conical nut
- / material: metal

Chrome  
AXOR FinishPlus\*39525000  
39525XXX

#### Optional parts:

- |                      |                            |                      |
|----------------------|----------------------------|----------------------|
| / Shower hose 1.25 m | Chrome<br>AXOR FinishPlus* | 28622000<br>28622XXX |
| / Shower hose 1.60 m | Chrome<br>AXOR FinishPlus* | 28626000<br>28626XXX |
| / Shower hose 2.00 m | Chrome<br>AXOR FinishPlus* | 28624000<br>28624XXX |

### Thermostatic mixers/ valves/ diverters



### Thermostat HighFlow for concealed installation with cross handle

- / maximum flow rate at 3 bar: 59 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

Chrome  
AXOR FinishPlus\*39716000  
39716XXX


#### Required parts:

- |                            |          |
|----------------------------|----------|
| / Basic set iBox universal | 01700180 |
|----------------------------|----------|

#### Optional parts:

- |  |                            |                      |
|--|----------------------------|----------------------|
| / Extension element square 1-hole              | Chrome<br>AXOR FinishPlus* | 14964000<br>14964XXX |
| / Extension 25 mm for basic set iBox universal |                            | 13587000             |
| / Fastening rail set for iBox universal        |                            | 93171000             |

Measurements within scale drawings are in mm.



### Thermostat HighFlow for concealed installation with lever handle

- / maximum flow rate at 3 bar: 59 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

#### Required parts:


- / Basic set iBox universal

01700180

#### Optional parts:

- / Extension element square 1-hole
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

finish

Chrome  
AXOR FinishPlus\*code no.  
39711000  
39711XXX

### Thermostat for concealed installation with shut-off valve and cross handle

- / 1 function
- / maximum flow rate at 3 bar: 26 l/min
- / thermostat cartridge, ceramic valves 90°
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar


#### Required parts:

- / Basic set iBox universal

01700180

#### Optional parts:

- / Extension element square 2-hole arrow
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
AXOR FinishPlus\*code no.  
39705000  
39705XXX

### Thermostat for concealed installation with shut-off valve and lever handle

- / 1 function
- / maximum flow rate at 3 bar: 26 l/min
- / thermostat cartridge, ceramic valves 90°
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

#### Required parts:


- / Basic set iBox universal

Chrome  
AXOR FinishPlus\*code no.  
39700000  
39700XXX

#### Optional parts:

- / Extension element square 2-hole arrow
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
AXOR FinishPlus\*code no.  
14970000  
14970XXX  
13587000  
93171000



### Thermostat for concealed installation with shut-off/diverter valve and cross handle


- / 2 functions
- / flow rate upper outlet: 25 l/min
- / flow rate lower outlet: 29 l/min
- / thermostat cartridge, shut-off valve
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

#### Required parts:

- / Basic set iBox universal

finish

code no.

Chrome  
AXOR FinishPlus\*39725000  
39725XXX

### Thermostat for concealed installation with shut-off/diverter valve and lever handle

- / 2 functions
- / flow rate upper outlet: 25 l/min
- / flow rate lower outlet: 29 l/min
- / thermostat cartridge, shut-off valve
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar


#### Required parts:

- / Basic set iBox universal

Chrome  
AXOR FinishPlus\*39720000  
39720XXXChrome  
AXOR FinishPlus\*14969000  
14969XXX

13587000

93171000



### Basic set iBox universal

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal


13587000

93171000

97759000

Measurements within scale drawings are in mm.

	finish	code no.
	<b>Shut-off valve for concealed installation with cross handle</b> / connection type: DN15/DN20  <b>Required parts:</b> / Basic set 52 l/min for shut-off valve for concealed installation spindle / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle  <b>Optional parts:</b> / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	Chrome AXOR FinishPlus* 39965000 39965XXX  16973180 16974180 16970180  92990000
	<b>Shut-off valve for concealed installation with lever handle</b> / connection type: DN15/DN20  <b>Required parts:</b> / Basic set 52 l/min for shut-off valve for concealed installation spindle / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle  <b>Optional parts:</b> / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	Chrome AXOR FinishPlus* 39960000 39960XXX  16973180 16974180 16970180  92990000
	<b>Basic set 52 l/min for shut-off valve for concealed installation spindle</b> / connection type: DN15 / suitable for all shut-off valves finish sets / connection dimension: DN15 / maximum flow rate at 3 bar: 52 l/min  <b>Alternative products:</b> / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle  <b>Optional parts:</b> / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	16973180  16974180 16970180  92990000
	<b>Shut-off/ diverter valve Trio/ Quattro for concealed installation with cross handle</b>  <b>Required parts:</b> / Basic set for Quattro four-way diverter valve for concealed installation / Basic set for shut-off/ diverter valve Trio for concealed installation  <b>Optional parts:</b> / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	Chrome AXOR FinishPlus* 39925000 39925XXX  16930180 16982180  92990000



**Shut-off/ diverter valve  
Trio/ Quattro for concealed  
installation with lever handle**

**Required parts:**

- / Basic set for Quattro four-way diverter valve for concealed installation
- / Basic set for shut-off/ diverter valve Trio for concealed installation


finish

Chrome  
AXOR FinishPlus\*code no.  
39920000  
39920XXX

16930180

16982180

92990000



**Basic set for shut-off/ diverter  
valve Trio for concealed  
installation**


- / 2 functions
- / simultaneous utilization of 2 functions
- / suitable for all Trio finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

16982180

**Optional parts:**

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000



**Basic set for Quattro four-way  
diverter valve for concealed  
installation**


- / requires volume control
- / 3 functions
- / simultaneous utilization of 2 functions
- / suitable for all Quattro finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

16930180

**Optional parts:**

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000




**Wall outlet stop with non return  
valve, shut-off valve and cross  
handle**

- / connection type: DN15
- / hose connection DN15/DN20
- / with non-return valve

Chrome  
AXOR FinishPlus\*code no.  
39883000  
39883XXX

Measurements within scale drawings are in mm.



### Wall outlet stop with non return valve, shut-off valve and lever handle

- / connection type: DN15
- / hose connection DN15/DN20
- / with non-return valve


finish

Chrome  
AXOR FinishPlus\*

code no.

39882000  
39882XXX

## Overhead showers



### Overhead shower 180 1jet



- / shower head size: 180 mm
- / spray type: RainAir
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / maximum flow rate at 3 bar: 24 l/min
- / flow rate RainAir spray (at 3 bar): 24 l/min
- / minimum flow pressure: 1,5 bar
- / spray disc removable for cleaning
- / installation: ceiling or wall
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters with an output of 18 kW

Chrome  
AXOR FinishPlus\*28489000  
28489XXX

#### Optional parts:

- |                            |                            |          |
|----------------------------|----------------------------|----------|
| / Shower arm 390 mm        | Chrome<br>AXOR FinishPlus* | 26431000 |
| / Ceiling connector 100 mm | Chrome<br>AXOR FinishPlus* | 26431XXX |
| / Ceiling connector 300 mm | Chrome<br>AXOR FinishPlus* | 26432000 |
|                            | Chrome<br>AXOR FinishPlus* | 26432XXX |
|                            | Chrome<br>AXOR FinishPlus* | 26433000 |
|                            | Chrome<br>AXOR FinishPlus* | 26433XXX |

## Shower sets

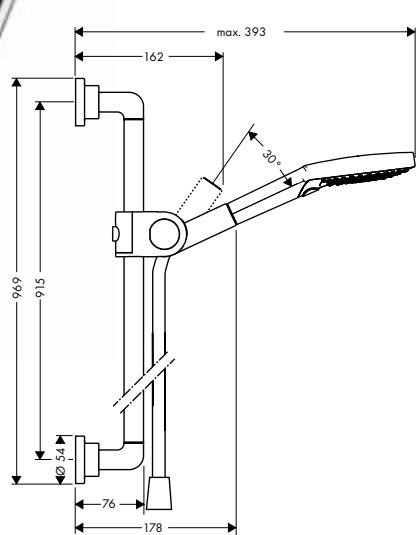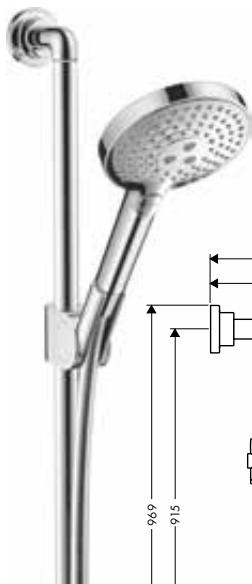

### Shower set 0.90 m with hand shower 120 3jet

- / consists of: hand shower, shower bar, shower hose, slider
- / shower head size: 120 mm
- / spray type: Rain, RainAir, WhirlAir
- / convenient diversion via Select button
- / inclination angle can be adjusted by 30°
- / wall bar 0.90 m
- / support for shower hose with conical nuts
- / maximum flow rate at 3 bar: 16 l/min
- / minimum flow pressure: 1 bar
- / pivot connector prevent hose from tangling
- / wall mounting: screw fastening
- / wall supports of metal
- / profile stand pipe: round


Chrome  
AXOR FinishPlus\*27991000  
27991XXX

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)
- / Shower hose 1.60 m (# 28626000)

#### Optional parts:

- |                        |        |          |
|------------------------|--------|----------|
| / Wall bar spacer 7 mm | Chrome | 96380000 |
|------------------------|--------|----------|

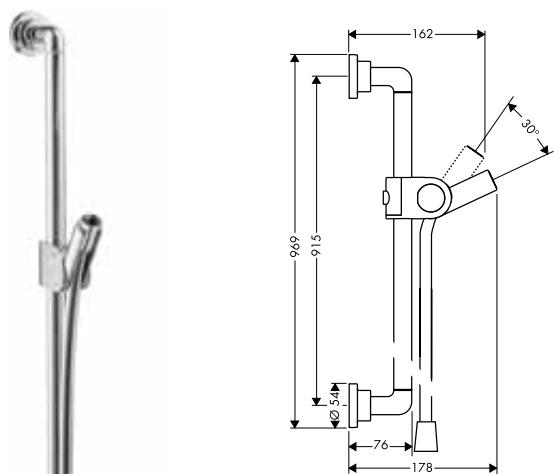

### Shower bar 0.90 m with shower hose 1.60 m

finish

Chrome  
AXOR FinishPlus\*

code no.


27831000  
27831XXX

- / consists of: shower bar, shower hose, slider
- / pivot connector prevent hose from tangling
- / profile stand pipe: round
- / shower bar diameter: 25 mm
- / metal hand shower holder
- / hand shower holder with locking mechanism
- / wall supports of metal

#### Consisting of:

- / Shower hose 1.60 m (# 28626000)

## Shower systems

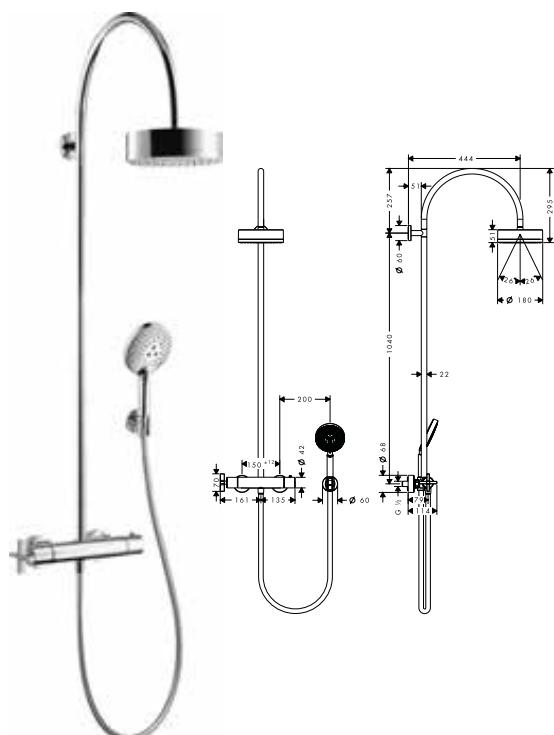

### Showerpipe with thermostat and overhead shower 180 1jet 2 ticks

Chrome  
AXOR FinishPlus\*39671009  
39671XXX

- / consists of: overhead shower, hand shower, shower thermostat, shower hose, shower holder
- / overhead shower AXOR Citterio
- / shower head size overhead shower: 180 mm
- / spray type overhead shower: Rain
- / ball-joint: overhead shower angle adjustable
- / spray type hand shower: RainAir, Rain, WhirlAir
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / shower bar diameter: 22 mm
- / hand shower wall support
- / shower arm length overhead shower: 444 mm
- / thermostat AXOR Citterio
- / safety lock at 38 °C
- / adjustable hot water limitation
- / outlets controlled via turning handle
- / suitable for continuous flow water heaters
- / mounting type: exposed installation
- / connection dimension DN15
- / connection thread G 1/2
- / centre distance 150 ± 12 mm
- / intrinsically safe against backflow
- / installation: wall-mounted

#### Consisting of:


- / Overhead shower 180 1jet (# 28489000)
- / Hand shower 120 3jet (# 26050000)
- / Shower holder round (# 39525000)
- / Shower hose 1.60 m (# 28626000)

## Thermostatic mixers



For matching thermostatic mixers, refer to the AXOR Showers chapter.


Measurements within scale drawings are in mm.

**Showers**

For matching shower products, refer to the AXOR Showers chapter.

**Accessories**


For matching accessories, refer to the AXOR Accessories chapter.

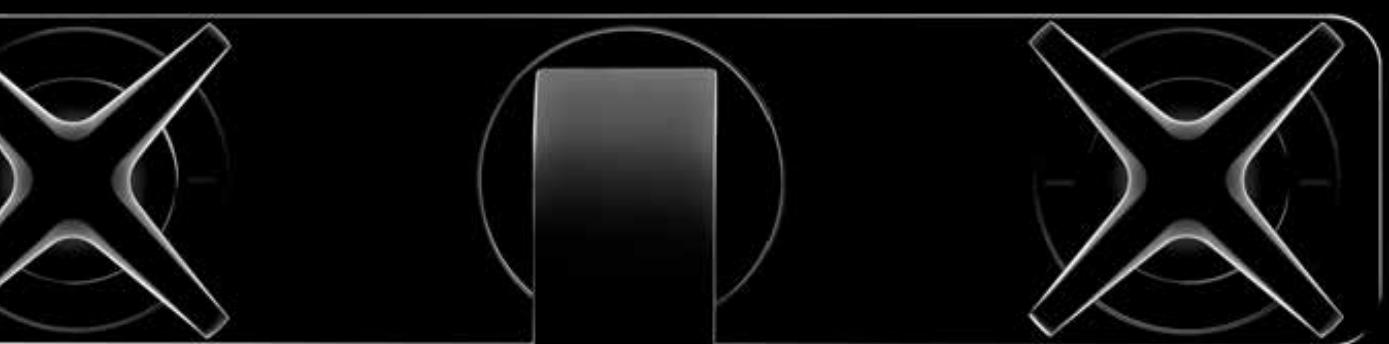

# AXOR Citterio E



Basin	160
Bath	164
Shower	168
Thermostatic mixers / valves / diverters	169
Shower sets	176

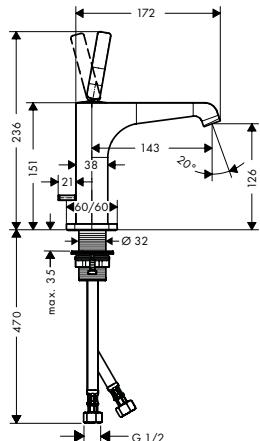**Basin**
**Single lever basin mixer 130  
with pop-up waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 130
- / projection: 143 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / suitable for continuous flow water heaters
- / pop-up waste set G 1 1/4
- / connection type: G 3/8 connections
- / connection dimension: DN15

## finish


## code no.

Chrome	36131009
Brushed Bronze	36131149
Polished Red Gold	36131309
Brushed Black	36131349
Chrome	AXOR FinishPlus*
	36131XXX



## Alternative products:

/ Single lever basin mixer 130 with pop-up waste set 3 ticks	Chrome	36132009
	AXOR FinishPlus*	36132XXX

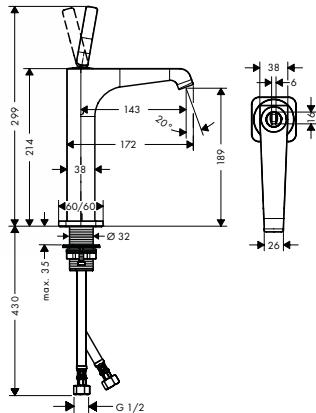
**Single lever basin mixer 190  
for wash bowls with waste set  
2 ticks**


- / consists of: single lever basin mixer, waste set
- / ComfortZone 250
- / projection: 163 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: G 3/8 connections
- / connection dimension: DN15

Chrome	36156009
AXOR FinishPlus*	36156XXX



## Alternative products:

/ Single lever basin mixer 190 for wash bowls with waste set 3 ticks	Chrome	36157009
	AXOR FinishPlus*	36157XXX

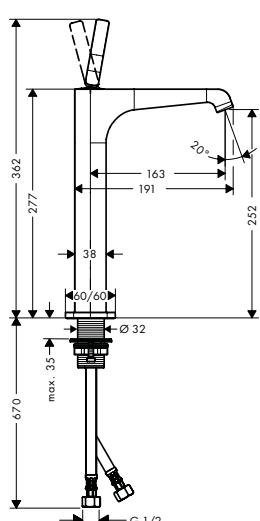
**Single lever basin mixer 250  
for wash bowls with waste set  
2 ticks**


- / consists of: single lever basin mixer, waste set
- / ComfortZone 250
- / projection: 163 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: G 3/8 connections
- / connection dimension: DN15

Chrome	36150009
Brushed Bronze	36150149
Polished Red Gold	36150309
AXOR FinishPlus*	36150XXX



## Alternative products:

/ Single lever basin mixer 250 for wash bowls with waste set 3 ticks	Chrome	36151009
	AXOR FinishPlus*	36151XXX

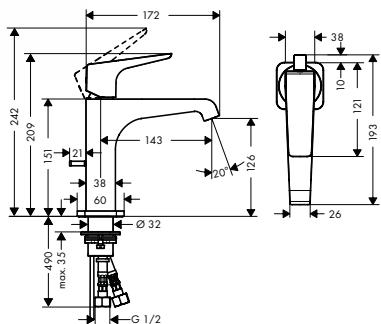

### Single lever basin mixer 130 with lever handle and pop-up waste set 2 ticks

- / consists of: single lever basin mixer, waste set
- / ComfortZone 130
- / projection: 143 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / suitable for continuous flow water heaters
- / pop-up waste set G 1 1/4
- / connection type: G 3/8 connections
- / connection dimension: DN15

#### Alternative products:



- / Single lever basin mixer 130 with lever handle and pop-up waste set 3 ticks

finish

Chrome  
Polished Red Gold  
AXOR FinishPlus\*

code no.

36154009  
36154309  
36154XXX

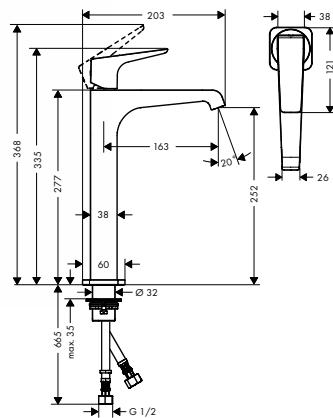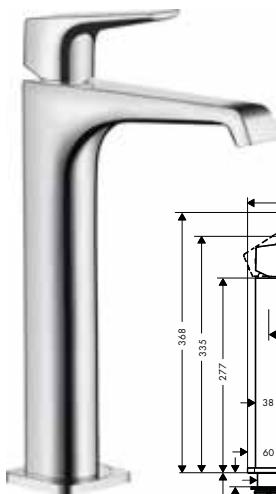

### Single lever basin mixer 250 with lever handle for wash bowls with waste set 2 ticks

- / consists of: single lever basin mixer, waste set
- / ComfortZone 250
- / projection: 163 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15


#### Alternative products:

- / Single lever basin mixer 250 with lever handle for wash bowls with waste set 3 ticks

Chrome  
AXOR FinishPlus\*

36152009  
36152XXX



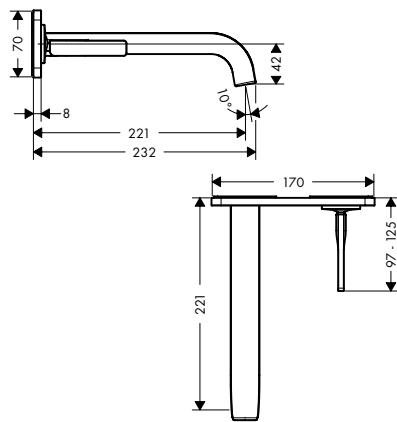

**Single lever basin mixer  
for concealed installation  
wall-mounted with spout  
221 mm and plate 2 ticks**

- / consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- / projection: 221 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 2,6 l/min
- / joystick ceramic cartridge
- / non-closing waste set
- / connection type: basic set
- / handle can be positioned on the right or left, depends on the basic set installation


**Alternative products:**

- / Single lever basin mixer for concealed installation wall-mounted with spout 221 mm and plate 3 ticks

finish

Chrome  
AXOR FinishPlus\*

code no.

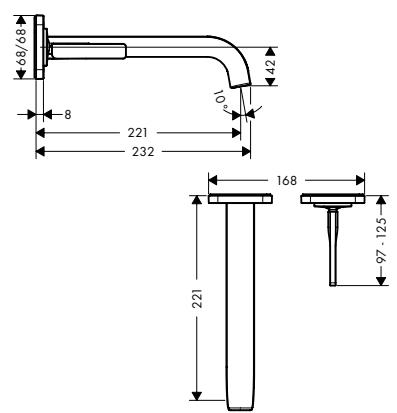36133009  
36133XXX

**Single lever basin mixer  
for concealed installation  
wall-mounted with spout  
221 mm and escutcheons 2 ticks**


- / consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- / projection: 221 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: basic set
- / handle can be positioned on the right or left, depends on the basic set installation

**Required parts:**

- / Basic set for single lever basin mixer for concealed installation wall-mounted

Chrome  
Brushed Bronze  
AXOR FinishPlus\*36143009  
36143149  
36143XXX

Measurements within scale drawings are in mm.



### Basic set for single lever basin mixer for concealed installation wall-mounted


- / installation depth: 44 - 72 mm
- / variable positioning of the mixer system, can be left or right of the spout
- / easy orientation due to support surfaces for the spirit level
- / with building protection cover against contamination during assembly
- / with dimension indication for exact determination of the installation depth
- / with pre-mounted fastening lugs for mounting in drywall and solidwall
- / sound-decoupled installation
- / connection dimension: DN15

#### Optional parts:

- / Extension set 25 mm for single lever basin mixer wall-mounted

code no.


13623180



### Extension set 25 mm for single lever basin mixer wall-mounted

13586000

- / extension length: 25 mm

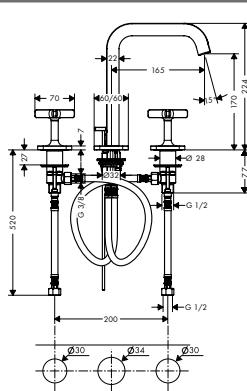

### 3-hole basin mixer 170 with escutcheons and pop-up waste set 2 ticks

Chrome  
Polished Red Gold  
AXOR FinishPlus\*

36145009  
36145309  
36145XXX




- / consists of: 3-hole basin mixer, waste set
- / ComfortZone 170
- / projection: 165 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic valves hot/cold 180°
- / pop-up waste set G 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

#### Optional parts:

- / Hose extension set for 3-hole basin mixer


38959000



### Hose extension set for 3-hole basin mixer

38959000

- / length of hoses 700 mm
- / for free positioning of spout and handles



**3-hole basin mixer  
for concealed installation  
wall-mounted with spout  
220 mm and escutcheons**


**2 ticks**

- / consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set
- / projection: 220 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic valves hot/ cold 180°
- / suitable for continuous flow water heaters
- / non-closing waste set
- / connection type: basic set
- / connection dimension: DN15

**Required parts:**

- / Basic set for 3-hole basin mixer for concealed installation wall-mounted

10303180



**Basic set for 3-hole basin mixer  
for concealed installation  
wall-mounted**


10303180

- / suitable for all 3-hole wash basin mixers for wall mounting
- / connection dimension: DN15/DN20
- / connection from above or below

**Optional parts:**

- / Seal

96383000



**Seal**

96383000


**Bath**




**Bath Spout**

Chrome 36425000  
AXOR FinishPlus\* 36425XXX

- / 1 function
- / connection type: G 3/4"
- / projection 181 mm
- / maximum flow rate at 3 bar: 23 l/min
- / spray type: laminar spray

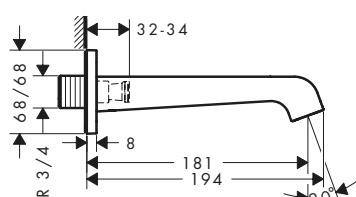

Measurements within scale drawings are in mm.

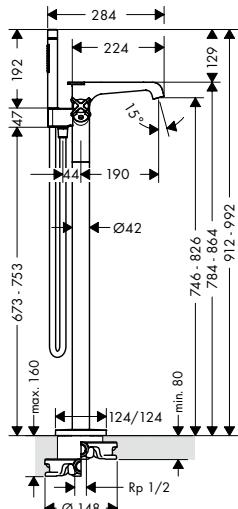

## Bath thermostat floor-standing

### 2 ticks

- / consists of: bath thermostat floor standing, baton hand shower, shower hose, shower holder
- / projection 190 mm
- / 2 functions
- / will not run two outlets at same time
- / diversion between outlets via diverter knob
- / spray type mixer: laminar spray
- / spray type hand shower: Rain, Mono
- / thermostat cartridge, ceramic valve 180°
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with automatic resetting
- / connection type: basic set
- / connection dimension: DN15

#### Required parts:


- / Basic set for mixers floor-standing

10452180

#### Optional parts:

- / Extension 60 mm for pipe

97686000




## Basic set for mixers

### floor-standing

10452180

- / for mounting on unfinished floor
- / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- / connection dimension: DN15



## Single lever bath mixer for concealed installation

Chrome  
AXOR FinishPlus\*  
36455000  
36455XXX

- / 2 functions
- / connection type: basic set
- / flow rate upper outlet: 21 l/min
- / flow rate lower outlet: 29 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / with silencer
- / suitable for continuous flow water heaters

#### Alternative products:

- / Single lever bath mixer for concealed installation with integrated security combination according to EN1717

Chrome  
AXOR FinishPlus\*  
36457000  
36457XXX

#### Required parts:


- / Basic set iBox universal

01700180

#### Optional parts:

- / Fastening rail set for iBox universal
- / Extension element softcube 2-hole
- / Extension 25 mm for basic set iBox universal

93171000  
14972000  
14972XXX  
13587000




### Basic set iBox universal

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- / Extension 25 mm for basic set iBox universal 13587000
- / Fastening rail set for iBox universal 93171000
- / Reduction coupling iBox universal 97759000



### 2-hole rim mounted thermostatic bath mixer

Chrome AXOR FinishPlus\* 36412000  
36412XXX


- / 2 functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / suitable for remote spout
- / connection type: basic set
- / connection dimension: DN15

#### Required parts:

- / Basic set for 2-hole rim mounted thermostatic bath mixer 15486180

#### Optional parts:

- / Flexible connection tube 800 mm 58308000
- / Connection tube set for 2-hole rim mounted thermostatic bath mixer 13089000




### Basic set for 2-hole rim mounted thermostatic bath mixer

15486180

- / suitable for remote spout
- / connection thread: G 1/2
- / connection dimension: DN15
- / flow rate upper outlet: 31 l/min
- / flow rate lower outlet: 31 l/min

#### Optional parts:

- / Rim mounted bath set with hand shower Chrome 19418000  
AXOR FinishPlus\* 19418XXX
- / Finish set square Chrome 28012000  
AXOR FinishPlus\* 28012XXX
- / Finish set oval Chrome 28022000  
AXOR FinishPlus\* 28022XXX
- / Rim and tile mounted bath basic set 15490180



### Rim mounted bath set with hand shower

Chrome AXOR FinishPlus\* 19418000  
19418XXX


- / consists of: hand shower, shower holder, shower hose, Secubox, Secuflex hose brake, hose insert
- / suitable for installation on bath rim or tile surround (no mounting plate available)
- / drilling diameter on bath tub: Ø 50 mm
- / connection dimension: DN15
- / maximum pull-out length of hand shower 1.10 m

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

Measurements within scale drawings are in mm.

	finish	code no.
 	<b>4-hole rim mounted thermostatic bath mixer</b> Chrome AXOR FinishPlus* 36411000 36411XXX	
	<ul style="list-style-type: none"> <li>/ consists of: 4-hole rim mounted bath mixer, hand shower, Secuflex hose set</li> <li>/ projection 190 mm</li> <li>/ 2 functions</li> <li>/ diversion between outlets via diverter knob</li> <li>/ spray type mixer: laminar spray</li> <li>/ spray type hand shower: Rain, RainAir, WhirlAir</li> <li>/ maximum pull-out length of hand shower: 1.10 m</li> <li>/ maximum flow rate at 3 bar: 20 l/min</li> <li>/ flow rate for bath spout at 3 bar: 20 l/min</li> <li>/ flow rate of hand shower at 3 bar: 1.4 l/min</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ non-return valve</li> <li>/ with automatic resetting</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ connection dimension: DN15</li> </ul> <p><b>Consisting of:</b></p> <ul style="list-style-type: none"> <li>/ Hand shower 120 3jet (# 26050000)</li> </ul> <p><b>Required parts:</b></p> <ul style="list-style-type: none"> <li>/ Basic set for 4-hole rim mounted thermostatic bath mixer</li> </ul>	15482180
	<b>Basic set for 4-hole rim mounted thermostatic bath mixer</b> 15482180	

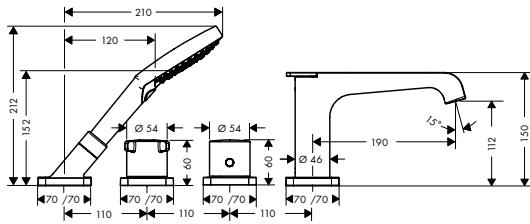

### 4-hole tile mounted thermostatic bath mixer

finish Chrome  
code no. 36410000  
AXOR FinishPlus\* 36410XXX


- / consists of: 4-hole tile mounted bath mixer, hand shower, Secuflex hose set
- / projection 190 mm
- / 2 functions
- / diversion between outlets via diverter knob
- / spray type mixer: laminar spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 20 l/min
- / flow rate for bath spout at 3 bar: 20 l/min
- / flow rate of hand shower at 3 bar: 14 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with automatic resetting
- / with silencer
- / connection type: basic set
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

#### Required parts:

- / Basic set for 4-hole tile mounted thermostatic bath mixer 15483180




### Basic set for 4-hole tile mounted thermostatic bath mixer

15483180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

## Shower



### Single lever shower mixer for concealed installation

finish Chrome  
code no. 36655000  
AXOR FinishPlus\* 36655XXX

- / 1 function
- / connection type: basic set
- / maximum flow rate at 3 bar: 29 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / with silencer
- / suitable for continuous flow water heaters

#### Required parts:

- / Basic set iBox universal 01700180


#### Optional parts:

- |  |                  |                   |
|--|------------------|-------------------|
| / Extension element softcube 1-hole            | finish Chrome    | code no. 14971000 |
| / Extension 25 mm for basic set iBox universal | AXOR FinishPlus* | 14971XXX          |
| / Fastening rail set for iBox universal        |                  | 13587000          |

Measurements within scale drawings are in mm.

finish

code no.



### Basic set iBox universal



- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |
| / Reduction coupling iBox universal            | 97759000 |

01700180

### Thermostatic mixers/ valves/ diverters

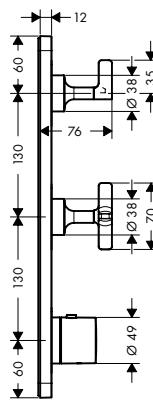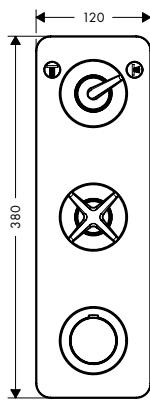



### Thermostatic module 380/120 for concealed installation for 2 functions with plate

Chrome  
AXOR FinishPlus\*  
36703000  
36703XXX

- / 2 functions
- / simultaneous utilization of 2 functions
- / maximum flow rate at 3 bar: 42 l/min
- / flow rate upper outlet: 42 l/min
- / flow rate lower outlet: 40 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / combination of highflow thermostat with shut-off valve and Duo diverter valve for controlling 2 consumers
- / connection type: basic set
- / connection dimension: DN20

#### Required parts:



- |  |          |
|--|----------|
| / Basic set for thermostatic module 380/120 for concealed installation for 2 functions | 36701180 |
|--|----------|

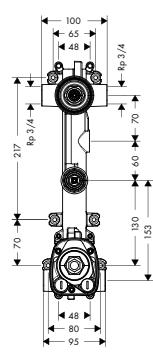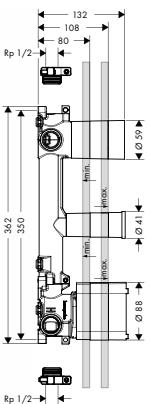

### Basic set for thermostatic module 380/120 for concealed installation for 2 functions

36701180

- / 2 functions
- / 2 outlets can be used simultaneously
- / flow rate at free through-flow: 59 l/min
- / horizontal or vertical installation
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN20

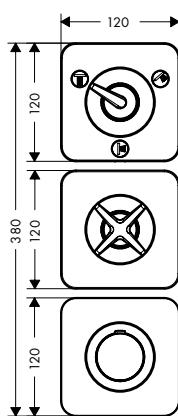

### Thermostatic module 380/120 for concealed installation for 3 functions with escutcheons

- / consists of: shower thermostat, shut-off/diverter valve, shut-off valve
- / 3 functions
- / simultaneous utilization of 2 functions
- / maximum flow rate at 3 bar: 42 l/min
- / flow rate lower outlet: 37,9 l/min
- / Flow rate left and right: 37,9 l/min
- / thermostatic cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / combination of highflow thermostat with shut-off valve and Quattro diverter valve for controlling 3 consumers
- / connection type: basic set
- / connection dimension: DN20

#### Consisting of:

- / Shut-off/diverter valve Trio/ Quattro 120/120 for concealed installation (# 36772000)
- / Shut-off valve 120/120 for concealed installation (# 36771000)
- / Thermostat 120/120 for concealed installation (# 36702000)

#### Required parts:



- / Basic set for thermostatic module 380/120 for concealed installation for 3 functions

finish

code no.

Chrome  
AXOR FinishPlus\*36704000  
36704XXX


36708180

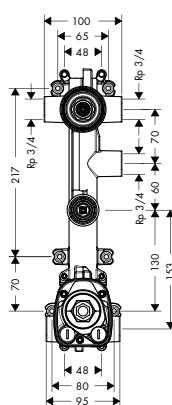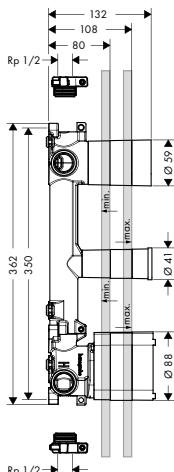

### Basic set for thermostatic module 380/120 for concealed installation for 3 functions

36708180

- / 3 functions
- / 2 outlets can be used simultaneously
- / flow rate at free through-flow: 59 l/min
- / horizontal or vertical installation
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN20



### Thermostat 120/120 for concealed installation

- / maximum flow rate at 3 bar: 59 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / connection type: basic set
- / connection dimension: DN20
- / min. operating pressure: 1,5 bar
- / max. operating pressure: 10 bar

#### Required parts:


- / Basic set for thermostatic module 120/120 for concealed installation

10754180

#### Optional parts:

- / Extension set 25 mm for thermostatic module

Chrome AXOR FinishPlus\*  
10790000  
10790XXX

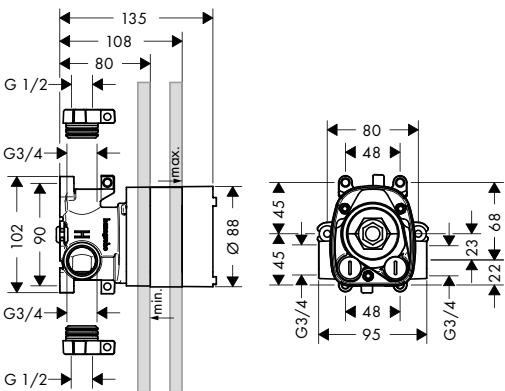

### Basic set for thermostatic module 120/120 for concealed installation


10754180

- / flow rate at free through-flow: 59 l/min
- / horizontal or vertical installation
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN20

#### Optional parts:

- / Thermostat HighFlow 120/120 for concealed installation
- / Thermostatic module 120/120 for concealed installation square
- / Thermostat 120/120 for concealed installation

Chrome AXOR FinishPlus\*  
12712000  
12712XXX  
Chrome AXOR FinishPlus\*  
10755000  
10755XXX  
Chrome AXOR FinishPlus\*  
36702000  
36702XXX



### Shut-off valve 120/120 for concealed installation

- / connection type: basic set
- / in a freely arranged installation, basic sets # 15973180, # 15974180 or # 15970180 can also be used
- / in a joined installation (10 mm distance) with # 36703000 or # 36704000, the basic set # 10971180 must be used
- / in a joined installation (10 mm distance) with # 36702000 and # 36772000, the thermostat module finish set for 3 consumers with 3 escutcheons 12x12 # 36704000 and the basic set # 36708180 must be used

finish

Chrome  
AXOR FinishPlus\*

code no.


36771000  
36771XXX

#### Required parts:

- |   |          |
|---|----------|
| / Basic set for shut-off valve 120/120 for concealed installation           | 10971180 |
| / Basic set 52 l/min for shut-off valve for concealed installation spindle  | 16973180 |
| / Basic set 40 l/min for concealed installation for shut-off valve ceramic  | 16974180 |
| / Basic set 130 l/min for shut-off valve for concealed installation spindle | 16970180 |

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|




### Basic set for shut-off valve 120/120 for concealed installation

10971180

- / suitable for all shut-off valves finish sets
- / connection from left or right
- / flow rate at free through-flow: 55 l/min
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN15

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|



### Basic set 52 l/min for shut-off valve for concealed installation spindle

16973180

- / connection type: DN15
- / suitable for all shut-off valves finish sets
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 52 l/min



#### Alternative products:


- |   |          |
|---|----------|
| / Basic set 40 l/min for concealed installation for shut-off valve ceramic  | 16974180 |
| / Basic set 130 l/min for shut-off valve for concealed installation spindle | 16970180 |

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|

Measurements within scale drawings are in mm.

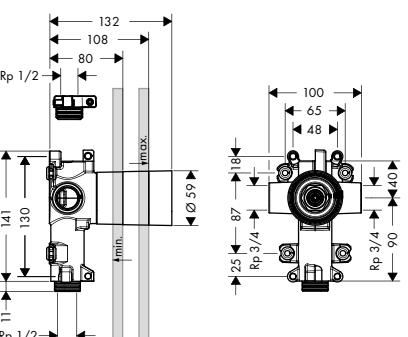	finish	code no.
	Chrome AXOR FinishPlus*	36772000 36772XXX
		
<b>Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation</b>		
/ 3 consumers: in a joined installation (10 mm distance) with # 36702000 and # 36771000, please use the thermostat module finish set for 3 consumers with 3 escutcheons 12x12 # 36704000 and the basic set # 36708180		
/ 3 consumers: in a freely-arranged installation (distance greater than 10 mm), the basic set # 15930180 must be used		
/ 2 consumers: in a joined installation (10 mm distance) with # 36702000, the basic set # 36770180 must be used		
/ 2 consumers: in a freely-arranged installation (distance greater than 10 mm), the basic set # 15981180 must be used		
/ 3 functions		
/ simultaneous utilization of 2 functions		
/ connection dimension: DN15		
<b>Required parts:</b>		
/ Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation	36770180	
/ Basic set for Quattro four-way diverter valve for concealed installation	16930180	
/ Basic set for shut-off/ diverter valve Trio for concealed installation	16982180	
<b>Optional parts:</b>		
/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	92990000	
		
		
<b>Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation</b>	36770180	
/ 2 functions		
/ 1 inlet/ 2 outlets		
/ 2 outlets can be used simultaneously		
/ connection thread Rp 3/4		
/ horizontal or vertical installation		
/ sound-decoupled installation		
/ in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning		
/ connection dimension: DN20		
<b>Required parts:</b>		
/ Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation	Chrome AXOR FinishPlus*	36772000 36772XXX
/ Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation	Chrome AXOR FinishPlus*	10932000 10932XXX
/ Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation	Chrome AXOR FinishPlus*	12731000 12731XXX
<b>Optional parts:</b>		
/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	92990000	




### Basic set for shut-off/ diverter valve Trio for concealed installation

- / 2 functions
- / simultaneous utilization of 2 functions
- / suitable for all Trio finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

16982180



### Basic set for Quattro four-way diverter valve for concealed installation


- / requires volume control
- / 3 functions
- / simultaneous utilization of 2 functions
- / suitable for all Quattro finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

16930180

## Showers



### Shower module 120/120 for concealed installation softcube

- / shower head size: 120 mm
- / spray type: Rain
- / spray angle adjustable in five steps
- / field of application: functions as overhead, shoulder or side shower
- / maximum flow rate at 3 bar: 5,3 l/min
- / flow rate Rain spray (at 3 bar): 5,3 l/min
- / minimum flow pressure: 1 bar
- / connection thread: G 1/2
- / in a joined installation (10 mm distance) the use of basic set # 28486180 is recommended
- / in a freely arranged installation, connection via a G 1/2 connecting thread is possible
- / if installed as an overhead shower with several joint modules, the use of installation aid # 28470180 is recommended
- / suitable for continuous flow water heaters
- / connection dimension: DN15
- / material: metal

Chrome  
AXOR FinishPlus\*

36822000  
36822XXX







#### Optional parts:


- / Basic set for shower module 120/120 for concealed installation
- / Installation part

28486180

28470180

Measurements within scale drawings are in mm.

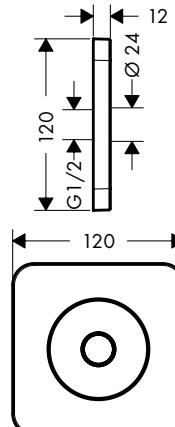	finish	code no.
 	Basic set for shower module 120/120 for concealed installation	28486180
 	Installation part	28470180
 	Porter unit 120/120 softcube	Chrome AXOR FinishPlus* 36724000 36724XXX
	<ul style="list-style-type: none"> <li>/ integrated support function</li> <li>/ metal connection angle</li> <li>/ non-return valve</li> <li>/ connection type: G 1/2"</li> <li>/ in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation</li> <li>/ in a joined installation (10 mm distance), the basic set # 28486180 must be used</li> <li>/ in a freely-arranged installation (distance greater than 10 mm), no basic set is required</li> <li>/ for shower hoses with conical nut on both sides</li> </ul>	
	<b>Optional parts:</b>	
	<ul style="list-style-type: none"> <li>/ Basic set for shower module 120/120 for concealed installation</li> <li>/ Shower hose 1.25 m</li> <li>/ Shower hose 1.60 m</li> <li>/ Shower hose 2.00 m</li> </ul>	28486180  Chrome AXOR FinishPlus* 28622000 28622XXX  Chrome AXOR FinishPlus* 28626000 28626XXX  Chrome AXOR FinishPlus* 28624000 28624XXX
 	Wall plate 120/120 Softcube	Chrome AXOR FinishPlus* 36725000 36725XXX
	<ul style="list-style-type: none"> <li>/ material: metal</li> <li>/ wall-mounted</li> </ul>	
	<b>Optional parts:</b>	
	<ul style="list-style-type: none"> <li>/ Shower arm 389 mm</li> </ul>	Chrome AXOR FinishPlus* 27348000 27348XXX

**Shower sets****Shower set 0.90 m with hand shower 120 3jet**

- / consists of: hand shower, shower bar, shower hose, slider
- / shower head size: 120 mm
- / spray type: Rain, RainAir, WhirlAir
- / convenient diversion via Select button
- / maximum flow rate at 3 bar: 15 l/min
- / minimum flow pressure: 1 bar
- / pivot connector prevent hose from tangling
- / wall supports of metal
- / 30 mm width of shower bar

**Consisting of:**


- / Hand shower 120 3jet (# 26050000)
- / Shower hose 1.60 m (# 28626000)

**finish**

Chrome  
AXOR FinishPlus\*

**code no.**

36735000  
36735XXX

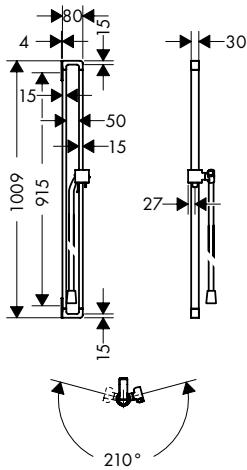**Shower bar 0.90 m with shower hose 1.60 m**

- / consists of: shower bar, shower hose, slider
- / pivot connector prevent hose from tangling
- / support for shower hose with conical nuts
- / hand shower holder moves sideways, up/down and pivots
- / profile stand pipe: square
- / bar width: 30 mm
- / metal hand shower holder
- / slider steplessly adjustable
- / silent inclination angle adjustment
- / wall supports of metal

**Consisting of:**


- / Shower hose 1.60 m (# 28626000)

Chrome  
AXOR FinishPlus\*

36736000  
36736XXX

Chrome  
AXOR FinishPlus\*

42871000  
42871XXX

**Cover for rail**

- / for covering the mounting holes if a continuous cover is not desired

Chrome  
AXOR FinishPlus\*

42871000  
42871XXX

**Required parts:**

- / Rail grab bar 300 mm
- / Rail bath towel holder 600 mm
- / Rail bath towel holder 800 mm
- / Shower set 0.90 m with hand shower 120 3jet
- / Shower bar 0.90 m with shower hose 1.60 m

Chrome  
AXOR FinishPlus\*

42830000  
42830XXX

Chrome  
AXOR FinishPlus\*

42832000  
42832XXX

Chrome  
AXOR FinishPlus\*

42833000  
42833XXX

Chrome  
AXOR FinishPlus\*

36735000  
36735XXX

Chrome  
AXOR FinishPlus\*

36736000  
36736XXX

Measurements within scale drawings are in mm.

**Thermostatic mixers**

For matching thermostatic mixers, refer to the AXOR Showers chapter.

**Showers**

For matching shower products, refer to the AXOR Showers chapter.


**Accessories**


For matching AXOR Universal accessories, refer to the AXOR Accessories chapter.



# AXOR Citterio M

Basin	180
Bath	182
Shower	184
Thermostatic mixers / valves / diverters	185




**Basin**
**Single lever basin mixer 100  
with pop-up waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 100
- / projection: 128 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15


finish

Chrome  
AXOR FinishPlus\*

code no.

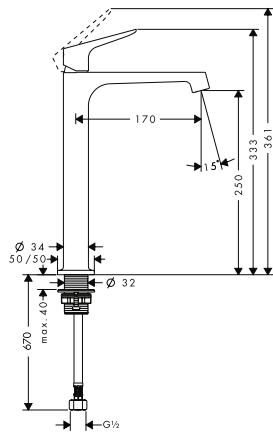34031009  
34031XXX
**Single lever basin mixer 250  
for wash bowls with waste set  
2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 250
- / projection: 170 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

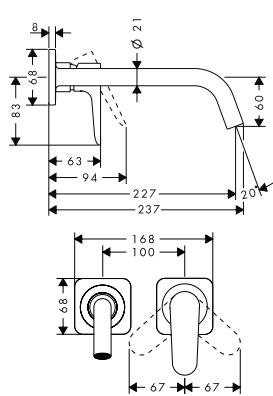Chrome  
AXOR FinishPlus\*34103009  
34103XXX
**Single lever basin mixer  
for concealed installation  
wall-mounted with spout  
227 mm and escutcheons  
2 ticks**

- / consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- / projection: 227 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: basic set
- / connection dimension: DN15
- / handle can be positioned on the right or left, depends on the basic set installation

Chrome  
AXOR FinishPlus\*34123009  
34123XXX**Required parts:**

- / Basic set for single lever basin mixer for concealed installation wall-mounted


13623180

**Optional parts:**

- / Extension set 25 mm for single lever basin mixer wall-mounted

13586000

Measurements within scale drawings are in mm.



### Basic set for single lever basin mixer for concealed installation wall-mounted


- / installation depth: 44 - 72 mm
- / variable positioning of the mixer system, can be left or right of the spout
- / easy orientation due to support surfaces for the spirit level
- / with building protection cover against contamination during assembly
- / with dimension indication for exact determination of the installation depth
- / with pre-mounted fastening lugs for mounting in drywall and solidwall
- / sound-decoupled installation
- / connection dimension: DN15

#### Optional parts:

- / Extension set 25 mm for single lever basin mixer wall-mounted

code no.


13623180



### Extension set 25 mm for single lever basin mixer wall-mounted

13586000

- / extension length: 25 mm

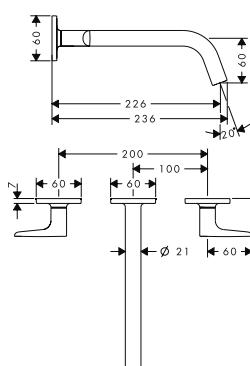

### 3-hole basin mixer for concealed installation wall-mounted with spout 226 mm, lever handles and escutcheons 2 ticks

Chrome  
AXOR FinishPlus\*  
34312009  
34312XXX




- / consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set
- / projection: 226 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic valves hot/ cold 90°
- / non-closing waste set
- / connection type: basic set
- / connection dimension: DN15

#### Required parts:

- / Basic set for 3-hole basin mixer for concealed installation wall-mounted

10303180



### Basic set for 3-hole basin mixer for concealed installation wall-mounted

10303180

- / suitable for all 3-hole wash basin mixers for wall mounting
- / connection dimension: DN15/DN20
- / connection from above or below



#### Optional parts:

- / Seal

96383000

**Seal**

96383000

**Bath****Single lever bath mixer for concealed installation**Chrome  
AXOR FinishPlus\*  
34425000  
34425XXX

- / 2 functions
- / connection type: basic set
- / maximum flow rate at 3 bar: 29 l/min
- / flow rate for bath spout at 3 bar: 29 l/min
- / flow rate of hand shower at 3 bar: 21 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / with silencer
- / suitable for continuous flow water heaters

**Alternative products:**

- / Single lever bath mixer for concealed installation with integrated security combination according to EN1717


Chrome  
AXOR FinishPlus\*  
34427000  
34427XXX**Required parts:**

- / Basic set iBox universal

01700180

**Optional parts:**

- / Extension element softcube 2-hole
- / Fastening rail set for iBox universal
- / Extension 25 mm for basic set iBox universal


Chrome  
AXOR FinishPlus\*  
14972000  
14972XXX  
93171000  
13587000**Basic set iBox universal**

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

**Optional parts:**

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal



13587000  
93171000  
97759000**Bath spout**Chrome  
AXOR FinishPlus\*  
34410000  
34410XXX

- / 1 function
- / projection 182 mm
- / maximum flow rate at 3 bar: 22 l/min
- / connection dimension: DN20
- / spray type: normal spray

Measurements within scale drawings are in mm.

finish


code no.



### Basic set for 4-hole rim mounted bath mixer

15480180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

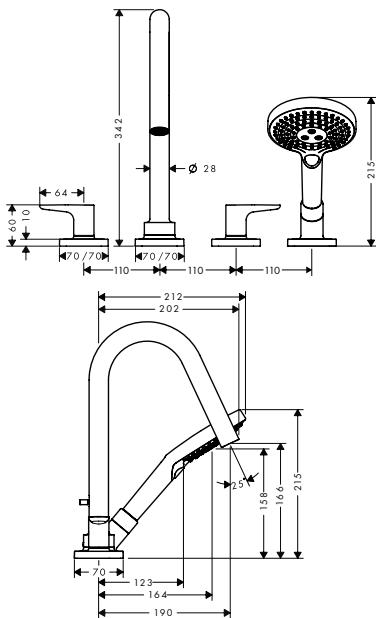

### 4-hole tile mounted bath mixer with lever handles and escutcheons

Chrome  
AXOR FinishPlus\*  
34454000  
34454XXX



- / consists of: 4-hole tile mounted bath mixer, hand shower, shower holder
- / 2 functions
- / projection 190 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / flow rate for bath spout at 3 bar: 20 l/min
- / flow rate of hand shower at 3 bar: 18 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15


#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

15481180

#### Required parts:


- / Basic set for 4-hole tile mounted bath mixer



### Basic set for 4-hole tile mounted bath mixer

15481180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

**Shower****Single lever shower mixer  
for concealed installation**

- / 1 function
- / connection type: basic set
- / maximum flow rate at 3 bar: 29 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / with silencer
- / suitable for continuous flow water heaters

finish

Chrome  
AXOR FinishPlus\*

code no.

34625000  
34625XXX**Required parts:**

- / Basic set iBox universal

01700180


**Optional parts:**

- / Extension element softcube 1-hole
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
AXOR FinishPlus\*14971000  
14971XXX

13587000

93171000

**Basic set iBox universal**

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20


**Optional parts:**

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal

13587000

93171000

97759000

**Porter unit**Chrome  
AXOR FinishPlus\*11626000  
11626XXX




- / integrated support function
- / non-return valve
- / for shower hoses with conical nut on both sides


**Optional parts:**

- / Shower hose 1.25 m
- / Shower hose 1.60 m
- / Shower hose 2.00 m

Chrome  
AXOR FinishPlus\*28622000  
28622XXXChrome  
AXOR FinishPlus\*28626000  
28626XXXChrome  
AXOR FinishPlus\*28624000  
28624XXX

Measurements within scale drawings are in mm.

	finish	code no.
	<b>Porter unit 120/120 softcube</b>  <ul style="list-style-type: none"> <li>/ integrated support function</li> <li>/ metal connection angle</li> <li>/ non-return valve</li> <li>/ connection type: G 1/2</li> <li>/ in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation</li> <li>/ in a joined installation (10 mm distance), the basic set # 28486180 must be used</li> <li>/ in a freely-arranged installation (distance greater than 10 mm), no basic set is required</li> <li>/ for shower hoses with conical nut on both sides</li> </ul>	Chrome AXOR FinishPlus* 36724000 36724XXX
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for shower module 120/120 for concealed installation</li> <li>/ Shower hose 1.25 m</li> <li>/ Shower hose 1.60 m</li> <li>/ Shower hose 2.00 m</li> </ul>	28486180  Chrome AXOR FinishPlus* 28622000 28622XXX  Chrome AXOR FinishPlus* 28626000 28626XXX  Chrome AXOR FinishPlus* 28624000 28624XXX
	<b>Shower holder round</b>  <ul style="list-style-type: none"> <li>/ consists of: shower holder, escutcheon</li> <li>/ fixed holding position</li> <li>/ for hoses with conical nut</li> <li>/ material: metal</li> </ul>	Chrome AXOR FinishPlus* 39525000 39525XXX
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Shower hose 1.25 m</li> <li>/ Shower hose 1.60 m</li> <li>/ Shower hose 2.00 m</li> </ul>	Chrome AXOR FinishPlus* 28622000 28622XXX  Chrome AXOR FinishPlus* 28626000 28626XXX  Chrome AXOR FinishPlus* 28624000 28624XXX
<b>Thermostatic mixers/ valves/ diverters</b>		
	<b>Thermostat HighFlow for concealed installation</b>  <ul style="list-style-type: none"> <li>/ maximum flow rate at 3 bar: 59 l/min</li> <li>/ flow rate upper outlet: 42 l/min</li> <li>/ flow rate lower outlet: 42 l/min</li> <li>/ thermostat cartridge</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> </ul>	Chrome AXOR FinishPlus* 34716000 34716XXX
	<b>Alternative products:</b> <ul style="list-style-type: none"> <li>/ Thermostat for concealed installation</li> </ul>	Chrome AXOR FinishPlus* 34715000 34715XXX
	<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set iBox universal</li> </ul>	01700180
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension element softcube 1-hole</li> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> </ul>	Chrome AXOR FinishPlus* 14971000 14971XXX 13587000  93171000



### Thermostat for concealed installation with shut-off valve

- / 1 function
- / flow rate upper outlet: 25 l/min
- / flow rate lower outlet: 25 l/min
- / thermostat cartridge, ceramic valves 90°
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

finish

Chrome  
AXOR FinishPlus\*

code no.


34705000  
34705XXX

#### Required parts:

- / Basic set iBox universal 01700180

#### Optional parts:

- |  |                            |                      |
|--|----------------------------|----------------------|
| / Extension element softcube 2-hole arrow      | Chrome<br>AXOR FinishPlus* | 14974000<br>14974XXX |
| / Extension 25 mm for basic set iBox universal |                            | 13587000             |
| / Fastening rail set for iBox universal        |                            | 93171000             |



### Thermostat for concealed installation with shut-off/diverter valve

- / 2 functions
- / flow rate upper outlet: 25 l/min
- / flow rate lower outlet: 29 l/min
- / thermostat cartridge, shut-off valve
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

Chrome

AXOR FinishPlus\*


34725000  
34725XXX

#### Required parts:

- / Basic set iBox universal 01700180

#### Optional parts:

- |  |                            |                      |
|--|----------------------------|----------------------|
| / Extension element softcube 2-hole 0-1-2      | Chrome<br>AXOR FinishPlus* | 14973000<br>14973XXX |
| / Extension 25 mm for basic set iBox universal |                            | 13587000             |
| / Fastening rail set for iBox universal        |                            | 93171000             |



### Basic set iBox universal

01700180


- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |
| / Reduction coupling iBox universal            | 97759000 |

Measurements within scale drawings are in mm.

	finish	code no.
	<b>Shut-off valve for concealed installation with lever handle</b> / connection type: DN15/DN20  <b>Required parts:</b> / Basic set 52 l/min for shut-off valve for concealed installation spindle / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle  <b>Optional parts:</b> / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	Chrome AXOR FinishPlus* 34960000 34960XXX  16973180 16974180 16970180  92990000
	<b>Basic set 52 l/min for shut-off valve for concealed installation spindle</b> / connection type: DN15 / suitable for all shut-off valves finish sets / connection dimension: DN15 / maximum flow rate at 3 bar: 52 l/min  <b>Alternative products:</b> / Basic set 40 l/min for concealed installation for shut-off valve ceramic / Basic set 130 l/min for shut-off valve for concealed installation spindle  <b>Optional parts:</b> / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	16973180  16974180 16970180  92990000
	<b>Shut-off/ diverter valve Trio/ Quattro for concealed installation</b>  <b>Required parts:</b> / Basic set for Quattro four-way diverter valve for concealed installation / Basic set for shut-off/ diverter valve Trio for concealed installation  <b>Optional parts:</b> / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	Chrome AXOR FinishPlus* 34920000 34920XXX  16930180 16982180  92990000
	<b>Basic set for Quattro four-way diverter valve for concealed installation</b> / requires volume control / 3 functions / simultaneous utilization of 2 functions / suitable for all Quattro finish sets / connection dimension: DN20 / maximum flow rate at 3 bar: 65 l/min  <b>Optional parts:</b> / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro	16930180  92990000



### Basic set for shut-off/ diverter valve Trio for concealed installation

- / 2 functions
- / simultaneous utilization of 2 functions
- / suitable for all Trio finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

16982180

92990000

### Thermostatic mixers



For matching thermostatic mixers, refer to the AXOR Showers chapter.

### Showers



For matching shower products, refer to the AXOR Showers chapter.

### Accessories



For matching accessories, refer to the AXOR Accessories chapter.

Measurements within scale drawings are in mm.






AJOR

# AXOR Urquiola

Basin	192
Wash bowls and wash basins	193
Bath	194
Shower	198
Thermostatic mixers / valves / diverters	199

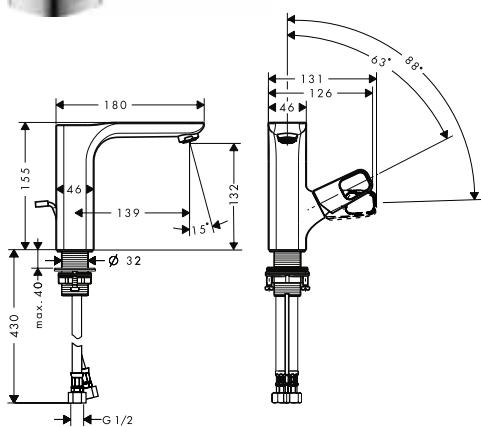

**Basin**
**Single lever basin mixer 130  
with pop-up waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 130
- / projection: 139 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*

code no.

11060009  
11060XXX


This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.


**Single lever basin mixer 280  
for wash bowls with waste set  
2 ticks**





- / consists of: single lever basin mixer, waste set
- / ComfortZone 280
- / projection: 198 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15
- / handle position on the side: top-side at the spout (generally suitable for wash bowls)

Chrome  
AXOR FinishPlus\*11061009  
11061XXX

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

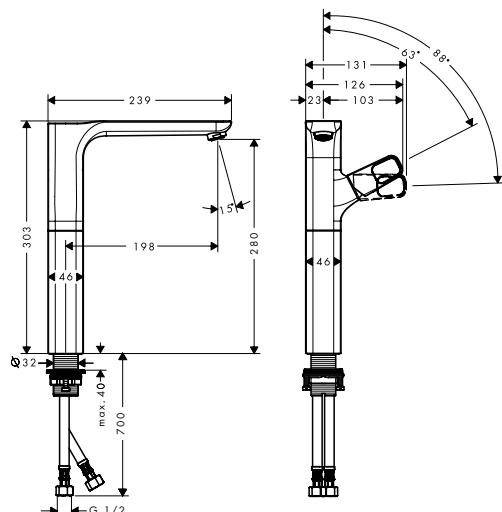

Measurements within scale drawings are in mm.

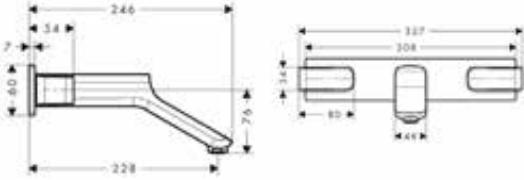	finish	code no.
 	<b>3-hole basin mixer for concealed installation wall-mounted with spout 228 mm 2 ticks</b> Chrome AXOR FinishPlus*	11050009 11050XXX
	<ul style="list-style-type: none"> <li>/ consists of: 3-hole basin mixer for concealed installation wall-mounted, waste set</li> <li>/ projection: 228 mm</li> <li>/ spray type: normal spray</li> <li>/ maximum flow rate at 3 bar: 3,8 l/min</li> <li>/ ceramic valves hot/ cold 90°</li> <li>/ non-closing waste set</li> <li>/ connection type: basic set</li> <li>/ connection dimension: DN15</li> </ul> <p>This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.</p>	  
	<b>Alternative products:</b> <ul style="list-style-type: none"> <li>/ 3-hole basin mixer for concealed installation wall-mounted with spout 228 mm 3 ticks</li> </ul> <p>This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.</p>	Chrome AXOR FinishPlus*
	<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for 3-hole basin mixer for concealed installation wall-mounted</li> </ul>	10303180
 	<b>Basic set for 3-hole basin mixer for concealed installation wall-mounted</b> <ul style="list-style-type: none"> <li>/ suitable for all 3-hole wash basin mixers for wall mounting</li> <li>/ connection dimension: DN15/DN20</li> <li>/ connection from above or below</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Seal</li> </ul>	10303180  96383000
<b>Washbasins and washbowls</b>		
 	<b>Wash bowl 624/408</b> <ul style="list-style-type: none"> <li>/ material: mineral cast with gelcoat</li> <li>/ only in conjunction with basin mixers without pull rod</li> <li>/ CE certified</li> <li>/ TÜV certified</li> <li>/ type of installation: built-on</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Waste set non-closing for washbasins</li> </ul>	White 11300000  Chrome AXOR FinishPlus*
 	<b>Wash bowl 511</b> <ul style="list-style-type: none"> <li>/ material: mineral cast with gelcoat</li> <li>/ only in conjunction with basin mixers without pull rod</li> <li>/ CE certified</li> <li>/ TÜV certified</li> <li>/ type of installation: built-on</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Waste set non-closing for washbasins</li> </ul>	White 11301000  Chrome AXOR FinishPlus*



## Wash basin 624/399 wall-mounted

- / material: mineral cast with gelcoat
- / only in conjunction with basin mixers without pull rod
- / CE certified
- / TÜV certified
- / type of installation: wall mounted

### Optional parts:

- / Waste set non-closing for washbasins

finish

White

code no.


11302000

Chrome

AXOR FinishPlus\*

51301000

51301XXX

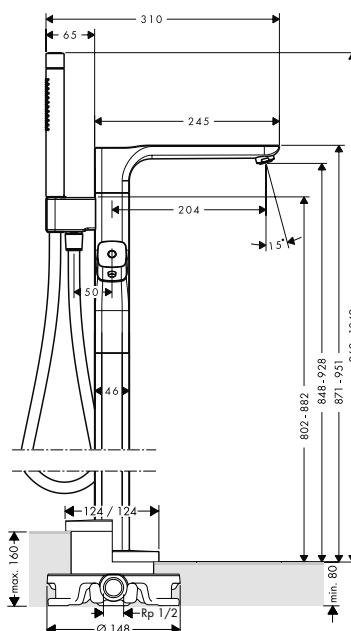**Bath**

## Bath thermostat floor-standing 2 ticks

- / consists of: bath thermostat floor standing, baton hand shower, shower hose, shower holder
- / projection 204 mm
- / 2 functions
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum flow rate at 3 bar: 21 l/min
- / flow rate for bath spout at 3 bar: 21 l/min
- / flow rate of hand shower at 3 bar: 5,2 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / thermostat cartridge, shut-off/ diverter valve
- / safety lock at 38 °C
- / temperature limitation adjustable
- / non-return valve
- / with automatic resetting
- / connection type: basic set
- / connection dimension: DN15
- / dirt filter included

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

### Alternative products:

- / Bath thermostat floor-standing 3 ticks

Chrome

AXOR FinishPlus\*

11438009

11438XXX

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

### Required parts:


- / Basic set for mixers floor-standing

10452180

### Optional parts:

- / Extension 60 mm for pipe

97686000




## Basic set for mixers floor-standing

10452180

- / for mounting on unfinished floor
- / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- / connection dimension: DN15

Measurements within scale drawings are in mm.



### Single lever bath mixer for concealed installation

- / 2 functions
- / connection type: basic set
- / maximum flow rate at 3 bar: 22 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / with silencer
- / suitable for continuous flow water heaters

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

#### Required parts:


- / Basic set iBox universal

01700180

#### Optional parts:

- / Extension element softcube 2-hole

Chrome  
AXOR FinishPlus\*  
14972000  
14972XXX



### Basic set iBox universal


01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4"
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal

13587000  
93171000  
97759000



### Bath spout

Chrome  
AXOR FinishPlus\*  
11430000  
11430XXX



- / 1 function
- / projection 171 mm
- / maximum flow rate at 3 bar: 21 l/min
- / connection dimension: DN20
- / spray type: normal spray

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.


finish

code no.

**3-hole rim mounted bath mixer**

Chrome  
AXOR FinishPlus\*

11436000  
11436XXX

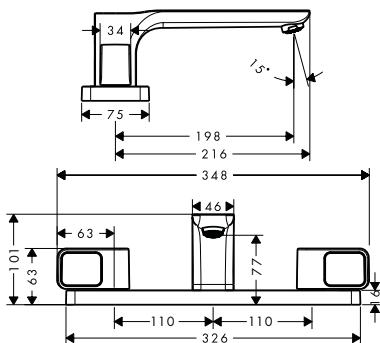

- / 1 function
- / projection 198 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / maximum flow rate at 3 bar: 25 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / connection dimension: DN15

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

**Required parts:**

- / Basic set for 3-hole rim mounted bath mixer

15484180

**Optional parts:**

- / Installation plate

39449000

**Basic set for 3-hole rim mounted bath mixer**

15484180




- / maintenance opening required
- / connection thread: G 1/2
- / connection dimension: DN15
- / ceramic valves hot/ cold 90°

**4-hole rim mounted bath mixer**

Chrome  
AXOR FinishPlus\*

11443000  
11443XXX

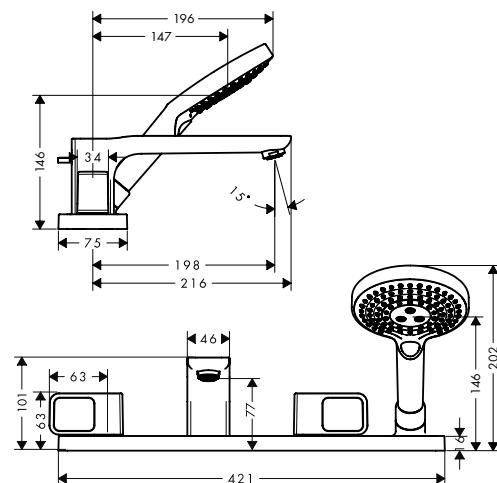

- / consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 198 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 22 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

**Consisting of:**

- / Hand shower 120 3jet (# 26050000)

**Required parts:**

- / Basic set for 4-hole rim mounted bath mixer

15480180

**Optional parts:**

- / Installation plate

39449000




Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

finish


code no.



### Basic set for 4-hole rim mounted bath mixer

15480180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

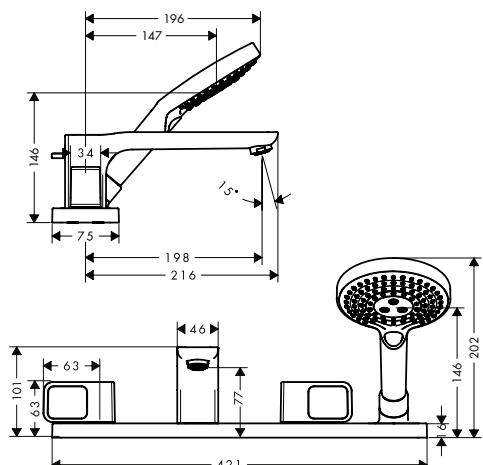

### 4-hole tile mounted bath mixer

Chrome  
AXOR FinishPlus\*11445000  
11445XXX

- / consists of: 4-hole tile mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 198 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 22 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.


#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

#### Required parts:

- / Basic set for 4-hole tile mounted bath mixer


15481180



### Basic set for 4-hole tile mounted bath mixer

15481180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

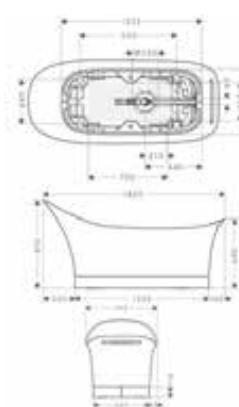
**Bath tub**

### Bath tub 1,800/600

White

11440000

- / free-standing bath tub
- / filling level: approx. 340 mm
- / filling capacity: approx. 180 l (1 person 70 kg)
- / weight with water (1 person 70 kg): approx. 440 kg
- / weight without water: 187 kg
- / material: mineral cast with gelcoat
- / CE certified
- / TÜV certified

**Shower****Single lever shower mixer  
for concealed installation**

- / 1 function
- / connection type: basic set
- / maximum flow rate at 3 bar: 29 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / with silencer
- / suitable for continuous flow water heaters

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

**finish****code no.**

Chrome	11625000
AXOR FinishPlus*	11625XXX

**Required parts:**

/ Basic set iBox universal	01700180
----------------------------	----------

**Optional parts:**

/ Extension 25 mm for basic set iBox universal	13587000
/ Extension element softcube 1-hole	Chrome 14971000
	AXOR FinishPlus* 14971XXX
/ Fastening rail set for iBox universal	93171000


**Basic set iBox universal**

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4"
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

**Optional parts:**

/ Extension 25 mm for basic set iBox universal	13587000
/ Fastening rail set for iBox universal	93171000
/ Reduction coupling iBox universal	97759000


**Porter unit**

Chrome 11626000  
AXOR FinishPlus\* 11626XXX


- / integrated support function
- / non-return valve
- / for shower hoses with conical nut on both sides

**Optional parts:**

/ Shower hose 1.25 m	Chrome 28622000 AXOR FinishPlus* 28622XXX
/ Shower hose 1.60 m	Chrome 28626000 AXOR FinishPlus* 28626XXX
/ Shower hose 2.00 m	Chrome 28624000 AXOR FinishPlus* 28624XXX



Measurements within scale drawings are in mm.

**Thermostatic mixers/ valves/ diverters****Thermostat HighFlow  
for concealed installation**

- / maximum flow rate at 3 bar: 59 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

**Required parts:**


- / Basic set iBox universal

01700180

**Optional parts:**

- / Extension element softcube 1-hole
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
AXOR FinishPlus\*  
14971000  
14971XXX  
13587000  
93171000

**Thermostat for concealed  
installation with shut-off valve**

- / 1 function
- / maximum flow rate at 3 bar: 26 l/min
- / thermostat cartridge, ceramic valves 90°
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

**Required parts:**


- / Basic set iBox universal

01700180

**Optional parts:**

- / Extension 25 mm for basic set iBox universal
- / Extension element softcube 2-hole arrow
- / Fastening rail set for iBox universal

Chrome  
AXOR FinishPlus\*  
14974000  
14974XXX  
93171000



### Thermostat for concealed installation with shut-off/diverter valve

- / 2 functions
- / maximum flow rate at 3 bar: 29 l/min
- / flow rate hand shower connection at 3 bar: 29 l/min
- / thermostat cartridge, shut-off valve
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar


This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

#### Required parts:

- / Basic set iBox universal 01700180

#### Optional parts:

- |  |                           |
|--|---------------------------|
| / Extension element softcube 2-hole 0-1-2      | Chrome 14973000           |
|  | AXOR FinishPlus* 14973XXX |
| / Extension 25 mm for basic set iBox universal | 13587000                  |
| / Fastening rail set for iBox universal        | 93171000                  |




### Basic set iBox universal

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |
| / Reduction coupling iBox universal            | 97759000 |



### Shut-off valve for concealed installation


Chrome 11960000  
AXOR FinishPlus\* 11960XXX

- / connection type: DN15/DN20

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

#### Required parts:

- / Basic set 52 l/min for shut-off valve for concealed installation spindle 16973180
- / Basic set 40 l/min for concealed installation for shut-off valve ceramic 16974180
- / Basic set 130 l/min for shut-off valve for concealed installation spindle 16970180



### Basic set 52 l/min for shut-off valve for concealed installation spindle

- / connection type: DN15
- / suitable for all shut-off valves finish sets
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 52 l/min

#### Alternative products:

- |   |          |
|---|----------|
| / Basic set 40 l/min for concealed installation for shut-off valve ceramic  | 16974180 |
| / Basic set 130 l/min for shut-off valve for concealed installation spindle | 16970180 |


#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|

finish

code no.

16973180



### Shut-off/ diverter valve Trio/ Quattro for concealed installation

Chrome  
AXOR FinishPlus\*

11925000  
11925XXX

- / connection dimension: DN20


This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

#### Required parts:

- |  |          |
|--|----------|
| / Basic set for Quattro four-way diverter valve for concealed installation | 16930180 |
| / Basic set for shut-off/ diverter valve Trio for concealed installation   | 16982180 |

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|




### Basic set for shut-off/ diverter valve Trio for concealed installation

16982180

- / 2 functions
- / simultaneous utilization of 2 functions
- / suitable for all Trio finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|



### Basic set for Quattro four-way diverter valve for concealed installation

- / requires volume control
- / 3 functions
- / simultaneous utilization of 2 functions
- / suitable for all Quattro finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

16930180

92990000

## Thermostatic mixers



For matching thermostatic mixers, refer to the AXOR Showers chapter.

## Showers



For matching shower products, refer to the AXOR Showers chapter.


## Accessories



For matching accessories, refer to the AXOR Accessories chapter.

Measurements within scale drawings are in mm.




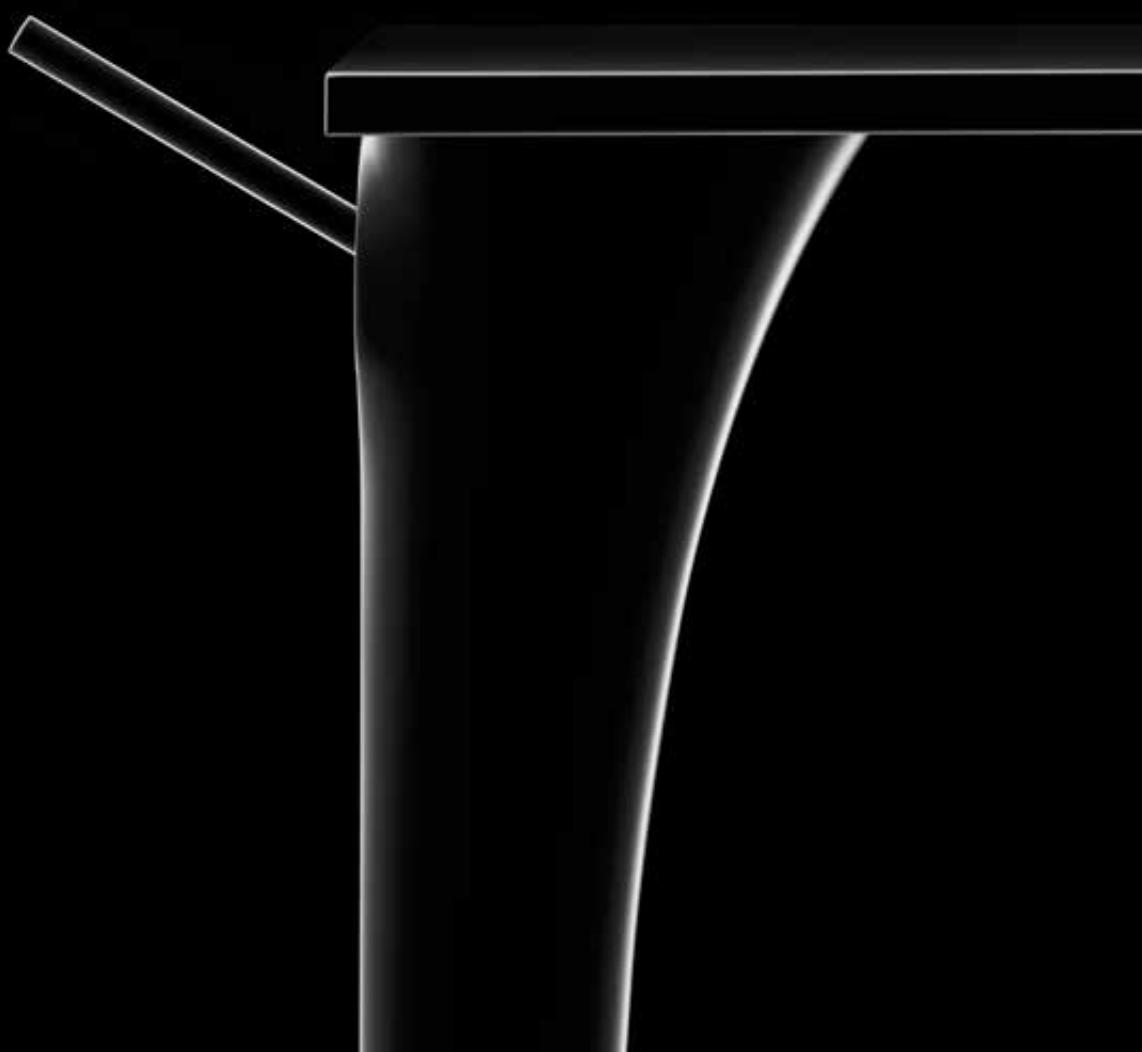

# AXOR Massaud

Basin	206
Wash bowls and wash basin	206
Bath	207

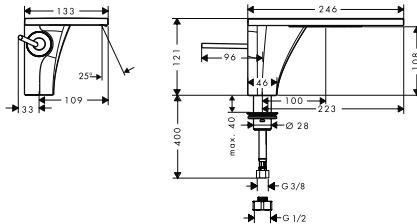

**Basin****Single lever basin mixer 110  
with waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 110
- / projection: 100 mm
- / spray type: wide flood jet
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15



finish

Chrome  
AXOR FinishPlus\*

code no.

18011009  
18011XXX**Single lever basin mixer 220  
for wash bowls with waste set  
2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 220
- / projection: 200 mm
- / spray type: wide flood jet
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

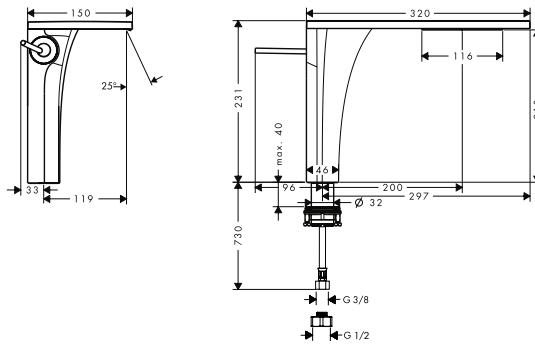Chrome  
AXOR FinishPlus\*18021009  
18021XXX**Washbasins and washbowls****Wash bowl 800/450**


White

42300000

- / material: mineral cast with gelcoat
- / only in conjunction with basin mixers without pull rod
- / CE certified
- / TÜV certified
- / type of installation: built-on

**Optional parts:**

- / Waste set non-closing for washbasins

Chrome  
AXOR FinishPlus\*51301000  
51301XXX**Wash bowl 570/450**

White

42305000


- / material: mineral cast with gelcoat
- / only in conjunction with basin mixers without pull rod
- / CE certified
- / TÜV certified
- / type of installation: built-on

**Optional parts:**

- / Waste set non-closing for washbasins

Chrome  
AXOR FinishPlus\*51301000  
51301XXX

Measurements within scale drawings are in mm.

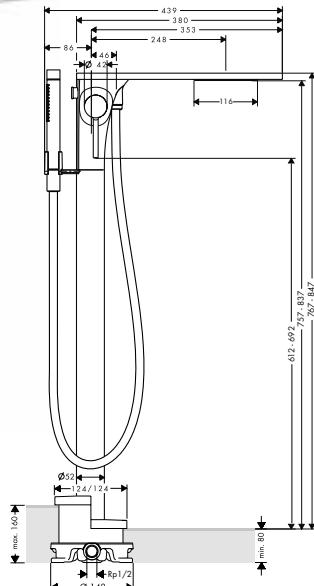**Bath****Single lever bath mixer  
floor-standing 2lick**

- / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder
- / 2 functions
- / projection 248 mm
- / connection type: basic set
- / spray type mixer: wide flood jet
- / spray type hand shower: Rain, Mono
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*

code no.

18463009  
18463XXX**Thermostatic mixers****Basic set for mixers  
floor-standing**

10452180



- / for mounting on unfinished floor
- / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- / connection dimension: DN15

**Showers**

**For matching thermostatic mixers, refer to the AXOR Showers chapter.**


**Accessories**


**For matching accessories, refer to the AXOR Accessories chapter.**

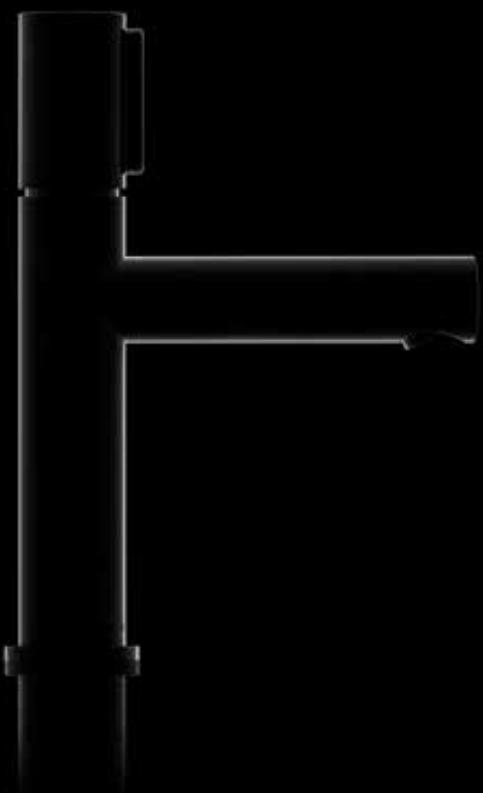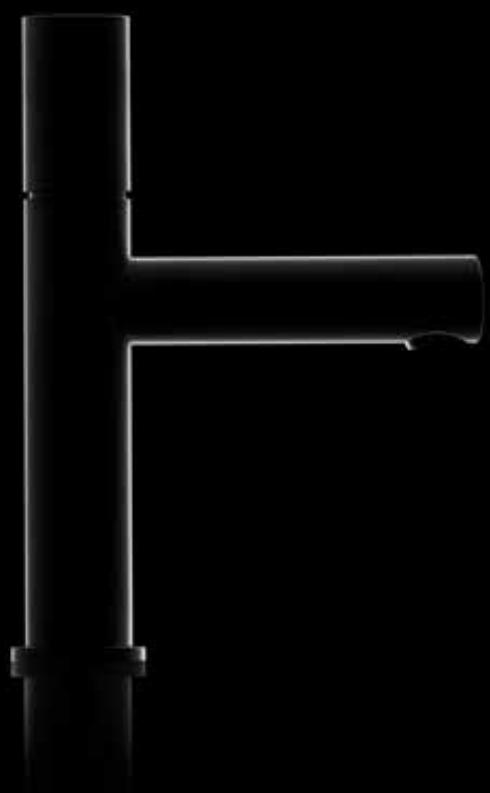

# AXOR Uno

Basin	210
Bath	214
Shower	221
Thermostatic mixers / valves / diverters	222

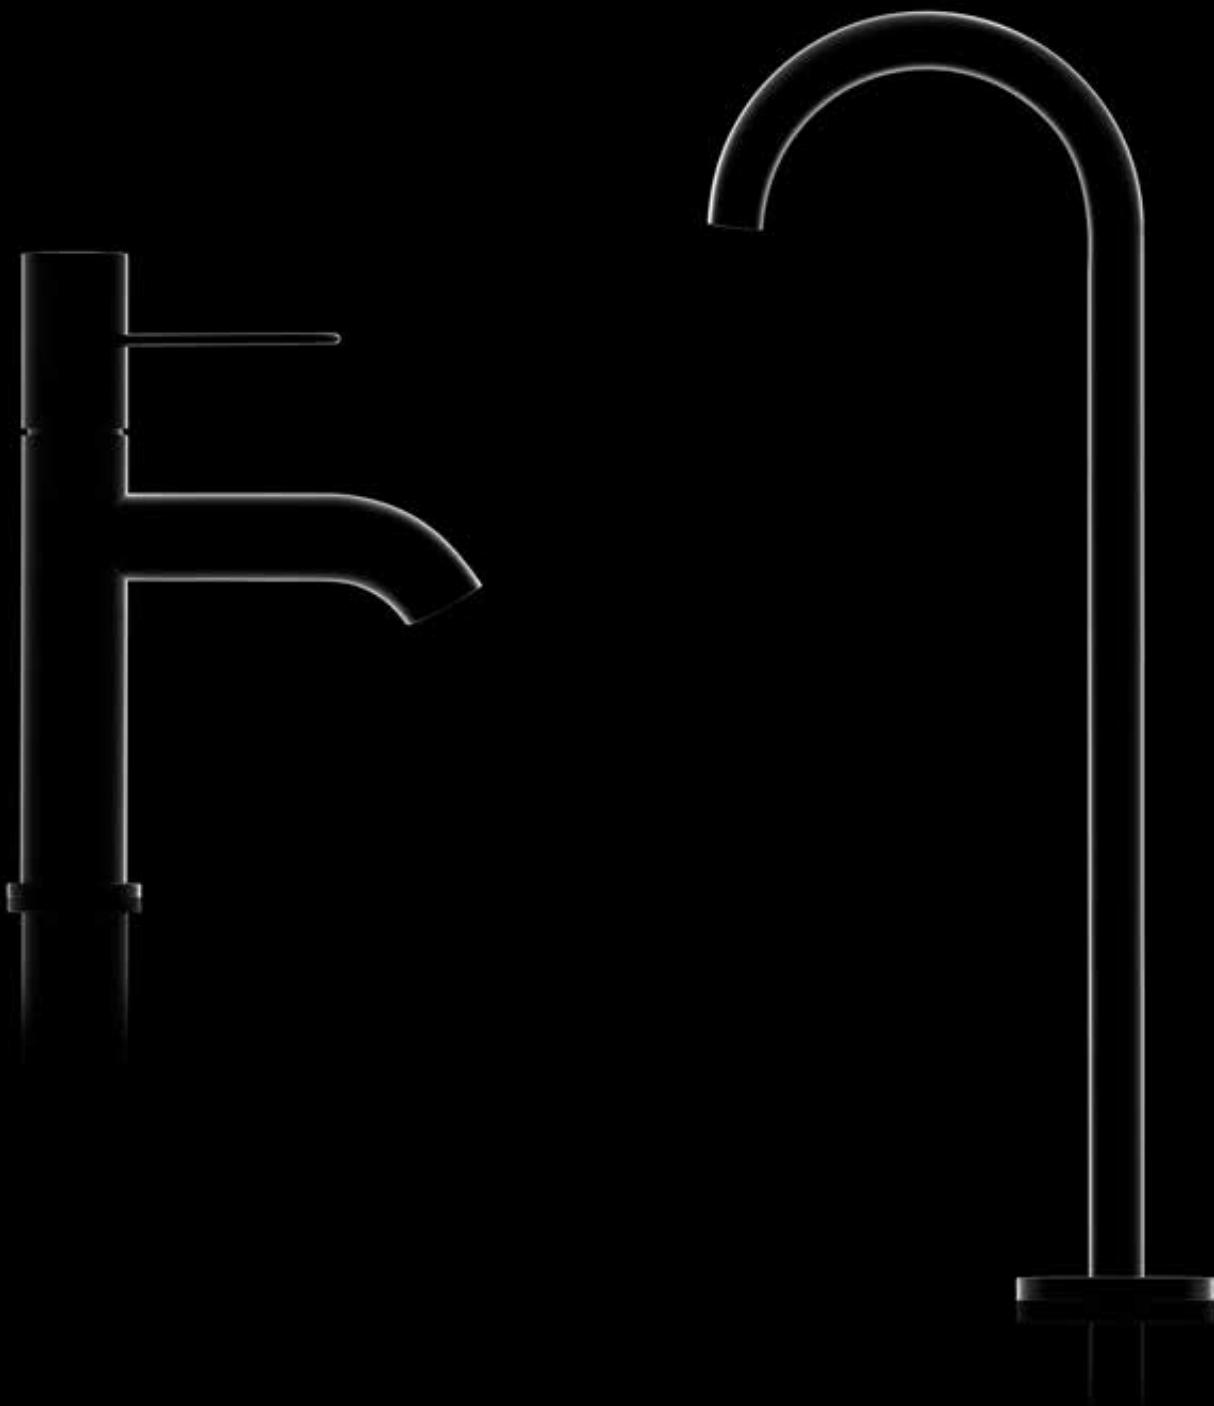

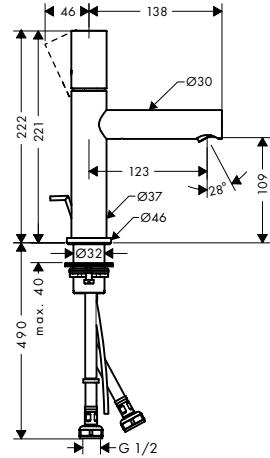**Basin**

### **Single lever basin mixer 110 with zero handle with pop-up waste set 2 ticks**


- / consists of: single lever basin mixer, waste set
- / ComfortZone 110
- / projection: 123 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

**finish**

Chrome 45006009  
Brushed Bronze 45006149  
Brushed Black 45006349  
Chrome AXOR FinishPlus\* 45006XXX



Chrome 45007009  
AXOR FinishPlus\* 45007XXX

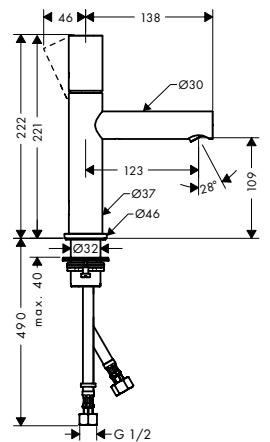


### **Single lever basin mixer 110 with zero handle and waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 110
- / projection: 123 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

Chrome 45032009  
AXOR FinishPlus\* 45032XXX



Chrome 45033009  
AXOR FinishPlus\* 45033XXX

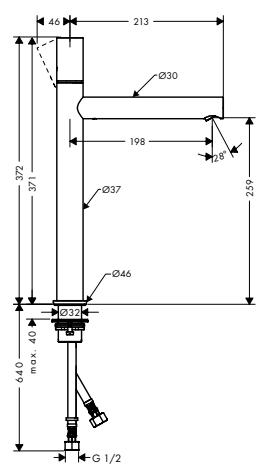





### **Single lever basin mixer 260 with zero handle and waste set 2 ticks**

- / consists of: single lever basin mixer, waste set
- / ComfortZone 260
- / projection: 198 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

Chrome 45030009  
Brushed Bronze 45030149  
Brushed Black 45030349  
Chrome AXOR FinishPlus\* 45030XXX



Chrome 45031009  
AXOR FinishPlus\* 45031XXX

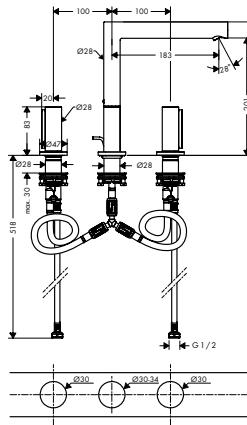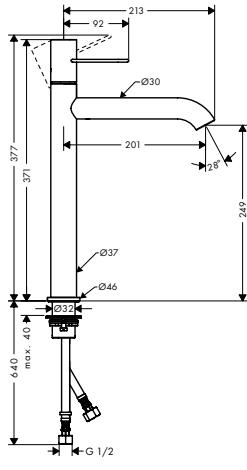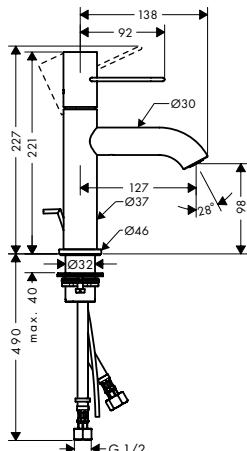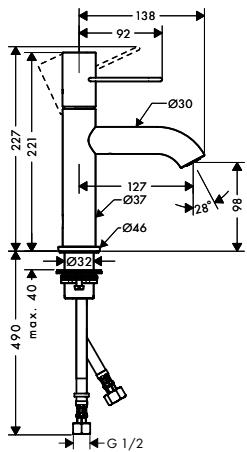

## Single lever basin mixer 100 with loop handle and waste set 2 ticks

- / consists of: single lever basin mixer, waste set
- / ComfortZone 100
- / projection: 127 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*

code no.

38050009  
38050XXX

## Single lever basin mixer 100 with loop handle and pop-up waste set 2 ticks

- / consists of: single lever basin mixer, waste set
- / ComfortZone 100
- / projection: 127 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / pop-up waste set G 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\*38041009  
38041XXX

## Single lever basin mixer 250 with loop handle and waste set 2 ticks

- / consists of: single lever basin mixer, waste set
- / ComfortZone 250
- / projection: 201 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: G 1/2 connections
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\*38055009  
38055XXX

## 3-hole basin mixer 200 with zero handles and pop-up waste set 2 ticks


- / consists of: 3-hole basin mixer, waste set
- / ComfortZone 200
- / projection: 183 mm
- / swivel range 110°
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,6 l/min
- / ceramic valves hot/ cold 90°
- / pop-up waste set G 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\*45134009  
45134XXX

### Optional parts:

- / Hose extension set for 3-hole basin mixer

38959000

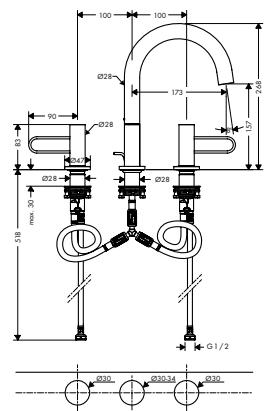

### 3-hole basin mixer 160 with loop handles and pop-up waste set 2 ticks

- / consists of: 3-hole basin mixer, waste set
- / ComfortZone 160
- / projection: 173 mm
- / swivel range 110°
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,1 l/min
- / ceramic valves hot/ cold 90°
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

#### Optional parts:

- / Hose extension set for 3-hole basin mixer


code no.

Chrome  
AXOR FinishPlus\*

38951009  
38951XXX




38959000

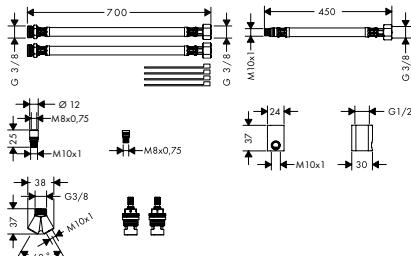

### Hose extension set for 3-hole basin mixer

38959000

- / length of hoses 700 mm
- / for free positioning of spout and handles



### Single lever basin mixer for concealed installation wall-mounted with loop handle and spout 225 mm 2 ticks

Chrome  
AXOR FinishPlus\*

38124009  
38124XXX



- / consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- / projection: 225 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / non-closing waste set
- / connection type: basic set
- / connection dimension: DN15
- / handle can be positioned on the right or left, depends on the basic set installation

#### Alternative products:

- / Single lever basin mixer for concealed installation wall-mounted with loop handle and spout 225 mm 3 ticks

Chrome  
AXOR FinishPlus\*

38125009  
38125XXX

#### Required parts:

- / Basic set for single lever basin mixer for concealed installation wall-mounted



13623180

#### Optional parts:

- / Extension set 25 mm for single lever basin mixer wall-mounted

13586000

Measurements within scale drawings are in mm.



**Single lever basin mixer  
for concealed installation  
wall-mounted with spout  
225 mm and escutcheons**

**2 ticks**

- / consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- / projection: 225 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / joystick ceramic cartridge
- / non-closing waste set
- / connection type: basic set
- / connection dimension: DN15
- / handle can be positioned on the right or left, depends on the basic set installation

**Alternative products:**


- / Single lever basin mixer for concealed installation wall-mounted with spout 225 mm and escutcheons 3 ticks

finish

Chrome  
AXOR FinishPlus\*

code no.

38126009  
38126XXX




**Basic set for single lever basin  
mixer for concealed installation  
wall-mounted**

- / installation depth: 44 - 72 mm
- / variable positioning of the mixer system, can be left or right of the spout
- / easy orientation due to support surfaces for the spirit level
- / with building protection cover against contamination during assembly
- / with dimension indication for exact determination of the installation depth
- / with pre-mounted fastening lugs for mounting in drywall and solidwall
- / sound-decoupled installation
- / connection dimension: DN15

**Optional parts:**

- / Extension set 25 mm for single lever basin mixer wall-mounted

13623180

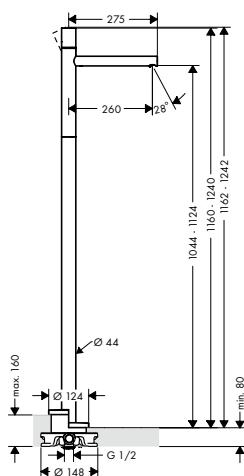

**Single lever basin mixer  
floor-standing with zero handle  
without waste set 2 ticks**

- / projection: 260 mm
- / spray type: laminar spray
- / maximum flow rate at 3 bar: 3,2 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / connection type: basic set
- / connection dimension: DN15

**Required parts:**


- / Basic set for mixers floor-standing

Chrome  
Brushed Bronze  
AXOR FinishPlus\*

45057009  
45057149  
45057XXX



10452180

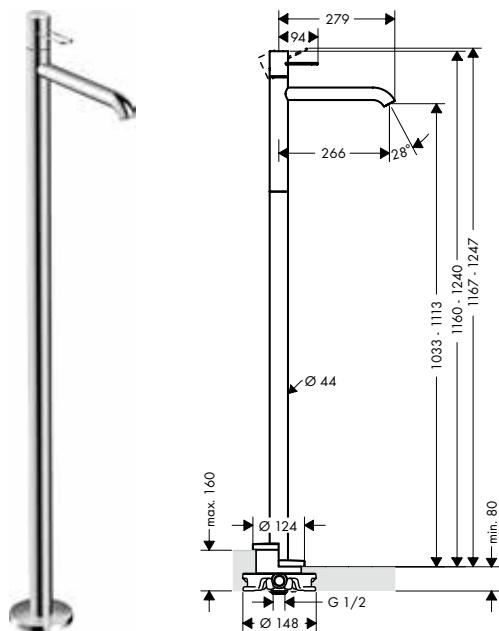

### Single lever basin mixer floor-standing with loop handle without waste set 2 ticks

- / projection: 266 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,2 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / connection type: basic set
- / connection dimension: DN15

#### Required parts:

- / Basic set for mixers floor-standing


finish

Chrome  
AXOR FinishPlus\*

code no.

38057009  
38057XXX

10452180




### Basic set for mixers floor-standing

10452180

- / for mounting on unfinished floor
- / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- / connection dimension: DN15


## Bath



### Single lever bath mixer for exposed installation with loop handle 2 ticks

- / 2 functions
- / projection 203 mm
- / connection type: s-shaped connections
- / centre distance:  $150 \pm 16$  mm
- / spray type mixer: normal spray
- / maximum flow rate at 3 bar: 20 l/min
- / flow rate for bath spout at 3 bar: 20 l/min
- / flow rate of hand shower at 3 bar: 5,8 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / non-return valve
- / with silencer
- / suitable for continuous flow water heaters
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\*38423009  
38423XXX

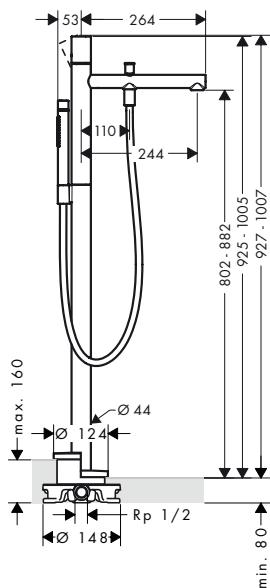

## Single lever bath mixer floor-standing with zero handle

### 2 ticks

- / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder
- / 2 functions
- / projection 264 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum flow rate at 3 bar: 19,1 l/min
- / flow rate for bath spout at 3 bar: 19,1 l/min
- / flow rate of hand shower at 3 bar: 5,6 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

### Required parts:


- / Basic set for mixers floor-standing

10452180

### Optional parts:

- / Extension 60 mm for pipe

97686000

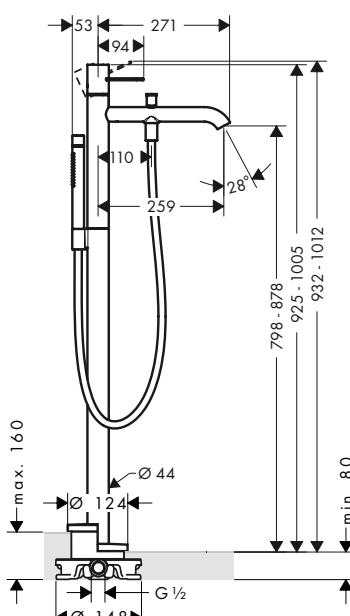

## Single lever bath mixer floor-standing with loop handle

### 2 ticks

- / consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder
- / 2 functions
- / projection 259 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum flow rate at 3 bar: 19,1 l/min
- / flow rate for bath spout at 3 bar: 19,1 l/min
- / flow rate of hand shower at 3 bar: 5,6 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / non-return valve
- / connection dimension: DN15

### Required parts:


- / Basic set for mixers floor-standing

10452180

### Optional parts:

- / Extension 60 mm for pipe

97686000




## Basic set for mixers floor-standing

10452180

- / for mounting on unfinished floor
- / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- / connection dimension: DN15



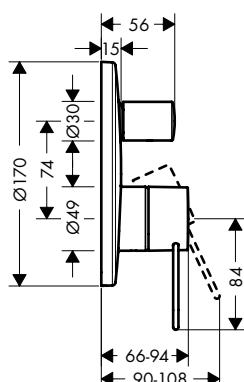

### Single lever bath mixer for concealed installation with loop handle

- / 2 functions
- / connection type: basic set
- / flow rate upper outlet: 21 l/min
- / flow rate lower outlet: 28 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / with silencer
- / suitable for continuous flow water heaters

#### finish

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

#### code no.

38426000  
38426820  
38426XXX

#### Alternative products:

- / Single lever bath mixer for concealed installation with loop handle and integrated security combination according to EN1717

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

38428000  
38428820  
38428XXX

#### Required parts:

- / Basic set iBox universal

01700180

#### Optional parts:

- / Extension 25 mm for basic set iBox universal

13587000


- / Extension element round 2-hole

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

14961000  
14961820  
14961XXX

- / Fastening rail set for iBox universal

93171000

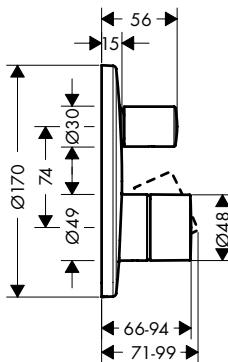

### Single lever bath mixer for concealed installation with zero handle

- / 2 functions
- / connection type: basic set
- / flow rate upper outlet: 21 l/min
- / flow rate lower outlet: 28 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / diverter with automatic resetting
- / with silencer
- / suitable for continuous flow water heaters

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

45405000  
45405820  
45405XXX

#### Alternative products:

- / Single lever bath mixer for concealed installation with zero handle and integrated security combination according to EN1717

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

45407000  
45407820  
45407XXX

#### Required parts:

- / Basic set iBox universal

01700180

#### Optional parts:

- / Extension element round 2-hole

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

14961000  
14961820  
14961XXX




- / Extension 25 mm for basic set iBox universal


13587000

- / Fastening rail set for iBox universal

93171000

Measurements within scale drawings are in mm.

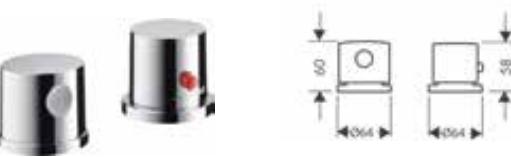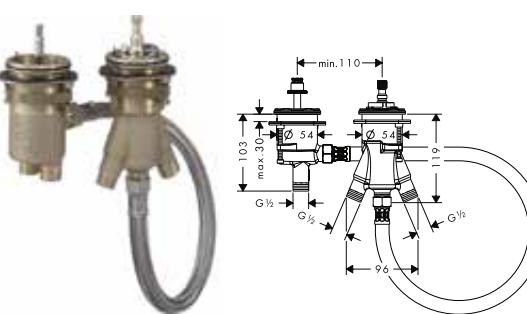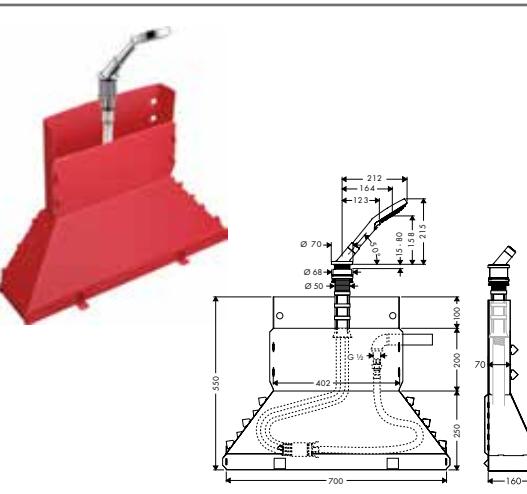	finish	code no.
	<b>Basic set iBox universal</b>	01700180
	<ul style="list-style-type: none"> <li>/ suitable for all shower, bath tub and thermostat finish sets for concealed installation</li> <li>/ connection thread Rp 3/4</li> <li>/ rotationally-symmetric installation</li> <li>/ sound-decoupled installation</li> <li>/ connection dimension: DN20</li> </ul>	
	<b>Optional parts:</b>	
	<ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> <li>/ Reduction coupling iBox universal</li> </ul>	13587000 93171000 97759000
	<b>2-hole rim mounted thermostatic bath mixer</b>	Chrome 38480000 Brushed Nickel 38480820 AXOR FinishPlus* 38480XXX
	<ul style="list-style-type: none"> <li>/ 2 functions</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ suitable for remote spout</li> <li>/ connection type: basic set</li> <li>/ connection dimension: DN15</li> </ul>	
	<b>Required parts:</b>	
	<ul style="list-style-type: none"> <li>/ Basic set for 2-hole rim mounted thermostatic bath mixer</li> </ul>	15486180
	<b>Optional parts:</b>	
	<ul style="list-style-type: none"> <li>/ Flexible connection tube 800 mm</li> <li>/ Connection tube set for 2-hole rim mounted thermostatic bath mixer</li> </ul>	58308000 13089000
	<b>Basic set for 2-hole rim mounted thermostatic bath mixer</b>	15486180
	<ul style="list-style-type: none"> <li>/ suitable for remote spout</li> <li>/ connection thread: G 1/2</li> <li>/ connection dimension: DN15</li> <li>/ flow rate upper outlet: 31 l/min</li> <li>/ flow rate lower outlet: 31 l/min</li> </ul>	
	<b>Optional parts:</b>	
	<ul style="list-style-type: none"> <li>/ Rim mounted bath set with hand shower</li> <li>/ Finish set square</li> <li>/ Finish set oval</li> <li>/ Rim and tile mounted bath basic set</li> </ul>	Chrome 19418000 AXOR FinishPlus* 19418XXX Chrome 28012000 AXOR FinishPlus* 28012XXX Chrome 28022000 AXOR FinishPlus* 28022XXX 15490180
	<b>Rim mounted bath set with hand shower</b>	Chrome 19418000 AXOR FinishPlus* 19418XXX
	<ul style="list-style-type: none"> <li>/ consists of: hand shower, shower holder, shower hose, Secubox, Secuflex hose brake, hose insert</li> <li>/ suitable for installation on bath rim or tile surround (no mounting plate available)</li> <li>/ drilling diameter on bath tub: Ø 50 mm</li> <li>/ connection dimension: DN15</li> <li>/ maximum pull-out length of hand shower 1.10 m</li> </ul>	
	<b>Consisting of:</b>	
	<ul style="list-style-type: none"> <li>/ Hand shower 120 3jet (# 26050000)</li> </ul>	

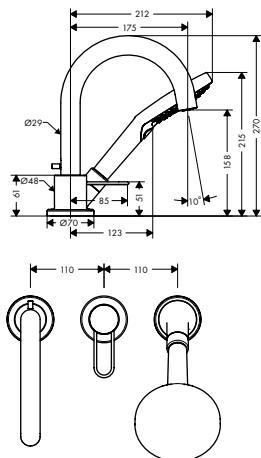

### 3-hole rim mounted bath mixer with loop handle

- / consists of: 3-hole rim mounted single lever bath mixer, hand shower, shower holder
- / 2 functions
- / projection 175 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, RainAir, WhirlAir
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 18 l/min
- / flow rate for bath spout at 3 bar: 18 l/min
- / flow rate of hand shower at 3 bar: 14 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic cartridge
- / temperature limitation adjustable
- / connection dimension: DN15

#### Consisting of:

- / Hand shower 120 3jet (# 26050000)

#### Required parts:


- / Basic set for 3-hole rim mounted single lever bath mixer

finish

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

code no.


38436000  
38436820  
38436XXX



### Basic set for 3-hole rim mounted single lever bath mixer

15485180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

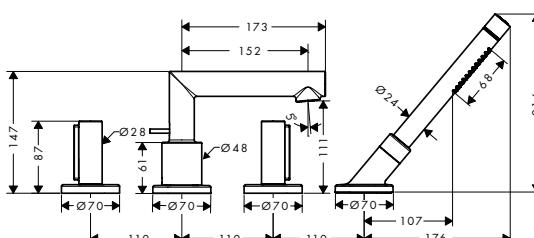

### 4-hole rim mounted bath mixer with zero handles

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

45444000

45444820

45444XXX



- / consists of: 4-hole rim mounted bath mixer, baton hand shower, Secuflex hose set, shower holder
- / 2 functions
- / projection 152 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: Rain, Mono
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 22 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / connection dimension: DN15

#### Consisting of:





- / Baton hand shower 2jet (# 28532000)


#### Required parts:

- / Basic set for 4-hole rim mounted bath mixer

15480180

Measurements within scale drawings are in mm.

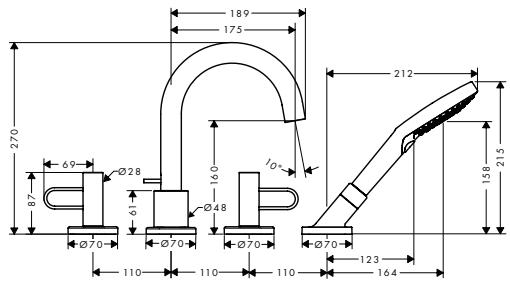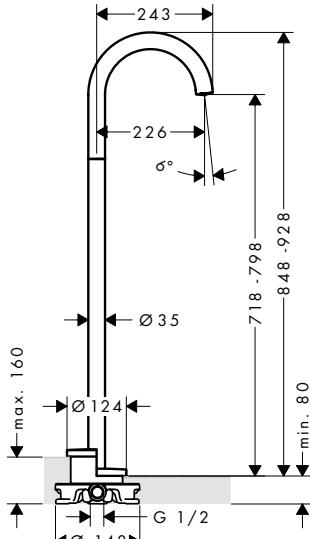	finish	code no.
	<b>4-hole rim mounted bath mixer with loop handles</b>	
	<p>/ consists of: 4-hole rim mounted bath mixer, hand shower, Secuflex hose set, shower holder</p> <p>/ 2 functions</p> <p>/ connection type: basic set</p> <p>/ spray type mixer: normal spray</p> <p>/ spray type hand shower: Rain, RainAir, WhirlAir</p> <p>/ maximum pull-out length of hand shower: 1.10 m</p> <p>/ maximum flow rate at 3 bar: 22 l/min</p> <p>/ flow rate for bath spout at 3 bar: 22 l/min</p> <p>/ flow rate of hand shower at 3 bar: 16 l/min</p> <p>/ min. operating pressure: 1 bar</p> <p>/ max. operating pressure: 10 bar</p> <p>/ ceramic valves hot/ cold 90°</p> <p>/ connection dimension: DN15</p> <p><b>Consisting of:</b></p> <p>/ Hand shower 120 3jet (# 26050000)</p>	Chrome Brushed Nickel AXOR FinishPlus*
	<b>Basic set for 4-hole rim mounted bath mixer</b>	15480180
	<p>/ maximum pull-out length of hand shower: 1.10 m</p> <p>/ connection dimension: DN15</p>	
	<b>Bath spout curved floor-standing</b>	
	<p>/ 1 function</p> <p>/ connection type: basic set</p> <p>/ projection 226 mm</p> <p>/ free-standing installation</p> <p>/ maximum flow rate at 3 bar: 18 l/min</p> <p>/ spray type: normal spray</p> <p><b>Required parts:</b></p> <p>/ Basic set for mixers floor-standing</p>	Chrome Matt Black Brushed Nickel AXOR FinishPlus*
		10452180

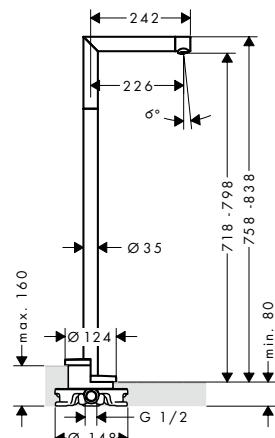

### Bath spout straight floor-standing

- / 1 function
- / connection type: basic set
- / projection 226 mm
- / free-standing installation
- / maximum flow rate at 3 bar: 18 l/min
- / spray type: normal spray

#### Required parts:


- / Basic set for mixers floor-standing

finish

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

code no.


45412000  
45412820  
45412XXX



### Basic set for mixers floor-standing

- / for mounting on unfinished floor
- / suitable for single lever bath mixer, single lever basin mixer and bath spout floor-standing
- / connection dimension: DN15

10452180




### Bath spout curved

- / 1 function
- / with escutcheon
- / projection 178 mm
- / wall-mounted
- / maximum flow rate at 3 bar: 19 l/min
- / connection dimension: DN20
- / spray type: normal spray

Chrome  
Matt Black  
Brushed Nickel  
AXOR FinishPlus\*

38411000  
38411670  
38411820  
38411XXX




### Bath spout straight

- / 1 function
- / with escutcheon
- / projection 175 mm
- / wall-mounted
- / maximum flow rate at 3 bar: 19 l/min
- / connection dimension: DN20
- / spray type: normal spray

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

45410000  
45410820  
45410XXX

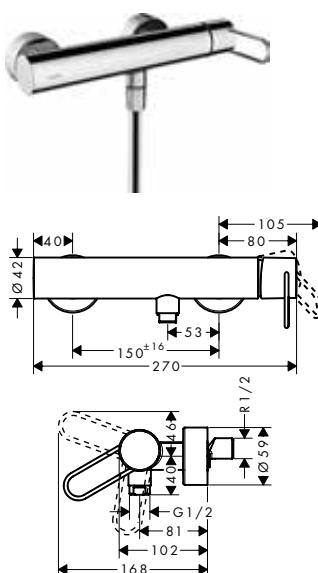


**Shower**
**Single lever shower mixer  
for exposed installation  
with loop handle 2 ticks**

finish

code no.

Chrome  
AXOR FinishPlus\*38622009  
38622XXX


- / 1 function
- / connection type: s-shaped connections
- / centre distance:  $150 \pm 16$  mm
- / maximum flow rate at 3 bar: 4,7 l/min
- / flow rate of hand shower at 3 bar: 4,7 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / suitable for continuous flow water heaters
- / hose connection DN15
- / connection dimension: DN15

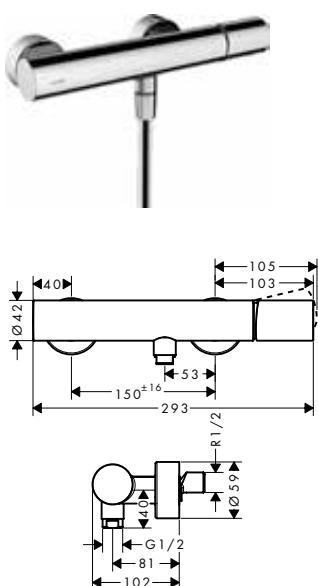
**Single lever shower mixer  
for exposed installation  
with zero handle 2 ticks**
Chrome  
AXOR FinishPlus\*45601009  
45601XXX

- / 1 function
- / connection type: s-shaped connections
- / centre distance:  $150 \pm 16$  mm
- / maximum flow rate at 3 bar: 4,5 l/min
- / flow rate of hand shower at 3 bar: 4,5 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / suitable for continuous flow water heaters
- / hose connection DN15
- / connection dimension: DN15

**Alternative products:**

- / Single lever shower mixer for exposed installation with zero handle 3 ticks

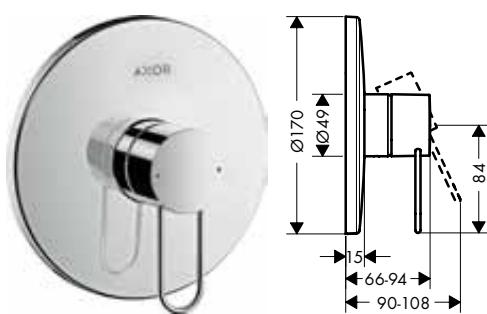Chrome  
AXOR FinishPlus\*45602009  
45602XXX
**Single lever shower mixer  
for concealed installation  
with loop handle**
Chrome  
Brushed Nickel  
AXOR FinishPlus\*38626000  
38626820  
38626XXX

- / 1 function
- / connection type: basic set
- / maximum flow rate at 3 bar: 29 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / with silencer
- / suitable for continuous flow water heaters

**Required parts:**

- / Basic set iBox universal

01700180


**Optional parts:**

- / Extension element round 1-hole
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
Brushed Nickel  
AXOR FinishPlus\*14960000  
14960820  
14960XXX

13587000

93171000



### Single lever shower mixer for concealed installation with zero handle

- / 1 function
- / connection type: basic set
- / maximum flow rate at 3 bar: 29 l/min
- / ceramic cartridge
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / temperature limitation adjustable
- / with silencer
- / suitable for continuous flow water heaters


#### Required parts:

- / Basic set iBox universal

01700180

#### Optional parts:

- |  |  |                                  |
|--|--|----------------------------------|
| / Extension element round 1-hole               | Chrome<br>Brushed Nickel<br>AXOR FinishPlus* | 14960000<br>14960820<br>14960XXX |
| / Extension 25 mm for basic set iBox universal |  | 13587000                         |
| / Fastening rail set for iBox universal        |  | 93171000                         |



### Basic set iBox universal


01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4"
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |
| / Reduction coupling iBox universal            | 97759000 |

## Thermostatic mixers/ valves/ diverters



### Thermostat HighFlow for concealed installation

Chrome  
AXOR FinishPlus\*  
38715000  
38715XXX

- / maximum flow rate at 3 bar: 59 l/min
- / flow rate upper outlet: 42 l/min
- / flow rate lower outlet: 42 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

#### Alternative products:

- / Thermostat for concealed installation

Chrome  
AXOR FinishPlus\*  
38375000  
38375XXX

This product is only available in the AXOR FinishPlus surfaces Polished and Brushed Bronze via AXOR Signature.

#### Required parts:



- / Basic set iBox universal


01700180

#### Optional parts:

- |  |                            |                      |
|--|----------------------------|----------------------|
| / Extension element round 1-hole               | Chrome<br>AXOR FinishPlus* | 14960000<br>14960XXX |
| / Extension 25 mm for basic set iBox universal |                            | 13587000             |
| / Fastening rail set for iBox universal        |                            | 93171000             |

Measurements within scale drawings are in mm.

	finish	code no.
 	<b>Thermostat for concealed installation with shut-off valve</b> Chrome AXOR FinishPlus*	38700000 38700XXX
/ 1 function / maximum flow rate at 3 bar: 25 l/min / thermostat cartridge, ceramic valves 90° / safety lock at 40 °C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set / min. operating pressure: 1 bar / max. operating pressure: 10 bar		
This product is only available in the AXOR FinishPlus surfaces Polished und Brushed Bronze via AXOR Signature.		
<b>Required parts:</b> / Basic set iBox universal		01700180
<b>Optional parts:</b> / Extension element round 2-hole arrow / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal	Chrome AXOR FinishPlus*	14963000 14963XXX 13587000 93171000
 	<b>Thermostat for concealed installation with shut-off/diverter valve</b> Chrome AXOR FinishPlus*	38720000 38720XXX
/ 2 functions / flow rate upper outlet: 25 l/min / flow rate lower outlet: 29 l/min / thermostat cartridge, shut-off valve / safety lock at 40 °C / temperature limitation adjustable / non-return valve / with silencer / connection type: basic set / min. operating pressure: 1 bar / max. operating pressure: 10 bar		
This product is only available in the AXOR FinishPlus surfaces Polished und Brushed Bronze via AXOR Signature.		
<b>Required parts:</b> / Basic set iBox universal		01700180
<b>Optional parts:</b> / Extension 25 mm for basic set iBox universal / Extension element round 2-hole 0-1-2 / Fastening rail set for iBox universal	Chrome AXOR FinishPlus*	13587000 14962000 14962XXX 93171000




### Basic set iBox universal

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

#### Optional parts:

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |
| / Reduction coupling iBox universal            | 97759000 |

01700180



### Shut-off valve for concealed installation

Chrome AXOR FinishPlus\* 38976000  
38976XXX

- / connection type: DN15/DN20


This product is only available in the AXOR FinishPlus surface Brushed Bronze via AXOR Signature.

#### Required parts:

- |   |          |
|---|----------|
| / Basic set 52 l/min for shut-off valve for concealed installation spindle  | 16973180 |
| / Basic set 40 l/min for concealed installation for shut-off valve ceramic  | 16974180 |
| / Basic set 130 l/min for shut-off valve for concealed installation spindle | 16970180 |

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|



### Basic set 52 l/min for shut-off valve for concealed installation spindle

16973180




- / connection type: DN15
- / suitable for all shut-off valves finish sets
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 52 l/min

#### Alternative products:

- |   |          |
|---|----------|
| / Basic set 40 l/min for concealed installation for shut-off valve ceramic  | 16974180 |
| / Basic set 130 l/min for shut-off valve for concealed installation spindle | 16970180 |

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|

	finish	code no.
	<b>Shut-off/ diverter valve Trio/ Quattro for concealed installation</b>  This product is only available in the AXOR FinishPlus surfaces Polished and Brushed Bronze via AXOR Signature.  <b>Required parts:</b> <ul style="list-style-type: none"><li>/ Basic set for Quattro four-way diverter valve for concealed installation</li><li>/ Basic set for shut-off/ diverter valve Trio for concealed installation</li></ul> <b>Optional parts:</b> <ul style="list-style-type: none"><li>/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro</li></ul>	Chrome AXOR FinishPlus* 38933000 38933XXX  16930180 16982180  92990000
	<b>Basic set for shut-off/ diverter valve Trio for concealed installation</b>   <ul style="list-style-type: none"><li>/ 2 functions</li><li>/ simultaneous utilization of 2 functions</li><li>/ suitable for all Trio finish sets</li><li>/ connection dimension: DN20</li><li>/ maximum flow rate at 3 bar: 65 l/min</li></ul> <b>Optional parts:</b> <ul style="list-style-type: none"><li>/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro</li></ul>	16982180  92990000
	<b>Basic set for Quattro four-way diverter valve for concealed installation</b>   <ul style="list-style-type: none"><li>/ requires volume control</li><li>/ 3 functions</li><li>/ simultaneous utilization of 2 functions</li><li>/ suitable for all Quattro finish sets</li><li>/ connection dimension: DN20</li><li>/ maximum flow rate at 3 bar: 65 l/min</li></ul> <b>Optional parts:</b> <ul style="list-style-type: none"><li>/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro</li></ul>	16930180  92990000
	<b>Wall outlet stop with shut-off valve</b>   <ul style="list-style-type: none"><li>/ hose connection DN15</li><li>/ with non-return valve</li></ul> This product is only available in the AXOR FinishPlus surface Polished Bronze via AXOR Signature.	Chrome AXOR FinishPlus* 38882000 38882XXX

Thermostatic mixers



For matching thermostatic mixers, refer to the AXOR Showers chapter.

Showers



For matching shower products, refer to the AXOR Showers chapter.

Accessories




For matching accessories, refer to the AXOR Accessories chapter.






# AXOR Montreux

Basin	230
Bath	231
Shower	233
Thermostatic mixers / valves / diverters	234
Overhead showers	239
Hand showers	240
Shower sets	240
Shower systems	240

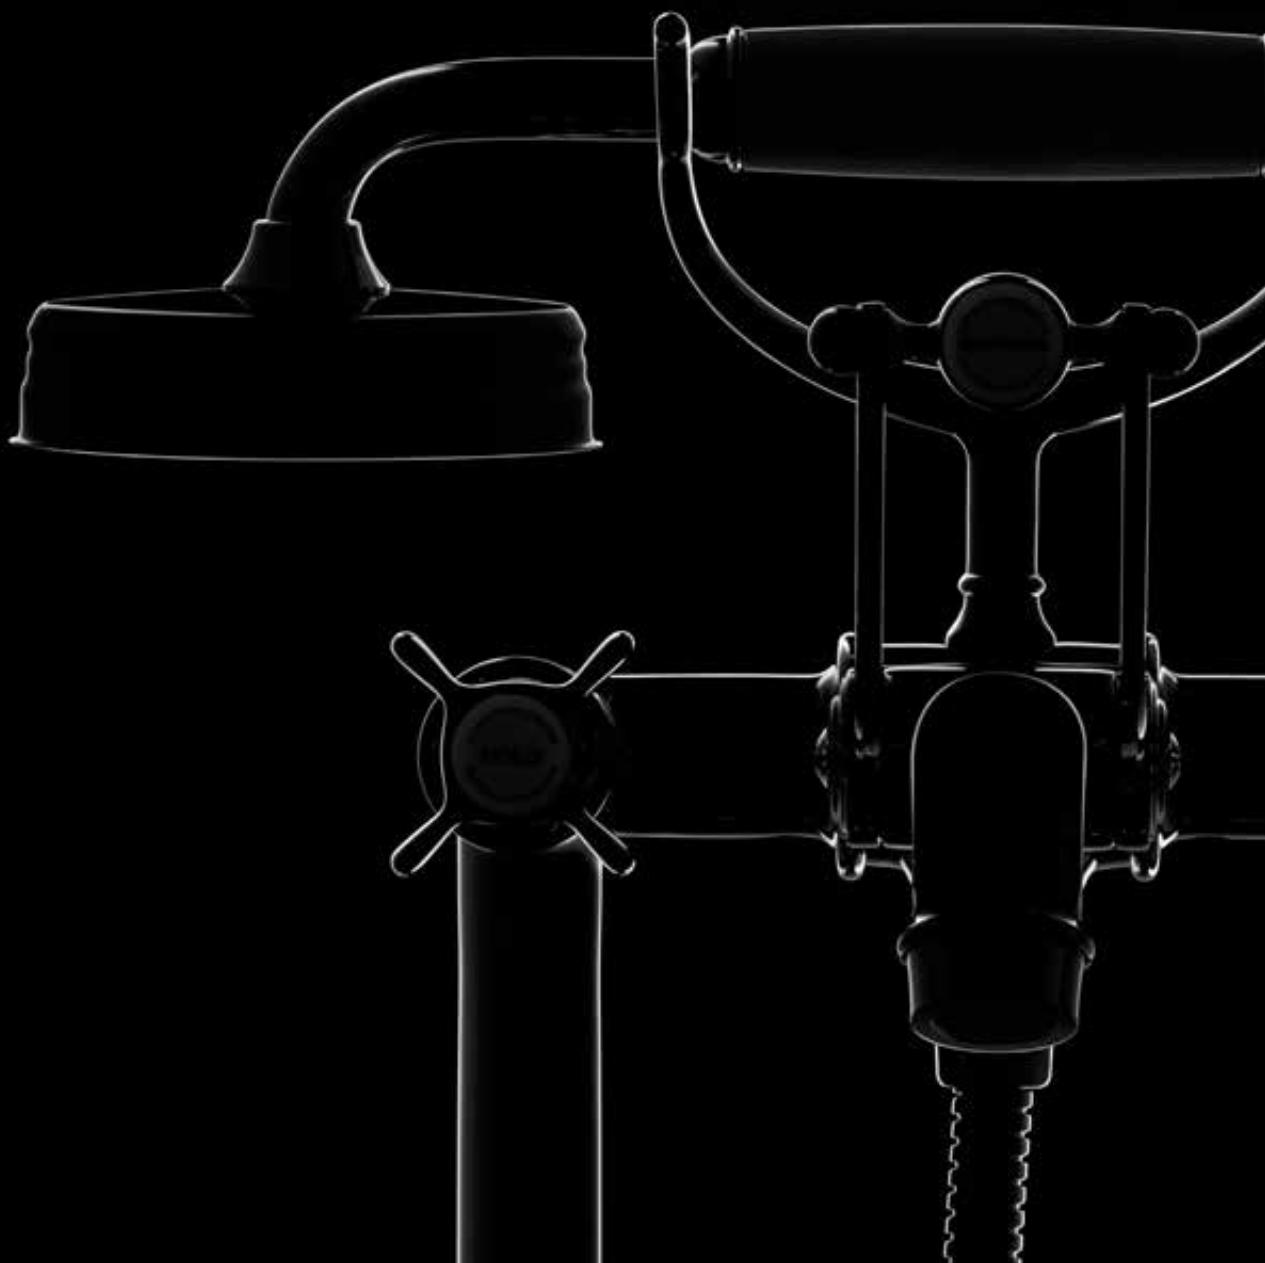

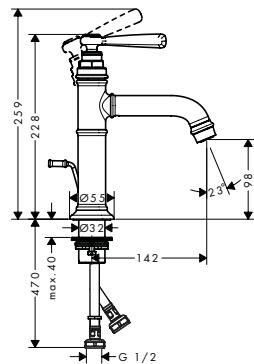**Basin**


### Single lever basin mixer 100 with lever handle and pop-up waste set 2 ticks

- / consists of: single lever basin mixer, waste set
- / ComfortZone 100
- / projection: 142 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic cartridge
- / temperature limitation adjustable
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*

code no.

16512009  
16512XXX


### 3-hole basin mixer 30 with lever handles and pop-up waste set 2 ticks

- / consists of: 3-hole basin mixer, waste set
- / ComfortZone 30
- / projection: 143 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic valves hot/ cold 90°
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\*16537009  
16537XXX**Optional parts:**

- / Hose extension set for 3-hole basin mixer

38959000




### 3-hole basin mixer 30 with cross handles and pop-up waste set 2 ticks

- / consists of: 3-hole basin mixer, waste set
- / ComfortZone 30
- / projection: 142 mm
- / spray type: normal spray
- / maximum flow rate at 3 bar: 3,8 l/min
- / ceramic valves hot/ cold 90°
- / pop-up waste set G 1 1/4
- / connection type: G 1/2 connections
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\*16538009  
16538XXX**Optional parts:**

- / Hose extension set for 3-hole basin mixer

38959000




### Hose extension set for 3-hole basin mixer

38959000

- / length of hoses 700 mm
- / for free positioning of spout and handles


Measurements within scale drawings are in mm.

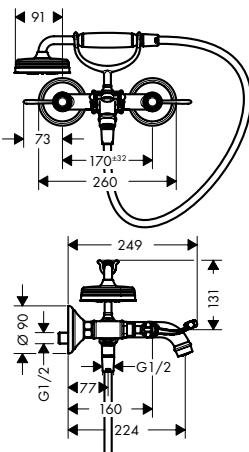**Bath**
**2-handle bath mixer  
for exposed installation  
with lever handles 2 ticks**


- / consists of: 2-handle bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 224 mm
- / connection type: s-shaped connections
- / centre distance:  $170 \pm 32$  mm
- / spray type mixer: normal spray
- / spray type hand shower: RainAir
- / maximum flow rate at 3 bar: 18,5 l/min
- / flow rate for bath spout at 3 bar: 18,5 l/min
- / flow rate of hand shower at 3 bar: 5,6 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / non-return valve
- / suitable for continuous flow water heaters
- / connection dimension: DN15

finish

code no.

Chrome  
AXOR FinishPlus\*16401009  
16401XXX
**Bath spout**

- / 1 function
- / connection type: G 3/4
- / projection 166 - 220 mm
- / maximum flow rate at 3 bar: 20 l/min
- / spray type: normal spray

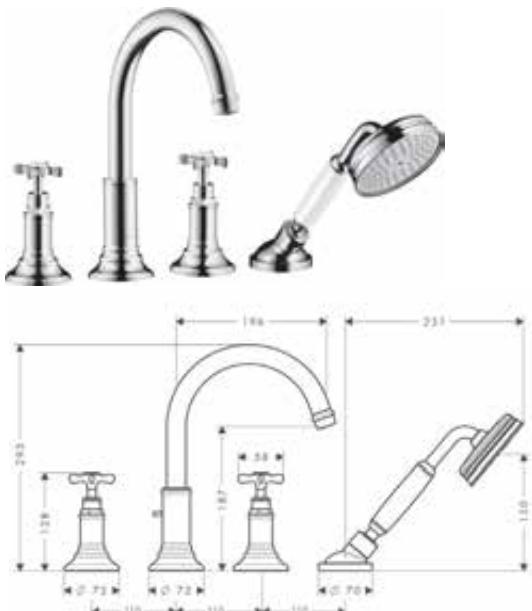Chrome  
Brushed Nickel  
AXOR FinishPlus\*16541000  
16541820  
16541XXX
**4-hole rim mounted bath mixer  
with cross handles**

- / consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 196 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: RainAir
- / maximum pull-out length of hand shower: 1,10 m
- / maximum flow rate at 3 bar: 20,5 l/min
- / flow rate for bath spout at 3 bar: 20,5 l/min
- / flow rate of hand shower at 3 bar: 15 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 180°
- / non-return valve
- / connection dimension: DN15


Chrome  
Brushed Nickel  
AXOR FinishPlus\*16546000  
16546820  
16546XXX
**Consisting of:**

- / Hand shower 100 1jet (# 16320XXX)

**Required parts:**

- / Basic set for 4-hole rim mounted bath mixer

15480180

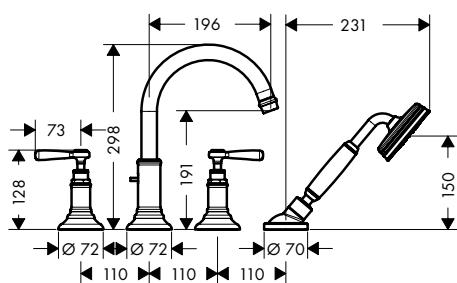

#### 4-hole rim mounted bath mixer with lever handles

- / consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 196 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: RainAir
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 20,5 l/min
- / flow rate for bath spout at 3 bar: 20,5 l/min
- / flow rate of hand shower at 3 bar: 15 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 90°
- / non-return valve
- / connection dimension: DN15

##### Consisting of:

- / Hand shower 100 1jet (# 16320XXX)

##### Required parts:


- / Basic set for 4-hole rim mounted bath mixer 15480180

finish

code no.

Chrome  
Brushed Nickel  
AXOR FinishPlus\*


16550000  
16550820  
16550XXX



#### Basic set for 4-hole rim mounted bath mixer

15480180

- / maximum pull-out length of hand shower: 1.10 m
- / connection dimension: DN15

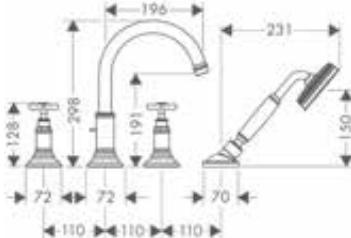

#### 4-hole tile mounted bath mixer with cross handles

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

16544000  
16544820  
16544XXX



- / consists of: 4-hole tile mounted bath mixer, hand shower, shower hose, shower holder
- / 2 functions
- / projection 196 mm
- / connection type: basic set
- / spray type mixer: normal spray
- / spray type hand shower: RainAir
- / maximum pull-out length of hand shower: 1.10 m
- / maximum flow rate at 3 bar: 21 l/min
- / flow rate for bath spout at 3 bar: 21 l/min
- / flow rate of hand shower at 3 bar: 15 l/min
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / ceramic valves hot/ cold 180°
- / non-return valve
- / connection dimension: DN15


##### Consisting of:


- / Hand shower 100 1jet (# 16320XXX)

##### Required parts:

- / Basic set for 4-hole tile mounted bath mixer 15481180

Measurements within scale drawings are in mm.

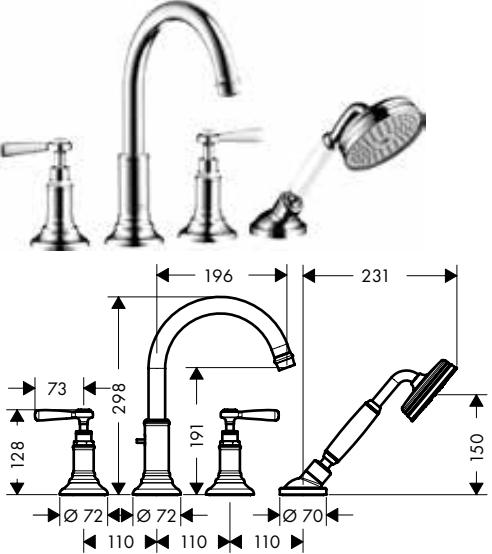	finish	code no.
	<b>4-hole tile mounted bath mixer with lever handles</b> / consists of: 4-hole tile mounted bath mixer, hand shower, shower hose, shower holder / 2 functions / projection 196 mm / connection type: basic set / spray type mixer: normal spray / spray type hand shower: RainAir / maximum pull-out length of hand shower: 1.10 m / maximum flow rate at 3 bar: 21 l/min / flow rate for bath spout at 3 bar: 21 l/min / flow rate of hand shower at 3 bar: 15 l/min / min. operating pressure: 1 bar / max. operating pressure: 10 bar / ceramic valves hot/ cold 90° / non-return valve / connection dimension: DN15	Chrome 16554000 Brushed Nickel 16554820 AXOR FinishPlus* 16554XXX
	<b>Consisting of:</b> / Hand shower 100 1jet (# 16320XXX)	
	<b>Required parts:</b> / Basic set for 4-hole tile mounted bath mixer	15481180
	<b>Basic set for 4-hole tile mounted bath mixer</b> / maximum pull-out length of hand shower: 1.10 m / connection dimension: DN15	15481180
	<b>Shower holder</b> / consists of: shower holder, escutcheon / fixed holding position / for hoses with conical nut / material: metal	Chrome 16325000 Brushed Nickel 16325820 AXOR FinishPlus* 16325XXX
	<b>Optional parts:</b> / Metal shower hose 1.25 m / Metal shower hose 1.60 m / Metal shower hose 2.00 m	Chrome 28112000 AXOR FinishPlus* 28112XXX Chrome 28116000 Brushed Nickel 28116820 AXOR FinishPlus* 28116XXX Chrome 28120000 AXOR FinishPlus* 28120XXX
	<b>Wall outlet with non-return valve</b> / metal connection angle / non-return valve	Chrome 16884000 Brushed Nickel 16884820 AXOR FinishPlus* 16884XXX




### Wall outlet stop with non return valve, shut-off valve and cross handle

- / connection type: DN15
- / hose connection DN15
- / with non-return valve

finish

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

code no.  
16882000  
16882820  
16882XXX




### Wall outlet stop with non return valve, shut-off valve and lever handle

- / connection type: DN15
- / hose connection DN15
- / with non-return valve

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

code no.  
16883000  
16883820  
16883XXX

### Thermostatic mixers/ valves/ diverters



### Thermostat HighFlow for concealed installation with cross handle

- / maximum flow rate at 3 bar: 59 l/min
- / flow rate upper outlet: 42 l/min
- / flow rate lower outlet: 42 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

code no.  
16815000  
16815820  
16815XXX

#### Alternative products:

- / Thermostat for concealed installation with cross handle

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

code no.  
16810000  
16810820  
16810XXX

#### Required parts:

- / Basic set iBox universal

code no.  
01700180



#### Optional parts:



- / Extension element round 1-hole
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
Brushed Nickel  
AXOR FinishPlus\*


code no.  
14960000  
14960820  
14960XXX  
13587000  
93171000

Measurements within scale drawings are in mm.

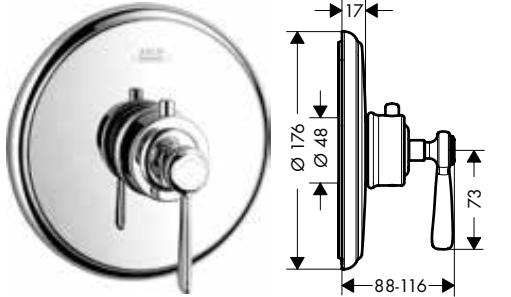	finish	code no.
	<b>Thermostat HighFlow for concealed installation with lever handle</b> Chrome Brushed Nickel AXOR FinishPlus*	16824000 16824820 16824XXX
<ul style="list-style-type: none"> <li>/ maximum flow rate at 3 bar: 59 l/min</li> <li>/ flow rate upper outlet: 42 l/min</li> <li>/ flow rate lower outlet: 42 l/min</li> <li>/ thermostat cartridge</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ non-return valve</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> </ul>		
<b>Alternative products:</b> <ul style="list-style-type: none"> <li>/ Thermostat for concealed installation with lever handle</li> </ul>	Chrome Brushed Nickel AXOR FinishPlus*	16823000 16823820 16823XXX
<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set iBox universal</li> </ul>		01700180
<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension element round 1-hole</li> </ul>	Chrome Brushed Nickel AXOR FinishPlus*	14960000 14960820 14960XXX
<ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> </ul>		13587000 93171000
	<b>Thermostat for concealed installation with cross handle and shut-off valve</b> Chrome Brushed Nickel AXOR FinishPlus*	16800000 16800820 16800XXX
<ul style="list-style-type: none"> <li>/ 1 function</li> <li>/ maximum flow rate at 3 bar: 25 l/min</li> <li>/ thermostat cartridge, ceramic valves 90°</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ non-return valve</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> </ul>		
<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set iBox universal</li> </ul>		01700180
<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension element round 2-hole arrow</li> </ul>	Chrome Brushed Nickel AXOR FinishPlus*	14963000 14963820 14963XXX
<ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> </ul>		13587000 93171000

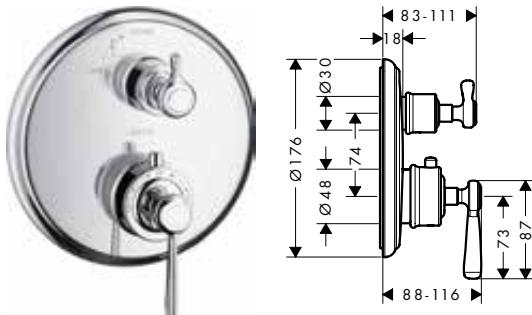	finish	code no.
 <p><b>Thermostat for concealed installation with lever handle and shut-off valve</b></p> <ul style="list-style-type: none"> <li>/ 1 function</li> <li>/ maximum flow rate at 3 bar: 25 l/min</li> <li>/ thermostat cartridge, ceramic valves 90°</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ non-return valve</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> </ul>	Chrome Brushed Nickel AXOR FinishPlus*	16801000 16801820 16801XXX
<b>Required parts:</b>		
/ Basic set iBox universal		01700180
<b>Optional parts:</b>		
/ Extension element round 2-hole arrow	Chrome Brushed Nickel AXOR FinishPlus*	14963000 14963820 14963XXX
/ Extension 25 mm for basic set iBox universal		13587000
/ Fastening rail set for iBox universal		93171000
 <p><b>Thermostat for concealed installation with cross handle and shut-off/ diverter valve</b></p> <ul style="list-style-type: none"> <li>/ 2 functions</li> <li>/ flow rate upper outlet: 25 l/min</li> <li>/ flow rate lower outlet: 29 l/min</li> <li>/ thermostat cartridge, shut-off valve</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ non-return valve</li> <li>/ with silencer</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ max. operating pressure: 10 bar</li> </ul>	Chrome Brushed Nickel AXOR FinishPlus*	16820000 16820820 16820XXX
<b>Required parts:</b>		
/ Basic set iBox universal		01700180
<b>Optional parts:</b>		
/ Extension 25 mm for basic set iBox universal		13587000
/ Extension element round 2-hole 0-1-2	Chrome Brushed Nickel AXOR FinishPlus*	14962000 14962820 14962XXX
/ Fastening rail set for iBox universal		93171000

Measurements within scale drawings are in mm.



### Thermostat for concealed installation with lever handle and shut-off/ diverter valve

- / 2 functions
- / flow rate upper outlet: 25 l/min
- / flow rate lower outlet: 29 l/min
- / thermostat cartridge, shut-off valve
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / with silencer
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar

finish

code no.

Chrome	16821000
Brushed Nickel	16821820
AXOR FinishPlus*	16821XXX

#### Required parts:


- / Basic set iBox universal

01700180

#### Optional parts:

- / Extension element round 2-hole 0-1-2
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome	14962000
Brushed Nickel	14962820
AXOR FinishPlus*	14962XXX
	13587000
	93171000



### Basic set iBox universal

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4"
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20


#### Optional parts:

- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal
- / Reduction coupling iBox universal

13587000

93171000

97759000



### Shut-off valve for concealed installation with cross handle

Chrome	16871000
Brushed Nickel	16871820
AXOR FinishPlus*	16871XXX

- / connection type: DN15/DN20

#### Required parts:

- / Basic set 52 l/min for shut-off valve for concealed installation spindle
- / Basic set 40 l/min for concealed installation for shut-off valve ceramic
- / Basic set 130 l/min for shut-off valve for concealed installation spindle

16973180


16974180

16970180

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000



### Shut-off valve for concealed installation with lever handle

/ connection type: DN15/DN20

#### Required parts:

- / Basic set 52 l/min for shut-off valve for concealed installation spindle
- / Basic set 40 l/min for concealed installation for shut-off valve ceramic
- / Basic set 130 l/min for shut-off valve for concealed installation spindle

finish

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

code no.


16872000  
16872820  
16872XXX

16973180

16974180

16970180

92990000



### Basic set 52 l/min for shut-off valve for concealed installation spindle

16973180

/ connection type: DN15

- / suitable for all shut-off valves finish sets
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 52 l/min

#### Alternative products:

- / Basic set 40 l/min for concealed installation for shut-off valve ceramic
- / Basic set 130 l/min for shut-off valve for concealed installation spindle


16974180

16970180

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000



### Shut-off/ diverter valve Trio/ Quattro for concealed installation with cross handle

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

16830000

16830820

16830XXX

#### Required parts:

- / Basic set for Quattro four-way diverter valve for concealed installation
- / Basic set for shut-off/ diverter valve Trio for concealed installation


16930180

16982180

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000



### Basic set for shut-off/ diverter valve Trio for concealed installation

16982180

/ 2 functions

- / simultaneous utilization of 2 functions
- / suitable for all Trio finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min


#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

92990000

finish

code no.



### Basic set for Quattro four-way diverter valve for concealed installation


- / requires volume control
- / 3 functions
- / simultaneous utilization of 2 functions
- / suitable for all Quattro finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

16930180

## Overhead showers

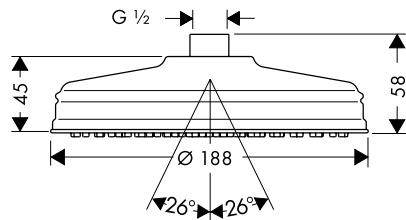

### Overhead shower 180 1jet Classic


Chrome  
AXOR FinishPlus\*

28487000  
28487XXX

- / shower head size: 180 mm
- / spray type: RainAir
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / maximum flow rate at 3 bar: 18 l/min
- / flow rate Rain spray (at 3 bar): 18 l/min
- / minimum flow pressure: 1,5 bar
- / spray disc removable for cleaning
- / installation: ceiling or wall
- / connection thread G 1/2
- / connection dimension: DN15

#### Optional parts:

- |                            |                            |          |
|----------------------------|----------------------------|----------|
| / Shower arm 389 mm        | Chrome<br>AXOR FinishPlus* | 27348000 |
| / Ceiling connector 100 mm | Chrome<br>AXOR FinishPlus* | 27348XXX |
| / Ceiling connector 300 mm | Chrome<br>AXOR FinishPlus* | 26432000 |
|                            | Chrome<br>AXOR FinishPlus* | 26432XXX |
|                            | Chrome<br>AXOR FinishPlus* | 26433000 |
|                            | Chrome<br>AXOR FinishPlus* | 26433XXX |

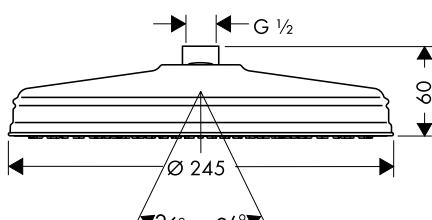

### Overhead shower 240 1jet Classic


Chrome  
AXOR FinishPlus\*

28474000  
28474XXX

- / shower head size: 240 mm
- / spray type: RainAir
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / maximum flow rate at 3 bar: 17 l/min
- / flow rate RainAir spray (at 3 bar): 17 l/min
- / minimum flow pressure: 1,5 bar
- / installation: ceiling or wall
- / connection thread G 1/2
- / connection dimension: DN15

#### Optional parts:

- |                            |                            |          |
|----------------------------|----------------------------|----------|
| / Shower arm 389 mm        | Chrome<br>AXOR FinishPlus* | 27348000 |
| / Ceiling connector 100 mm | Chrome<br>AXOR FinishPlus* | 27348XXX |
| / Ceiling connector 300 mm | Chrome<br>AXOR FinishPlus* | 26432000 |
|                            | Chrome<br>AXOR FinishPlus* | 26432XXX |
|                            | Chrome<br>AXOR FinishPlus* | 26433000 |
|                            | Chrome<br>AXOR FinishPlus* | 26433XXX |


**Hand showers****Hand shower 100 1jet**

- / shower head size: 100 mm
- / spray type: RainAir
- / grey spray disc
- / maximum flow rate at 3 bar: 16 l/min
- / minimum flow pressure: 1 bar
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15

**finish**

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

16320000  
16320820  
16320XXX

**Shower sets****Shower set 0.90 m  
with hand shower 100 1jet**

- / consists of: hand shower, shower bar, shower hose, slider
- / shower head size: 100 mm
- / spray type: RainAir
- / support for shower hose with conical nuts
- / AXOR Montreux wall bar 0.90 m
- / maximum flow rate at 3 bar: 16 l/min
- / minimum flow pressure: 1 bar
- / wall supports of metal

**Consisting of:**



- / Hand shower 100 1jet (# 16320XXX)
- / Metal shower hose 1.60 m (# 28116XXX)

**Optional parts:**

- / Corner basket 160/83

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

27982000  
27982820  
27982XXX

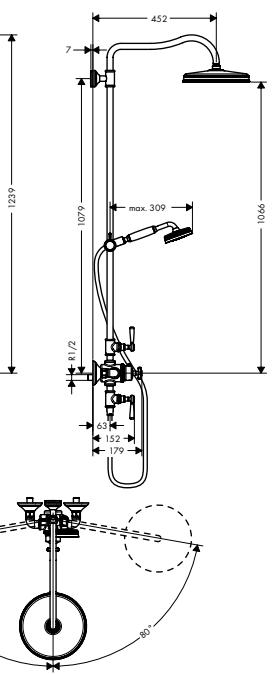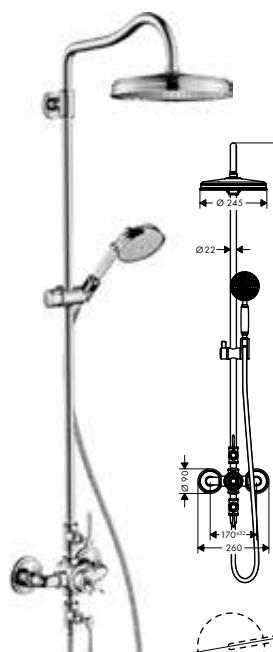**Shower systems****Showerpipe with thermostat  
and overhead shower 240 1jet  
2 ticks**

- / consists of: overhead shower, hand shower, shower thermostat, shower hose, slider, shower bar
- / shower head size overhead shower: 240 mm
- / spray type overhead shower: RainAir
- / spray type hand shower: RainAir
- / maximum flow rate at 3 bar: 6,3 l/min
- / flow rate of hand shower at 3 bar: 5,4 l/min
- / minimum flow pressure: 1 bar
- / operating pressure: min. 2 bar / max. 10 bar
- / shower bar diameter: 22 mm
- / shower arm length overhead shower: 450 mm
- / swivel shower arm
- / thermostat AXOR Montreux
- / safety lock at 40 °C
- / adjustable hot water limitation
- / outlets controlled via turning handle
- / mounting type: exposed installation
- / connection dimension DN15
- / connection thread G 1/2
- / centre distance 170 ± 32 mm

Chrome  
Brushed Bronze  
AXOR FinishPlus\*

16575009  
16575149  
16575XXX

**Consisting of:**

- / Overhead shower 240 1jet Classic (# 28474000)
- / Hand shower 100 1jet (# 16320000)
- / Metal shower hose 1.60 m (# 28116000)

Measurements within scale drawings are in mm.

---

Showers

---



For matching shower products, refer to the AXOR Showers chapter.

---

Accessories

---



For matching AXOR Montreux Accessories, refer to the AXOR Accessories chapter.

# Programs



AXOR Showers / Flow diagrams

244



AXOR Accessories

334




AXOR Kitchen faucets

360




AXOR Basic sets, wastes and overflows

370

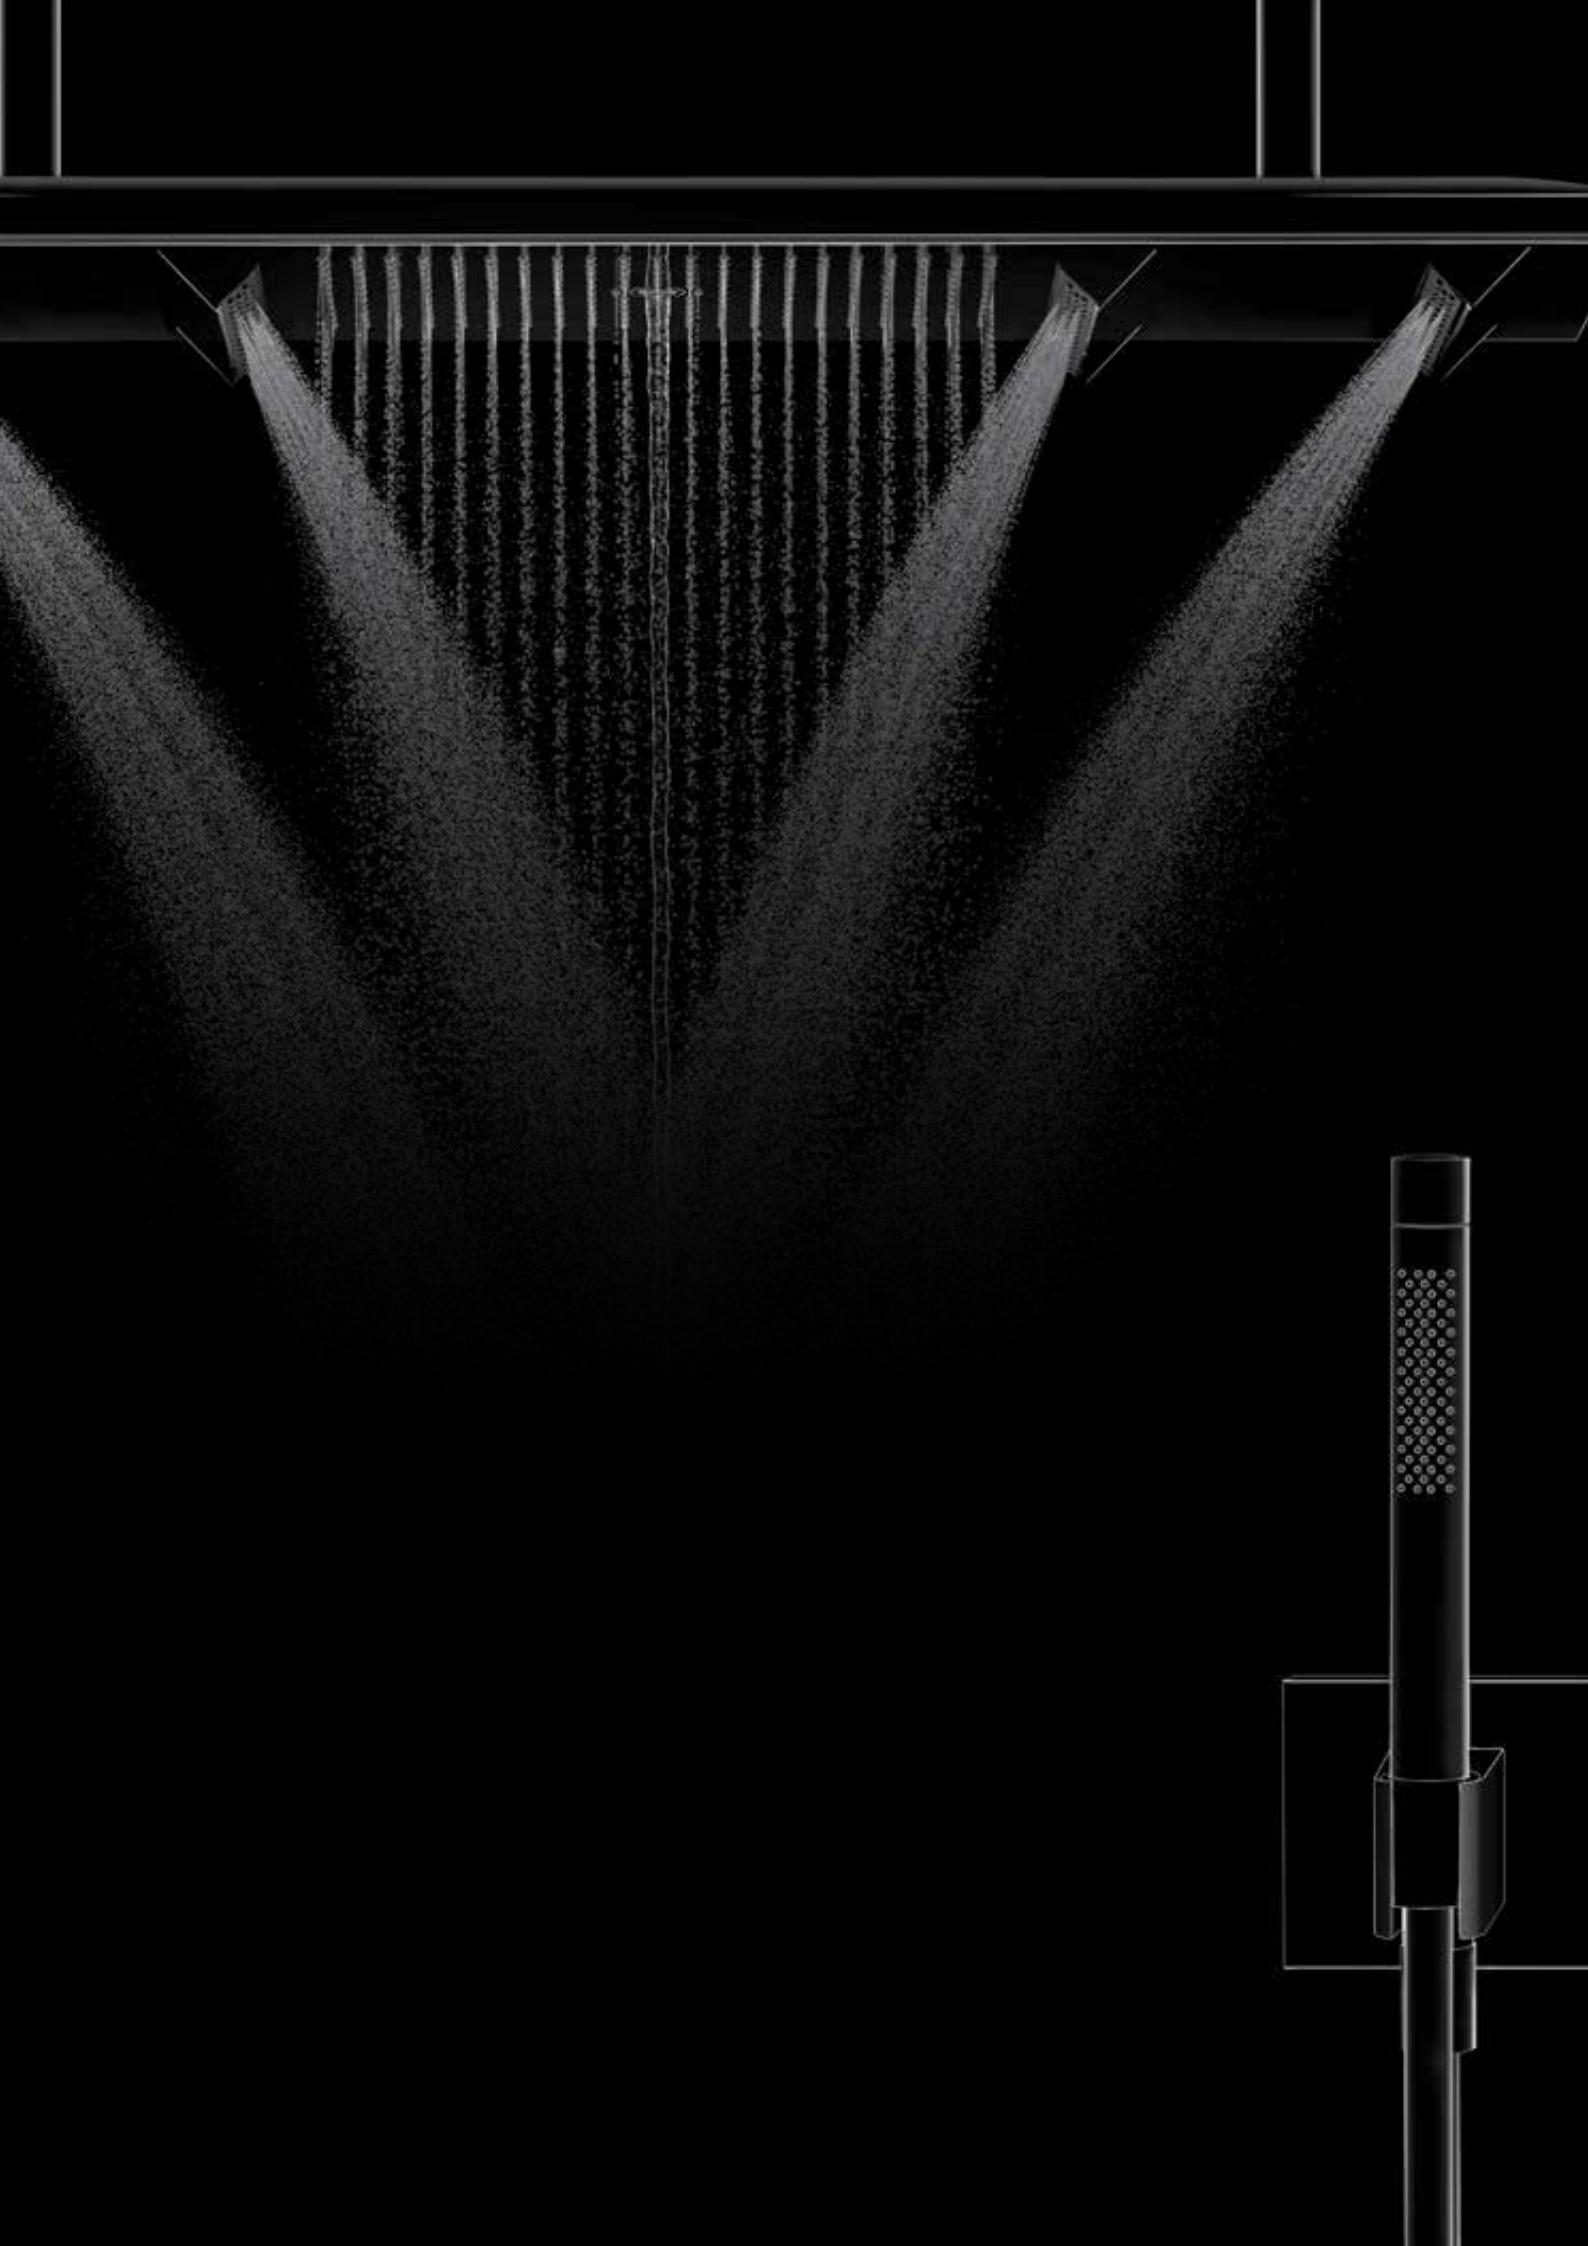

# AXOR Showers / Flow diagrams

Overhead showers	250
Wall plates	282
Body shower / Shower module	283
Hand showers	284
Shower sets	287
Shower holders	292
FixFit wall outlets	293
Porter	294
Shower hoses	296
Shower systems	298
Thermostatic module Select	304
ShowerCollection	307
ShowerCollection Accessories	312
ShowerSelect	313
One	322
Flow diagrams	325

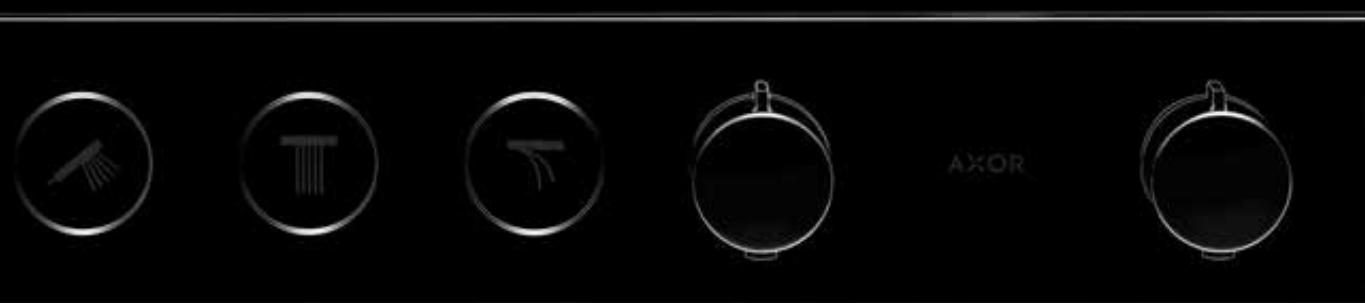

# AXOR ShowerHeaven

## 1200/300 4jet

Luxury taken to a new level. AXOR ShowerHeaven is a new archetype in the shower. With maximum appeal, and scope. Where water takes the stage. And assumes a variety of forms: from revitalising jets to soothing shower rain. Including the gentle PowderRain – the latest AXOR innovation in water design. Precisely distributed drops. Gently enveloping. A cocoon of pure water. An elegant ballet. Borne of precise technology. Adapted optimally to the user. In perfection.


### Mechanical wings:

- / Movable flaps that open under water pressure
- / Body jet adjustable to angle the height and preferences of different users
- / When not in use, the flaps close to form an even surface that is ideal for cleaning



### Body jet with PowderRain:

- / Can be controlled separately
- / Wets the body from both sides
- / Head remains dry
- / With QuickClean function
- / Envelops the body with water – without spraying
- / Flow rate: approx. 15 l/min

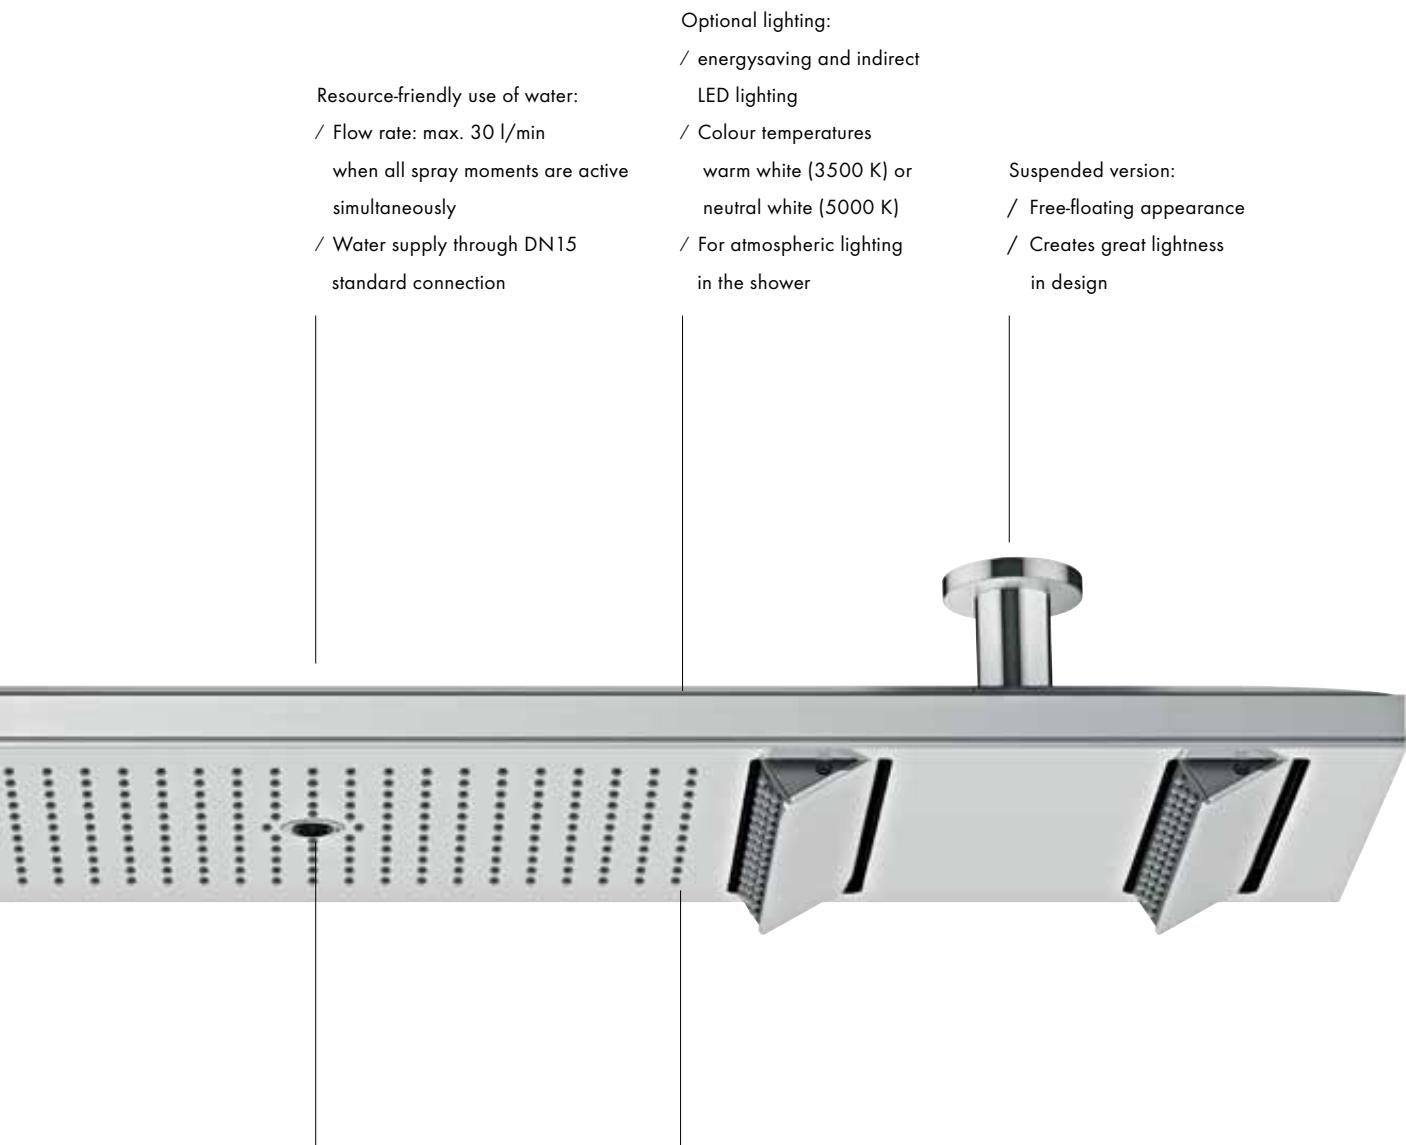

Optional lighting:

/ energysaving and indirect

LED lighting

/ Colour temperatures

warm white (3500 K) or

neutral white (5000 K)

Suspended version:

/ Free-floating appearance

/ Creates great lightness

in design

Resource-friendly use of water:

/ Flow rate: max. 30 l/min

when all spray moments are active simultaneously

/ Water supply through DN15 standard connection

/ For atmospheric lighting


in the shower

Mono-jet:

/ Concentrated laminar jet  
/ Creates a relaxing spa feeling and massages the neck area  
/ Flow rate: 15 l/min

Rain jet:

/ Large shower field, 460 mm in width  
/ Abundant all-body jet  
/ Geometric jet management, perfectly aligned to the user's body  
/ With QuickClean function  
/ Flow rate: 16 l/min

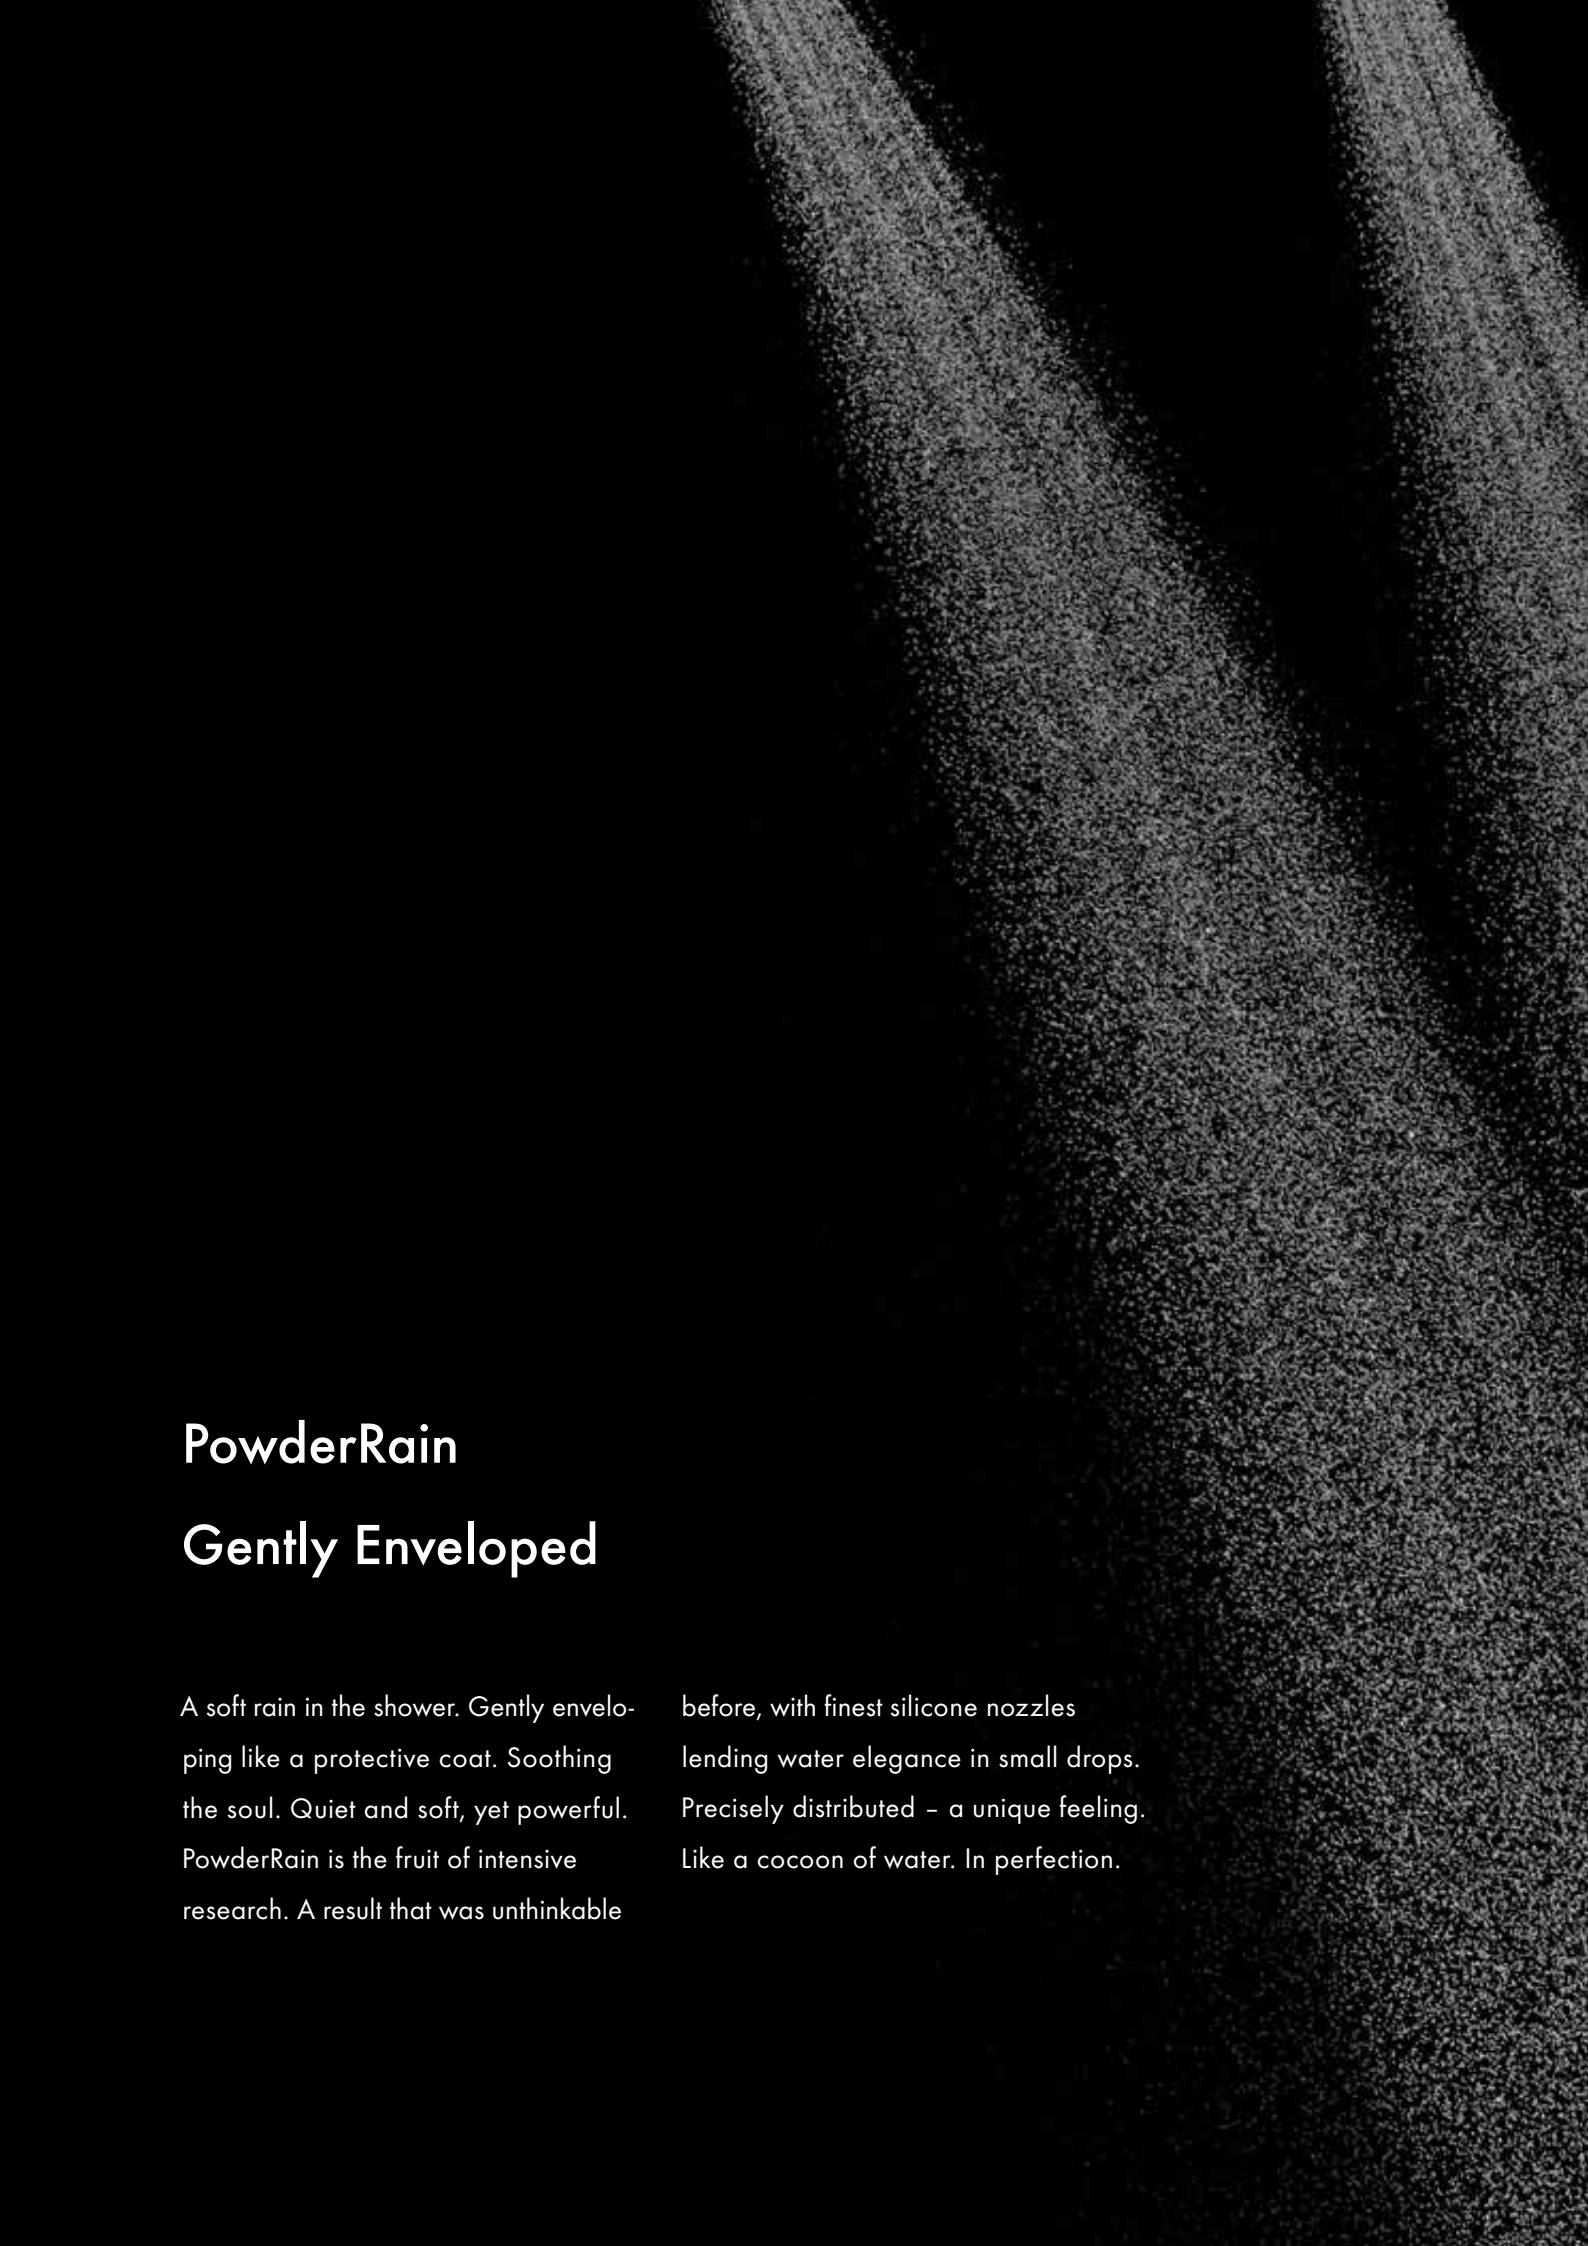


# PowderRain


## Gently Enveloped

A soft rain in the shower. Gently enveloping like a protective coat. Soothing the soul. Quiet and soft, yet powerful. PowderRain is the fruit of intensive research. A result that was unthinkable

before, with finest silicone nozzles lending water elegance in small drops. Precisely distributed – a unique feeling. Like a cocoon of water. In perfection.

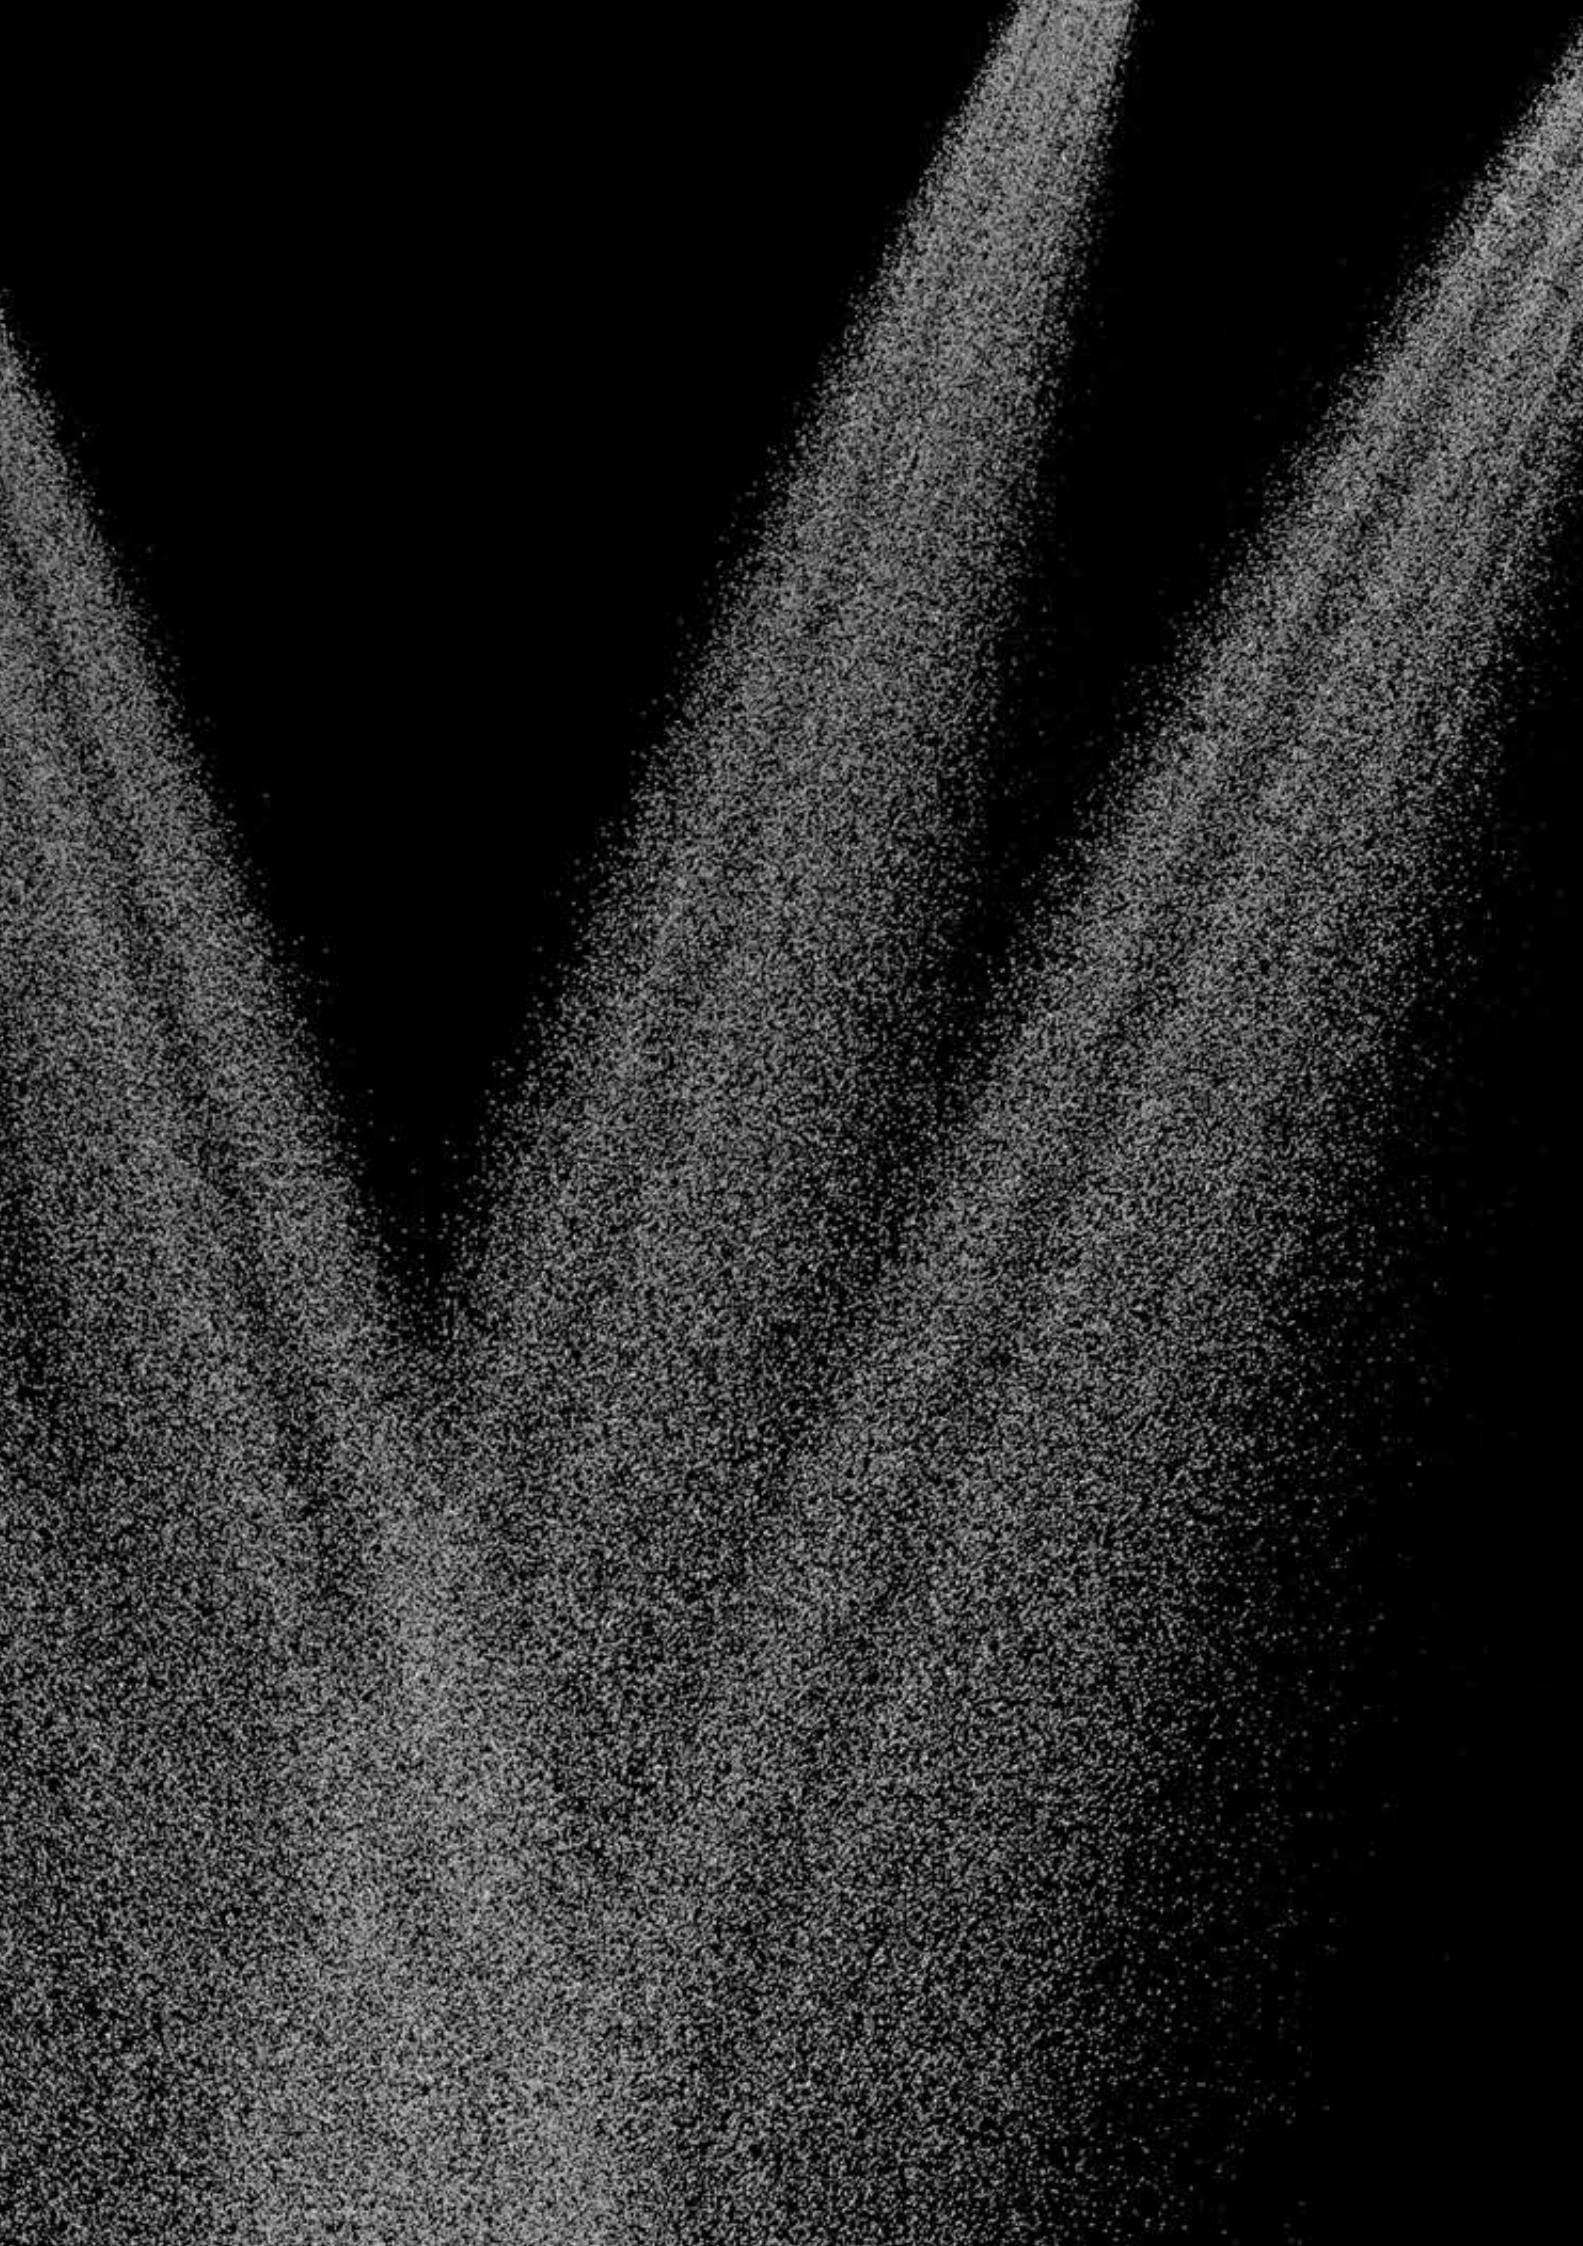

## Overhead showers

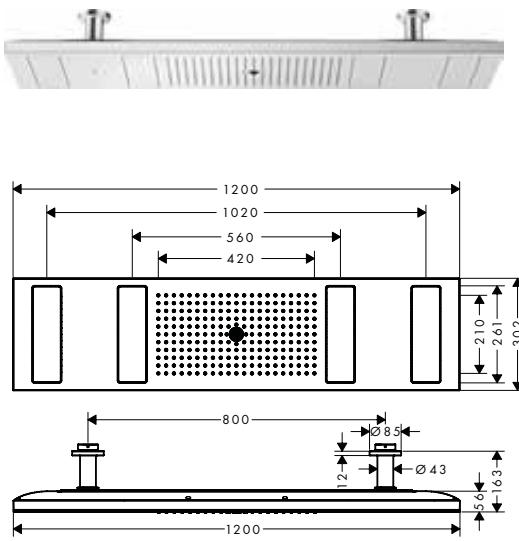**ShowerHeaven 1200/300 4jet  
with lighting 3500 K**

- / shower head size: 1200 x 300 mm
- / spray type: PowderRain, Rain, Mono
- / Select button on thermostat
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 100 mm
- / maximum flow rate at 3 bar: 30 l/min
- / flow rate PowderRain spray outer (at 0,3 MPa): 12 l/min
- / flow rate PowderRain spray inner (at 0,3 MPa): 12 l/min
- / flow rate Rain spray (at 3 bar): 16 l/min
- / flow rate Mono spray (at 3 bar): 15 l/min
- / minimum flow pressure: 3 bar
- / can be activated individually or in combination
- / overhead shower removable for cleaning
- / extendable flaps can be opened manually
- / installation: ceiling, extendable claps can be pre-set to the user size
- / connection dimension: DN15
- / with integrated lighting
- / illuminant: LED
- / power supply: 24 V
- / transformer power supply, 24 V, 60 W, EuP II
- / input voltage: 100 - 240 V AC / 50 / 60 Hz
- / output voltage: 24 V - DC
- / colour temperature: 3500 K
- / Light color: neutral white
- / not suitable for continuous flow water heaters

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

**Alternative products:**

- / ShowerHeaven 1200/300 4jet without lighting Chrome AXOR FinishPlus\* 10637000  
10637XXX

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

- / ShowerHeaven 1200/300 4jet with lighting 5000 K Chrome AXOR FinishPlus\* 10629000  
10629XXX

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

**Required parts:**

- / Basic set for ShowerHeaven 1200/300 4jet 10922180

**Optional parts:**

- / Extension set 230 mm for ceiling connector ShowerHeaven 1200/300 4jet Chrome AXOR FinishPlus\* 13603000  
13603XXX
- / Thermostatic module Select 670/90 for concealed installation for 5 functions Chrome AXOR FinishPlus\* 18358000  
18358XXX

## finish



Chrome  
AXOR FinishPlus\*


## code no.

10628000  
10628XXX



Measurements within scale drawings are in mm.

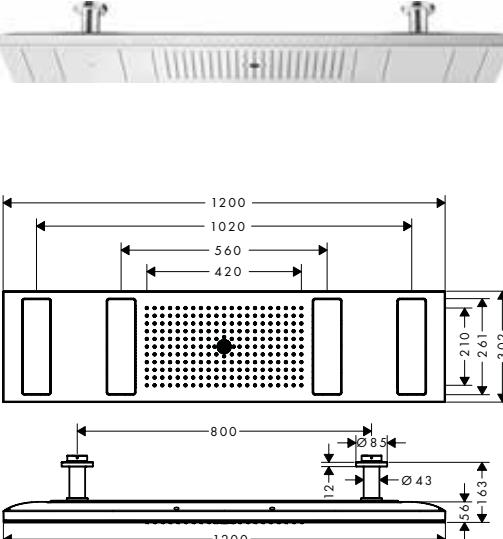	finish	code no.
 <p><b>ShowerHeaven 1200/300 4jet with lighting 5000 K</b></p> <ul style="list-style-type: none"> <li>/ shower head size: 1200 x 300 mm</li> <li>/ spray type: PowderRain, Rain, Mono</li> <li>/ Select button on thermostat</li> <li>/ material spray disc: metal</li> <li>/ brass ceiling connector</li> <li>/ ceiling connection length: 100 mm</li> <li>/ maximum flow rate at 3 bar: 30 l/min</li> <li>/ flow rate PowderRain spray outer (at 0,3 MPa): 12 l/min</li> <li>/ flow rate PowderRain spray inner (at 0,3 MPa): 12 l/min</li> <li>/ flow rate Rain spray (at 3 bar): 16 l/min</li> <li>/ flow rate Mono spray (at 3 bar): 15 l/min</li> <li>/ minimum flow pressure: 3 bar</li> <li>/ can be activated individually or in combination</li> <li>/ overhead shower removable for cleaning</li> <li>/ extendable flaps can be opened manually</li> <li>/ installation: ceiling, extendable claps can be pre-set to the user size</li> <li>/ connection dimension: DN15</li> <li>/ with integrated lighting</li> <li>/ illuminant: LED</li> <li>/ power supply: 24 V</li> <li>/ transformer power supply, 24 V, 60 W, EuP II</li> <li>/ input voltage: 100 - 240 V AC / 50 / 60 Hz</li> <li>/ output voltage: 24 V - DC</li> <li>/ colour temperature: 5000 K</li> <li>/ Light color: neutral white</li> <li>/ not suitable for continuous flow water heaters</li> </ul> <p>This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.</p>	Chrome AXOR FinishPlus*	10629000 10629XXX
<p><b>Alternative products:</b></p> <ul style="list-style-type: none"> <li>/ ShowerHeaven 1200/300 4jet without lighting</li> </ul> <p>This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.</p> <ul style="list-style-type: none"> <li>/ ShowerHeaven 1200/300 4jet with lighting 3500 K</li> </ul> <p>This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.</p> <p><b>Required parts:</b></p> <ul style="list-style-type: none"> <li>/ Basic set for ShowerHeaven 1200/300 4jet</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Thermostatic module Select 670/90 for concealed installation for 5 functions</li> <li>/ Extension set 230 mm for ceiling connector ShowerHeaven 1200/300 4jet</li> </ul>	Chrome AXOR FinishPlus*	10637000 10637XXX
<p><b>Basic set for ShowerHeaven 1200/300 4jet</b></p>  <ul style="list-style-type: none"> <li>/ sound-decoupled installation</li> <li>/ connection dimension: Rp 1/2</li> </ul>		10922180



**Extension set 230 mm  
for ceiling connector  
ShowerHeaven 1200/300 4jet**

- / packaging unit: 2 pieces
- / dimension: 230 mm

**Optional parts:**

- / ShowerHeaven 1200/300 4jet with lighting 3500 K Chrome AXOR FinishPlus\* 10628000 10628XXX

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

- / ShowerHeaven 1200/300 4jet with lighting 5000 K Chrome AXOR FinishPlus\* 10629000 10629XXX

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

- / ShowerHeaven 1200/300 4jet without lighting Chrome AXOR FinishPlus\* 10637000 10637XXX

This product is not available in the AXOR FinishPlus surfaces Polished and Brushed Black Chrome.

- / Overhead shower 300 1jet with ceiling connection Chrome AXOR FinishPlus\* 35301000 35301XXX
- / Overhead shower 300 2jet with ceiling connection Chrome AXOR FinishPlus\* 35304000 35304XXX
- / Overhead shower 300/300 1jet with ceiling connection Chrome AXOR FinishPlus\* 35316000 35316XXX
- / Overhead shower 300/300 2jet with ceiling connection Chrome AXOR FinishPlus\* 35320000 35320XXX
- / Overhead shower 250 1jet with ceiling connection Chrome AXOR FinishPlus\* 35286000 35286XXX
- / Overhead shower 250 2jet with ceiling connection Chrome AXOR FinishPlus\* 35297000 35297XXX
- / Overhead shower 250/250 1jet with ceiling connection Chrome AXOR FinishPlus\* 35308000 35308XXX
- / Overhead shower 250/250 2jet with ceiling connection Chrome AXOR FinishPlus\* 35312000 35312XXX

finish

code no.

Chrome AXOR FinishPlus\* 13603000 13603XXX

Chrome AXOR FinishPlus\* 10628000 10628XXX

Chrome AXOR FinishPlus\* 10629000 10629XXX

Chrome AXOR FinishPlus\* 10637000 10637XXX

Chrome AXOR FinishPlus\* 35301000 35301XXX

Chrome AXOR FinishPlus\* 35304000 35304XXX

Chrome AXOR FinishPlus\* 35316000 35316XXX

Chrome AXOR FinishPlus\* 35320000 35320XXX

Chrome AXOR FinishPlus\* 35286000 35286XXX

Chrome AXOR FinishPlus\* 35297000 35297XXX

Chrome AXOR FinishPlus\* 35308000 35308XXX

Chrome AXOR FinishPlus\* 35312000 35312XXX

Chrome AXOR FinishPlus\* 35312XXX

Measurements within scale drawings are in mm.

finish

code no.

**ShowerHeaven 970/970 3jet**

Stainless Steel Optic 10623800

**with lighting**

- / shower head size: 970 x 970 mm
- / spray type: RainAir, Rain, Mono
- / frame: brushed stainless steel
- / material spray disc: metal
- / spray disc surface: polished stainless steel
- / maximum flow rate at 3 bar: 33,3 l/min
- / flow rate Rain spray (at 3 bar): 33,3 l/min
- / flow rate RainAir spray (at 3 bar): 20,6 l/min
- / flow rate Mono spray (at 3 bar): 15,6 l/min
- / minimum flow pressure: 2,5 bar
- / can be activated individually or in combination, the 3 spray zones must be controlled via 3 valves or a diverter valve with 3 outlets
- / spray zones: Bodyzone - outer overhead shower zone, Rainzone - inner overhead shower zone with AirPower function, Mono spray at Ø 17 mm
- / installation: ceiling
- / connection dimension: DN20
- / with integrated lighting
- / illuminant: LED
- / power supply: 12 V
- / transformer power supply for concealed installation 12 V, 18 W
- / input voltage: 100 - 240 V AC / 50 / 60 Hz
- / output voltage: 12 V - DC
- / colour temperature: 2700 K
- / Light color: warm white
- / not suitable for continuous flow water heaters
- / TÜV certified

**Alternative products:**



- / ShowerHeaven 970/970 3jet without lighting



Stainless Steel Optic 10621800

**Optional parts:**

- / Thermostatic module 360/120 for concealed installation square for 3 functions

Chrome	AXOR FinishPlus*	10751000
		10751XXX

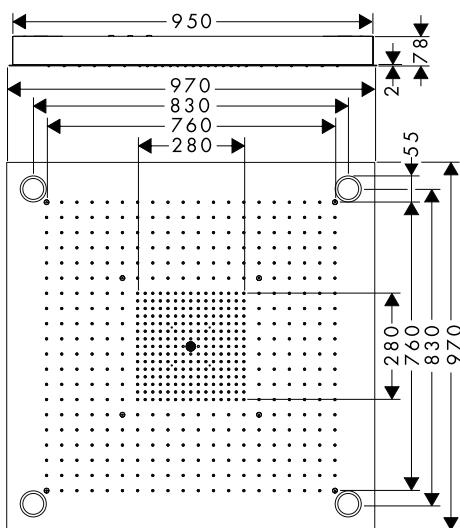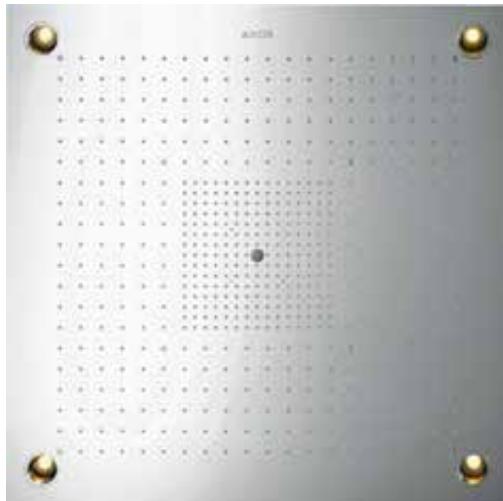

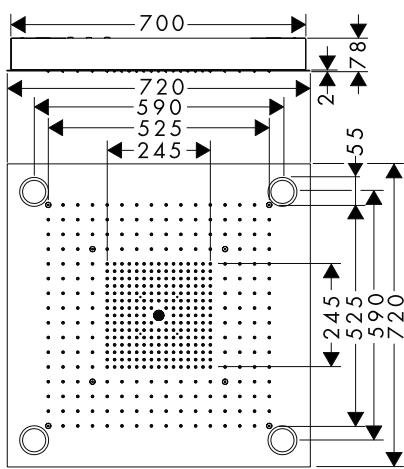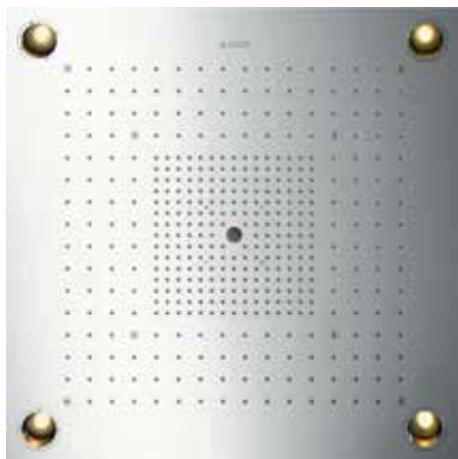

## ShowerHeaven 720/720 3jet with lighting

- / shower head size: 720 x 720 mm
- / spray type: RainAir, Rain, Mono
- / frame: brushed stainless steel
- / material spray disc: metal
- / spray disc surface: polished stainless steel
- / maximum flow rate at 3 bar: 36,8 l/min
- / flow rate RainAir spray (at 3 bar): 20,5 l/min
- / flow rate normal spray (at 3 bar): 36,8 l/min
- / flow rate laminar spray: 15,9 l/min
- / minimum flow pressure: 2,5 bar
- / can be activated individually or in combination, the 3 spray zones must be controlled via 3 valves or a diverter valve with 3 outlets
- / spray zones: Bodyzone - outer overhead shower zone, Rainzone - inner overhead shower zone with AirPower function, Mono spray at Ø 17 mm
- / installation: ceiling
- / connection dimension: DN20
- / with integrated lighting
- / illuminant: LED
- / power supply: 12 V
- / transformer power supply for concealed installation 12 V, 18 W
- / input voltage: 100 - 240 V AC / 50 / 60 Hz
- / output voltage: 12 V - DC
- / colour temperature: 2700 K
- / Light color: warm white
- / not suitable for continuous flow water heaters
- / TÜV certified

Stainless Steel Optic 10627800




### Alternative products:

- / ShowerHeaven 720/720 3jet without lighting

Stainless Steel Optic 10625800

### Optional parts:


- / Thermostatic module 360/120 for concealed installation square for 3 functions

Chrome 10751000  
AXOR FinishPlus\* 10751XXX

## Overhead shower 75 1jet EcoSmart with shower arm

- / consists of: overhead shower, shower arm
- / shower head size: 73 mm
- / spray type: PowderRain
- / projection 116 mm
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / shower arm length 85 mm
- / maximum flow rate at 3 bar: 8,7 l/min
- / flow rate PowderRain spray (at 3 bar): 8,7 l/min
- / minimum function point for proper function: 6,3 l/min
- / minimum flow pressure: 1 bar
- / overhead shower removable for cleaning
- / installation: wall
- / connection thread G 1/2
- / connection dimension: DN15

Chrome 48490000  
Matt Black 48490670  
AXOR FinishPlus\* 48490XXX

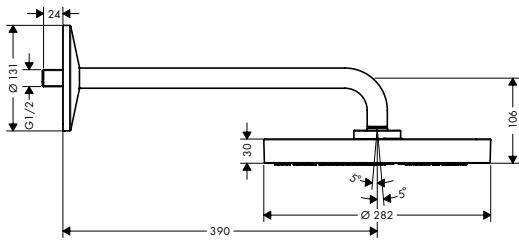**NEW**

### Overhead shower 280 1jet with shower arm

finish

code no.


Chrome 48491000  
Matt Black 48491670  
AXOR FinishPlus\* 48491XXX



- / consists of: overhead shower, shower arm
- / shower head size: 280 mm
- / spray type: PowderRain and Rain in combination
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / shower arm length 390 mm
- / maximum flow rate at 3 bar: 12,3 l/min
- / flow rate PowderRain and Rain spray in combination (at 3 bar): 12,3 l/min
- / minimum function point for proper function: 8,7 l/min
- / minimum flow pressure: 1,2 bar
- / overhead shower removable for cleaning
- / installation: wall
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters with an output of 18 kW

#### Alternative products:

<b>NEW</b>	Overhead shower 280 2jet with shower arm	Chrome Matt Black AXOR FinishPlus*	48492000 48492670 48492XXX
------------	--	--	----------------------------------

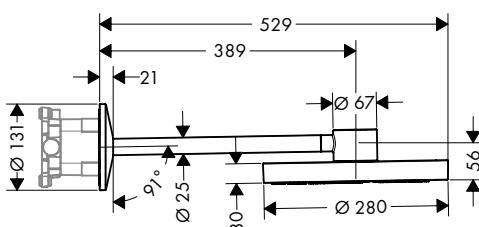**NEW**

### Overhead shower 280 2jet with shower arm

Chrome  
Matt Black  
AXOR FinishPlus\*

48492000  
48492670  
48492XXX



- / consists of: overhead shower, shower arm
- / shower head size: 280 mm
- / spray type: PowderRain, Rain
- / material spray disc: metal
- / shower arm length 389 mm
- / maximum flow rate at 3 bar: 12 l/min
- / flow rate PowderRain spray (at 3 bar): 7,2 l/min
- / flow rate Rain spray (at 3 bar): 12 l/min
- / minimum function point for proper function: 6,7 l/min
- / minimum flow pressure: 1,5 bar
- / connection of overhead shower: bayonet fixation
- / overhead shower removable for cleaning
- / installation: wall
- / connection dimension: DN15
- / connection type: basic set
- / suitable for continuous flow water heaters with an output of 18 kW
- / not included: basic set


#### Alternative products:

<b>NEW</b>	Overhead shower 280 1jet with shower arm	Chrome Matt Black AXOR FinishPlus*	48491000 48491670 48491XXX
------------	--	--	----------------------------------

#### Required parts:

- / Basic set for overhead shower 2jet with shower arm

35361180

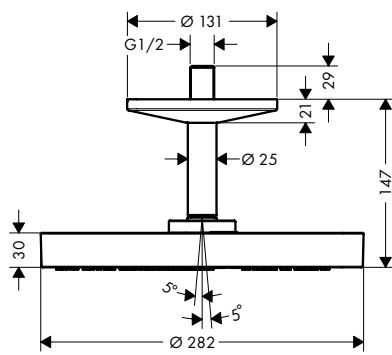

## Overhead shower 280 1jet with ceiling connection

- / consists of: overhead shower, ceiling connector
- / shower head size: 280 mm
- / spray type: PowderRain and Rain in combination
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 120 mm
- / maximum flow rate at 3 bar: 12,2 l/min
- / flow rate PowderRain and Rain spray in combination (at 3 bar): 12,2 l/min
- / minimum function point for proper function: 9,2 l/min
- / minimum flow pressure: 1,4 bar
- / overhead shower removable for cleaning
- / installation: ceiling
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters with an output of 18 kW

finish

code no.

Chrome 48493000  
 Matt Black 48493670  
 AXOR FinishPlus\* 48493XXX



NEW

### Alternative products:

- / Overhead shower 280 2jet with ceiling connection


Chrome 48494000  
 Matt Black 48494670  
 AXOR FinishPlus\* 48494XXX

NEW

### Optional parts:

- / Ceiling connector 300 mm for overhead shower 280 1jet

Chrome 48495000  
 Matt Black 48495670  
 AXOR FinishPlus\* 48495XXX



## Overhead shower 280 2jet with ceiling connection

finish	code no.
Chrome	48494000
Matt Black	48494670
AXOR FinishPlus*	48494XXX



- / consists of: overhead shower, ceiling connector
- / shower head size: 280 mm
- / spray type: PowderRain, Rain
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 211 mm
- / maximum flow rate at 3 bar: 12,5 l/min
- / flow rate PowderRain spray (at 3 bar): 7,5 l/min
- / flow rate Rain spray (at 3 bar): 12,5 l/min
- / minimum function point for proper function: 1,5 l/min
- / minimum flow pressure: 1,5 bar
- / connection of overhead shower: bayonet fixation
- / overhead shower removable for cleaning
- / installation: ceiling
- / connection dimension: DN15
- / connection type: basic set
- / suitable for continuous flow water heaters with an output of 18 kW
- / not included: basic set


### Alternative products:

NEW	/ Overhead shower 280 1jet with ceiling connection	Chrome Matt Black AXOR FinishPlus*	48493000 48493670 48493XXX
-----	--	--	----------------------------------

### Required parts:

/ Basic set for overhead shower with ceiling connector	26434180
--	----------

NEW	/ Ceiling connector 300 mm for overhead shower 280 2jet	Chrome Matt Black AXOR FinishPlus*	48496000 48496670 48496XXX
-----	---	--	----------------------------------

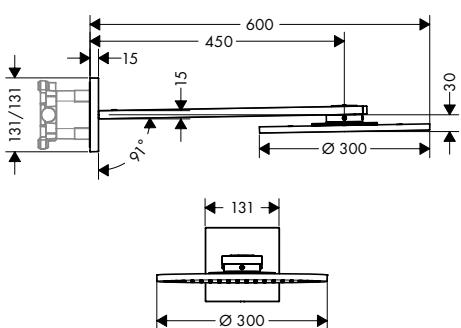

## Overhead shower 300 2jet with shower arm

Chrome AXOR FinishPlus*	35303000 35303XXX
----------------------------	----------------------




- / consists of: overhead shower, shower arm
- / shower head size: 300 mm
- / spray type: PowderRain, Intense PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / shower arm length 450 mm
- / maximum flow rate at 3 bar: 19 l/min
- / flow rate PowderRain spray (at 3 bar): 19 l/min
- / flow rate Intense PowderRain (at 3 bar): 16 l/min
- / minimum flow pressure: 2 bar
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning purpose
- / installation: wall
- / connection thread G 1/2
- / connection dimension: DN15

### Alternative products:

/ Overhead shower 300 1jet with shower arm	Chrome AXOR FinishPlus*	35300000 35300XXX
--	----------------------------	----------------------

### Required parts:

/ Basic set for overhead shower 2jet with shower arm	35361180
--	----------



### Overhead shower 300 2jet with ceiling connection

- / consists of: overhead shower, ceiling connector
- / shower head size: 300 mm
- / spray type: PowderRain, Intense PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 100 mm
- / maximum flow rate at 3 bar: 18 l/min
- / flow rate PowderRain spray (at 3 bar): 18 l/min
- / flow rate Intense PowderRain (at 3 bar): 17 l/min
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning purpose
- / installation: ceiling
- / connection dimension: DN15

finish


Chrome  
AXOR FinishPlus\*

code no.

35304000  
35304XXX

### Overhead shower 300 2jet ceiling

- / shower head size: 300 mm
- / spray type: PowderRain, Intense PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / maximum flow rate at 3 bar: 17 l/min
- / flow rate PowderRain spray (at 3 bar): 17 l/min
- / flow rate Intense PowderRain (at 3 bar): 15 l/min
- / minimum flow pressure: 1,5 bar
- / overhead shower removable for cleaning
- / installation: flush with the ceiling
- / connection dimension: DN15

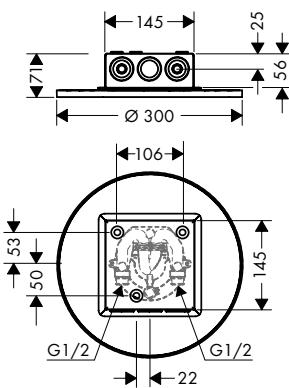Chrome  
AXOR FinishPlus\*35305000  
35305XXX

#### Alternative products:

- / Overhead shower 300 1jet ceiling



Chrome  
AXOR FinishPlus\*35302000  
35302XXX


#### Required parts:

- / Basic set for overhead shower ceiling

35363180

Measurements within scale drawings are in mm.

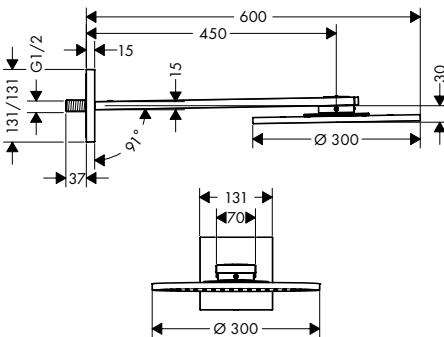	finish	code no.
	<b>Overhead shower 300 1jet with shower arm</b>	Chrome AXOR FinishPlus* 35300000 35300XXX
	/ consists of: overhead shower, shower arm / shower head size: 300 mm / spray type: PowderRain / dynamic spray nozzles move out while using / material spray disc: metal / shower arm length 450 mm / maximum flow rate at 3 bar: 17,6 l/min / flow rate PowderRain spray (at 3 bar): 17,6 l/min / minimum function point for proper function: 14,3 l/min / minimum flow pressure: 1,9 bar / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning purpose / installation: wall / connection thread G 1/2 / connection dimension: DN15	
	<b>Alternative products:</b>	
	/ Overhead shower 300 2jet with shower arm	Chrome AXOR FinishPlus* 35303000 35303XXX
	<b>Overhead shower 300 1jet with ceiling connection</b>	Chrome AXOR FinishPlus* 35301000 35301XXX
	/ consists of: overhead shower, ceiling connector / shower head size: 300 mm / spray type: PowderRain / dynamic spray nozzles move out while using / material spray disc: metal / brass ceiling connector / ceiling connection length: 100 mm / maximum flow rate at 3 bar: 19 l/min / flow rate PowderRain spray (at 3 bar): 19 l/min / minimum flow pressure: 1,8 bar / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning purpose / installation: ceiling / connection dimension: DN15	
	<b>Alternative products:</b>	
	/ Overhead shower 300 2jet with ceiling connection	Chrome AXOR FinishPlus* 35304000 35304XXX
	<b>Required parts:</b>	
	/ Basic set for overhead shower with ceiling connector	26434180
	<b>Optional parts:</b>	
	/ Extension 230 mm for ceiling connector overhead shower	Chrome AXOR FinishPlus* 35288000 35288XXX

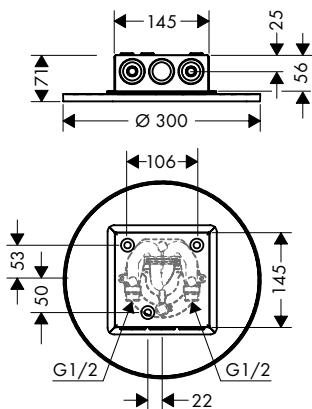

### Overhead shower 300 1jet ceiling

- / shower head size: 300 mm
- / spray type: PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / maximum flow rate at 3 bar: 18,1 l/min
- / flow rate PowderRain spray (at 3 bar): 18,1 l/min
- / minimum function point for proper function: 15,4 l/min
- / minimum flow pressure: 1,8 bar
- / overhead shower removable for cleaning
- / installation: flush with the ceiling
- / connection thread G 1/2
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*


code no.

35302000  
35302XXXAlternative products:  
/ Overhead shower 300 2jet ceilingChrome  
AXOR FinishPlus\*35305000  
35305XXX

## Required parts:

- / Basic set for overhead shower ceiling

35363180

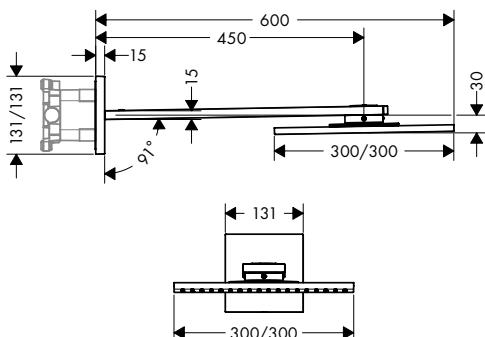

### Overhead shower 300/300 2jet with shower arm

- / consists of: overhead shower, shower arm
- / shower head size: 300 x 300 mm
- / spray type: PowderRain, Intense PowderRain
- / Select button on thermostat
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / shower arm length 450 mm
- / maximum flow rate at 3 bar: 19 l/min
- / flow rate PowderRain spray (at 3 bar): 19 l/min
- / flow rate Intense PowderRain (at 3 bar): 16 l/min
- / minimum flow pressure: 2 bar
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning purpose
- / installation: wall
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\*35318000  
35318XXX

## Alternative products:

- / Overhead shower 300/300 1jet with shower arm



Chrome  
AXOR FinishPlus\*35314000  
35314XXX


## Required parts:

- / Basic set for overhead shower 2jet with shower arm

35361180

Measurements within scale drawings are in mm.

	finish	code no.
 	<b>Overhead shower 300/300 2jet with ceiling connection</b> Chrome AXOR FinishPlus* 	35320000 35320XXX
<ul style="list-style-type: none"> <li>/ consists of: overhead shower, ceiling connector</li> <li>/ shower head size: 300 x 300 mm</li> <li>/ spray type: PowderRain, Intense PowderRain</li> <li>/ Select button on thermostat</li> <li>/ dynamic spray nozzles move out while using</li> <li>/ material spray disc: metal</li> <li>/ brass ceiling connector</li> <li>/ ceiling connection length: 100 mm</li> <li>/ maximum flow rate at 3 bar: 18 l/min</li> <li>/ flow rate PowderRain spray (at 3 bar): 18 l/min</li> <li>/ flow rate Intense PowderRain (at 3 bar): 17 l/min</li> <li>/ minimum flow pressure: 1,7 bar</li> <li>/ overhead shower removable for cleaning</li> <li>/ ServiceCard with sieve can be removed without tools for cleaning purpose</li> <li>/ installation: ceiling</li> <li>/ connection dimension: DN15</li> </ul>		
<b>Alternative products:</b> / Overhead shower 300/300 1jet with ceiling connection	Chrome AXOR FinishPlus*	35316000 35316XXX
<b>Required parts:</b> / Basic set for overhead shower with ceiling connector		26434180
<b>Optional parts:</b> / Extension 230 mm for ceiling connector overhead shower	Chrome AXOR FinishPlus*	35288000 35288XXX
 	<b>Overhead shower 300/300 2jet ceiling</b> Chrome AXOR FinishPlus* 	35321000 35321XXX
<ul style="list-style-type: none"> <li>/ shower head size: 300 x 300 mm</li> <li>/ spray type: PowderRain, Intense PowderRain</li> <li>/ Select button on thermostat</li> <li>/ dynamic spray nozzles move out while using</li> <li>/ material spray disc: metal</li> <li>/ maximum flow rate at 3 bar: 17 l/min</li> <li>/ flow rate PowderRain spray (at 3 bar): 17 l/min</li> <li>/ flow rate Intense PowderRain (at 3 bar): 15 l/min</li> <li>/ minimum flow pressure: 1,5 bar</li> <li>/ overhead shower removable for cleaning</li> <li>/ installation: flush with the ceiling</li> <li>/ connection dimension: DN15</li> </ul>		
<b>Alternative products:</b> / Overhead shower 300/300 1jet ceiling	Chrome AXOR FinishPlus*	35317000 35317XXX
<b>Required parts:</b> / Basic set for overhead shower ceiling		35363180

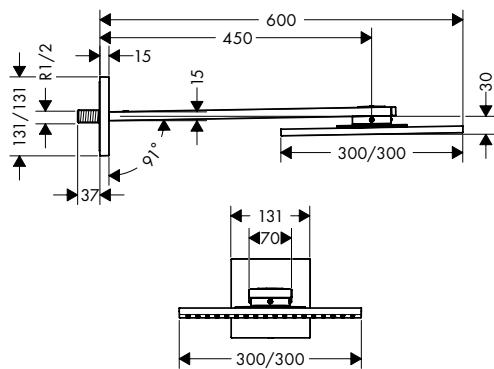


### Overhead shower 300/300 1jet with shower arm

- / consists of: overhead shower, shower arm
- / shower head size: 300 x 300 mm
- / spray type: PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / shower arm length 450 mm
- / maximum flow rate at 3 bar: 18,2 l/min
- / flow rate PowderRain spray (at 3 bar): 18,2 l/min
- / minimum function point for proper function: 13,5 l/min
- / minimum flow pressure: 2 bar
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning porpose
- / installation: wall
- / connection thread G 1/2
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*

code no.

35314000  
35314XXX

### Overhead shower 300/300 1jet with ceiling connection

- / consists of: overhead shower, ceiling connector
- / shower head size: 300 x 300 mm
- / spray type: PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 100 mm
- / maximum flow rate at 3 bar: 19 l/min
- / flow rate PowderRain spray (at 3 bar): 19 l/min
- / minimum flow pressure: 1,8 bar
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning porpose
- / installation: ceiling
- / connection thread G 1/2
- / connection dimension: DN15
- / not included: basic set

Chrome  
AXOR FinishPlus\*35316000  
35316XXX

#### Alternative products:

- / Overhead shower 300/300 2jet with ceiling connection

Chrome  
AXOR FinishPlus\*35320000  
35320XXX

#### Required parts:

- / Basic set for overhead shower with ceiling connector



26434180


#### Optional parts:

- / Extension 230 mm for ceiling connector overhead shower

Chrome  
AXOR FinishPlus\*35288000  
35288XXX

Measurements within scale drawings are in mm.

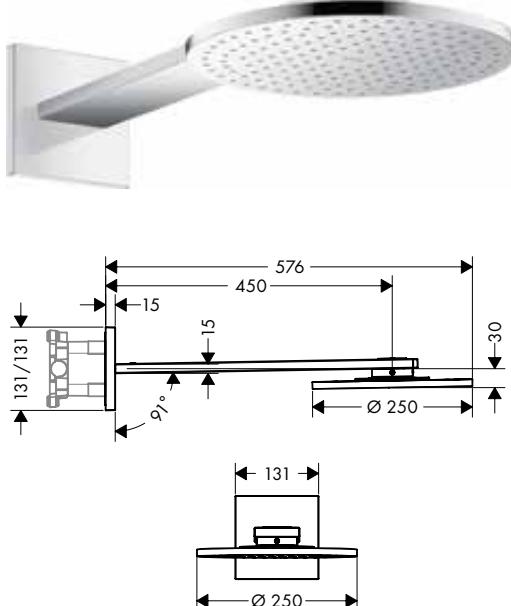	finish	code no.
  <p><b>Overhead shower 300/300 1jet ceiling</b></p> <ul style="list-style-type: none"> <li>/ shower head size: 300 x 300 mm</li> <li>/ spray type: PowderRain</li> <li>/ dynamic spray nozzles move out while using</li> <li>/ material spray disc: metal</li> <li>/ maximum flow rate at 3 bar: 18,1 l/min</li> <li>/ flow rate PowderRain spray (at 3 bar): 18,1 l/min</li> <li>/ minimum function point for proper function: 15,4 l/min</li> <li>/ minimum flow pressure: 1,8 bar</li> <li>/ overhead shower removable for cleaning</li> <li>/ installation: flush with the ceiling</li> <li>/ connection thread G 1/2</li> <li>/ connection dimension: DN15</li> </ul>	Chrome AXOR FinishPlus*	35317000 35317XXX
<b>Alternative products:</b>		
/ Overhead shower 300/300 2jet ceiling	Chrome AXOR FinishPlus*	35321000 35321XXX
<b>Required parts:</b>		
/ Basic set for overhead shower ceiling		35363180
<hr/>		
  <p><b>Overhead shower 250 2jet with shower arm</b></p> <ul style="list-style-type: none"> <li>/ consists of: overhead shower, shower arm</li> <li>/ shower head size: 250 mm</li> <li>/ spray type: PowderRain, Intense PowderRain</li> <li>/ Select button on thermostat</li> <li>/ dynamic spray nozzles move out while using</li> <li>/ material spray disc: metal</li> <li>/ shower arm length 450 mm</li> <li>/ maximum flow rate at 3 bar: 19 l/min</li> <li>/ flow rate PowderRain spray (at 3 bar): 19 l/min</li> <li>/ flow rate Intense PowderRain (at 3 bar): 15 l/min</li> <li>/ minimum flow pressure: 2 bar</li> <li>/ overhead shower removable for cleaning</li> <li>/ ServiceCard with sieve can be removed without tools for cleaning purpose</li> <li>/ installation: wall</li> <li>/ connection dimension: DN15</li> </ul>	Chrome AXOR FinishPlus*	35296000 35296XXX
<b>Alternative products:</b>		
/ Overhead shower 250 1jet with shower arm	Chrome AXOR FinishPlus*	35284000 35284XXX
<b>Required parts:</b>		
/ Basic set for overhead shower 2jet with shower arm		35361180



### Overhead shower 250 2jet with ceiling connection

- / consists of: overhead shower, ceiling connector
- / shower head size: 250 mm
- / spray type: PowderRain, Intense PowderRain
- / Select button on thermostat
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 100 mm
- / maximum flow rate at 3 bar: 18 l/min
- / flow rate PowderRain spray (at 3 bar): 18 l/min
- / flow rate Intense PowderRain (at 3 bar): 16 l/min
- / minimum flow pressure: 1,7 bar
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning purpose
- / installation: ceiling
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*

code no.

35297000  
35297XXX

#### Alternative products:

- / Overhead shower 250 1jet with ceiling connection

Chrome  
AXOR FinishPlus\*35286000  
35286XXX

#### Required parts:

- / Basic set for overhead shower with ceiling connector

26434180

#### Optional parts:

- / Extension 230 mm for ceiling connector overhead shower

Chrome  
AXOR FinishPlus\*35288000  
35288XXX

### Overhead shower 250 2jet ceiling

Chrome  
AXOR FinishPlus\*35298000  
35298XXX

- / shower head size: 250 mm
- / spray type: PowderRain, Intense PowderRain
- / Select button on thermostat
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / maximum flow rate at 3 bar: 21 l/min
- / flow rate PowderRain spray (at 3 bar): 21 l/min
- / flow rate Intense PowderRain (at 3 bar): 15 l/min
- / minimum flow pressure: 1,5 bar
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning purpose
- / installation: flush with the ceiling
- / connection dimension: DN15

#### Alternative products:


- / Overhead shower 250 1jet ceiling

Chrome  
AXOR FinishPlus\*35287000  
35287XXX



#### Required parts:


- / Basic set for overhead shower ceiling

35363180



Measurements within scale drawings are in mm.

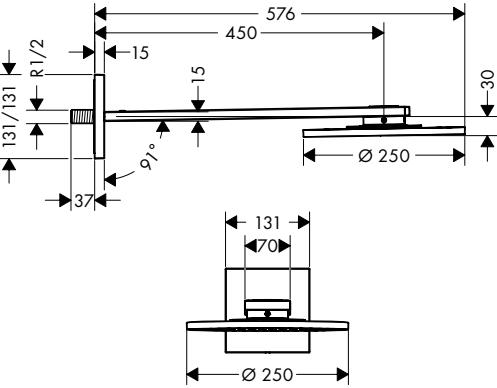	finish	code no.
	Chrome AXOR FinishPlus*	35284000 35284XXX
	/ consists of: overhead shower, shower arm / shower head size: 250 mm / spray type: PowderRain / dynamic spray nozzles move out while using / material spray disc: metal / shower arm length 450 mm / maximum flow rate at 3 bar: 18,1 l/min / flow rate PowderRain spray (at 3 bar): 18,1 l/min / minimum function point for proper function: 12,5 l/min / minimum flow pressure: 1,5 bar / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning purpose / installation: wall / connection thread G 1/2 / connection dimension: DN15	
<b>Alternative products:</b>		
/ Overhead shower 250 2jet with shower arm	Chrome AXOR FinishPlus*	35296000 35296XXX
	Chrome AXOR FinishPlus*	35286000 35286XXX
	/ consists of: overhead shower, ceiling connector / shower head size: 250 mm / spray type: PowderRain / dynamic spray nozzles move out while using / material spray disc: metal / brass ceiling connector / ceiling connection length: 100 mm / maximum flow rate at 3 bar: 19 l/min / flow rate PowderRain spray (at 3 bar): 19 l/min / minimum flow pressure: 1,8 bar / overhead shower removable for cleaning / ServiceCard with sieve can be removed without tools for cleaning purpose / installation: ceiling / connection dimension: DN15	
<b>Alternative products:</b>		
/ Overhead shower 250 2jet with ceiling connection	Chrome AXOR FinishPlus*	35297000 35297XXX
<b>Required parts:</b>		
/ Basic set for overhead shower with ceiling connector		26434180
<b>Optional parts:</b>		
/ Extension 230 mm for ceiling connector overhead shower	Chrome AXOR FinishPlus*	35288000 35288XXX

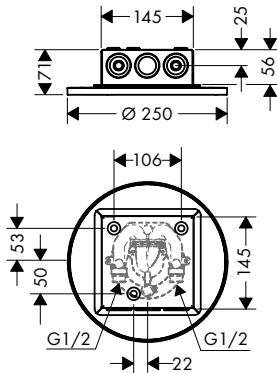

### Overhead shower 250 1jet ceiling

- / shower head size: 250 mm
- / spray type: PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / maximum flow rate at 3 bar: 17,7 l/min
- / flow rate PowderRain spray (at 3 bar): 17,7 l/min
- / minimum function point for proper function: 12,5 l/min
- / minimum flow pressure: 1,5 bar
- / overhead shower removable for cleaning
- / installation: flush with the ceiling
- / connection thread G 1/2
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*


code no.

35287000  
35287XXXAlternative products:  
/ Overhead shower 250 2jet ceiling Chrome  
AXOR FinishPlus\* 35298000  
35298XXX

## Required parts:

- / Basic set for overhead shower ceiling

35363180

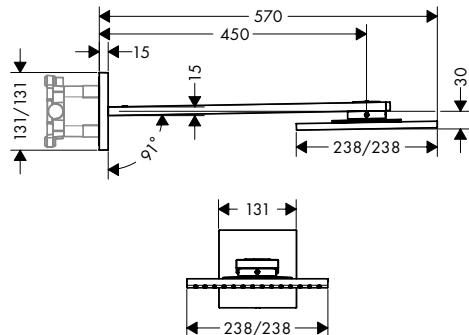

### Overhead shower 250/250 2jet with shower arm

- / consists of: overhead shower, shower arm
- / shower head size: 250 x 250 mm
- / spray type: PowderRain, Intense PowderRain
- / Select button on thermostat
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / shower arm length 450 mm
- / maximum flow rate at 3 bar: 19 l/min
- / flow rate PowderRain spray (at 3 bar): 19 l/min
- / flow rate Intense PowderRain (at 3 bar): 15 l/min
- / minimum flow pressure: 2 bar
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning purpose
- / installation: wall
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\* 35310000  
35310XXX

## Alternative products:




- / Overhead shower 250/250 1jet with shower arm


Chrome  
AXOR FinishPlus\* 35306000  
35306XXX

## Required parts:

- / Basic set for overhead shower 2jet with shower arm

35361180

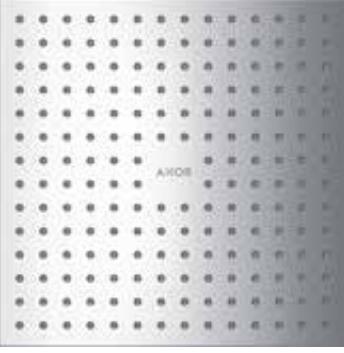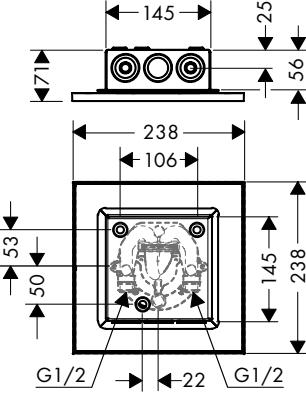	finish	code no.
 	<b>Overhead shower 250/250 2jet with ceiling connection</b> Chrome AXOR FinishPlus* 	35312000 35312XXX
<ul style="list-style-type: none"> <li>/ consists of: overhead shower, ceiling connector</li> <li>/ shower head size: 250 x 250 mm</li> <li>/ spray type: PowderRain, Intense PowderRain</li> <li>/ Select button on thermostat</li> <li>/ dynamic spray nozzles move out while using</li> <li>/ material spray disc: metal</li> <li>/ brass ceiling connector</li> <li>/ ceiling connection length: 100 mm</li> <li>/ maximum flow rate at 3 bar: 18 l/min</li> <li>/ flow rate PowderRain spray (at 3 bar): 18 l/min</li> <li>/ flow rate Intense PowderRain (at 3 bar): 16 l/min</li> <li>/ minimum flow pressure: 2 bar</li> <li>/ overhead shower removable for cleaning</li> <li>/ ServiceCard with sieve can be removed without tools for cleaning purpose</li> <li>/ installation: ceiling</li> <li>/ connection dimension: DN15</li> <li>/ connection type: basic set</li> </ul>		
<b>Alternative products:</b> / Overhead shower 250/250 1jet with ceiling connection	Chrome AXOR FinishPlus*	35308000 35308XXX
<b>Required parts:</b> / Basic set for overhead shower with ceiling connector		26434180
<b>Optional parts:</b> / Extension 230 mm for ceiling connector overhead shower	Chrome AXOR FinishPlus*	35288000 35288XXX
 	<b>Overhead shower 250/250 2jet ceiling</b> Chrome AXOR FinishPlus* 	35313000 35313XXX
<ul style="list-style-type: none"> <li>/ shower head size: 250 x 250 mm</li> <li>/ spray type: PowderRain, Intense PowderRain</li> <li>/ Select button on thermostat</li> <li>/ dynamic spray nozzles move out while using</li> <li>/ material spray disc: metal</li> <li>/ maximum flow rate at 3 bar: 17 l/min</li> <li>/ flow rate PowderRain spray (at 3 bar): 17 l/min</li> <li>/ flow rate Intense PowderRain (at 3 bar): 15 l/min</li> <li>/ minimum flow pressure: 1,5 bar</li> <li>/ overhead shower removable for cleaning</li> <li>/ installation: flush with the ceiling</li> <li>/ connection dimension: DN15</li> </ul>		
<b>Alternative products:</b> / Overhead shower 250/250 1jet ceiling	Chrome AXOR FinishPlus*	35309000 35309XXX
<b>Required parts:</b> / Basic set for overhead shower ceiling		35363180

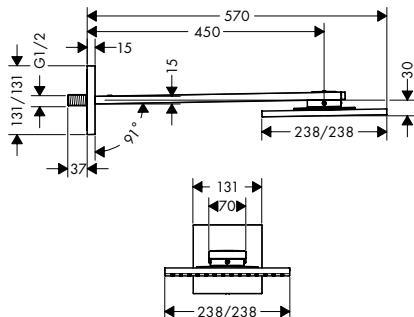


### Overhead shower 250/250 1jet with shower arm

- / consists of: overhead shower, shower arm
- / shower head size: 250 x 250 mm
- / spray type: PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / shower arm length 450 mm
- / maximum flow rate at 3 bar: 17 l/min
- / flow rate PowderRain spray (at 3 bar): 17 l/min
- / minimum function point for proper function: 12,8 l/min
- / minimum flow pressure: 1,8 bar
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning porpose
- / installation: wall
- / connection thread G 1/2
- / connection dimension: DN15

finish

Chrome  
AXOR FinishPlus\*

code no.

35306000  
35306XXX

### Overhead shower 250/250 1jet with ceiling connection

Chrome  
AXOR FinishPlus\*35308000  
35308XXX

- / consists of: overhead shower, ceiling connector
- / shower head size: 250 x 250 mm
- / spray type: PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 100 mm
- / maximum flow rate at 3 bar: 19 l/min
- / flow rate PowderRain spray (at 3 bar): 19 l/min
- / minimum flow pressure: 1,8 bar
- / overhead shower removable for cleaning
- / ServiceCard with sieve can be removed without tools for cleaning porpose
- / installation: ceiling
- / connection thread G 1/2
- / connection dimension: DN15

#### Alternative products:

- / Overhead shower 250/250 2jet with ceiling connection

Chrome  
AXOR FinishPlus\*35312000  
35312XXX

#### Required parts:

- / Basic set for overhead shower with ceiling connector



26434180

#### Optional parts:

- / Extension 230 mm for ceiling connector overhead shower

Chrome  
AXOR FinishPlus\*35288000  
35288XXX

Measurements within scale drawings are in mm.

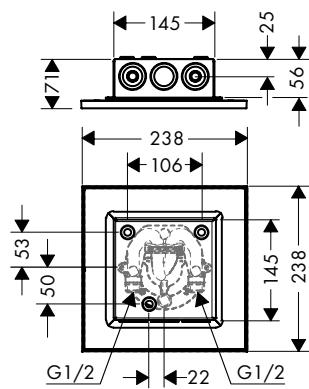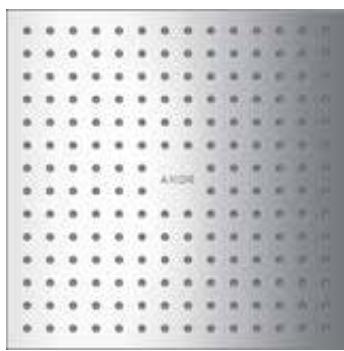

## Overhead shower 250/250 1jet ceiling

finish Chrome  
code no. 35309000  
AXOR FinishPlus\* 35309XXX




- / shower head size: 250 x 250 mm
- / spray type: PowderRain
- / dynamic spray nozzles move out while using
- / material spray disc: metal
- / maximum flow rate at 3 bar: 18,1 l/min
- / flow rate PowderRain spray (at 3 bar): 18,1 l/min
- / minimum function point for proper function: 15,4 l/min
- / minimum flow pressure: 1,8 bar
- / overhead shower removable for cleaning
- / installation: flush with the ceiling
- / connection dimension: DN15

### Alternative products:

/ Overhead shower 250/250 2jet ceiling Chrome 35313000  
AXOR FinishPlus\* 35313XXX

### Required parts:

/ Basic set for overhead shower ceiling 35363180




## Basic set for overhead shower

### 2jet with shower arm

- / includes polystyrene sheathing as a placeholder during installation
- / sound-decoupled installation
- / connection dimension: Rp 1/2"

35363180



## Basic set for overhead shower with ceiling connector

- / ceiling installation, includes polystyrene sheathing as a placeholder during installation

### Optional parts:


/ Overhead shower 460/300 1jet with ceiling connection	Chrome	35277000
/ Overhead shower 460/300 2jet with ceiling connection	AXOR FinishPlus*	35277XXX
/ Overhead shower 460/300 3jet with ceiling connection	Chrome	35279000
/ Overhead shower 460/300 3jet with ceiling connection	AXOR FinishPlus*	35279XXX
/ Overhead shower 300 1jet with ceiling connection	Chrome	35281000
/ Overhead shower 300 2jet with ceiling connection	AXOR FinishPlus*	35281XXX
/ Overhead shower 300 3jet with ceiling connection	Chrome	35301000
/ Overhead shower 300 1jet with ceiling connection	AXOR FinishPlus*	35301XXX
/ Overhead shower 300 2jet with ceiling connection	Chrome	35304000
/ Overhead shower 300 3jet with ceiling connection	AXOR FinishPlus*	35304XXX
/ Overhead shower 300/300 1jet with ceiling connection	Chrome	35316000
/ Overhead shower 300/300 2jet with ceiling connection	AXOR FinishPlus*	35316XXX
/ Overhead shower 300/300 3jet with ceiling connection	Chrome	35320000
/ Overhead shower 250 1jet with ceiling connection	AXOR FinishPlus*	35326000
/ Overhead shower 250 2jet with ceiling connection	Chrome	35286XXX
/ Overhead shower 250 3jet with ceiling connection	AXOR FinishPlus*	35286XXX
/ Overhead shower 250 1jet with ceiling connection	Chrome	35297000
/ Overhead shower 250 2jet with ceiling connection	AXOR FinishPlus*	35297XXX
/ Overhead shower 250/250 1jet with ceiling connection	Chrome	35308000
/ Overhead shower 250/250 2jet with ceiling connection	AXOR FinishPlus*	35308XXX
/ Overhead shower 250/250 3jet with ceiling connection	Chrome	35312000
/ Overhead shower 250/250 4jet with ceiling connection	AXOR FinishPlus*	35312XXX



### Basic set for overhead shower ceiling

- / ServiceCard with sieve and flow restrictor can be removed without tools for cleaning purpose
- / connection dimension: Rp 1/2

35363180

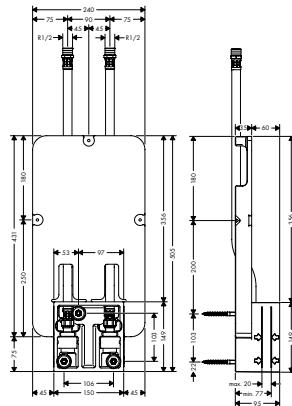


#### Optional parts:

/ Overhead shower 300 1jet ceiling	Chrome	35302000
/ Overhead shower 300 2jet ceiling	AXOR FinishPlus*	35302XXX
/ Overhead shower 300/300 1jet ceiling	Chrome	35305000
/ Overhead shower 300/300 2jet ceiling	AXOR FinishPlus*	35305XXX
/ Overhead shower 250 1jet ceiling	Chrome	35317000
/ Overhead shower 250 2jet ceiling	AXOR FinishPlus*	35317XXX
/ Overhead shower 250/250 1jet ceiling	Chrome	35321000
/ Overhead shower 250/250 2jet ceiling	AXOR FinishPlus*	35321XXX
/ Overhead shower 250/580 1jet ceiling	Chrome	35287000
/ Overhead shower 250/580 2jet ceiling	AXOR FinishPlus*	35287XXX
/ Overhead shower 250/250/580 1jet ceiling	Chrome	35298000
/ Overhead shower 250/250/580 2jet ceiling	AXOR FinishPlus*	35298XXX
/ Overhead shower 250/250/580 3jet	Chrome	35309000
/ Overhead shower 250/250/580 3jet	AXOR FinishPlus*	35309XXX
/ Overhead shower 250/250/580 3jet	Chrome	35313000
/ Overhead shower 250/250/580 3jet	AXOR FinishPlus*	35313XXX



### Overhead shower 250/580 3jet

Chrome  
AXOR FinishPlus\*

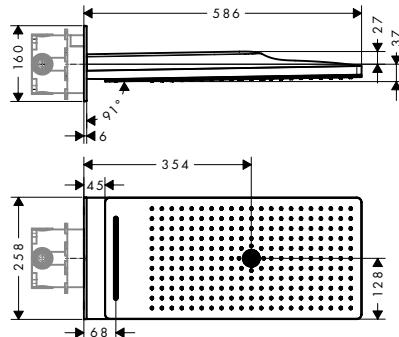

- / consists of: overhead shower, wall connector
- / shower head size: 580 x 260 mm
- / spray type: Rain, RainFlow, Mono
- / material spray disc: metal
- / maximum flow rate at 3 bar: 20 l/min
- / flow rate Rain spray (at 3 bar): 17 l/min
- / flow rate RainFlow spray (at 3 bar): 17 l/min
- / flow rate Mono spray (at 3 bar): 20 l/min
- / minimum flow pressure: 1,7 bar
- / spray disc removable for cleaning
- / installation: wall-mounted - for installation on iBox
- / connection dimension: DN15

#### Required parts:


- / Basic set iBox universal

01700180



### Overhead shower 460/300 3jet with shower arm and square escutcheon

Chrome  
AXOR FinishPlus\*

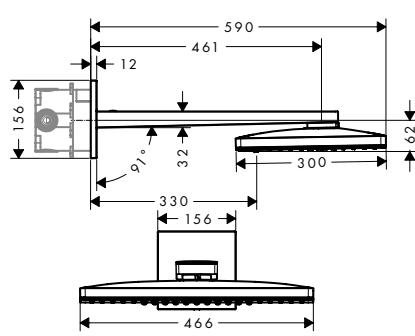



- / consists of: overhead shower, shower arm
- / shower head size: 460 x 300 mm
- / spray type: Rain, RainStream, Mono
- / material spray disc: metal
- / shower arm length 460 mm
- / maximum flow rate at 3 bar: 18 l/min
- / flow rate Rain spray (at 3 bar): 18 l/min
- / flow rate RainStream spray (at 3 bar): 15 l/min
- / flow rate Mono spray (at 3 bar): 18 l/min
- / minimum flow pressure: 1,5 bar
- / spray disc removable for cleaning
- / overhead shower removable for cleaning
- / installation: wall-mounted - for installation on iBox
- / connection dimension: DN15


#### Required parts:

- / Basic set iBox universal

01700180

Measurements within scale drawings are in mm.

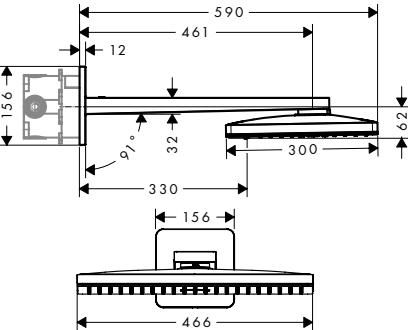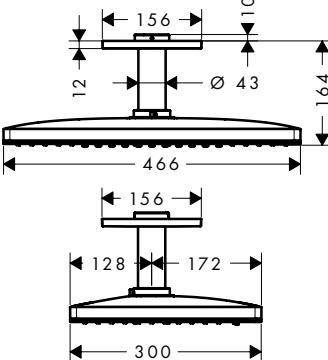	finish	code no.
 	<b>Overhead shower 460/300 3jet with shower arm and softcube escutcheon</b> Chrome AXOR FinishPlus* 	35276000 35276XXX  <b>Required parts:</b> / Basic set iBox universal 01700180
 	<b>Overhead shower 460/300 3jet with ceiling connection</b> Chrome AXOR FinishPlus* 	35281000 35281XXX  <b>Required parts:</b> / Basic set for overhead shower with ceiling connector 26434180
	<b>Optional parts:</b> / Extension 230 mm for ceiling connector overhead shower	Chrome AXOR FinishPlus* 35288000 35288XXX

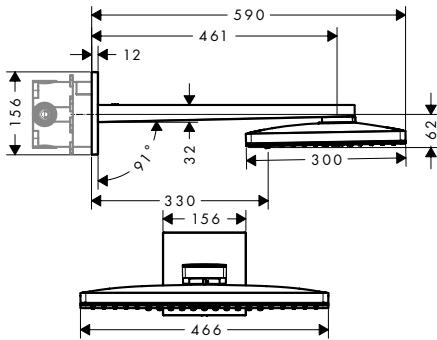

**Overhead shower 460/300  
2jet with shower arm  
and square escutcheon**

- / consists of: overhead shower, shower arm
- / shower head size: 460 x 300 mm
- / spray type: Rain, RainStream
- / material spray disc: metal
- / shower arm length 460 mm
- / maximum flow rate at 3 bar: 18 l/min
- / flow rate Rain spray (at 3 bar): 18 l/min
- / flow rate RainStream spray (at 3 bar): 15 l/min
- / minimum flow pressure: 1,5 bar
- / spray disc removable for cleaning
- / overhead shower removable for cleaning
- / installation: wall-mounted - for installation on iBox
- / connection dimension: DN15


**Required parts:**

- / Basic set iBox universal

finish

Chrome  
AXOR FinishPlus\*

code no.

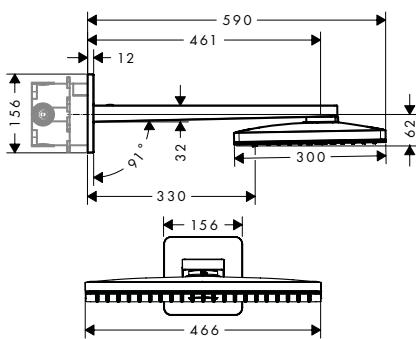
35280000  
35280XXX

**Overhead shower 460/300  
2jet with shower arm  
and softcube escutcheon**

- / consists of: overhead shower, shower arm, escutcheon
- / shower head size: 460 x 300 mm
- / spray type: Rain, RainStream
- / material spray disc: metal
- / shower arm length 460 mm
- / maximum flow rate at 3 bar: 18 l/min
- / flow rate Rain spray (at 3 bar): 18 l/min
- / flow rate RainStream spray (at 3 bar): 15 l/min
- / minimum flow pressure: 1,5 bar
- / spray disc removable for cleaning
- / overhead shower removable for cleaning
- / installation: wall-mounted - for installation on iBox
- / connection dimension: DN15

**Required parts:**

- / Basic set iBox universal

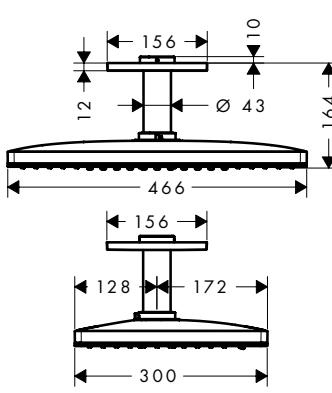Chrome  
AXOR FinishPlus\*35275000  
35275XXX

**Overhead shower 460/300  
2jet with ceiling connection**

- / consists of: overhead shower, ceiling connector
- / shower head size: 460 x 300 mm
- / spray type: Rain, RainStream
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 100 mm
- / flow rate Rain spray (at 3 bar): 21 l/min
- / flow rate RainStream spray (at 3 bar): 18 l/min
- / minimum flow pressure: 1,5 bar
- / spray disc removable for cleaning
- / overhead shower removable for cleaning
- / installation: ceiling
- / connection dimension: DN15

**Required parts:**

- / Basic set for overhead shower with ceiling connector

Chrome  
AXOR FinishPlus\*35279000  
35279XXX


**Optional parts:**

- / Extension 230 mm for ceiling connector overhead shower

Chrome  
AXOR FinishPlus\*35288000  
35288XXX


Measurements within scale drawings are in mm.

Technical specifications and units of measure are subject to change.

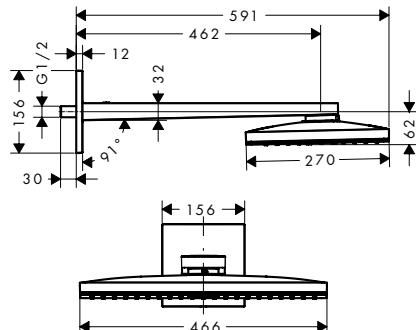


### Overhead shower 460/300 1jet with shower arm and square escutcheon

finish Chrome  
code no. 35278000  
AXOR FinishPlus\*  
35278XXX

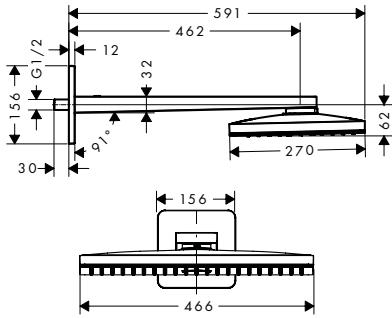

### Overhead shower 460/300 1jet with shower arm and softcube escutcheon

Chrome  
AXOR FinishPlus\*  
35274000  
35274XXX

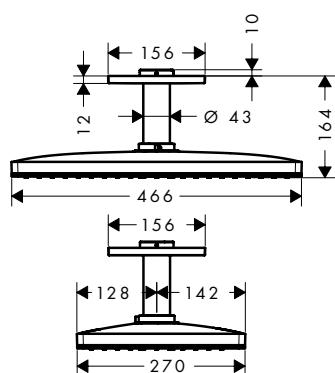

### Overhead shower 460/300 1jet with ceiling connection

Chrome  
AXOR FinishPlus\*  
35277000  
35277XXX



#### Required parts:


- / Basic set for overhead shower with ceiling connector

26434180

#### Optional parts:

- / Extension 230 mm for ceiling connector overhead shower

Chrome  
AXOR FinishPlus\*  
35288000  
35288XXX




## Basic set for overhead shower with ceiling connector

- / ceiling installation, includes polystyrene sheathing as a placeholder during installation

### Optional parts:

- |  |                  |          |
|--|------------------|----------|
| / Overhead shower 460/300 1jet with ceiling connection | Chrome           | 35277000 |
|  | AXOR FinishPlus* | 35277XXX |
| / Overhead shower 460/300 2jet with ceiling connection | Chrome           | 35279000 |
|  | AXOR FinishPlus* | 35279XXX |
| / Overhead shower 460/300 3jet with ceiling connection | Chrome           | 35281000 |
|  | AXOR FinishPlus* | 35281XXX |
| / Overhead shower 300 1jet with ceiling connection     | Chrome           | 35301000 |
|  | AXOR FinishPlus* | 35301XXX |
| / Overhead shower 300 2jet with ceiling connection     | Chrome           | 35304000 |
|  | AXOR FinishPlus* | 35304XXX |
| / Overhead shower 300/300 1jet with ceiling connection | Chrome           | 35316000 |
|  | AXOR FinishPlus* | 35316XXX |
| / Overhead shower 300/300 2jet with ceiling connection | Chrome           | 35320000 |
|  | AXOR FinishPlus* | 35320XXX |
| / Overhead shower 250 1jet with ceiling connection     | Chrome           | 35286000 |
|  | AXOR FinishPlus* | 35286XXX |
| / Overhead shower 250 2jet with ceiling connection     | Chrome           | 35297000 |
|  | AXOR FinishPlus* | 35297XXX |
| / Overhead shower 250/250 1jet with ceiling connection | Chrome           | 35308000 |
|  | AXOR FinishPlus* | 35308XXX |
| / Overhead shower 250/250 2jet with ceiling connection | Chrome           | 35312000 |
|  | AXOR FinishPlus* | 35312XXX |



## Extension 230 mm for ceiling connector overhead shower

- / packaging unit: 1 piece
- / dimension: 230 mm

### Optional parts:

- |  |                  |          |
|--|------------------|----------|
| / Overhead shower 460/300 1jet with ceiling connection | Chrome           | 35277000 |
|  | AXOR FinishPlus* | 35277XXX |
| / Overhead shower 460/300 2jet with ceiling connection | Chrome           | 35279000 |
|  | AXOR FinishPlus* | 35279XXX |
| / Overhead shower 460/300 3jet with ceiling connection | Chrome           | 35281000 |
|  | AXOR FinishPlus* | 35281XXX |
| / Overhead shower 300 1jet with ceiling connection     | Chrome           | 35301000 |
|  | AXOR FinishPlus* | 35301XXX |
| / Overhead shower 300 2jet with ceiling connection     | Chrome           | 35304000 |
|  | AXOR FinishPlus* | 35304XXX |
| / Overhead shower 300/300 1jet with ceiling connection | Chrome           | 35316000 |
|  | AXOR FinishPlus* | 35316XXX |
| / Overhead shower 300/300 2jet with ceiling connection | Chrome           | 35320000 |
|  | AXOR FinishPlus* | 35320XXX |
| / Overhead shower 250 1jet with ceiling connection     | Chrome           | 35286000 |
|  | AXOR FinishPlus* | 35286XXX |
| / Overhead shower 250 2jet with ceiling connection     | Chrome           | 35297000 |
|  | AXOR FinishPlus* | 35297XXX |
| / Overhead shower 250/250 1jet with ceiling connection | Chrome           | 35308000 |
|  | AXOR FinishPlus* | 35308XXX |
| / Overhead shower 250/250 2jet with ceiling connection | Chrome           | 35312000 |
|  | AXOR FinishPlus* | 35312XXX |




finish

code no.

26434180

Measurements within scale drawings are in mm.


	finish	code no.
 	<b>Basic set iBox universal</b>	01700180
	<ul style="list-style-type: none"> <li>/ suitable for all shower, bath tub and thermostat finish sets for concealed installation</li> <li>/ connection thread Rp 3/4</li> <li>/ rotationally-symmetric installation</li> <li>/ sound-decoupled installation</li> <li>/ connection dimension: DN20</li> </ul>	
	<b>Optional parts:</b>	
	<ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> <li>/ Reduction coupling iBox universal</li> </ul>	13587000 93171000 97759000
 	<b>Overhead shower 350 1jet with shower arm</b>	Chrome 26034000 Brushed Nickel 26034820 AXOR FinishPlus* 26034XXX
	<ul style="list-style-type: none"> <li>/ consists of: overhead shower, shower arm</li> <li>/ shower head size: 350 mm</li> <li>/ spray type: PowderRain</li> <li>/ ball-joint: overhead shower angle adjustable</li> <li>/ material spray disc: metal</li> <li>/ shower arm length 390 mm</li> <li>/ maximum flow rate at 3 bar: 26 l/min</li> <li>/ flow rate PowderRain spray (at 3 bar): 26 l/min</li> <li>/ minimum flow pressure: 1 bar</li> <li>/ overhead shower removable for cleaning</li> <li>/ installation: wall</li> <li>/ connection thread G 1/2</li> <li>/ connection dimension: DN15</li> </ul>	
 	<b>Overhead shower 350 1jet with ceiling connection</b>	Chrome 26035000 Brushed Nickel 26035820 AXOR FinishPlus* 26035XXX
	<ul style="list-style-type: none"> <li>/ consists of: overhead shower, ceiling connector</li> <li>/ shower head size: 350 mm</li> <li>/ spray type: PowderRain</li> <li>/ ball-joint: overhead shower angle adjustable</li> <li>/ material spray disc: metal</li> <li>/ brass ceiling connector</li> <li>/ ceiling connection length: 100 mm</li> <li>/ maximum flow rate at 3 bar: 26 l/min</li> <li>/ flow rate PowderRain spray (at 3 bar): 26 l/min</li> <li>/ minimum flow pressure: 1 bar</li> <li>/ overhead shower removable for cleaning</li> <li>/ installation: ceiling</li> <li>/ connection thread G 1/2</li> <li>/ connection dimension: DN15</li> </ul>	

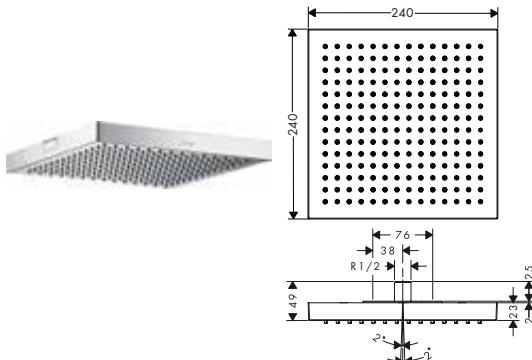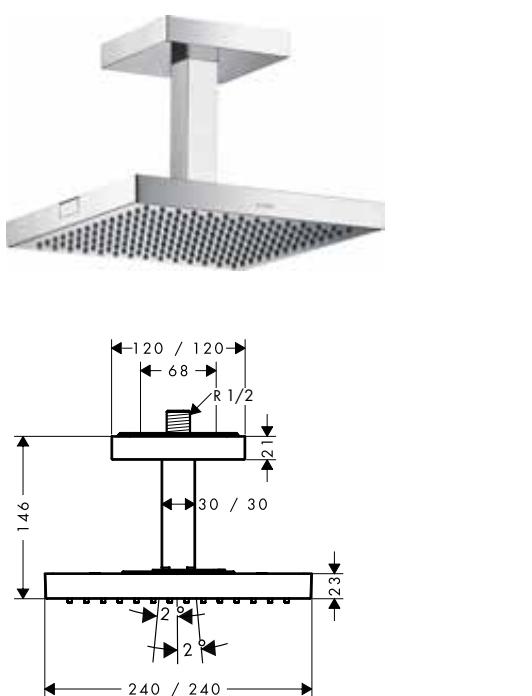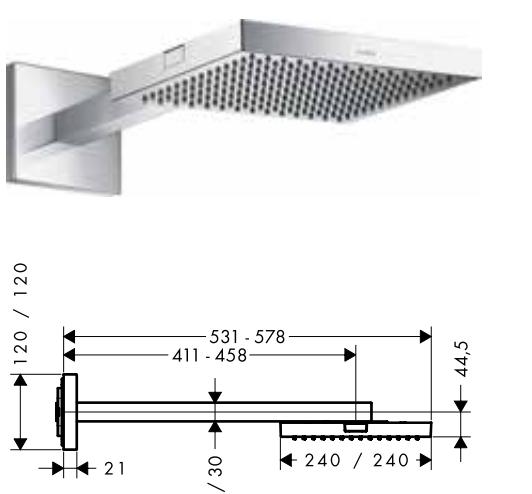	finish	code no.
 <p><b>Overhead shower 240/240 1jet ceiling</b></p> <ul style="list-style-type: none"> <li>/ shower head size: 240 x 240 mm</li> <li>/ spray type: RainAir</li> <li>/ material spray disc: metal</li> <li>/ flow rate RainAir spray (at 3 bar): 12 l/min</li> <li>/ flow rate expandable to 25 l/min</li> <li>/ minimum flow pressure: 2 bar</li> <li>/ spray disc removable for cleaning</li> <li>/ installation: flush with the ceiling</li> <li>/ connection thread G 1/2</li> <li>/ connection dimension: DN15</li> <li>/ not suitable for continuous flow water heaters</li> </ul>	Chrome AXOR FinishPlus*	10924000 10924XXX
 <p><b>Overhead shower 240/240 1jet with ceiling connection</b></p> <ul style="list-style-type: none"> <li>/ consists of: overhead shower, ceiling connector</li> <li>/ shower head size: 240 x 240 mm</li> <li>/ spray type: RainAir</li> <li>/ material spray disc: metal</li> <li>/ brass ceiling connector</li> <li>/ ceiling connection length: 102 mm</li> <li>/ flow rate RainAir spray (at 3 bar): 12 l/min</li> <li>/ flow rate expandable to 25 l/min</li> <li>/ minimum flow pressure: 2 bar</li> <li>/ spray disc removable for cleaning</li> <li>/ installation: ceiling</li> <li>/ connection thread G 1/2</li> <li>/ connection dimension: DN15</li> <li>/ not suitable for continuous flow water heaters</li> </ul>	Chrome AXOR FinishPlus*	10929000 10929XXX
 <p><b>Overhead shower 240/240 1jet with shower arm</b></p> <ul style="list-style-type: none"> <li>/ consists of: overhead shower, shower arm, escutcheon</li> <li>/ shower head size: 240 x 240 mm</li> <li>/ spray type: RainAir</li> <li>/ material spray disc: metal</li> <li>/ shower arm length metal shower arm 411 - 458 mm</li> <li>/ flow rate RainAir spray (at 3 bar): 12 l/min</li> <li>/ flow rate expandable to 25 l/min</li> <li>/ minimum flow pressure: 2 bar</li> <li>/ spray disc removable for cleaning</li> <li>/ installation: wall</li> <li>/ connection dimension: DN15</li> <li>/ not suitable for continuous flow water heaters</li> </ul> <p><b>Required parts:</b></p> <ul style="list-style-type: none"> <li>/ Basic set for overhead shower 240/240 1jet with shower arm</li> </ul>	Chrome AXOR FinishPlus*	10925000 10925XXX

Measurements within scale drawings are in mm.

finish


code no.



### Basic set for overhead shower 240/240 1jet with shower arm

- / for installation in a direct line with # 40872000, # 40873000 the mounting plate # 10973180 is necessary
- / sound-decoupled installation

10921180



### Flood spout 240/120 for concealed installation

Chrome  
AXOR FinishPlus\*


10942000  
10942XXX

- / 1 function
- / projection 180 mm
- / when positioning the spout between waterconducting parts (# 10751000, # 10755000, # 10972000, # 10651000, # 28491000, # 40872000, # 40873000) in joined installation (10 mm distance) it is recommended to use basic set # 10941180
- / can be used as bath spout or flood shower
- / maximum flow rate at 3 bar: 19 l/min
- / connection dimension: device connection DN20
- / spray type: wide flood jet

#### Optional parts:

- / Basic set for flood spout 240/120 for concealed installation

10941180

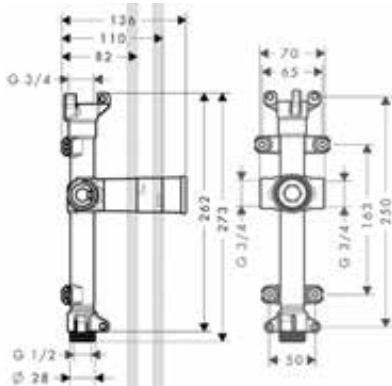

### Basic set for flood spout 240/120 for concealed installation

10941180

- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN20

#### Required parts:


- / Flood spout 240/120 for concealed installation

Chrome  
AXOR FinishPlus\*

10942000  
10942XXX

finish

code no.

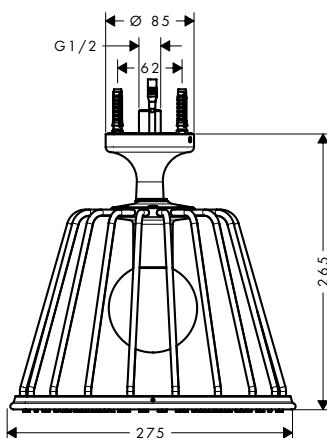


### LampShower 275 1jet with ceiling connector

- / consists of: overhead shower, ceiling connector
- / shower head size: 275 mm
- / spray type: Rain
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 120 mm
- / maximum flow rate at 3 bar: 18 l/min
- / flow rate Rain spray (at 3 bar): 18 l/min
- / minimum flow pressure: 2 bar
- / spray zones: special spray image from placed inside spray nozzles on the inner diameter
- / spray disc removable for cleaning
- / installation: ceiling
- / connection thread G 1/2
- / connection dimension: DN15
- / with integrated lighting
- / illuminant: LED
- / power supply: 12 V
- / transformer power supply for concealed installation 12 V, 18 W
- / input voltage: 100 - 240 V AC / 50 / 60 Hz
- / output voltage: 12 V - DC
- / colour temperature: 2700 K
- / not suitable for continuous flow water heaters
- / TÜV certified

Chrome  
AXOR FinishPlus\*

26032000  
26032XXX

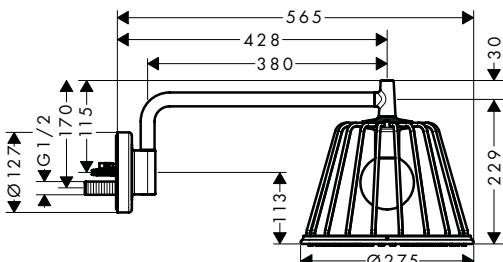

### LampShower 275 1jet with shower arm

- / consists of: overhead shower, shower arm
- / shower head size: 275 mm
- / spray type: Rain
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / shower arm length 380 mm
- / shower arm swivels by 150°
- / maximum flow rate at 3 bar: 13 l/min
- / flow rate Rain spray (at 3 bar): 13 l/min
- / minimum flow pressure: 2 bar
- / spray zones: special spray image from placed inside spray nozzles on the inner diameter
- / spray disc removable for cleaning
- / installation: wall
- / connection thread G 1/2
- / connection dimension: DN15
- / with integrated lighting
- / illuminant: LED
- / power supply: 12 V
- / transformer power supply for concealed installation 12 V, 18 W
- / input voltage: 100 - 240 V AC / 50 / 60 Hz
- / output voltage: 12 V - DC
- / colour temperature: 2700 K
- / not suitable for continuous flow water heaters
- / TÜV certified

Chrome  
AXOR FinishPlus\*

26031000  
26031XXX



#### Optional parts:


- / Basic set for LampShower 275 1jet with shower arm and overhead shower 240 2jet with shower arm

26909180

Measurements within scale drawings are in mm.

finish


code no.



**Basic set for LampShower  
275 1jet with shower arm  
and overhead shower 240 2jet  
with shower arm**

- / TÜV certified
- / sound-decoupled installation
- / connection for power supply by empty tube
- / the basic set is required in case of insufficient quality and stability of the wall structure
- / connection dimension: Rp 1/2


26909180



**Overhead shower 240 2jet  
with ceiling connector**

- / consists of: overhead shower, ceiling connector
- / shower head size: 279 mm
- / spray type: Rain, RainAir
- / Select button on overhead shower
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / brass ceiling connector
- / ceiling connection length: 139 mm
- / maximum flow rate at 3 bar: 17 l/min
- / flow rate Rain spray (at 3 bar): 17 l/min
- / flow rate RainAir spray (at 3 bar): 16 l/min
- / minimum flow pressure: 1 bar
- / spray disc removable for cleaning
- / installation: ceiling
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters with an output of 18 kW

Chrome  
AXOR FinishPlus\*  
26022000  
26022XXX

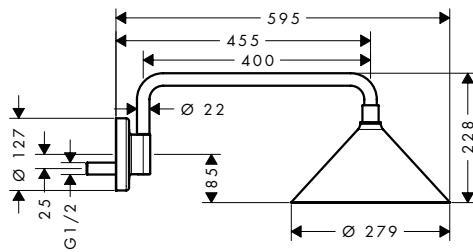

**Overhead shower 240 2jet  
with shower arm**

- / consists of: overhead shower, shower arm
- / shower head size: 279 mm
- / spray type: Rain, RainAir
- / Select button on overhead shower
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / shower arm length 400 mm
- / shower arm swivels by 150°
- / maximum flow rate at 3 bar: 15 l/min
- / flow rate Rain spray (at 3 bar): 15 l/min
- / flow rate RainAir spray (at 3 bar): 15 l/min
- / minimum function point for proper function: 8 l/min
- / minimum flow pressure: 1 bar
- / spray disc removable for cleaning
- / installation: wall
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters with an output of 18 kW


Chrome  
AXOR FinishPlus\*  
26021000  
26021XXX



**Optional parts:**

- / Basic set for LampShower 275 1jet with shower arm and overhead shower 240 2jet with shower arm

26909180

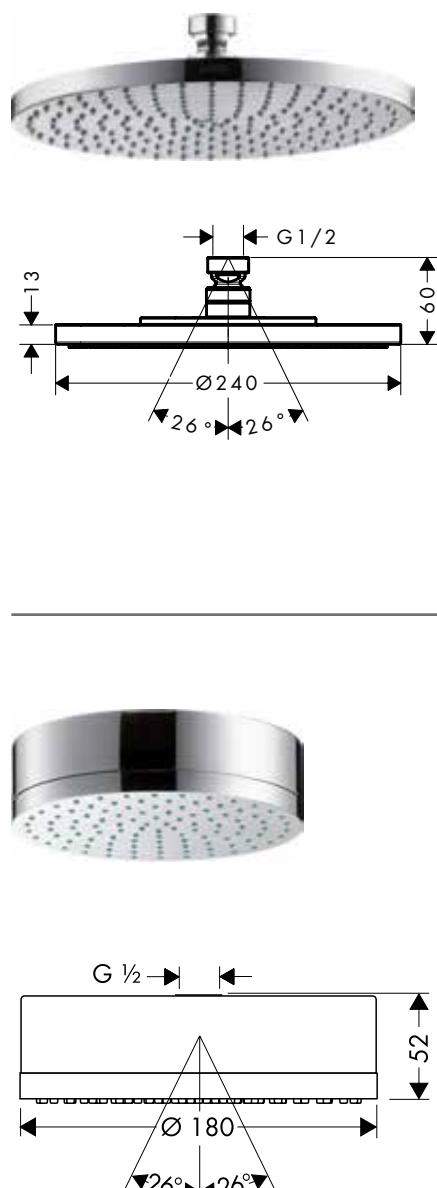**Overhead shower 240 1jet**

- / shower head size: 240 mm
- / spray type: RainAir
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / maximum flow rate at 3 bar: 19 l/min
- / flow rate RainAir spray (at 3 bar): 19 l/min
- / minimum flow pressure: 1,5 bar
- / spray disc removable for cleaning
- / installation: ceiling or wall
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters with an output of 18 kW

finish





Chrome  
AXOR FinishPlus\*code no.  
28494000  
28494XXX**Overhead shower 180 1jet  
Classic**


- / shower head size: 180 mm
- / spray type: RainAir
- / ball-joint: overhead shower angle adjustable
- / material spray disc: metal
- / maximum flow rate at 3 bar: 18 l/min
- / flow rate Rain spray (at 3 bar): 18 l/min
- / minimum flow pressure: 1,5 bar
- / spray disc removable for cleaning
- / installation: ceiling or wall
- / connection thread G 1/2
- / connection dimension: DN15

Chrome  
AXOR FinishPlus\*code no.  
28487000  
28487XXX**Optional parts:**

- / Shower arm 389 mm
- / Ceiling connector 100 mm
- / Ceiling connector 300 mm

Chrome	27348000
AXOR FinishPlus*	27348XXX
Chrome	26432000
AXOR FinishPlus*	26432XXX
Chrome	26433000
AXOR FinishPlus*	26433XXX

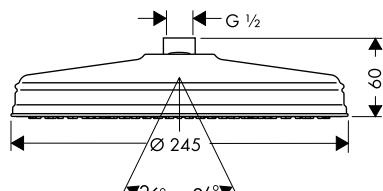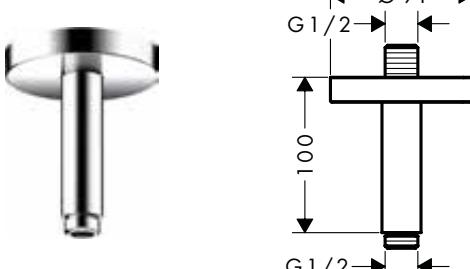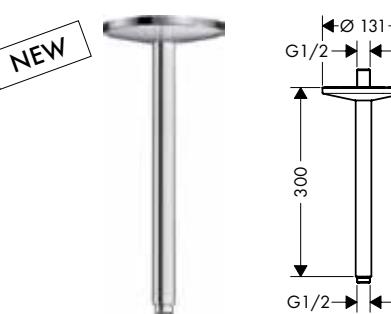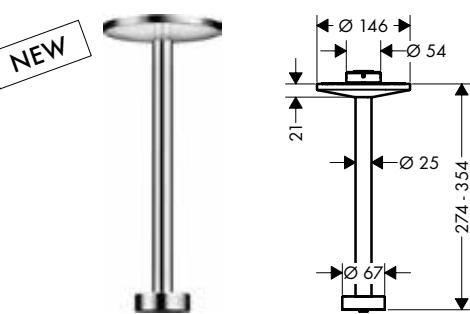	finish	code no.
	<b>Overhead shower 240 1jet Classic</b> / shower head size: 240 mm / spray type: RainAir / ball-joint: overhead shower angle adjustable / material spray disc: metal / maximum flow rate at 3 bar: 17 l/min / flow rate RainAir spray (at 3 bar): 17 l/min / minimum flow pressure: 1,5 bar / installation: ceiling or wall / connection thread G 1/2 / connection dimension: DN15	Chrome AXOR FinishPlus* 28474000 28474XXX
	<b>Optional parts:</b> / Shower arm 389 mm / Ceiling connector 100 mm / Ceiling connector 300 mm	AirPower Quick Clean
	<b>Ceiling connector 100 mm</b> / length: 100 mm / material: brass / connection type: G 1/2	Chrome Brushed Nickel AXOR FinishPlus* 26432000 26432820 26432XXX
	<b>Alternative sizes:</b> / Ceiling connector 300 mm	Chrome Brushed Nickel AXOR FinishPlus* 26433000 26433820 26433XXX
	<b>Optional parts:</b> / Overhead shower 240 1jet / Overhead shower 180 1jet / Overhead shower 180 1jet Classic / Overhead shower 240 1jet Classic	Chrome AXOR FinishPlus* 28494000 28494XXX Chrome AXOR FinishPlus* 28489000 28489XXX Chrome AXOR FinishPlus* 28487000 28487XXX Chrome AXOR FinishPlus* 28474000 28474XXX
	<b>Ceiling connector 300 mm for overhead shower 280 1jet</b> / length: 300 mm / installation type: exposed installation / material: solid brass / connection type: G 1/2	Chrome Matt Black AXOR FinishPlus* 48495000 48495670 48495XXX
	<b>Optional parts:</b> / Overhead shower 280 1jet with ceiling connection	Chrome Matt Black AXOR FinishPlus* 48493000 48493670 48493XXX
	<b>Ceiling connector 300 mm for overhead shower 280 2jet</b> / length: 300 mm / installation type: on a basic set / material: solid brass / connection type: G 1/2	Chrome Matt Black AXOR FinishPlus* 48496000 48496670 48496XXX



### Ceiling connector 300 mm

- / length: 300 mm
- / material: brass
- / connection type: G 1/2

finish

code no.

Chrome	26433000
Brushed Nickel	26433820
AXOR FinishPlus*	26433XXX

#### Alternative sizes:


- / Ceiling connector 100 mm

Chrome	26432000
Brushed Nickel	26432820
AXOR FinishPlus*	26432XXX

#### Optional parts:

- / Overhead shower 240 1jet
- / Overhead shower 180 1jet
- / Overhead shower 180 1jet Classic
- / Overhead shower 240 1jet Classic

Chrome	28494000
AXOR FinishPlus*	28494XXX
Chrome	28489000
AXOR FinishPlus*	28489XXX
Chrome	28487000
AXOR FinishPlus*	28487XXX
Chrome	28474000
AXOR FinishPlus*	28474XXX

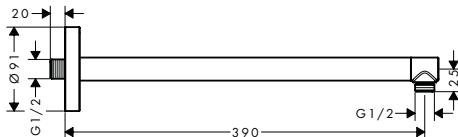

### Shower arm 390 mm


- / length: 390 mm
- / installation type: exposed installation
- / material: brass
- / connection type: G 1/2

Chrome	26431000
Brushed Nickel	26431820
AXOR FinishPlus*	26431XXX

#### Optional parts:

- / Overhead shower 240 1jet
- / Overhead shower 180 1jet

Chrome	28494000
AXOR FinishPlus*	28494XXX
Chrome	28489000
AXOR FinishPlus*	28489XXX

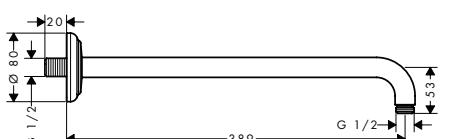

### Shower arm 389 mm

- / length: 389 mm
- / version: 90° angle
- / connection type: G 1/2


Chrome	27348000
AXOR FinishPlus*	27348XXX

#### Optional parts:

- / Overhead shower 180 1jet Classic
- / Overhead shower 240 1jet Classic
- / Wall plate 120/120 Softcube

Chrome	28487000
AXOR FinishPlus*	28487XXX
Chrome	28474000
AXOR FinishPlus*	28474XXX
Chrome	36725000
AXOR FinishPlus*	36725XXX

### Wall plates



### Wall plate 120/120 Softcube




- / material: metal
- / wall-mounted


Chrome	36725000
AXOR FinishPlus*	36725XXX

#### Optional parts:

- / Shower arm 389 mm

Chrome	27348000
AXOR FinishPlus*	27348XXX


	finish	code no.
	<b>Wall plate square</b> / material: metal / wall or ceiling mounting	Chrome AXOR FinishPlus* 27419000 27419XXX
<b>Body showers / shower modules</b>		
	<b>Shower module 120/120 for concealed installation square</b> / shower head size: 120 mm / spray type: Rain / spray angle adjustable in five steps / field of application: functions as overhead, shoulder or side shower / maximum flow rate at 3 bar: 5,3 l/min / flow rate Rain spray (at 3 bar): 5,3 l/min / minimum flow pressure: 1 bar / connection thread: G 1/2 / in a joined installation (10 mm distance) the use of basic set # 28486180 is recommended / in a freely arranged installation, connection via a G 1/2 connecting thread is possible / if installed as an overhead shower with several joint modules, the use of installation aid # 28470180 is recommended / suitable for continuous flow water heaters / connection dimension: DN15 / material: metal  <b>Optional parts:</b> / Basic set for shower module 120/120 for concealed installation 28486180 / Installation part 28470180	Chrome AXOR FinishPlus* 28491000 28491XXX 
	<b>Shower module 120/120 for concealed installation softcube</b> / shower head size: 120 mm / spray type: Rain / spray angle adjustable in five steps / field of application: functions as overhead, shoulder or side shower / maximum flow rate at 3 bar: 5,3 l/min / flow rate Rain spray (at 3 bar): 5,3 l/min / minimum flow pressure: 1 bar / connection thread: G 1/2 / in a joined installation (10 mm distance) the use of basic set # 28486180 is recommended / in a freely arranged installation, connection via a G 1/2 connecting thread is possible / if installed as an overhead shower with several joint modules, the use of installation aid # 28470180 is recommended / suitable for continuous flow water heaters / connection dimension: DN15 / material: metal  <b>Optional parts:</b> / Basic set for shower module 120/120 for concealed installation 28486180 / Installation part 28470180	Chrome AXOR FinishPlus* 36822000 36822XXX 



### Basic set for shower module 120/120 for concealed installation


- / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning, connection right or left
- / sound-decoupled installation

28486180



### Body shower round 1jet

- / shower head size: 65 mm
- / spray type: Rain
- / grey spray disc
- / ball-joint: side shower angle adjustable
- / rosette: circular
- / maximum flow rate at 3 bar: 5 l/min
- / flow rate Rain spray (at 3 bar): 5 l/min
- / minimum flow pressure: 1,5 bar
- / connection thread: G 1/2
- / suitable for continuous flow water heaters
- / connection dimension: DN15
- / material: metal

Chrome  
AXOR FinishPlus\*28464000  
28464XXX


### Body shower square 1jet

- / shower head size: 65 mm
- / spray type: Rain
- / grey spray disc
- / ball-joint: side shower angle adjustable
- / rosette: angular
- / maximum flow rate at 3 bar: 5 l/min
- / flow rate Rain spray (at 3 bar): 5 l/min
- / minimum flow pressure: 1,5 bar
- / connection thread: G 1/2
- / suitable for continuous flow water heaters
- / connection dimension: DN15
- / material: metal

Chrome  
AXOR FinishPlus\*28469000  
28469XXX

### Hand showers

NEW





### Hand shower 75 1jet EcoSmart


- / shower head size: 73 mm
- / spray type: PowderRain
- / maximum flow rate at 3 bar: 9,1 l/min
- / material: metal
- / with internal water conduction
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters

Chrome  
Matt Black  
AXOR FinishPlus\*48651000  
48651670  
48651XXX

#### Optional parts:

- / Metal effect shower hose 1.25 m
  - / Metal effect shower hose 1.60 m
  - / Metal effect shower hose 2.00 m
- |                  |          |
|------------------|----------|
| Chrome           | 28282000 |
| Matt Black       | 28282670 |
| AXOR FinishPlus* | 28282XXX |
| Chrome           | 28286000 |
| AXOR FinishPlus* | 28286XXX |
| Chrome           | 28284000 |
| AXOR FinishPlus* | 28284XXX |

	finish	code no.
	<b>Hand shower 2jet</b> <ul style="list-style-type: none"> <li>/ shower head size: 124 x 24 mm</li> <li>/ spray type: Rain, flood spray</li> <li>/ convenient diversion via Select button</li> <li>/ maximum flow rate at 3 bar: 12 l/min</li> <li>/ flow rate Mono spray (at 3 bar): 12 l/min</li> <li>/ flow rate Rain spray (at 3 bar): 12 l/min</li> <li>/ minimum flow pressure: 2,4 bar</li> <li>/ with internal water conduction</li> <li>/ rinseable screen seal</li> <li>/ connection thread G 1/2</li> <li>/ connection dimension: DN15</li> <li>/ suitable for continuous flow water heaters</li> <li>/ not recommended for rim-/ tile-mounted mixers</li> </ul>	Chrome Matt Black AXOR FinishPlus*
		45720000 45720670 45720XXX
	 	
	<b>Baton hand shower 2jet</b> <ul style="list-style-type: none"> <li>/ spray type: Rain, Mono</li> <li>/ spray type adjustment by turning spray disc</li> <li>/ grey spray disc</li> <li>/ maximum flow rate at 3 bar: 13 l/min</li> <li>/ flow rate Mono spray (at 3 bar): 11 l/min</li> <li>/ flow rate Rain spray (at 3 bar): 13 l/min</li> <li>/ minimum flow pressure: 1 bar</li> <li>/ rinseable screen seal</li> <li>/ connection thread G 1/2</li> <li>/ connection dimension: DN15</li> <li>/ suitable for continuous flow water heaters</li> </ul>	Chrome AXOR FinishPlus*
		12680000 12680XXX
		
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Metal effect shower hose 1.25 m</li> <li>/ Metal effect shower hose 1.60 m</li> <li>/ Metal effect shower hose 2.00 m</li> </ul>	Chrome Matt Black AXOR FinishPlus*
		28282000 28282670 28282XXX
		28286000 28286XXX
		28284000 AXOR FinishPlus*
		28284XXX




### Baton hand shower 2jet

- / spray type: Rain, Mono
- / spray type adjustment by turning spray disc
- / grey spray disc
- / maximum flow rate at 3 bar: 16,2 l/min
- / flow rate Mono spray (at 3 bar): 12,4 l/min
- / flow rate Rain spray (at 3 bar): 16,2 l/min
- / minimum flow pressure: 1 bar
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters

finish

Chrome  
AXOR FinishPlus\*

code no.

28532000  
28532XXX

### Baton hand shower 1jet

- / shower head size: 68 x 24 mm
- / spray type: Rain
- / maximum flow rate at 3 bar: 8 l/min
- / flow rate Rain spray (at 3 bar): 8 l/min
- / minimum flow pressure: 1 bar
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters

Chrome  
AXOR FinishPlus\*10531000  
10531XXX


#### Alternative products:

- / Baton hand shower 2jet

Chrome  
AXOR FinishPlus\*28532000  
28532XXX

#### Optional parts:



- / Metal effect shower hose 1.25 m
- / Metal effect shower hose 1.60 m
- / Metal effect shower hose 2.00 m


Chrome  
AXOR FinishPlus\*28282000  
28282XXX  
28286000  
28286XXX  
28284000  
28284XXX

### Hand shower 85 1jet

- / shower head size: 85 mm
- / spray type: Rain
- / maximum flow rate at 3 bar: 9 l/min
- / flow rate Rain spray (at 3 bar): 9 l/min
- / minimum flow pressure: 1 bar
- / with internal water conduction
- / rinseable screen seal
- / connection thread G 1/2
- / connection dimension: DN15
- / suitable for continuous flow water heaters

Chrome  
AXOR FinishPlus\*26025000  
26025XXX

	finish	code no.
 	<b>Hand shower 120 3jet</b> / shower head size: 125 mm / spray type: Rain, RainAir, WhirlAir / convenient diversion via Select button / maximum flow rate at 3 bar: 15 l/min / minimum flow pressure: 1,4 bar / with internal water conduction / rinseable screen seal / connection thread G 1/2 / connection dimension: DN15 / suitable for continous flow water heaters	Chrome AXOR FinishPlus* 26050000 26050XXX
	<b>Water saving EcoSmart version:</b> 	Chrome AXOR FinishPlus* 26051000 26051XXX
 	<b>Hand shower 100 1jet</b> / shower head size: 100 mm / spray type: RainAir / grey spray disc / maximum flow rate at 3 bar: 16 l/min / minimum flow pressure: 1 bar / rinseable screen seal / connection thread G 1/2 / connection dimension: DN15	Chrome Brushed Nickel AXOR FinishPlus* 16320000 16320820 16320XXX
<b>Shower sets</b> 	<b>Shower set 75 1jet EcoSmart with wall connection</b> / consists of: hand shower, shower bar, shower hose, slider, wall connector / shower head size: 73 mm / spray type: PowderRain / maximum flow rate at 3 bar: 9,1 l/min / shower hose with conical nut on both ends / pivot connector prevent hose from tangling / wall mounting: screw fastening / wall supports of metal / stand pipe length: 965 mm / shower bar diameter: 25 mm / profile stand pipe: round / drilling distance 929 mm / metal hand shower holder  <b>Consisting of:</b> <b>NEW</b> / Hand shower 75 1jet EcoSmart (# 48651XXX) <b>NEW</b> / Shower bar with wall connection and shower hose 1.60 m (# 48792XXX)	Chrome Matt Black AXOR FinishPlus* 48791000 48791670 48791XXX
	<b>Shower bar with wall connection and shower hose 1.60 m</b> / consists of: shower bar, slider, wall connector, shower hose / pivot connector prevent hose from tangling / hose nut: for shower hoses with conical nut on both sides / profile stand pipe: round / shower bar diameter: 25 mm / metal hand shower holder / slider steplessly adjustable / wall supports of metal  <b>Consisting of:</b> / Shower hose 1.60 m (# 28626000)	Chrome Matt Black AXOR FinishPlus* 48792000 48792670 48792XXX

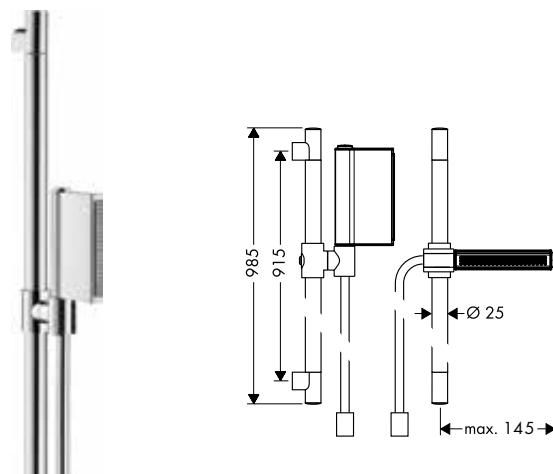

### Shower set 0.90 m with hand shower 2jet

- / consists of: baton hand shower, shower bar, shower hose, slider
- / spray type: Rain, flood spray
- / convenient diversion via Select button
- / AXOR Starck wall bar 0.90 m
- / maximum flow rate at 3 bar: 12 l/min
- / minimum flow pressure: 2,5 bar
- / shower hose with cylindrical nut on both ends
- / pivot joints on shower and fixed side
- / wall supports of plastic

#### Consisting of:


- / Hand shower 2jet (# 45720000)
- / Metal effect shower hose 1.60 m (# 28286000)

#### Optional parts:

- / Wall bar spacer for Unica wall bar D Chrome 96186000

finish

code no.

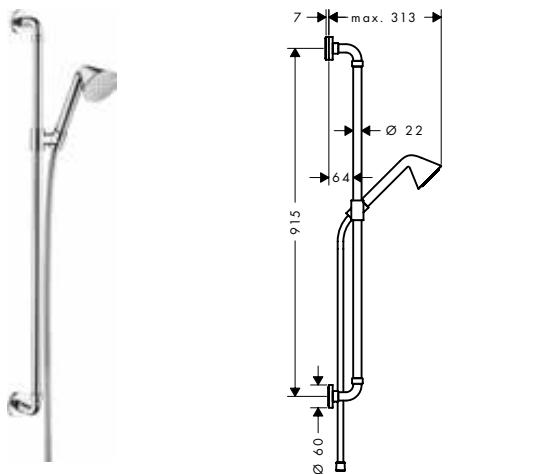
Chrome  
AXOR FinishPlus\*45722000  
45722XXX

### Shower set 0.90 m with hand shower 85 1jet

- / consists of: hand shower, shower bar, shower hose, slider
- / shower head size: 85 mm
- / spray type: Rain
- / support for shower hose with conical nuts
- / wall bar 0.90 m
- / maximum flow rate at 3 bar: 9 l/min
- / minimum flow pressure: 1 bar
- / pivot connector prevent hose from tangling
- / wall supports of metal

#### Consisting of:

- / Hand shower 85 1jet (# 26025000)
- / Shower hose 1.60 m (# 28626000)

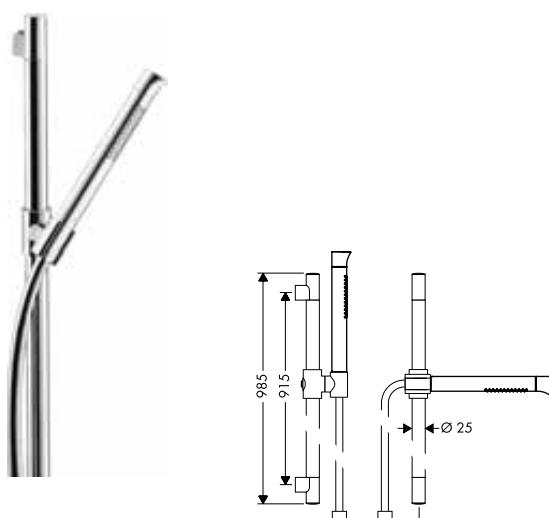Chrome  
AXOR FinishPlus\*26023000  
26023XXX

### Shower set 0.90 m with baton hand shower 2jet

- / consists of: baton hand shower, shower bar, shower hose, slider
- / shower head size: 70 mm
- / spray type: Rain, Soft spray
- / spray type adjustment by turning spray disc
- / maximum flow rate at 3 bar: 13 l/min
- / minimum flow pressure: 1 bar
- / shower hose with cylindrical nut on both ends
- / pivot connector prevent hose from tangling
- / wall supports of plastic
- / profile stand pipe: round




#### Consisting of:


- / Baton hand shower 2jet (# 12680000)
- / Metal effect shower hose 1.60 m (# 28286000)

#### Optional parts:

- / Wall bar spacer for Unica wall bar D Chrome 96186000

Chrome  
AXOR FinishPlus\*12231000  
12231XXX

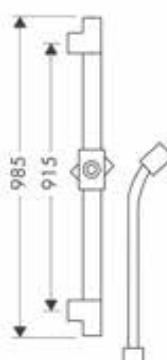	finish	code no.
 <p><b>Shower set 0.90 m with baton hand shower 2jet</b></p> <ul style="list-style-type: none"> <li>/ consists of: baton hand shower, shower bar, shower hose, slider</li> <li>/ shower head size: 70 mm</li> <li>/ spray type: Rain, Mono</li> <li>/ spray type adjustment by turning spray disc</li> <li>/ maximum flow rate at 3 bar: 16,2 l/min</li> <li>/ minimum flow pressure: 1 bar</li> <li>/ shower hose with cylindrical nut on both ends</li> <li>/ pivot connector prevent hose from tangling</li> <li>/ wall supports of plastic</li> </ul> <p><b>Consisting of:</b></p> <ul style="list-style-type: none"> <li>/ Baton hand shower 2jet (# 28532000)</li> <li>/ Metal effect shower hose 1.60 m (# 28286000)</li> </ul> <p><b>Alternative products:</b></p>  <ul style="list-style-type: none"> <li>/ Shower set 0.90 m with baton hand shower 1jet Chrome AXOR FinishPlus* 27983000 27983XXX</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Wall bar spacer for Unica wall bar D Chrome 96186000</li> </ul>	Chrome AXOR FinishPlus*	27980000 27980XXX
 <p><b>Shower set 0.90 m with baton hand shower 1jet</b></p> <ul style="list-style-type: none"> <li>/ consists of: baton hand shower, shower bar, shower hose, slider</li> <li>/ shower head size: 70 mm</li> <li>/ spray type: Rain</li> <li>/ maximum flow rate at 3 bar: 8 l/min</li> <li>/ minimum flow pressure: 1 bar</li> <li>/ shower hose with cylindrical nut on both ends</li> <li>/ pivot connector prevent hose from tangling</li> <li>/ wall supports of plastic</li> </ul> <p><b>Consisting of:</b></p> <ul style="list-style-type: none"> <li>/ Baton hand shower 1jet (# 10531000)</li> <li>/ Metal effect shower hose 1.60 m (# 28286000)</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Wall bar spacer for Unica wall bar D Chrome 96186000</li> </ul>	Chrome AXOR FinishPlus*	27983000 27983XXX
 <p><b>Shower bar 0.90 m with shower hose 1.60 m</b></p> <ul style="list-style-type: none"> <li>/ consists of: shower bar, shower hose, slider</li> <li>/ profile stand pipe: round</li> <li>/ shower bar diameter: 25 mm</li> <li>/ metal hand shower holder</li> <li>/ slider steplessly adjustable</li> </ul> <p><b>Consisting of:</b></p> <ul style="list-style-type: none"> <li>/ Metal effect shower hose 1.60 m (# 28286000)</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Wall bar spacer for Unica wall bar D Chrome 96186000</li> </ul>	Chrome AXOR FinishPlus*	27830000 27830XXX

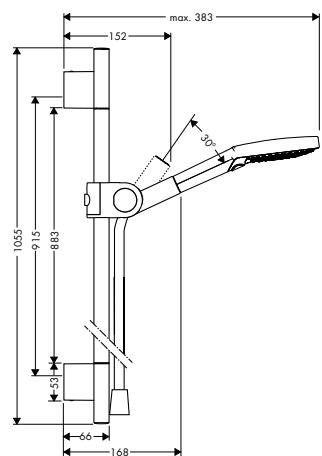

## Shower set 0.90 m with hand shower 120 3jet

- / consists of: hand shower, shower bar, shower hose, slider
- / shower head size: 120 mm
- / spray type: Rain, RainAir, WhirlAir
- / convenient diversion via Select button
- / inclination angle can be adjusted by 30°
- / wall bar 0.90 m
- / support for shower hose with conical nuts
- / maximum flow rate at 3 bar: 15 l/min
- / minimum flow pressure: 1 bar
- / pivot connector prevent hose from tangling
- / wall supports of metal

### Consisting of:


- / Hand shower 120 3jet (# 26050000)
- / Shower bar 0.90 m with shower hose 1.60 m (# 27989000)
- / Shower hose 1.60 m (# 28626000)

### Optional parts:

- |                      |                         |          |
|----------------------|-------------------------|----------|
| / Corner fitting set | Chrome AXOR FinishPlus* | 28693000 |
| / Wall bar spacer    | Light Grey              | 96397000 |

finish

code no.

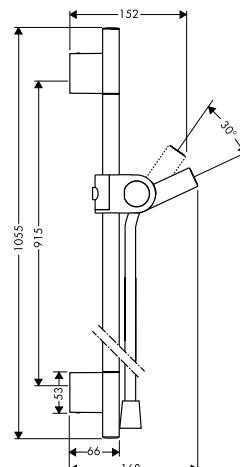Chrome AXOR FinishPlus\*  
27987000  
27987XXX

## Shower bar 0.90 m with shower hose 1.60 m


- / consists of: shower bar, shower hose, slider
- / profile stand pipe: round
- / shower bar diameter: 22 mm
- / metal hand shower holder
- / hand shower holder with locking mechanism
- / slider steplessly adjustable

### Consisting of:

- / Shower hose 1.60 m (# 28626000)

### Optional parts:

- |                      |                         |          |
|----------------------|-------------------------|----------|
| / Corner fitting set | Chrome AXOR FinishPlus* | 28693000 |
| / Wall bar spacer    | Light Grey              | 96397000 |

Chrome AXOR FinishPlus\*  
27989000  
27989XXX

## Shower set 0.90 m with hand shower 120 3jet

- / consists of: hand shower, shower bar, shower hose, slider
- / shower head size: 120 mm
- / spray type: Rain, RainAir, WhirlAir
- / convenient diversion via Select button
- / maximum flow rate at 3 bar: 15 l/min
- / minimum flow pressure: 1 bar
- / pivot connector prevent hose from tangling
- / wall supports of metal
- / 30 mm width of shower bar

### Consisting of:

- / Hand shower 120 3jet (# 26050000)
- / Shower hose 1.60 m (# 28626000)

### Alternative products:


- |   |                         |                      |
|---|-------------------------|----------------------|
| / Shower bar 0.90 m with shower hose 1.60 m | Chrome AXOR FinishPlus* | 36736000<br>36736XXX |
|---|-------------------------|----------------------|

### Optional parts:

- |                  |                         |                      |
|------------------|-------------------------|----------------------|
| / Cover for rail | Chrome AXOR FinishPlus* | 42871000<br>42871XXX |
|------------------|-------------------------|----------------------|



Measurements within scale drawings are in mm.

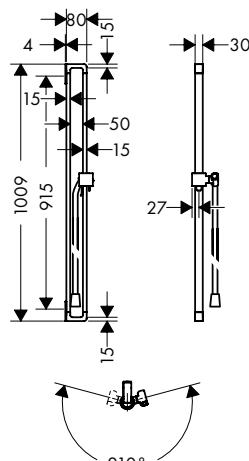

### Shower bar 0.90 m with shower hose 1.60 m

finish

code no.

Chrome  
AXOR FinishPlus\*36736000  
36736XXX


- / consists of: shower bar, shower hose, slider
- / pivot connector prevent hose from tangling
- / support for shower hose with conical nuts
- / hand shower holder moves sideways, up/down and pivots
- / profile stand pipe: square
- / bar width: 30 mm
- / metal hand shower holder
- / slider steplessly adjustable
- / silent inclination angle adjustment
- / wall supports of metal

#### Consisting of:

- / Shower hose 1.60 m (# 28626000)

#### Optional parts:

- / Cover for rail



Chrome  
AXOR FinishPlus\*42871000  
42871XXX

### Cover for rail

Chrome  
AXOR FinishPlus\*42871000  
42871XXX

#### Required parts:

- / Rail grab bar 300 mm
- / Rail bath towel holder 600 mm
- / Rail bath towel holder 800 mm
- / Shower set 0.90 m with hand shower 120 3jet
- / Shower bar 0.90 m with shower hose 1.60 m

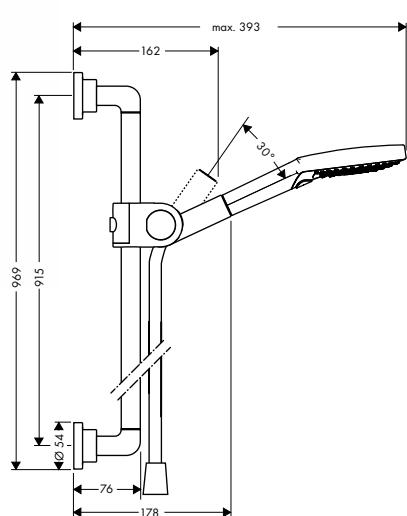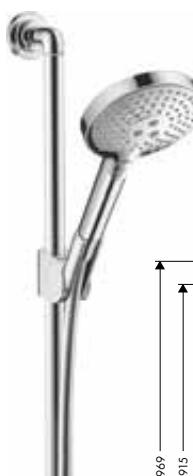Chrome  
AXOR FinishPlus\*42830000  
42830XXX  
42832000  
42832XXX  
42833000  
42833XXX  
36735000  
36735XXX  
36736000  
36736XXX

### Shower set 0.90 m with hand shower 120 3jet

Chrome  
AXOR FinishPlus\*27991000  
27991XXX

- / consists of: hand shower, shower bar, shower hose, slider
- / shower head size: 120 mm
- / spray type: Rain, RainAir, WhirlAir
- / convenient diversion via Select button
- / inclination angle can be adjusted by 30°
- / wall bar 0.90 m
- / support for shower hose with conical nuts
- / maximum flow rate at 3 bar: 16 l/min
- / minimum flow pressure: 1 bar
- / pivot connector prevent hose from tangling
- / wall mounting: screw fastening
- / wall supports of metal
- / profile stand pipe: round

#### Consisting of:


- / Hand shower 120 3jet (# 26050000)
- / Shower hose 1.60 m (# 28626000)

#### Optional parts:

- / Wall bar spacer 7 mm

Chrome

96380000

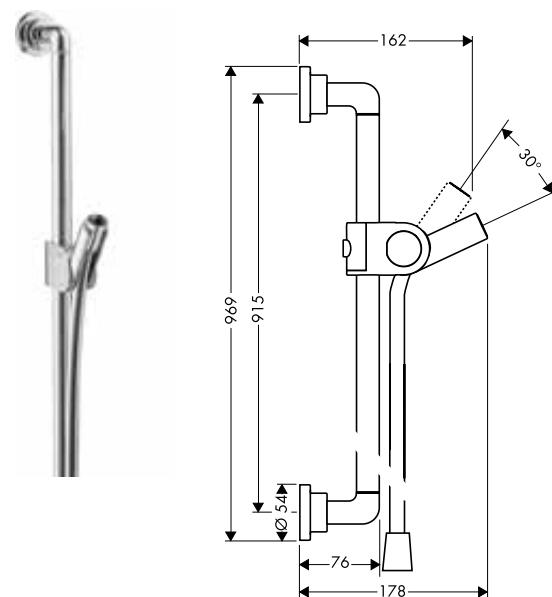

### Shower bar 0.90 m with shower hose 1.60 m


- / consists of: shower bar, shower hose, slider
- / pivot connector prevent hose from tangling
- / profile stand pipe: round
- / shower bar diameter: 25 mm
- / metal hand shower holder
- / hand shower holder with locking mechanism
- / wall supports of metal

#### Consisting of:

- / Shower hose 1.60 m (# 28626000)

finish

code no.

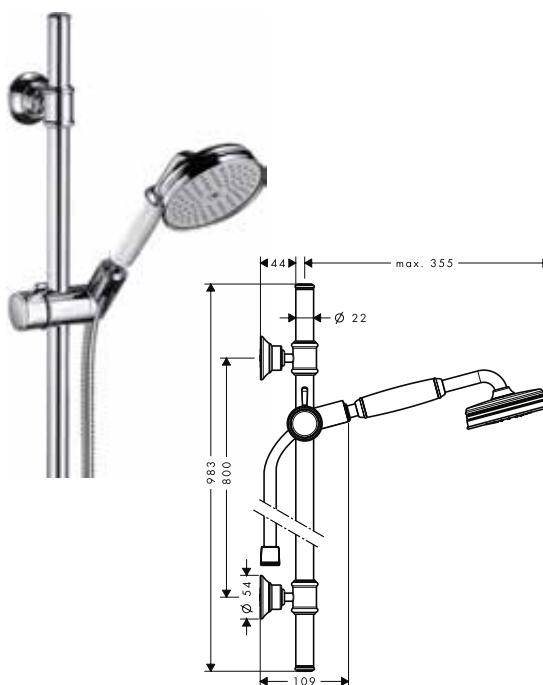Chrome  
AXOR FinishPlus\*27831000  
27831XXX

### Shower set 0.90 m with hand shower 100 1jet

- / consists of: hand shower, shower bar, shower hose, slider
- / shower head size: 100 mm
- / spray type: RainAir
- / support for shower hose with conical nuts
- / AXOR Montreux wall bar 0.90 m
- / maximum flow rate at 3 bar: 16 l/min
- / minimum flow pressure: 1 bar
- / wall supports of metal

#### Consisting of:

- / Hand shower 100 1jet (# 16320XXX)
- / Metal shower hose 1.60 m (# 28116XXX)

#### Optional parts:

- / Corner basket 160/83

Chrome  
Brushed Nickel  
AXOR FinishPlus\*27982000  
27982820  
27982XXX

## Shower holders



### Shower holder

- / fixed holding position
- / for shower hoses with cylindrical nut
- / material: metal





Chrome  
AXOR FinishPlus\*27515000  
27515XXX


#### Optional parts:

- / Metal effect shower hose 1.25 m
- / Metal effect shower hose 1.60 m
- / Metal effect shower hose 2.00 m

Chrome  
AXOR FinishPlus\*28282000  
28282XXX  
28286000  
AXOR FinishPlus\*28286XXX  
28284000  
AXOR FinishPlus\*

Measurements within scale drawings are in mm.

	finish	code no.
	<b>Shower holder round</b> / consists of: shower holder, escutcheon / fixed holding position / for hoses with conical nut / material: metal	Chrome AXOR FinishPlus* 39525000 39525XXX
	<b>Optional parts:</b> / Shower hose 1.25 m / Shower hose 1.60 m / Shower hose 2.00 m	Chrome AXOR FinishPlus* 28622000 28622XXX Chrome AXOR FinishPlus* 28626000 28626XXX Chrome AXOR FinishPlus* 28624000 28624XXX
	<b>Shower holder</b> / consists of: shower holder, escutcheon / fixed holding position / for hoses with conical nut / material: metal	Chrome Brushed Nickel AXOR FinishPlus* 16325000 16325820 16325XXX
	<b>Optional parts:</b> / Metal shower hose 1.25 m / Metal shower hose 1.60 m / Metal shower hose 2.00 m	Chrome AXOR FinishPlus* 28112000 28112XXX Chrome Brushed Nickel AXOR FinishPlus* 28116000 28116820 28116XXX Chrome AXOR FinishPlus* 28120000 28120XXX
	<b>Shower holder</b> / fixed holding position / for shower hoses with cylindrical nut / material: metal	Chrome AXOR FinishPlus* 45721000 45721XXX
	<b>Optional parts:</b> / Metal effect shower hose 1.25 m / Metal effect shower hose 1.60 m / Metal effect shower hose 2.00 m	Chrome AXOR FinishPlus* 28282000 28282XXX Chrome AXOR FinishPlus* 28286000 28286XXX Chrome AXOR FinishPlus* 28284000 28284XXX
<b>Fixfit wall outlets</b>		
	<b>Wall outlet softcube</b> / plastic connection angle / non-return valve / connection type: G 1/2"	Chrome AXOR FinishPlus* 36731000 36731XXX
		


**Wall outlet square**

- / plastic connection angle
- / non-return valve
- / connection type: G 1/2


finish

Chrome  
AXOR FinishPlus\*


code no.

36732000  
36732XXX**Wall outlet round**

- / metal connection angle
- / non-return valve

Chrome  
AXOR FinishPlus\*27451000  
27451XXX**Wall outlet with non-return valve**


- / metal connection angle
- / non-return valve

Chrome  
Brushed Nickel  
AXOR FinishPlus\*16884000  
16884820  
16884XXX**Porter units****Porter unit round**

- / integrated support function
- / metal connection angle
- / non-return valve
- / connection type: G 1/2
- / for shower hoses with conical nut on both sides
- / metal housing with internal water supply made of plastic

Chrome

36733000




**Porter unit square**


- / integrated support function
- / metal connection angle
- / non-return valve
- / connection type: G 1/2
- / for shower hoses with conical nut on both sides
- / metal housing with internal water supply made of plastic

Chrome

36734000

Measurements within scale drawings are in mm.

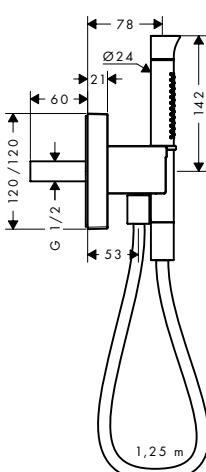	finish	code no.
	<b>Porter unit 120/120 softcube</b>  <ul style="list-style-type: none"> <li>/ integrated support function</li> <li>/ metal connection angle</li> <li>/ non-return valve</li> <li>/ connection type: G 1/2</li> <li>/ in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation</li> <li>/ in a joined installation (10 mm distance), the basic set # 28486180 must be used</li> <li>/ in a freely-arranged installation (distance greater than 10 mm), no basic set is required</li> <li>/ for shower hoses with conical nut on both sides</li> </ul>	Chrome AXOR FinishPlus* 36724000 36724XXX
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for shower module 120/120 for concealed installation</li> <li>/ Shower hose 1.25 m</li> <li>/ Shower hose 1.60 m</li> <li>/ Shower hose 2.00 m</li> </ul>	28486180 28622000 28622XXX 28626000 28626XXX 28624000 28624XXX
	<b>Porter unit</b>  <ul style="list-style-type: none"> <li>/ integrated support function</li> <li>/ non-return valve</li> <li>/ for shower hoses with conical nut on both sides</li> </ul>	Chrome AXOR FinishPlus* 11626000 11626XXX
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Shower hose 1.25 m</li> <li>/ Shower hose 1.60 m</li> <li>/ Shower hose 2.00 m</li> </ul>	28622000 28622XXX 28626000 28626XXX 28624000 28624XXX
	<b>Porter unit 120/120 with baton hand shower 2jet and shower hose</b>  <ul style="list-style-type: none"> <li>/ consists of: porter unit, baton hand shower, shower holder, shower hose</li> <li>/ integrated support function</li> <li>/ spray type: Rain, Mono</li> <li>/ maximum flow rate at 3 bar: 13 l/min</li> <li>/ minimum flow pressure: 1 bar</li> <li>/ nuts shower hose: for shower hoses with conical or cylindrical nut on both sides</li> <li>/ with non-return valve</li> <li>/ in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation</li> <li>/ in a joined installation (10 mm distance), the basic set # 28486180 must be used</li> <li>/ in a freely-arranged installation (distance greater than 10 mm), no basic set is required</li> <li>/ rinseable screen seal</li> </ul> <p><b>Consisting of:</b></p> <ul style="list-style-type: none"> <li>/ Metal effect shower hose 1.25 m (# 28282000)</li> </ul> <p><b>Optional parts:</b></p> <ul style="list-style-type: none"> <li>/ Basic set for shower module 120/120 for concealed installation</li> </ul>	Chrome AXOR FinishPlus* 12232000 12232XXX

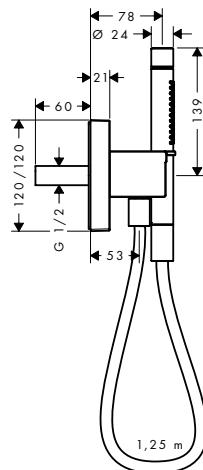

### Porter unit 120/120 with baton hand shower 2jet and shower hose

- / consists of: porter unit, baton hand shower, shower holder, shower hose
- / integrated support function
- / spray type: Rain, Mono
- / maximum flow rate at 3 bar: 16,2 l/min
- / minimum flow pressure: 1 bar
- / nuts shower hose: for shower hoses with conical or cylindrical nut on both sides
- / with non-return valve
- / in a joined installation (10 mm distance), the basic set # 28486180 must be used
- / in a joined installation (10 mm distance) we recommend for perfect handling only the horizontal installation
- / in a freely-arranged installation (distance greater than 10 mm), no basic set is required
- / rinseable screen seal

#### Consisting of:


- / Metal effect shower hose 1.25 m (# 28282000)

#### Optional parts:

- / Basic set for shower module 120/120 for concealed installation

code no.

finish

12626000  
12626XXXChrome  
AXOR FinishPlus\*

### Porter unit


- / for hoses with cylindrical nuts
- / integrated support function
- / metal
- / non-return valve
- / connection type: G 1/2

45723000  
45723670  
45723XXXChrome  
Matt Black  
AXOR FinishPlus\*

#### Optional parts:

- |                                   |  |                                  |
|-----------------------------------|--|----------------------------------|
| / Metal effect shower hose 1.25 m | Chrome<br>Matt Black<br>AXOR FinishPlus* | 28282000<br>28282670<br>28282XXX |
| / Metal effect shower hose 1.60 m | Chrome<br>AXOR FinishPlus*               | 28286000<br>28286XXX             |
| / Metal effect shower hose 2.00 m | Chrome<br>AXOR FinishPlus*               | 28284000<br>28284XXX             |

### Shower hoses



### Shower hose 1.25 m




- / high-quality shower hose with metal effect
- / with plastic coating, easy to clean
- / shower hose length: 1.25 m
- / pivot connector prevent hose from tangling
- / kink-protected
- / nuts shower hose: conical nut on both ends


28622000  
28622XXXChrome  
AXOR FinishPlus\*

#### Alternative sizes:

- |                      |                            |                      |
|----------------------|----------------------------|----------------------|
| / Shower hose 1.60 m | Chrome<br>AXOR FinishPlus* | 28626000<br>28626XXX |
| / Shower hose 2.00 m | Chrome<br>AXOR FinishPlus* | 28624000<br>28624XXX |

Measurements within scale drawings are in mm.

	finish	code no.
 <p><b>Shower hose 1.25 m with volume control</b></p> <ul style="list-style-type: none"> <li>/ high-quality shower hose with metal effect</li> <li>/ with plastic coating, easy to clean</li> <li>/ shower hose length: 1.25 m</li> <li>/ pivot connector prevent hose from tangling</li> <li>/ kink-protected</li> <li>/ adjustable flow rate between 6 l/min and 16 l/min</li> <li>/ nuts shower hose: cylindrical nut on both ends</li> </ul> <p><b>Alternative sizes:</b></p> <ul style="list-style-type: none"> <li>/ Shower hose 1.60 m with volume control</li> </ul>	Chrome AXOR FinishPlus*	28127000 28127XXX
 <p><b>Metal effect shower hose 1.25 m</b></p> <ul style="list-style-type: none"> <li>/ high-quality shower hose with metal effect</li> <li>/ with plastic coating, easy to clean</li> <li>/ shower hose length: 1.25 m</li> <li>/ pivot connector prevent hose from tangling</li> <li>/ kink-protected</li> <li>/ nuts shower hose: cylindrical nut on both ends</li> </ul> <p><b>Alternative sizes:</b></p> <ul style="list-style-type: none"> <li>/ Metal effect shower hose 1.60 m</li> <li>/ Metal effect shower hose 2.00 m</li> </ul>	Chrome Matt Black AXOR FinishPlus*	28282000 28282670 28282XXX
 <p><b>Metal shower hose 1.25 m</b></p> <ul style="list-style-type: none"> <li>/ metal shower hose</li> <li>/ without plastic coating</li> <li>/ shower hose length: 1.25 m</li> <li>/ pivot joints on both sides</li> <li>/ kink-protected</li> <li>/ nuts shower hose: conical nut on both ends</li> </ul> <p><b>Alternative sizes:</b></p> <ul style="list-style-type: none"> <li>/ Metal shower hose 1.60 m</li> <li>/ Metal shower hose 2.00 m</li> </ul>	Chrome AXOR FinishPlus*	28112000 28112XXX

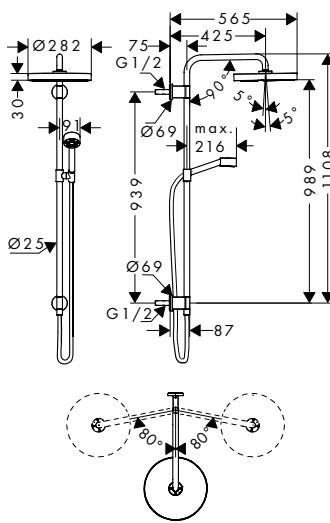**Shower systems****NEW****Showerpipe 280 1jet  
for concealed installation**

- / consists of: overhead shower, hand shower, wall connector, shower hose, hand shower holder, shower bar
- / overhead shower AXOR One 280 1jet
- / shower head size overhead shower: 280 mm
- / spray type overhead shower: PowderRain and Rain in combination
- / ball-joint: overhead shower angle adjustable
- / spray type hand shower: PowderRain shower holder inclination angle can be adjusted continuously
- / requires a mixer for 2 functions
- / maximum flow rate at 3 bar: 12,7 l/min
- / flow rate of hand shower at 3 bar: 8,3 l/min
- / minimum flow pressure: 2 bar
- / mounting type: concealed
- / shower bar diameter: 25 mm
- / height-adjustable hand shower holder
- / swivelling shower arm
- / connection dimension: DN15
- / min. operating pressure: 1,5 bar
- / max. operating pressure: 10 bar

**finish**

Chrome  
Matt Black  
AXOR FinishPlus\*

**code no.**

48790000  
48790670  
48790XXX

**NEW**

- / Overhead shower 280 1jet with shower arm (# 48491XXX)

**NEW**

- / Hand shower 75 1jet EcoSmart (# 48651XXX)

**NEW**

- / Shower bar with wall connection and shower hose 1.60 m (# 48792XXX)

**Required parts:****NEW**

- / Basic set for showerpipe

48798180

**Optional parts:**


- / Thermostatic module for concealed installation for 2 functions

Chrome  
Matt Black  
AXOR FinishPlus\*

45712000


45712670


45712XXX

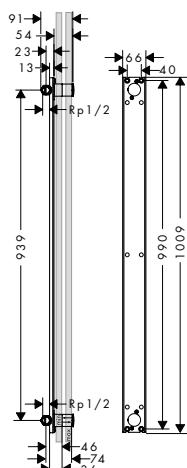**NEW****Basic set for showerpipe**

48798180

- / suitable for AXOR One Showerpipe 48490XXX
- / sound-decoupled installation
- / AXOR One Showerpipe 48490XXX
- / connection dimension: G 1/2

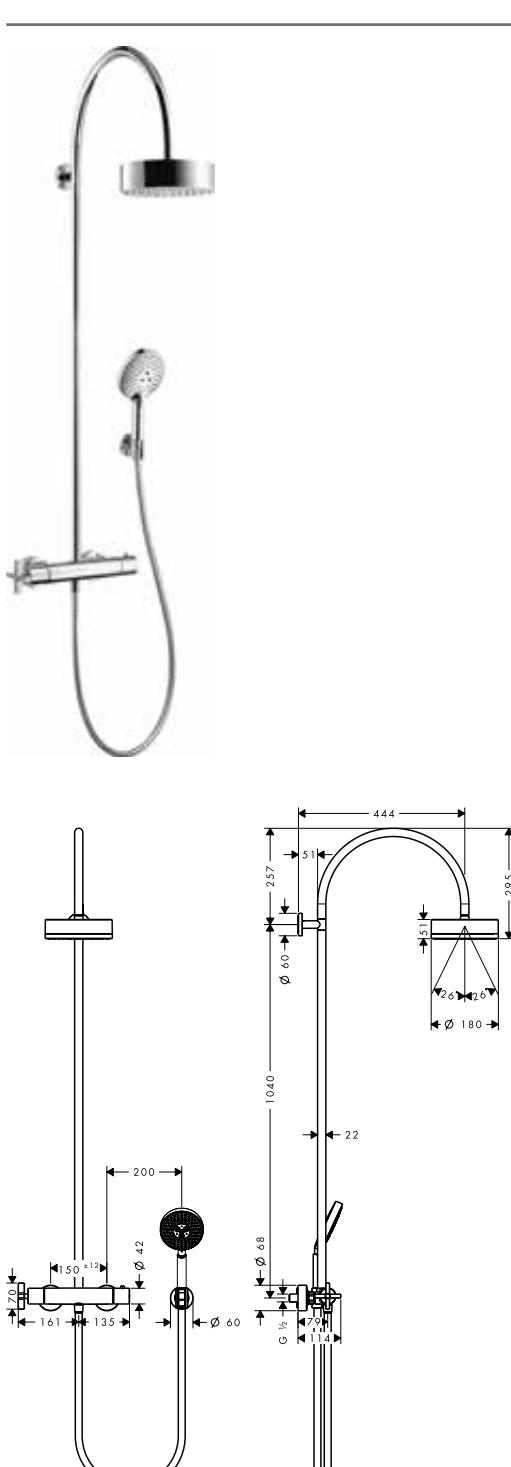	finish	code no.
 <p><b>Showerpipe with thermostat and overhead shower 180 1jet 2 ticks</b></p> <p>/ consists of: overhead shower, hand shower, shower thermostat, shower hose, shower holder      / overhead shower AXOR Citterio      / shower head size overhead shower: 180 mm      / spray type overhead shower: Rain      / ball-joint: overhead shower angle adjustable      / spray type hand shower: RainAir, Rain, WhirlAir      / min. operating pressure: 1 bar      / max. operating pressure: 10 bar      / shower bar diameter: 22 mm      / hand shower wall support      / shower arm length overhead shower: 444 mm      / thermostat AXOR Citterio      / safety lock at 38 °C      / adjustable hot water limitation      / outlets controlled via turning handle      / suitable for continuous flow water heaters      / mounting type: exposed installation      / connection dimension DN15      / connection thread G 1/2      / centre distance 150 ± 12 mm      / intrinsically safe against backflow      / installation: wall-mounted</p> <p><b>Consisting of:</b></p> <ul style="list-style-type: none"> <li>/ Overhead shower 180 1jet (# 28489000)</li> <li>/ Hand shower 120 3jet (# 26050000)</li> <li>/ Shower holder round (# 39525000)</li> <li>/ Shower hose 1.60 m (# 28626000)</li> </ul>	Chrome AXOR FinishPlus*	39671009 39671XXX

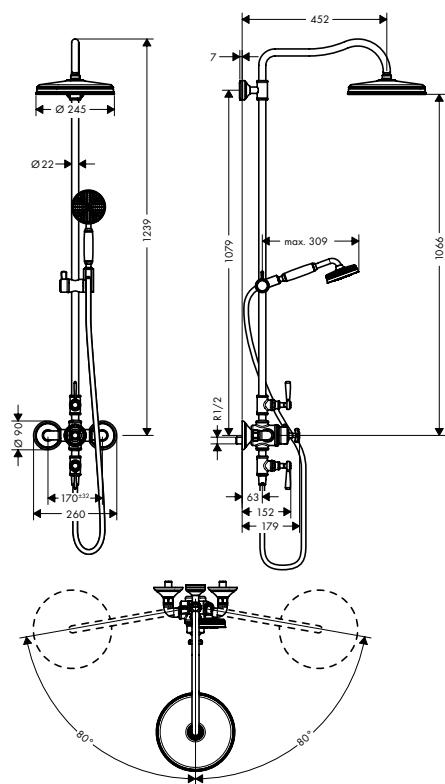

**Showerpipe with thermostat  
and overhead shower 240 1jet  
2 ticks**

- / consists of: overhead shower, hand shower, shower thermostat, shower hose, slider, shower bar
- / shower head size overhead shower: 240 mm
- / spray type overhead shower: RainAir
- / spray type hand shower: RainAir
- / maximum flow rate at 3 bar: 6,3 l/min
- / flow rate of hand shower at 3 bar: 5,4 l/min
- / minimum flow pressure: 1 bar
- / operating pressure:  
min. 2 bar/max. 10 bar
- / shower bar diameter: 22 mm
- / shower arm length overhead shower: 450 mm
- / swivel shower arm
- / thermostat AXOR Montreux
- / safety lock at 40 °C
- / adjustable hot water limitation
- / outlets controlled via turning handle
- / mounting type: exposed installation
- / connection dimension DN15
- / connection thread G 1/2
- / centre distance 170 ± 32 mm

**Consisting of:**

- / Overhead shower 240 1jet Classic (# 28474000)
- / Hand shower 100 1jet (# 16320000)
- / Metal shower hose 1.60 m (# 28116000)

finish

Chrome  
Brushed Bronze  
AXOR FinishPlus\*

code no.

16575009  
16575149  
16575XXX





# AXOR Thermostatic modules with select technology

## Intuitive control in the shower

Exclusive aesthetics. Impressive functionality. AXOR thermostatic modules create perfect moments in the shower. Comfortable to use. With Select technology. At the touch of a button.

With precise regulation for constant temperature control. Escutcheons made of high-grade metal. In a variety of designs. In perfection.

## AXOR ShowerSelect Thermostatic mixers

Modular. Combinable. Intuitive. AXOR ShowerSelect individual thermometer mixers. Easy to operate thanks to Select technology. Allow several outlets to be controlled – either individually or at the same time. Easy to install with the iBox Universal.



Available in three different escutcheon forms.

As a square with precise corners, as a softcube or a circular.

## AXOR One



Flat. Soft. Planar. The monolithic control element and the hand shower of the AXOR One shower set. Interaction design par excellence. All thanks to the innovative ShowerSelect technology. With the control element, two large paddles manage the shower jets. Can be combined with one, two or three outlets. Concealed installation.

# AXOR Select thermostatic module


The technical counterpart to the element of water. The AXOR Select thermostatic module. Clear in appearance, impressive in performance. Timeless and elegant. Perfect integration in the room.


Intuitive to use thanks to its large Select buttons.

For three to five outlets or spray modes depending on the version. Precise switching at the touch of a button. Purely mechanical.

With integrated thermostat and porter unit.

Design: Phoenix Design

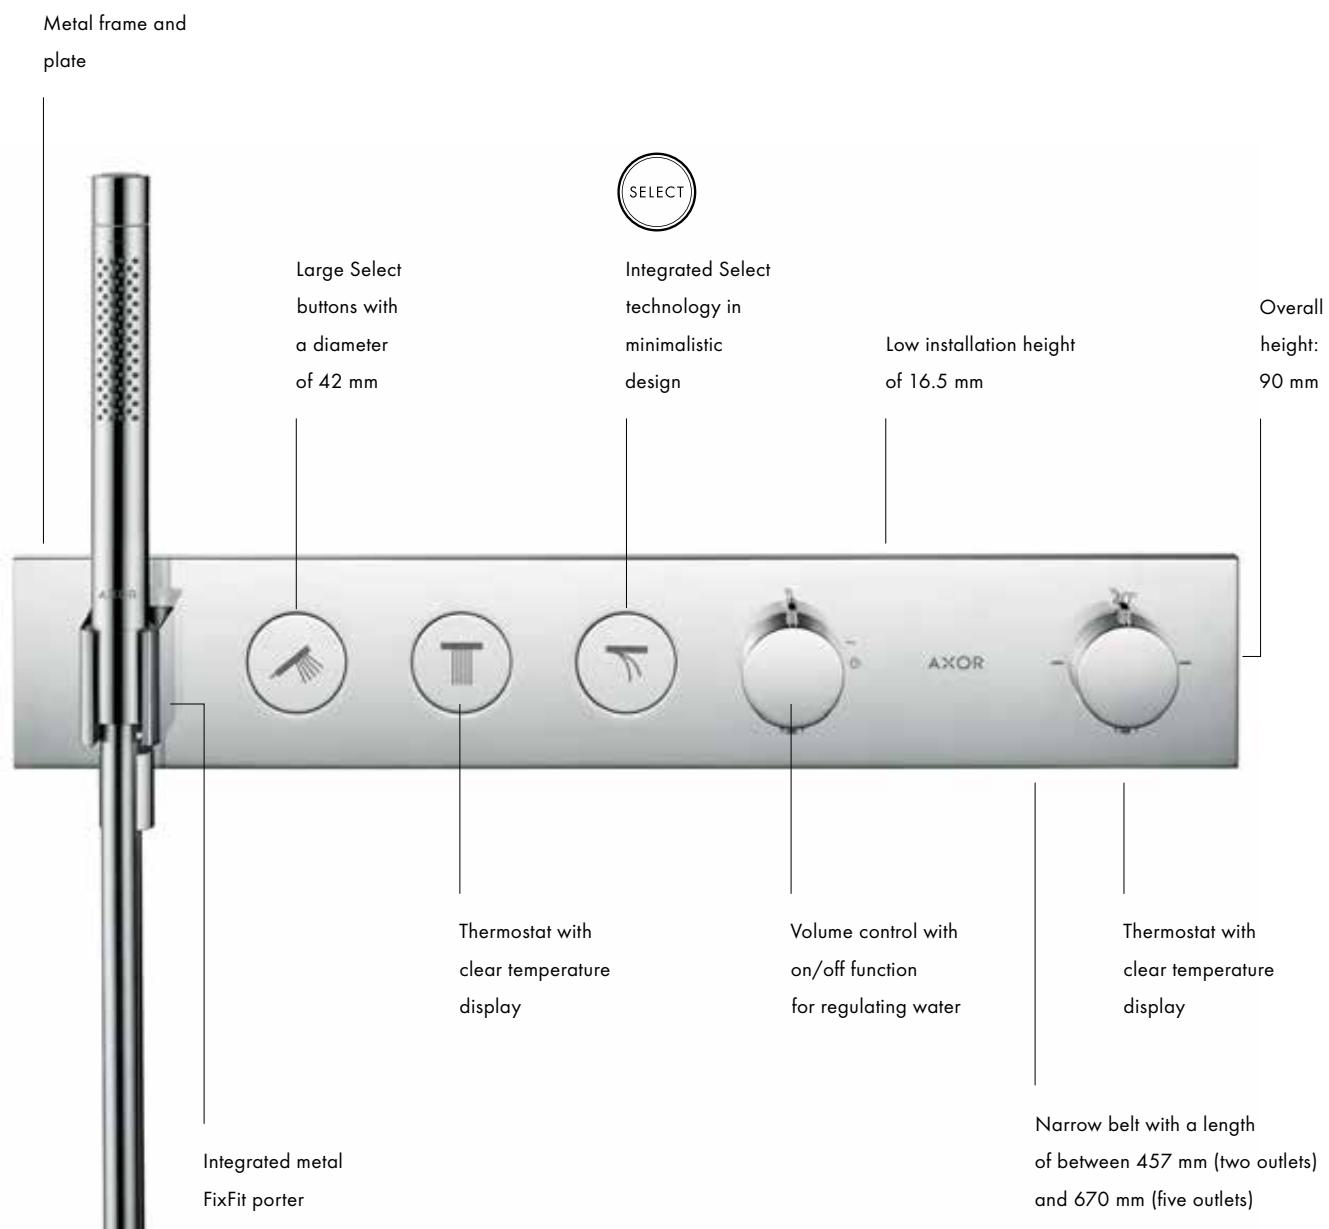

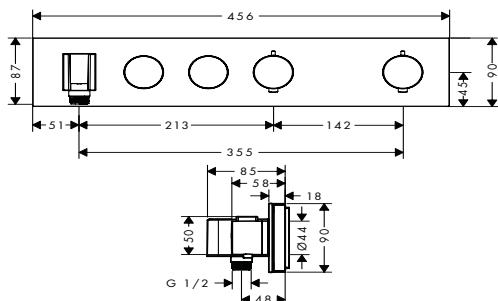
**Thermostatic module Select**
**Thermostatic module Select  
460/90 for concealed  
installation for 2 functions**

- / consists of: Thermostatic module, shower holder
- / depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- / 2 functions
- / Select push-button on/off control for 2 outlets
- / simultaneous use of several outlets
- / maximum flow rate at 3 bar: 26 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / hose nut: for shower hoses with conical or cylindrical nut on both sides
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / Thermostat is delivered with buttons Rain large and hand shower

finish

Chrome  
AXOR FinishPlus\*


code no.

18355000  
18355XXX
**Basic set for thermostatic  
module Select for 2 functions**

18310180

- / 2 functions
- / connection thread Rp 3/4
- / installation depth: 87 - 122 mm
- / horizontal installation
- / sound-decoupled installation
- / connection dimension: DN15/DN20

18310180

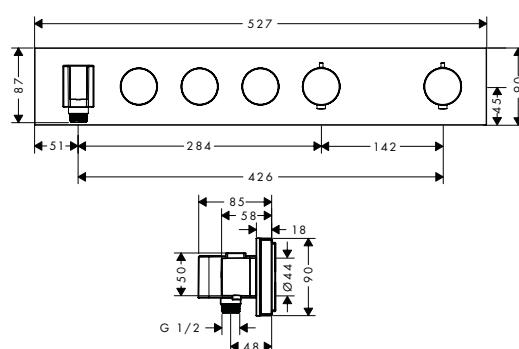
**Thermostatic module Select  
530/90 for concealed  
installation for 3 functions**
Chrome  
AXOR FinishPlus\*18356000  
18356XXX**Required parts:**


- / Basic set for thermostatic module Select for 3 functions

18311180

Measurements within scale drawings are in mm.

finish


code no.

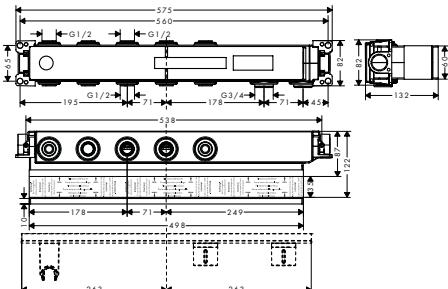

### Basic set for thermostatic module Select for 3 functions

18311180

- / 3 functions
- / connection thread Rp 3/4
- / installation depth: 87 - 122 mm
- / horizontal installation
- / sound-decoupled installation
- / connection dimension: DN15/DN20

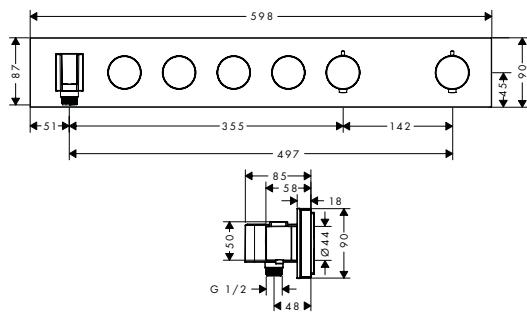

### Thermostatic module Select 600/90 for concealed installation for 4 functions


Chrome  
AXOR FinishPlus\*  
18357000  
18357XXX

- / consists of: Thermostatic module, shower holder
- / depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- / 4 functions
- / Select push-button on/off control for 4 outlets
- / simultaneous use of several outlets
- / maximum flow rate at 3 bar: 26 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / hose nut: for shower hoses with conical or cylindrical nut on both sides
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / Thermostat is delivered with buttons Waterfall, Rain large, Mono, hand shower

#### Required parts:

- / Basic set for thermostatic module Select for 4 functions


18312180

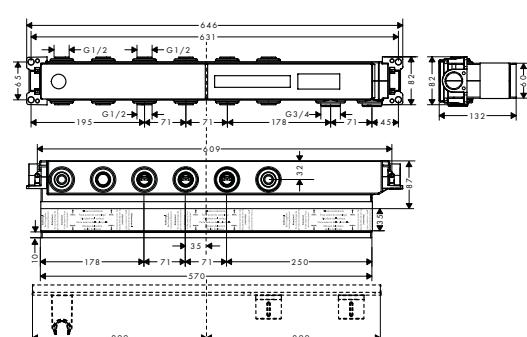

### Basic set for thermostatic module Select for 4 functions

18312180

- / 4 functions
- / connection thread Rp 3/4
- / installation depth: 87 - 122 mm
- / horizontal installation
- / sound-decoupled installation
- / connection dimension: DN15/DN20

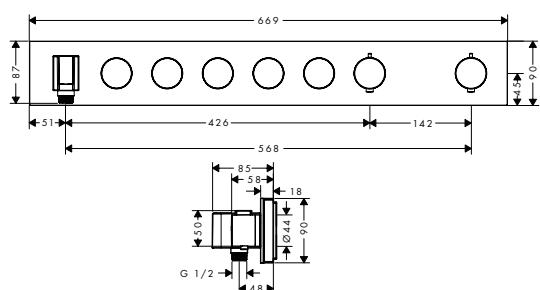


### Thermostatic module Select 670/90 for concealed installation for 5 functions

- / consists of: Thermostatic module, shower holder
- / depending on volume flow and installation situation approx. 50% flow rate reduction and integrated shut off function
- / 5 functions
- / Select push-button on/off control for 5 outlets
- / simultaneous use of several outlets
- / maximum flow rate at 3 bar: 26 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / hose nut: for shower hoses with conical or cylindrical nut on both sides
- / connection type: basic set
- / min. operating pressure: 1 bar
- / max. operating pressure: 10 bar
- / Thermostat is delivered with buttons hand shower, Mono, PowderRain inside, PowderRain outside, overhead shower

finish

Chrome  
AXOR FinishPlus\*

code no.

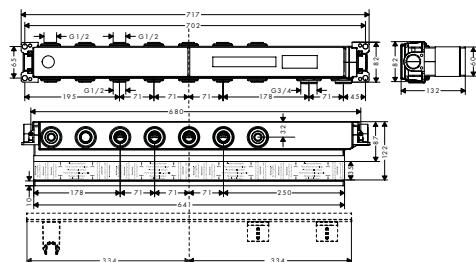18358000  
18358XXX

### Basic set for thermostatic module Select for 5 functions

18313180

- / 5 functions
- / connection thread Rp 3/4
- / installation depth: 87 - 122 mm
- / horizontal installation
- / sound-decoupled installation
- / connection dimension: DN15/DN20

Optional parts - buttons - please order separately



#### Symbol handshower thermostatic module Select

Chrome 93307000



#### Symbol overhead shower thermostatic module Select

Chrome 93308000



#### Symbol overhead shower Rain small thermostatic module Select



Chrome 93663000




#### Symbol RainFlow thermostatic module Select

Chrome 93309000

Measurements within scale drawings are in mm.

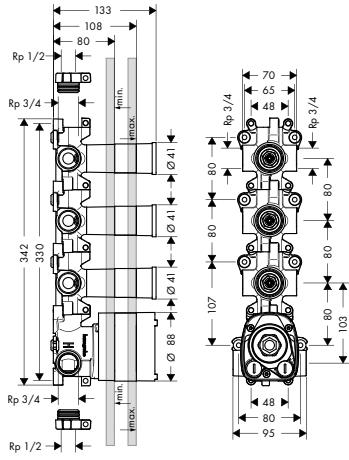		finish	code no.
	<b>Symbol Mono thermostatic module Select</b>	Chrome	93310000
	<b>Symbol PowderRain inside thermostatic module Select</b>	Chrome	93311000
	<b>Symbol PowderRain outside thermostatic module Select</b>	Chrome	93312000
<b>ShowerCollection</b>			
	<b>Thermostatic module 360/120 for concealed installation square for 3 functions</b>	Chrome AXOR FinishPlus*	10751000 10751XXX
	<ul style="list-style-type: none"><li>/ 3 functions</li><li>/ simultaneous use of several outlets</li><li>/ thermostat cartridge</li><li>/ safety lock at 40 °C</li><li>/ temperature limitation adjustable</li><li>/ non-return valve</li><li>/ connection type: basic set</li><li>/ connection dimension: DN20</li><li>/ min. operating pressure: 1,5 bar</li><li>/ max. operating pressure: 10 bar</li></ul>		
	<b>Required parts:</b>		
	<ul style="list-style-type: none"><li>/ Basic set for thermostatic module 360/120 for concealed installation</li></ul>		10750180
	<b>Optional parts:</b>		
	<ul style="list-style-type: none"><li>/ Extension set 25 mm for thermostatic module</li></ul>	Chrome AXOR FinishPlus*	10790000 10790XXX
	<ul style="list-style-type: none"><li>/ Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro</li></ul>		92990000
	<b>Basic set for thermostatic module 360/120 for concealed installation</b>		10750180
	<ul style="list-style-type: none"><li>/ connection from left or right</li><li>/ 3 outlets can be used simultaneously</li><li>/ flow rate at free through-flow: 59 l/min</li><li>/ spindle valves</li><li>/ horizontal or vertical installation</li><li>/ sound-decoupled installation</li><li>/ in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning</li><li>/ connection dimension: DN20</li></ul>		
	<b>Required parts:</b>		
	<ul style="list-style-type: none"><li>/ Thermostatic module 360/120 for concealed installation square for 3 functions</li></ul>	Chrome AXOR FinishPlus*	10751000 10751XXX
	<ul style="list-style-type: none"><li>/ Thermostatic module 360/120 for concealed installation</li></ul>	Chrome AXOR FinishPlus*	12717000 12717XXX



### Thermostatic module 120/120 for concealed installation square

- / maximum flow rate at 3 bar: 59 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / non-return valve
- / connection type: basic set
- / connection dimension: DN20
- / min. operating pressure: 1,5 bar
- / max. operating pressure: 10 bar

#### Required parts:

- / Basic set for thermostatic module 120/120 for concealed installation

finish

Chrome  
AXOR FinishPlus\*

code no.

10755000  
10755XXX

10754180

#### Optional parts:

- / Extension set 25 mm for thermostatic module

Chrome  
AXOR FinishPlus\*10790000  
10790XXX


### Basic set for thermostatic module 120/120 for concealed installation

10754180


- / flow rate at free through-flow: 59 l/min
- / horizontal or vertical installation
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN20

#### Optional parts:

- / Thermostat HighFlow 120/120 for concealed installation
- / Thermostatic module 120/120 for concealed installation square
- / Thermostat 120/120 for concealed installation


Chrome  
AXOR FinishPlus\*12712000  
12712XXX  
10755000  
10755XXX  
36702000  
36702XXX

### Extension set 25 mm for thermostatic module

Chrome  
AXOR FinishPlus\*10790000  
10790XXX

- / connection dimension: DN20
- / extension for basic set
- / extension length: 25 mm

Measurements within scale drawings are in mm.



### Shut-off valve 120/120 for concealed installation square


- / connection type: DN15/DN20
- / in a joined installation (10 mm distance) with # 10755000, # 10751000, # 10651000, # 28491000, # 40872000 or # 40873000 the use of basic set # 10971180 is recommended
- / in a freely arranged installation, basic sets # 15973180, # 15974180 or # 15970180 can also be used

#### Required parts:

- / Basic set for shut-off valve 120/120 for concealed installation 10971180
- / Basic set 52 l/min for shut-off valve for concealed installation spindle 16973180
- / Basic set 40 l/min for concealed installation for shut-off valve ceramic 16974180
- / Basic set 130 l/min for shut-off valve for concealed installation spindle 16970180

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 92990000




### Basic set for shut-off valve 120/120 for concealed installation

- / suitable for all shut-off valves finish sets
- / connection from left or right
- / flow rate at free through-flow: 55 l/min
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN15

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 92990000



### Basic set 52 l/min for shut-off valve for concealed installation spindle

- / connection type: DN15
- / suitable for all shut-off valves finish sets
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 52 l/min

#### Alternative products:

- / Basic set 40 l/min for concealed installation for shut-off valve ceramic 16974180
- / Basic set 130 l/min for shut-off valve for concealed installation spindle 16970180



#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro 92990000

finish

code no.

Chrome  
AXOR FinishPlus\*10972000  
10972XXX




### Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation

- / 3 consumers: in a freely-arranged installation (distance greater than 10 mm), the basic set # 15930180 must be used
- / 2 consumers: in a joined installation (10 mm distance) with # 36702000, the basic set # 36770180 must be used
- / 2 consumers: in a freely-arranged installation (distance greater than 10 mm), the basic set # 15981180 must be used
- / simultaneous utilization of 2 functions

#### Required parts:

- |  |          |
|--|----------|
| / Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation | 36770180 |
| / Basic set for Quattro four-way diverter valve for concealed installation       | 16930180 |
| / Basic set for shut-off/ diverter valve Trio for concealed installation         | 16982180 |

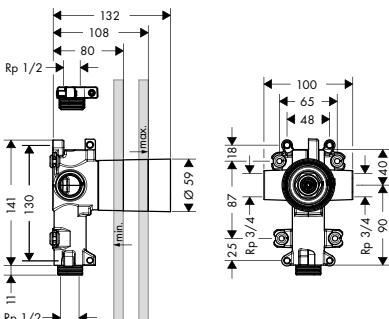

### Basic set for shut-off/ diverter valve Trio 120/120 for concealed installation

36770180



- / 2 functions
- / 1 inlet/ 2 outlets
- / 2 outlets can be used simultaneously
- / connection thread Rp 3/4
- / horizontal or vertical installation
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN20

#### Required parts:

- |   |                           |
|---|---------------------------|
| / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation | Chrome 36772000           |
| / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation | AXOR FinishPlus* 36772XXX |
| / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation | Chrome 10932000           |
| / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation | AXOR FinishPlus* 10932XXX |
| / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation | Chrome 12731000           |
| / Shut-off/ diverter valve Trio/ Quattro 120/120 for concealed installation | AXOR FinishPlus* 12731XXX |

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|



### Basic set for shut-off/ diverter valve Trio for concealed installation

16982180

- / 2 functions
- / simultaneous utilization of 2 functions
- / suitable for all Trio finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:

- |   |          |
|---|----------|
| / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro | 92990000 |
|---|----------|

finish

code no.


Chrome  
AXOR FinishPlus\*

10932000  
10932XXX

Measurements within scale drawings are in mm.

finish

code no.




### Basic set for Quattro four-way diverter valve for concealed installation

- / requires volume control
- / 3 functions
- / simultaneous utilization of 2 functions
- / suitable for all Quattro finish sets
- / connection dimension: DN20
- / maximum flow rate at 3 bar: 65 l/min

#### Optional parts:

- / Extension set 25 mm for shut-off/ diverter valve Trio-/ Quattro

16930180

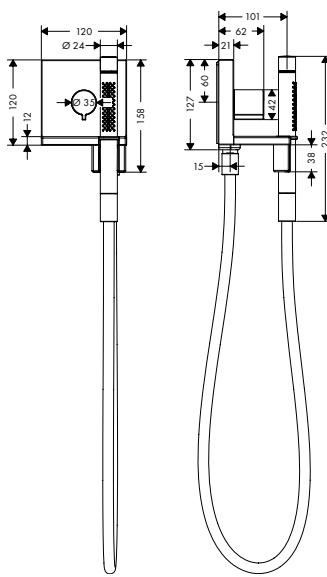

### Hand shower module 120/120 for concealed installation square

Chrome AXOR FinishPlus\* 10651000  
10651XXX

- / consists of: shut-off valve, hand shower module, baton hand shower, shower hose
- / hose nut: for shower hoses with cylindrical nut on both sides
- / connection type: DN15
- / with non-return valve
- / material: metal
- / maximum flow rate at 3 bar: 17 l/min

#### Consisting of:

- / Metal effect shower hose 1.25 m (# 28282000)

#### Required parts:


- / Basic set for hand shower module 120/120 for concealed installation

10650180

#### Optional parts:

- / Extension set for hand shower module

10658000




### Basic set for hand shower module 120/120 for concealed installation

10650180

- / flow rate at free through-flow: 30 l/min
- / ceramic valve 180°
- / horizontal or vertical installation
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN15

## ShowerCollection Accessories

**Shelf 120/120**

- / when positioning the shelf between waterconducting parts (# 10755XXX, # 10751XXX, # 10942XXX, # 10972XXX, # 10651XXX, # 28491XXX) in joined installation (10 mm distance), it is recommended to use basic set # 40877180
- / suitable for installation with or without basic set # 40877180
- / for use with either vertical or horizontal installation of the basic set
- / material frame: solid brass
- / material shelf: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 72 mm
- / diameter drill hole: 6 mm

finish

Chrome  
AXOR FinishPlus\*

code no.


40872000  
40872XXX**Optional parts:**

- / Basic set/ waterconducting unit for shelf 120/120 for concealed installation

40877180

**Basic set/ waterconducting unit for shelf 120/120 for concealed installation**

40877180


**Shelf 240/120**

- / for use with either vertical or horizontal installation of the basic set
- / when positioning the shelf between waterconducting parts (# 10755XXX, # 10751XXX, # 10942XXX, # 10972XXX, # 10651XXX, # 28491XXX) in joined installation (10 mm distance), it is recommended to use basic set # 40878180
- / suitable for installation with or without basic set # 40878180
- / material frame: solid brass
- / material shelf: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 72 mm
- / diameter drill hole: 6 mm

Chrome  
AXOR FinishPlus\*40873000  
40873XXX**Optional parts:**

- / Basic set/ waterconducting unit for shelf 240/120 for concealed installation

40878180


**Basic set/ waterconducting unit for shelf 240/120 for concealed installation**

40878180



- / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning. In combination with: # 40873XXX

Measurements within scale drawings are in mm.

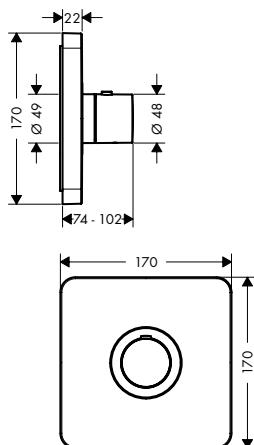**ShowerSelect Soft**
**Thermostat HighFlow  
for concealed installation  
softcube**

- / maximum flow rate at 3 bar: 59 l/min
- / flow rate upper outlet: 42 l/min
- / flow rate lower outlet: 42 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / connection type: basic set


**Required parts:**

- / Basic set iBox universal

01700180

**Optional parts:**

- |   |                  |          |
|---|------------------|----------|
| / Valve for concealed installation softcube for 3 functions | Chrome           | 36773000 |
|   | AXOR FinishPlus* | 36773XXX |
| / Extension 25 mm for basic set iBox universal              | 13587000         |          |
| / Fastening rail set for iBox universal                     | 93171000         |          |

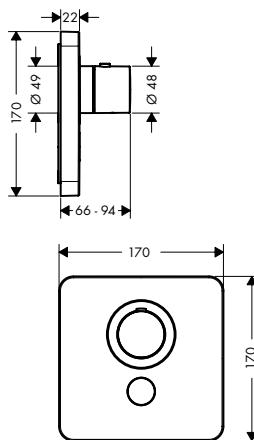
**Thermostat HighFlow  
for concealed installation  
softcube for 1 function  
and additional outlet**

- / 1 function and 1 additional outlet
- / Select push-button on/off control for 1 outlet
- / flow rate hand shower connection at 3 bar: 34 l/min
- / flow rate upper outlet: 59 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / connection type: basic set
- / Thermostat is delivered with button hand shower


**Required parts:**


- / Basic set iBox universal

01700180

**Optional parts:**

- |   |                  |          |
|---|------------------|----------|
| / Valve for concealed installation softcube for 3 functions | Chrome           | 36773000 |
|   | AXOR FinishPlus* | 36773XXX |
| / Fastening rail set for iBox universal                     | 93171000         |          |
| / Extension 25 mm for basic set iBox universal              | 13587000         |          |





### Valve for concealed installation softcube for 3 functions

- / 3 functions
- / Select push-button on/off control for 3 outlets
- / simultaneous use of several outlets
- / maximum flow rate at 3 bar: 30 l/min
- / flow rate upper outlet: 26 l/min
- / Flow rate left and right: 29 l/min
- / Start/stop valve to operate the functions
- / safety lock at 40 °C
- / connection type: basic set
- / valve is delivered with buttons Rain large, Waterfall, hand shower

finish

Chrome  
AXOR FinishPlus\*

code no.

36773000  
36773XXX


#### Required parts:

- / Basic set iBox universal

01700180

#### Optional parts:

- |  |                  |          |
|--|------------------|----------|
| / Thermostat HighFlow for concealed installation softcube                                      | Chrome           | 36711000 |
| / Thermostat HighFlow for concealed installation softcube for 1 function and additional outlet | AXOR FinishPlus* | 36711XXX |
| / Fastening rail set for iBox universal  | Chrome           | 36706000 |
| / Extension 25 mm for basic set iBox universal   | AXOR FinishPlus* | 36706XXX |
- 
- |   |  |          |
|---|--|----------|
| / |  | 93171000 |
| / |  | 13587000 |

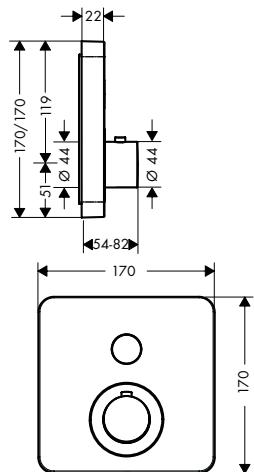

### Thermostat for concealed installation softcube for 1 function

Chrome  
AXOR FinishPlus\*36705000  
36705XXX

- / 1 function
- / Select push-button on/off control for 1 outlet
- / maximum flow rate at 3 bar: 26 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / connection type: basic set
- / Thermostat is delivered with button On/Off

#### Required parts:




- / Basic set iBox universal



01700180

#### Optional parts:

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |

Measurements within scale drawings are in mm.

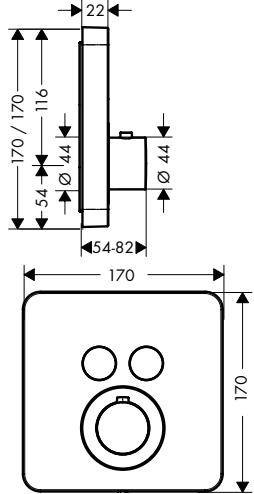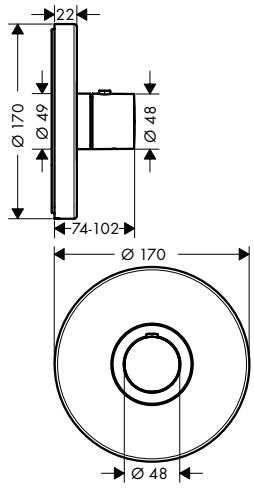	finish	code no.
 	<b>Thermostat for concealed installation SoftSquare for 2 functions</b> Chrome AXOR FinishPlus* 	36707000 36707XXX
<b>Required parts:</b> / Basic set iBox universal		01700180
<b>Optional parts:</b> / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal		13587000 93171000
 	<b>Basic set iBox universal</b>	01700180
<b>Optional parts:</b> / Extension 25 mm for basic set iBox universal / Fastening rail set for iBox universal / Reduction coupling iBox universal		13587000 93171000 97759000
<b>ShowerSelect Round</b>  	<b>Thermostat HighFlow for concealed installation round</b> Chrome Brushed Nickel AXOR FinishPlus*	36721000 36721820 36721XXX
<b>Required parts:</b> / Basic set iBox universal		01700180
<b>Optional parts:</b> / Valve for concealed installation round for 3 functions / Fastening rail set for iBox universal / Extension 25 mm for basic set iBox universal	Chrome Brushed Nickel AXOR FinishPlus*	36727000 36727820 36727XXX 93171000 13587000



### Thermostat HighFlow for concealed installation round for 1 function and additional outlet

- / 1 function and 1 additional outlet
- / Select push-button on/off control for 1 outlet
- / flow rate hand shower connection at 3 bar: 34 l/min
- / flow rate upper outlet: 59 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / connection type: basic set
- / Thermostat is delivered with button hand shower

#### Required parts:


- / Basic set iBox universal

finish

code no.

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

36726000  
36726820  
36726XXX



### Valve for concealed installation round for 3 functions

- / 3 functions
- / Select push-button on/off control for 3 outlets
- / simultaneous use of several outlets
- / maximum flow rate at 3 bar: 30 l/min
- / flow rate upper outlet: 26 l/min
- / Flow rate left and right: 29 l/min
- / Start/stop valve to operate the functions
- / safety lock at 40 °C
- / connection type: basic set
- / valve is delivered with buttons Rain large, Waterfall, hand shower

#### Required parts:

- / Basic set iBox universal




Chrome  
Brushed Nickel  
AXOR FinishPlus\*


36727000  
36727820  
36727XXX



Chrome	36721000
Brushed Nickel	36721820
AXOR FinishPlus*	36721XXX
Chrome	36726000
Brushed Nickel	36726820
AXOR FinishPlus*	36726XXX
	13587000
	93171000

Measurements within scale drawings are in mm.

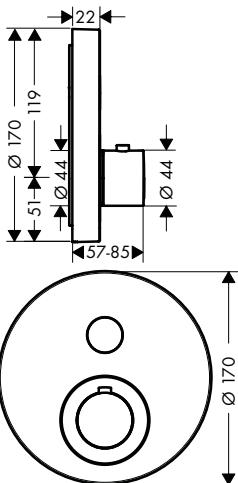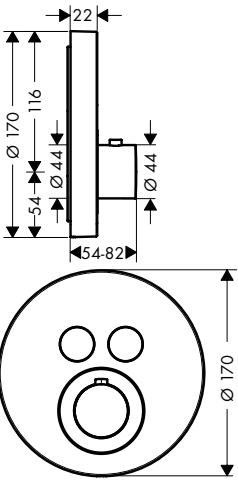	finish	code no.
 	<b>Thermostat for concealed installation round for 1 function</b> Chrome Brushed Nickel AXOR FinishPlus*	36722000 36722820 36722XXX
	<ul style="list-style-type: none"> <li>/ 1 function</li> <li>/ Select push-button on/off control for 1 outlet</li> <li>/ maximum flow rate at 3 bar: 26 l/min</li> <li>/ thermostat cartridge</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ connection type: basic set</li> <li>/ Thermostat is delivered with button On/Off</li> </ul>	
	<b>Required parts:</b>	01700180
	<ul style="list-style-type: none"> <li>/ Basic set iBox universal</li> </ul>	
	<b>Optional parts:</b>	13587000
	<ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> </ul>	93171000
 	<b>Thermostat for concealed installation round for 2 functions</b> Chrome Brushed Nickel AXOR FinishPlus*	36723000 36723820 36723XXX
	<ul style="list-style-type: none"> <li>/ 2 functions</li> <li>/ Select push-button on/off control for 2 outlets</li> <li>/ simultaneous use of several outlets</li> <li>/ flow rate upper outlet: 25 l/min</li> <li>/ flow rate lower outlet: 23 l/min</li> <li>/ thermostat cartridge</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ connection type: basic set</li> <li>/ Thermostat is delivered with buttons Rain large and hand shower</li> </ul>	
	<b>Required parts:</b>	01700180
	<ul style="list-style-type: none"> <li>/ Basic set iBox universal</li> </ul>	
	<b>Optional parts:</b>	13587000
	<ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> </ul>	93171000
 	<b>Basic set iBox universal</b> 01700180	
	<ul style="list-style-type: none"> <li>/ suitable for all shower, bath tub and thermostat finish sets for concealed installation</li> <li>/ connection thread Rp 3/4"</li> <li>/ rotationally-symmetric installation</li> <li>/ sound-decoupled installation</li> <li>/ connection dimension: DN20</li> </ul>	
	<b>Optional parts:</b>	13587000
	<ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal</li> <li>/ Fastening rail set for iBox universal</li> <li>/ Reduction coupling iBox universal</li> </ul>	93171000 97759000

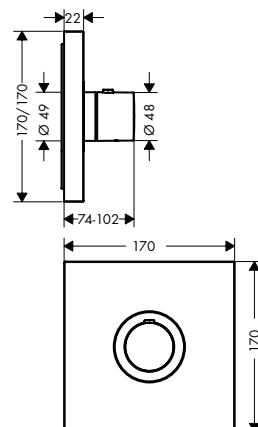**ShowerSelect Square**
**Thermostat HighFlow  
for concealed installation  
square**

- / maximum flow rate at 3 bar: 59 l/min
- / flow rate upper outlet: 42 l/min
- / flow rate lower outlet: 42 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / connection type: basic set

**Required parts:**


- / Basic set iBox universal

finish

code no.

Chrome  
AXOR FinishPlus\*36718000  
36718XXX**Optional parts:**

- / Extension 25 mm for basic set iBox universal
- / Valve for concealed installation square for 3 functions
- / Fastening rail set for iBox universal

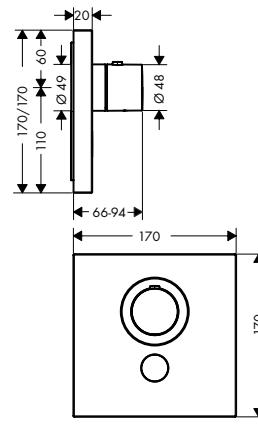Chrome  
AXOR FinishPlus\*36717000  
36717XXX  
93171000
**Thermostat HighFlow  
for concealed installation  
square for 1 function  
and additional outlet**

- / 1 function and 1 additional outlet
- / Select push-button on/off control for 1 outlet
- / flow rate hand shower connection at 3 bar: 34 l/min
- / flow rate upper outlet: 59 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / connection type: basic set
- / Thermostat is delivered with button hand shower

**Required parts:**



- / Basic set iBox universal


Chrome  
AXOR FinishPlus\*36716000  
36716XXX**Optional parts:**

- / Valve for concealed installation square for 3 functions
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal

Chrome  
AXOR FinishPlus\*36717000  
36717XXX  
13587000

93171000

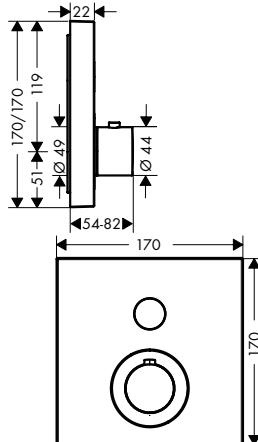	finish	code no.
 	<b>Valve for concealed installation square for 3 functions</b> Chrome AXOR FinishPlus* 36717000 36717XXX	
<ul style="list-style-type: none"> <li>/ 3 functions</li> <li>/ Select push-button on/off control for 3 outlets</li> <li>/ simultaneous use of several outlets</li> <li>/ maximum flow rate at 3 bar: 30 l/min</li> <li>/ flow rate upper outlet: 26 l/min</li> <li>/ Flow rate left and right: 29 l/min</li> <li>/ Start/stop valve to operate the functions</li> <li>/ safety lock at 40 °C</li> <li>/ connection type: basic set</li> <li>/ valve is delivered with buttons Rain large, Waterfall, hand shower</li> </ul>		
<b>Required parts:</b> / Basic set iBox universal	01700180	
<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Thermostat HighFlow for concealed installation square Chrome AXOR FinishPlus* 36718000 36718XXX</li> <li>/ Thermostat HighFlow for concealed installation square for 1 function Chrome AXOR FinishPlus* 36716000 36716XXX</li> <li>/ Extension 25 mm for basic set iBox universal 13587000</li> <li>/ Fastening rail set for iBox universal 93171000</li> </ul>		
 	<b>Thermostat for concealed installation square for 1 function</b> Chrome AXOR FinishPlus* 36714000 36714XXX	
<ul style="list-style-type: none"> <li>/ 1 function</li> <li>/ Select push-button on/off control for 1 outlet</li> <li>/ maximum flow rate at 3 bar: 26 l/min</li> <li>/ thermostat cartridge</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ connection type: basic set</li> <li>/ Thermostat is delivered with button On/Off</li> </ul>		
<b>Required parts:</b> / Basic set iBox universal	01700180	
<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension 25 mm for basic set iBox universal 13587000</li> <li>/ Fastening rail set for iBox universal 93171000</li> </ul>		

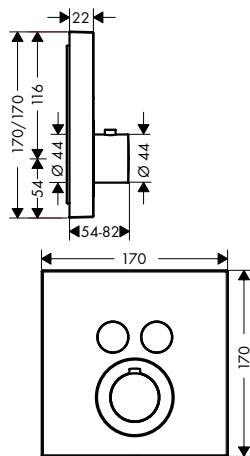

### Thermostat for concealed installation square for 2 functions


- / 2 functions
- / Select push-button on/off control for 2 outlets
- / simultaneous use of several outlets
- / flow rate upper outlet: 25 l/min
- / flow rate lower outlet: 23 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / connection type: basic set
- / Thermostat is delivered with buttons Rain large and hand shower

#### Required parts:

- / Basic set iBox universal

finish

code no.

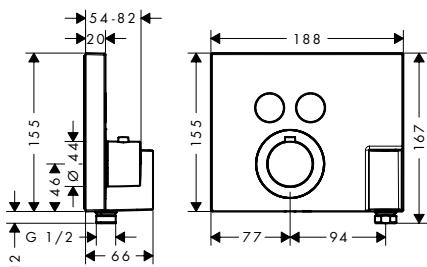Chrome  
AXOR FinishPlus\*36715000  
36715XXX

### Thermostat for concealed installation square for 2 functions with wall outlet and shower holder

- / consists of: Thermostat, shower holder
- / 2 functions
- / Select push-button on/off control for 2 outlets
- / simultaneous use of several outlets
- / maximum flow rate at 3 bar: 29 l/min
- / flow rate hand shower connection at 3 bar: 14 l/min
- / flow rate upper outlet: 29 l/min
- / flow rate lower outlet: 29 l/min
- / thermostat cartridge
- / safety lock at 40 °C
- / temperature limitation adjustable
- / hose nut: for shower hoses with conical nut on both sides
- / connection type: basic set
- / Thermostat is delivered with buttons Rain large and hand shower

Chrome  
AXOR FinishPlus\*36712000  
36712XXX

This product is not available in brushed AXOR FinishPlus surfaces.

#### Required parts:

- / Basic set iBox universal

01700180

#### Optional parts:

- / Shower hose 1.25 m
- / Extension element ShowerSelect FixFit Porter
- / Extension 25 mm for basic set iBox universal
- / Fastening rail set for iBox universal


Chrome  
AXOR FinishPlus\*28622000  
28622XXX

Chrome

13601000

13587000


93171000

	finish	code no.
	<b>Basic set iBox universal</b>	01700180
	/ suitable for all shower, bath tub and thermostat finish sets for concealed installation / connection thread Rp 3/4 / rotationally-symmetric installation / sound-decoupled installation / connection dimension: DN20	
	<b>Optional parts:</b>	
	/ Extension 25 mm for basic set iBox universal	13587000
	/ Fastening rail set for iBox universal	93171000
	/ Reduction coupling iBox universal	97759000
	<b>Symbol ON/OFF</b>	Black 93579610
	<b>Symbol hand shower</b>	Black 93573610
	<b>Symbol overhead shower Rain large</b>	Black 93571610
	<b>Symbol overhead shower Rain small</b>	Black 93572610
	<b>Symbol Rain Flow</b>	Black 93574610
	<b>Symbol Whirl</b>	Black 93575610
	<b>Symbol Mono</b>	Black 93576610
	<b>Symbol tub</b>	Black 93577610



	finish	code no.
<b>Symbol body spray</b>	Black	93578610

One

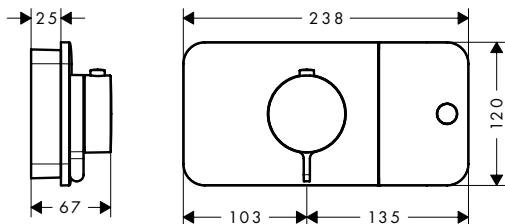

### Thermostatic module for concealed installation for 1 function

- / Eco-Function: flow rate regulation via lever handle
- / depending on volume flow and installation situation approx. 50% flow rate reduction
- / 1 function and 1 additional outlet
- / comfortable turning on / off of consumers with large Select-paddle
- / maximum flow rate at 3 bar: 24 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / the thermostat offers the possibility for thermal disinfection
- / non-return valve
- / connection type: basic set
- / min. operating pressure: 1 bar
- / Thermostat is delivered with button hand shower

Chrome  
Matt Black  
AXOR FinishPlus\*


45711000  
45711670  
45711XXX



#### Required parts:

- / Basic set for thermostatic module for concealed installation

45710180

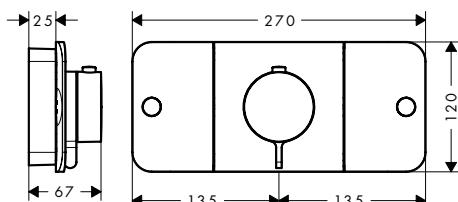

### Thermostatic module for concealed installation for 2 functions

- / Eco-Function: flow rate regulation via lever handle
- / depending on volume flow and installation situation approx. 50% flow rate reduction
- / 2 functions and 1 additional outlet
- / comfortable turning on / off of consumers with large Select-paddle
- / simultaneous use of several outlets
- / flow rate per outlet: 24 l/min
- / flow rate by simultaneous use of all outlets: 30 l/min
- / thermostat cartridge, Start/stop valve to operate the functions
- / safety lock at 40 °C
- / temperature limitation adjustable
- / the thermostat offers the possibility for thermal disinfection
- / non-return valve
- / connection type: basic set
- / min. operating pressure: 1 bar
- / Thermostat is delivered with buttons hand shower and Rain large

Chrome  
Matt Black  
AXOR FinishPlus\*

45712000  
45712670  
45712XXX






#### Required parts:

- / Basic set for thermostatic module for concealed installation

45710180

Measurements within scale drawings are in mm.

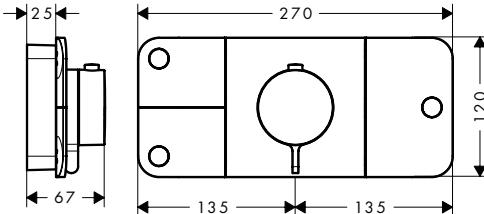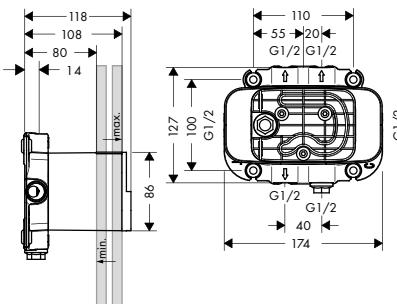	finish	code no.
 	<b>Thermostatic module for concealed installation for 3 functions</b> Chrome Matt Black AXOR FinishPlus*	45713000 45713670 45713XXX
	<ul style="list-style-type: none"> <li>/ Eco-Function: flow rate regulation via lever handle</li> <li>/ depending on volume flow and installation situation approx. 50% flow rate reduction</li> <li>/ 3 functions and 1 additional outlet</li> <li>/ comfortable turning on / off of consumers with large Select-paddle</li> <li>/ simultaneous use of several outlets</li> <li>/ flow rate per outlet: 24 l/min</li> <li>/ flow rate by simultaneous use of all outlets: 30 l/min</li> <li>/ thermostat cartridge, Start/stop valve to operate the functions</li> <li>/ safety lock at 40 °C</li> <li>/ temperature limitation adjustable</li> <li>/ the thermostat offers the possibility for thermal disinfection</li> <li>/ non-return valve</li> <li>/ connection type: basic set</li> <li>/ min. operating pressure: 1 bar</li> <li>/ Thermostat is delivered with buttons handshower, Rain large and Body spray</li> </ul>	
	<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for thermostatic module for concealed installation</li> </ul>	45710180
 	<b>Basic set for thermostatic module for concealed installation</b> <ul style="list-style-type: none"> <li>/ 2 inlets / 4 outlets</li> <li>/ all outlets can be used simultaneously</li> <li>/ connection thread Rp 1/2</li> <li>/ installation depth: from 80 to 108 mm</li> <li>/ sound-decoupled installation</li> </ul>	45710180
	<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Extension set 25 mm for basic set thermostatic module</li> </ul>	45790000
	<b>Extension set 25 mm for basic set thermostatic module</b> <ul style="list-style-type: none"> <li>/ extension for basic set</li> <li>/ extension length: 25 mm</li> </ul>	45790000
	<b>Required parts:</b> <ul style="list-style-type: none"> <li>/ Basic set for thermostatic module for concealed installation</li> </ul>	45710180



### Shut-off valve for concealed installation

- / comfortable turning on / off of consumers with large Select-paddle
- / connection type: basic set
- / 1 function
- / connection dimension: DN15
- / material: metal

#### Required parts:


- / Basic set for shut-off valve for concealed installation

finish

code no.

Chrome  
Matt Black  
AXOR FinishPlus\*

45771000  
45771670  
45771XXX



### Basic set for shut-off valve for concealed installation

- / connection from left or right
- / flow rate at free through-flow: 30 l/min
- / sound-decoupled installation
- / in a joined installation it serves as a waterconducting unit and allows dimensionally accurate positioning
- / connection dimension: DN15

45770180


Measurements within scale drawings are in mm.

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

## AXOR Flow diagrams


### Overhead showers

/ ShowerHeaven 1200/300 4jet with lighting  
3500 K  
# 10628000

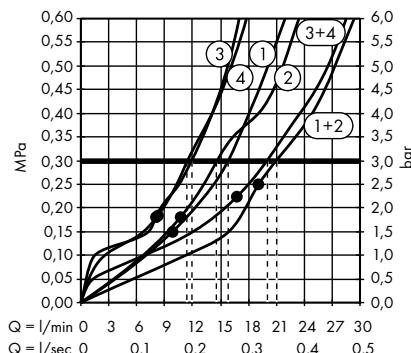


1. Rain
2. Mono
3. PowderRain inside
4. PowderRain outside

/ ShowerHeaven 1200/300 4jet with lighting  
5000 K  
# 10629000

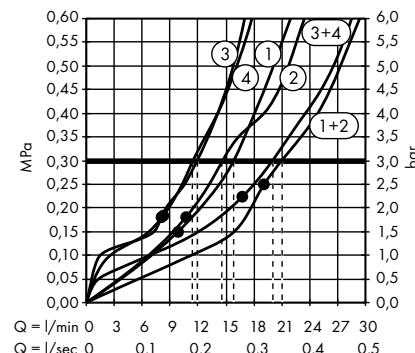


1. Rain
2. Mono
3. PowderRain inside
4. PowderRain outside

/ ShowerHeaven 1200/300 4jet without lighting  
# 10637000

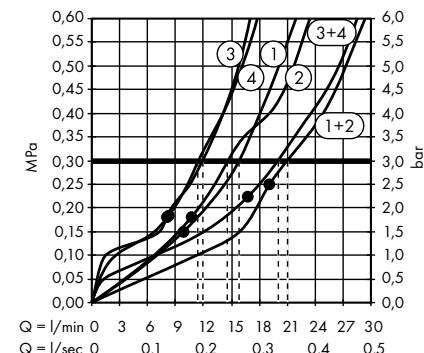


1. Rain
2. Mono
3. PowderRain inside
4. PowderRain outside

/ ShowerHeaven 970/970 3jet with lighting  
# 10623800

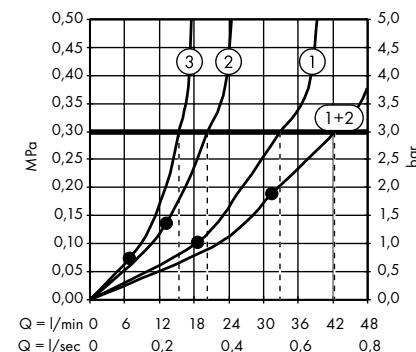


1. Rain
2. RainAir
3. Mono

/ ShowerHeaven 720/720 3jet with lighting  
# 10627800

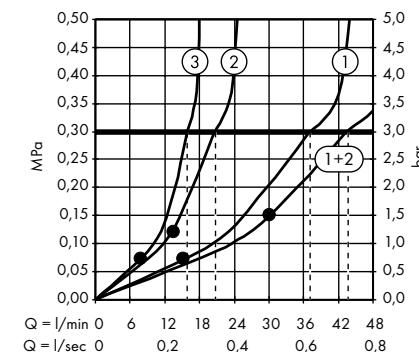


1. Rain
2. RainAir
3. Mono

/ Overhead shower 75 1jet EcoSmart  
with shower arm  
# 48490000, 48490670

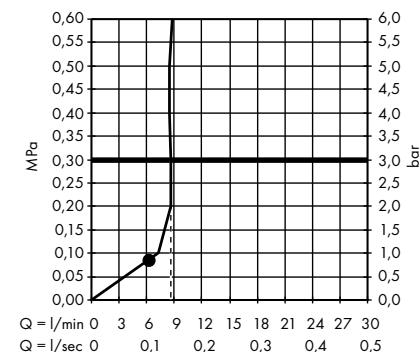


1. With flow limiter
2. Without flow limiter

/ Overhead shower 280 1jet with shower arm  
# 48491000, 48491670

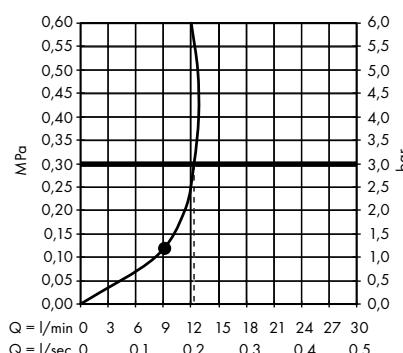


/ Overhead shower 280 2jet with shower arm  
# 48492000, 48492670

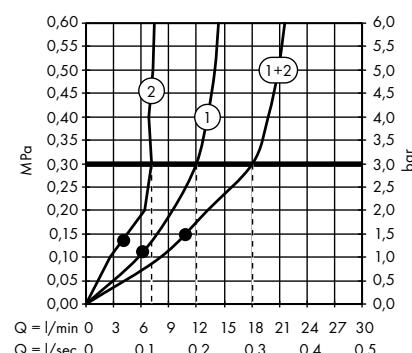

1. Rain
2. PowderRain


/ Overhead shower 280 1jet with ceiling connection  
# 48493000, 48493670

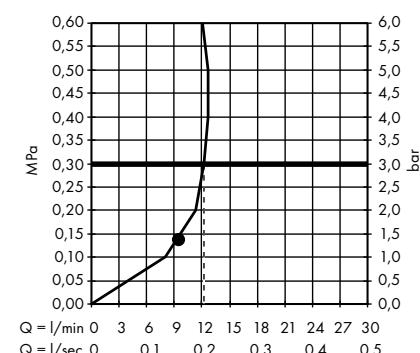

## AXOR Flow diagrams


The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

/ Overhead shower 280 2jet with ceiling connection  
# 48494000, 48494670

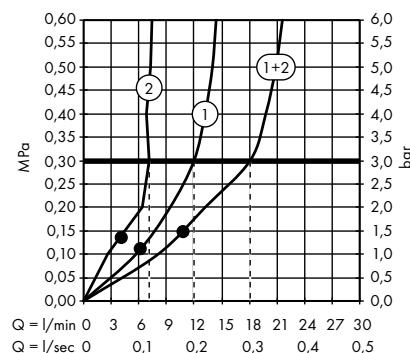


1. Rain
2. PowderRain

/ Overhead shower 250/580 3jet  
# 35283000

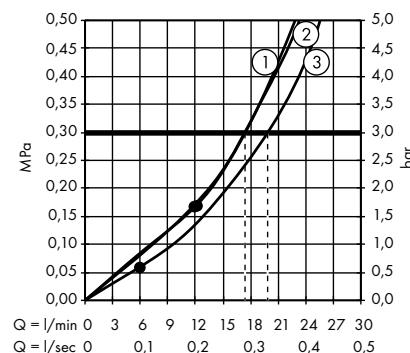


1. Rain
2. Rainflow
3. Mono

/ Overhead shower 460/300 3jet with shower arm and square escutcheon  
# 35282000

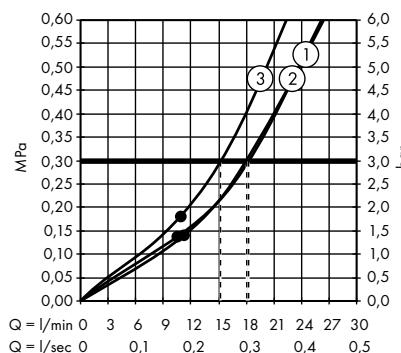


1. Mono
2. Rain
3. RainStream

/ Overhead shower 460/300 3jet with shower arm and softcube escutcheon  
# 35276000

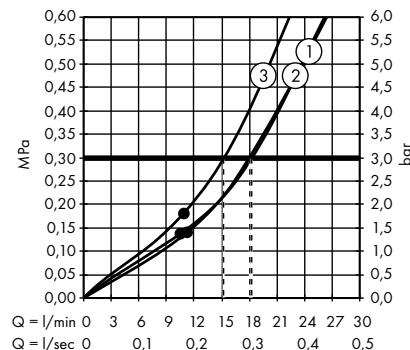


1. Mono
2. Rain
3. RainStream

/ Overhead shower 460/300 3jet with ceiling connection  
# 35281000

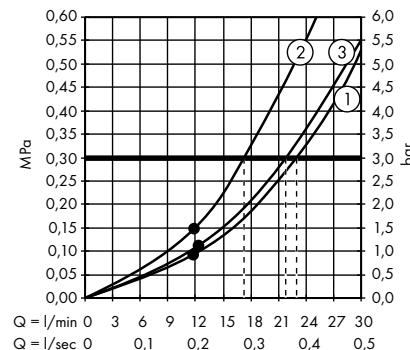


1. Mono
2. Rain
3. RainStream

/ Overhead shower 460/300 2jet with shower arm and square escutcheon  
# 35280000

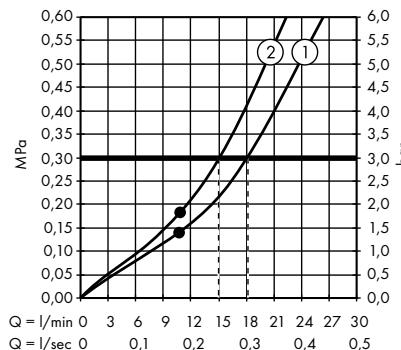


1. Rain
2. RainStream

/ Overhead shower 460/300 2jet with shower arm and softcube escutcheon  
# 35275000

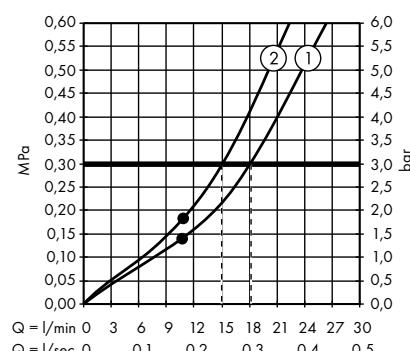


1. Rain
2. RainStream

/ Overhead shower 460/300 2jet with ceiling connection  
# 35279000

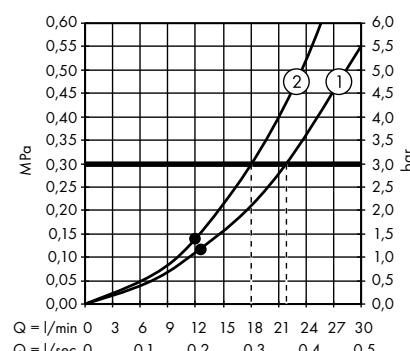

1. Rain
2. RainStream

/ Overhead shower 460/300 1jet with shower arm and square escutcheon  
# 35278000

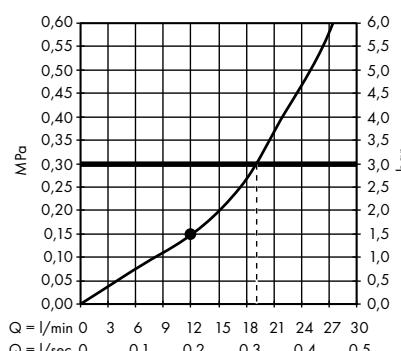


1. Rain
2. RainStream


The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

## AXOR Flow diagrams


/ Overhead shower 460/300 1jet  
with shower arm and softcube escutcheon  
# 35274000

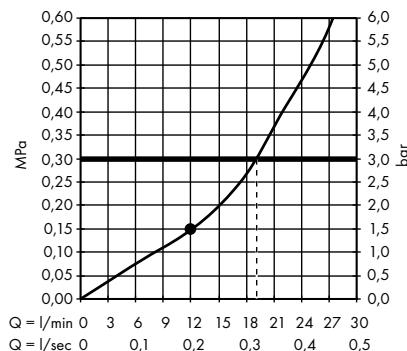


/ Overhead shower 460/300 1jet  
with ceiling connection  
# 35277000

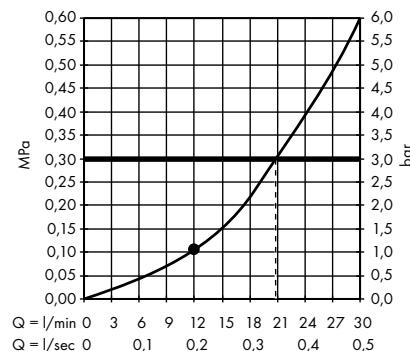


/ Overhead shower 350 1jet with shower arm  
# 26034000, 26034820

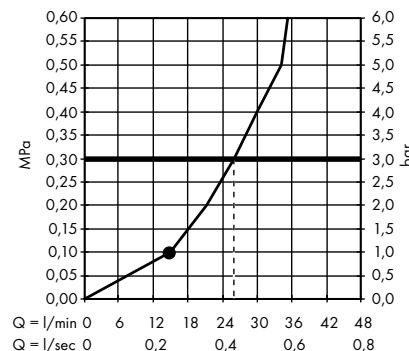


/ Overhead shower 350 1jet with ceiling  
connection  
# 26035000, 26035820

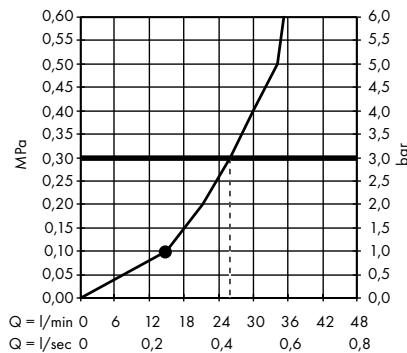

/ Overhead shower 300 2jet with shower arm  
# 35303000

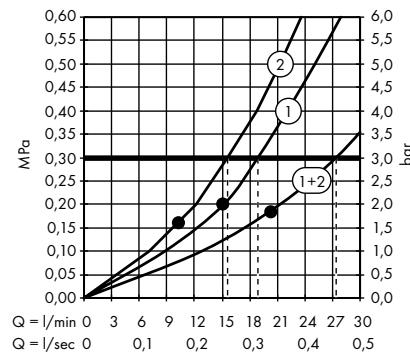


/ Overhead shower 300 2jet with ceiling  
connection  
# 35304000

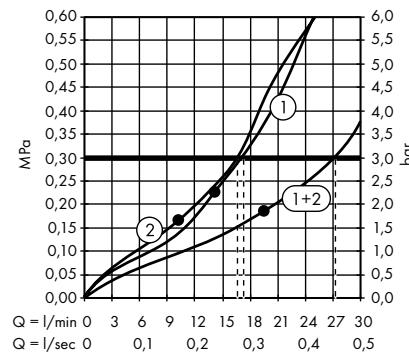


1. PowderRain  
2. Intense PowderRain

1. PowderRain  
2. Intense PowderRain


/ Overhead shower 300 2jet ceiling  
# 35305000

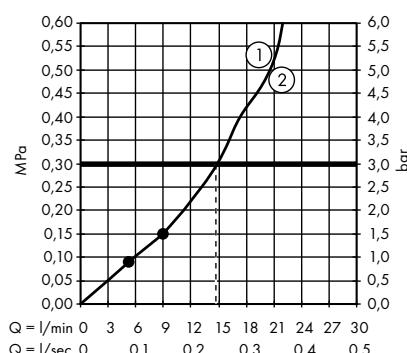

/ Overhead shower 300 1jet with shower arm  
# 35300000

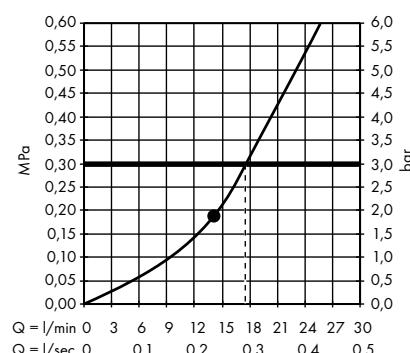


/ Overhead shower 300 1jet with ceiling  
connection  
# 35301000

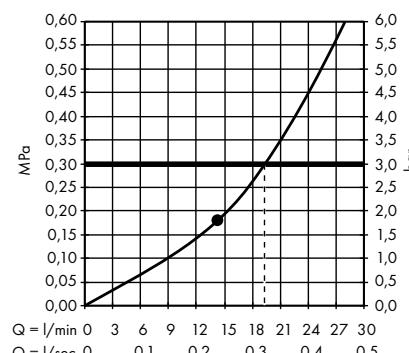


## AXOR Flow diagrams

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.


/ Overhead shower 300 1jet ceiling  
# 35302000

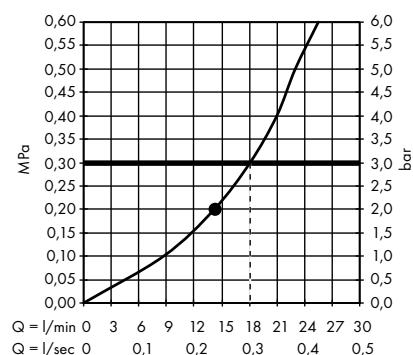


/ Overhead shower 300/300 2jet  
with shower arm  
# 35318000

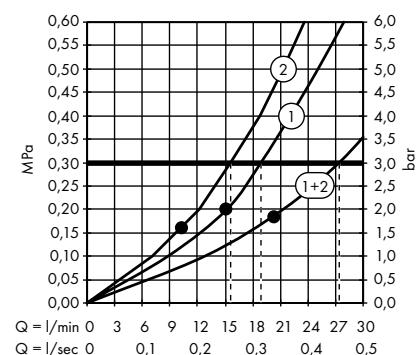


/ Overhead shower 300/300 2jet  
with ceiling connection  
# 35320000

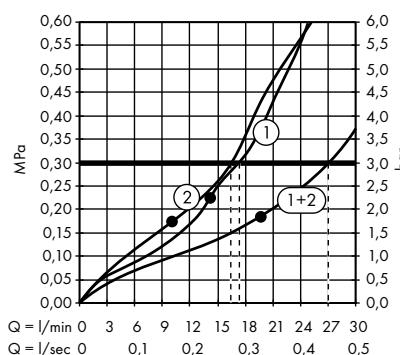


/ Overhead shower 300/300 2jet ceiling  
# 35321000

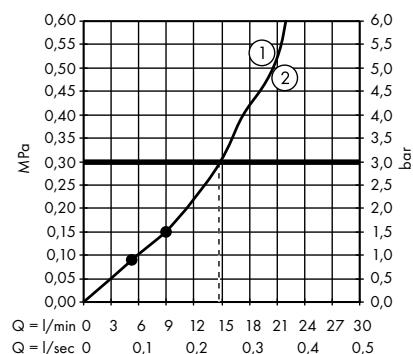


/ Overhead shower 300/300 1jet  
with shower arm  
# 35314000

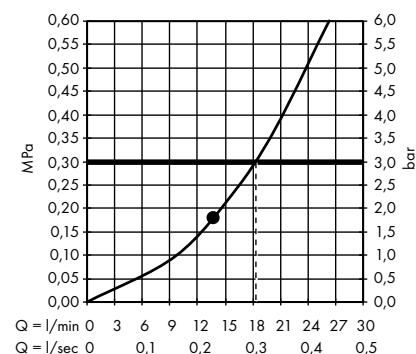


/ Overhead shower 300/300 1jet  
with ceiling connection  
# 35316000

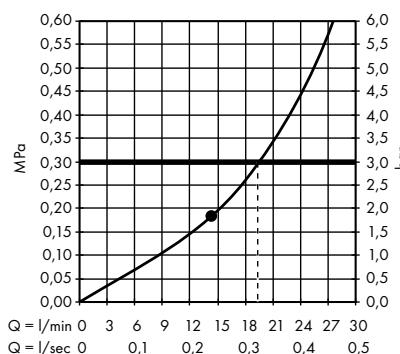


/ Overhead shower 300/300 1jet ceiling  
# 35317000

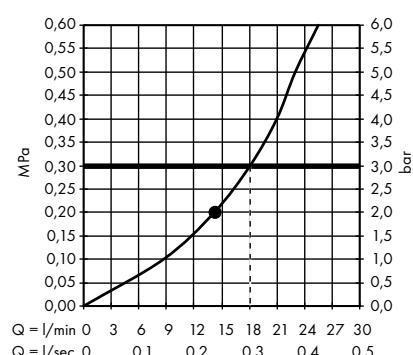

/ Overhead shower 250 2jet with shower arm  
# 35296000

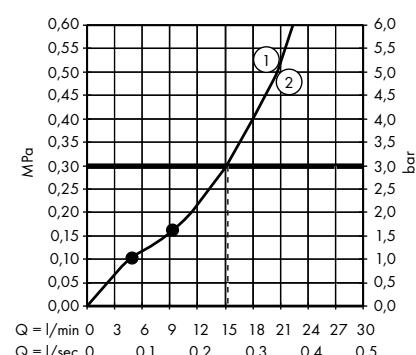

/ Overhead shower 250 2jet with ceiling connection  
# 35297000

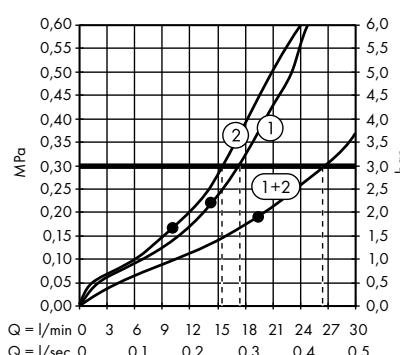


1. Intense PowderRain  
2. PowderRain

1. PowderRain  
2. Intense PowderRain


The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.

## AXOR Flow diagrams


/ Overhead shower 250 2jet ceiling  
# 35298000

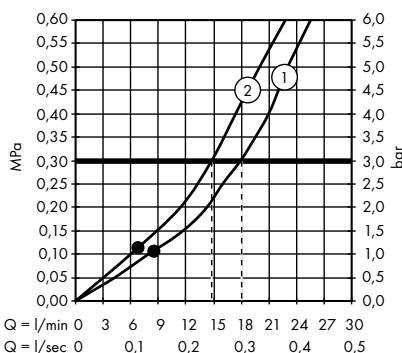


/ Overhead shower 250 1jet with shower arm  
# 35284000

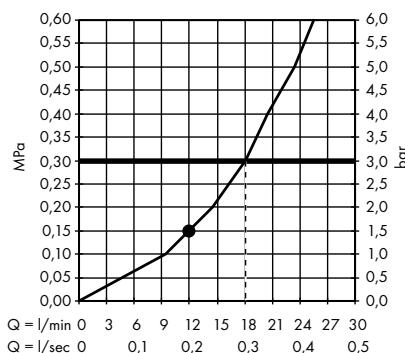


/ Overhead shower 250 1jet with ceiling connection  
# 35286000

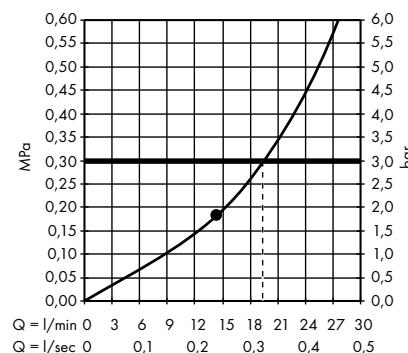


/ Overhead shower 250 1jet ceiling  
# 35287000

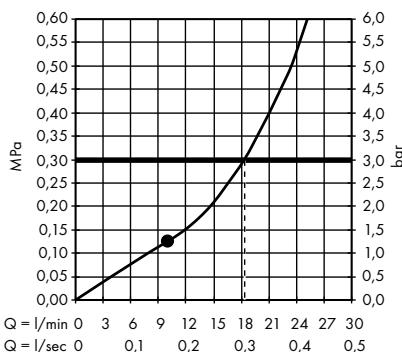


/ Overhead shower 250/250 2jet with shower arm  
# 35310000

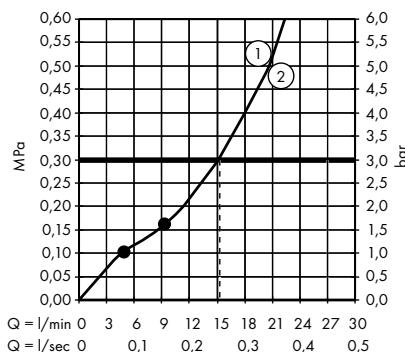


/ Overhead shower 250/250 2jet with ceiling connection  
# 35312000

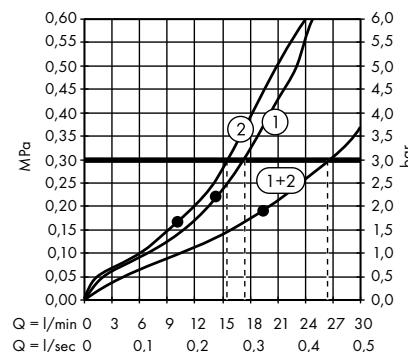


/ Overhead shower 250/250 2jet ceiling  
# 35313000

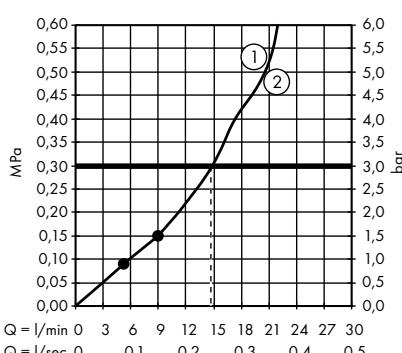

/ Overhead shower 250/250 1jet with shower arm  
# 35306000

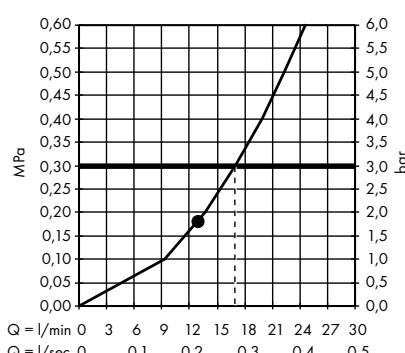


/ Overhead shower 250/250 1jet with ceiling connection  
# 35308000

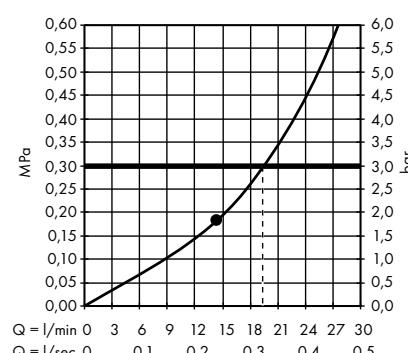


## AXOR Flow diagrams

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.


/ Overhead shower 250/250 1jet ceiling  
# 35309000

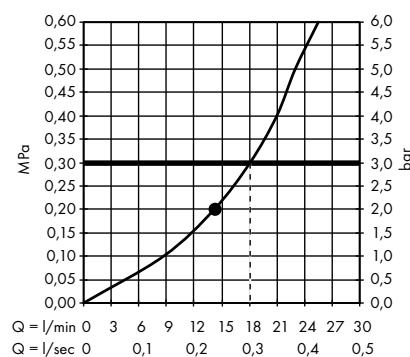


/ Overhead shower 240/240 1jet ceiling  
# 10924000

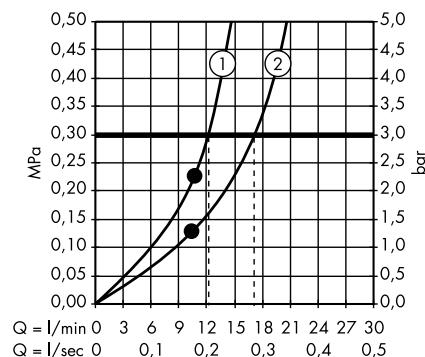


/ Overhead shower 240/240 1jet with ceiling connection  
# 10929000

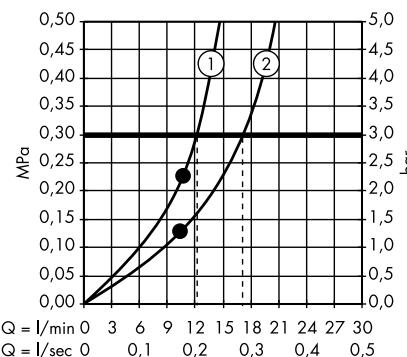


/ Overhead shower 240/240 1jet with shower arm  
# 10925000

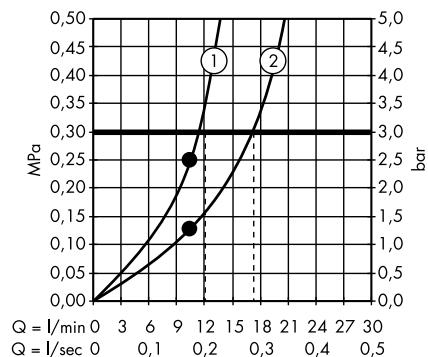


/ Flood spout 240/120 for concealed installation  
# 10942000

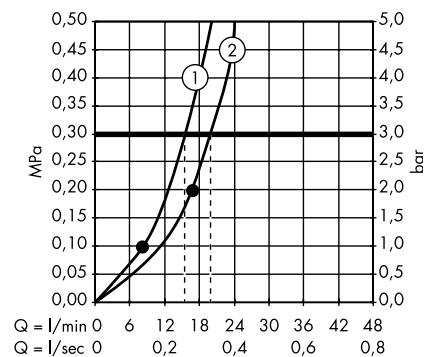


/ LampShower 275 1jet with ceiling connector  
# 26032000

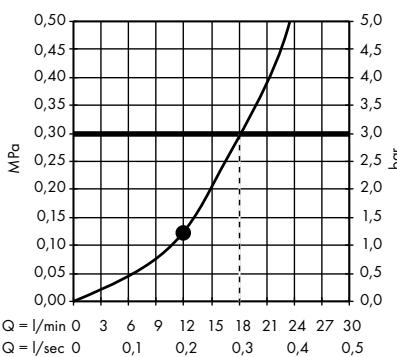


/ LampShower 275 1jet with shower arm  
# 26031000

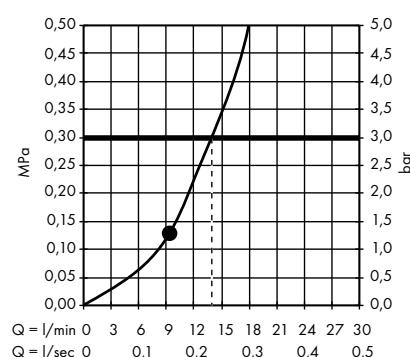

/ Overhead shower 240 2jet with ceiling connector  
# 26022000

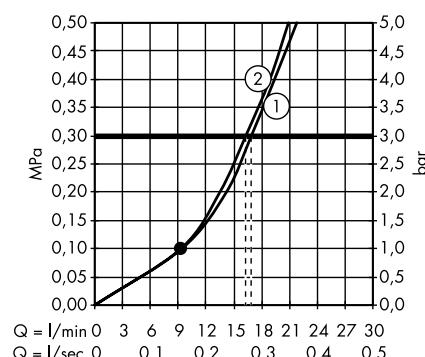


/ Overhead shower 240 2jet with shower arm  
# 26021000

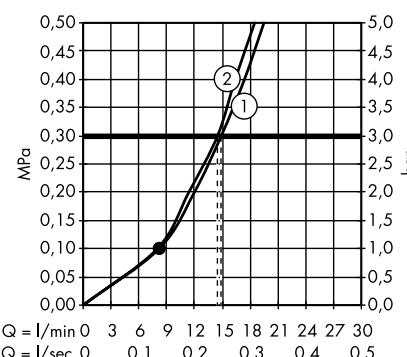


The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.


/ Overhead shower 240 1jet  
# 28494000

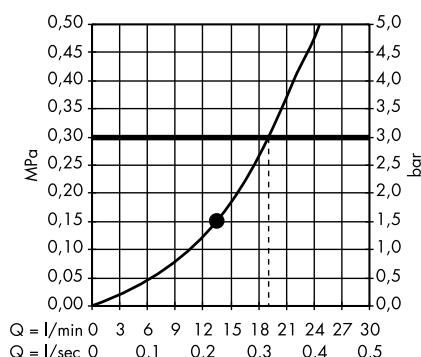


/ Overhead shower 180 1jet  
# 28489000

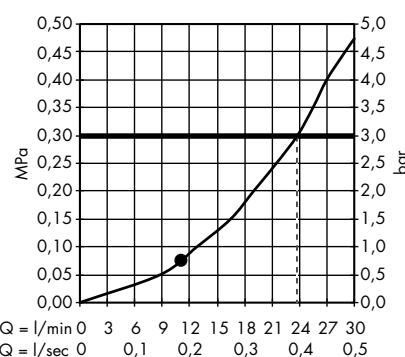


/ Overhead shower 180 1jet Classic  
# 28487000

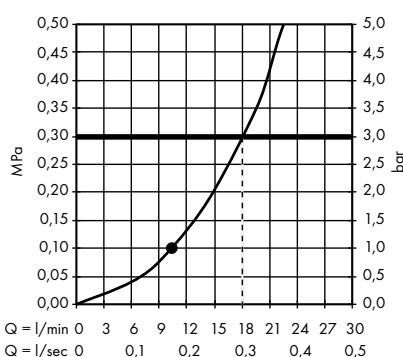

/ Overhead shower 240 1jet Classic  
# 28474000

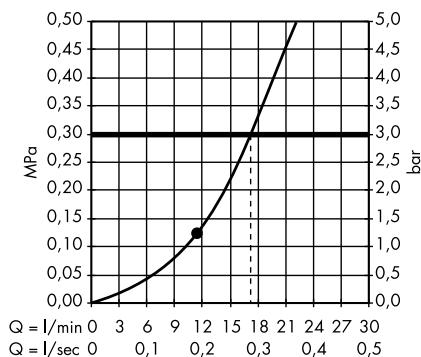


Body showers  
/ Shower module 120/120 for concealed installation square  
# 28491000

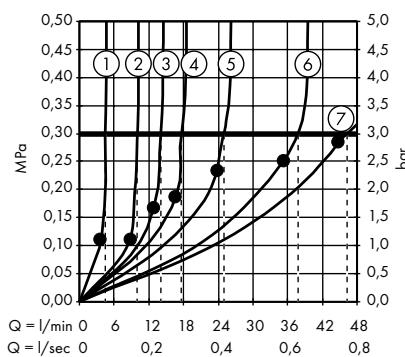


1.1 x Body shower      6.9 x Body shower  
2.2 x Body shower      7.12 x Body shower  
3.3 x Body shower  
4.4 x Body shower  
5.6 x Body shower

/ Shower module 120/120 for concealed installation softcube  
# 36822000

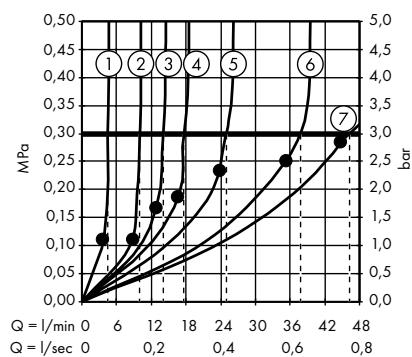


1.1 x Body shower      6.9 x Body shower  
2.2 x Body shower      7.12 x Body shower  
3.3 x Body shower  
4.4 x Body shower  
5.6 x Body shower


/ Body shower round 1jet  
# 28464000

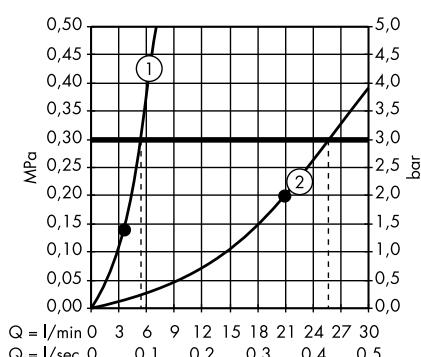

/ Body shower square 1jet  
# 28469000

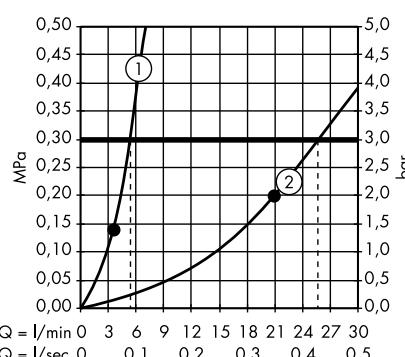


1.1 x Body shower  
2.6 x Body shower

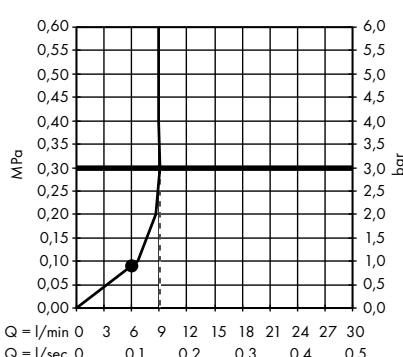


## AXOR Flow diagrams

The consumption was measured in combination with the appropriate fittings (thermostat/mixer/in-wall valve) to reflect actual application in practice.


/ Hand shower 2jet  
# 45720000, 45720670

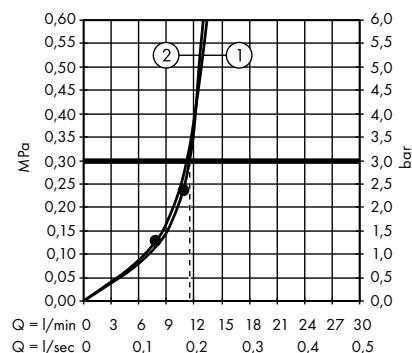


/ Baton hand shower 2jet  
# 12680000

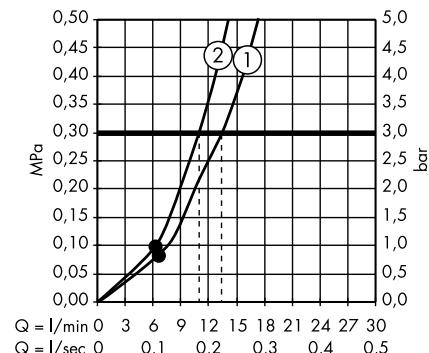


/ Baton hand shower 2jet  
# 28532000

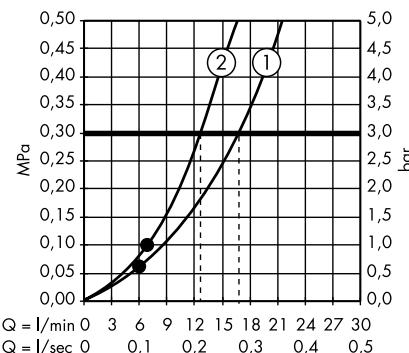


/ Baton hand shower 1jet  
# 10531000

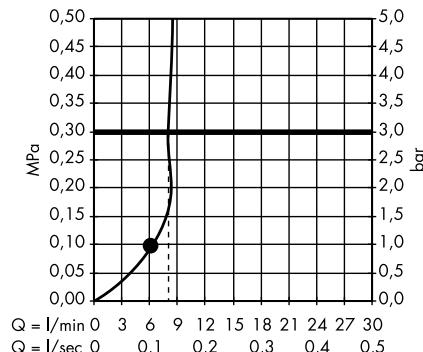


/ Hand shower 85 1jet  
# 26025000

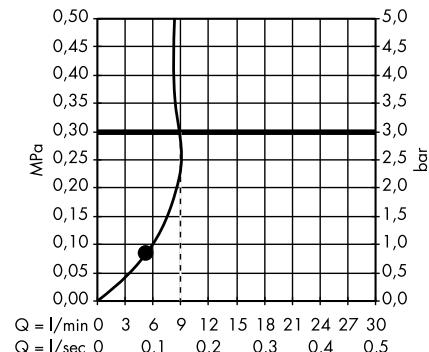


/ Hand shower 120 3jet  
# 26050000

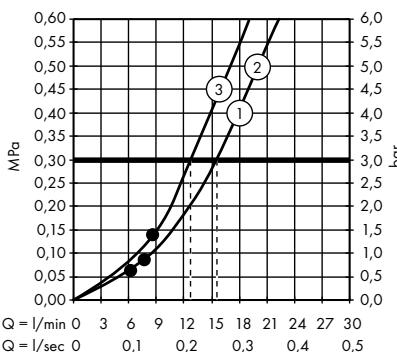

/ Hand shower 120 3jet EcoSmart 9 l/min  
# 26051000

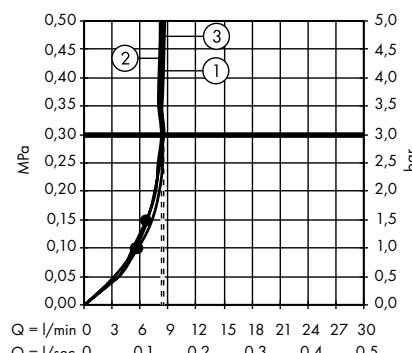


/ Hand shower 100 1jet  
# 16320000, 16320820

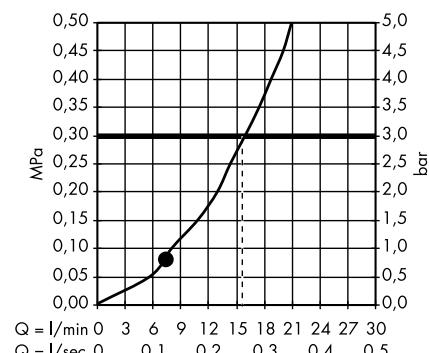


## Showerpipes and shower panels

/ Showerpipe 280 1jet for concealed installation  
# 48790000, 48790670

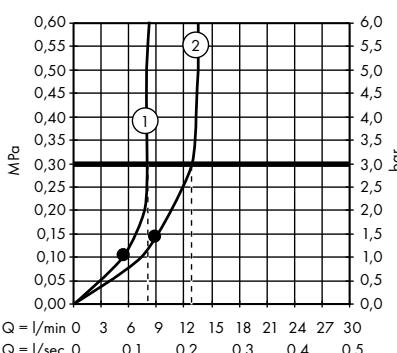


/ Showerpipe with thermostat and overhead shower 180 1jet 2 ticks  
# 39671009

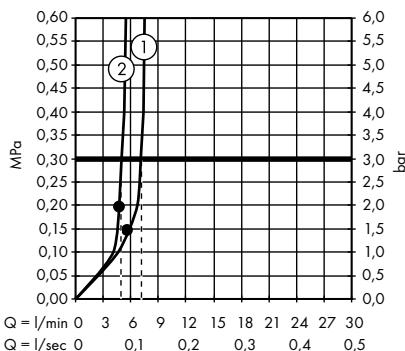


1. Overhead shower
2. Hand shower

/ Showerpipe with thermostat and overhead shower 240 1jet 2 ticks  
# 16575009, 16575149

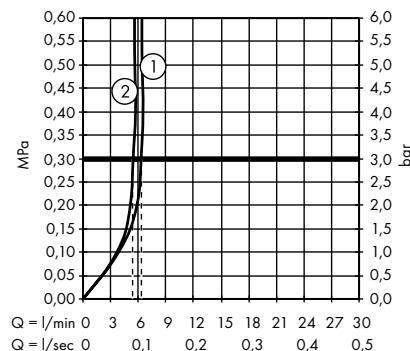

1. Overhead shower
2. Hand shower

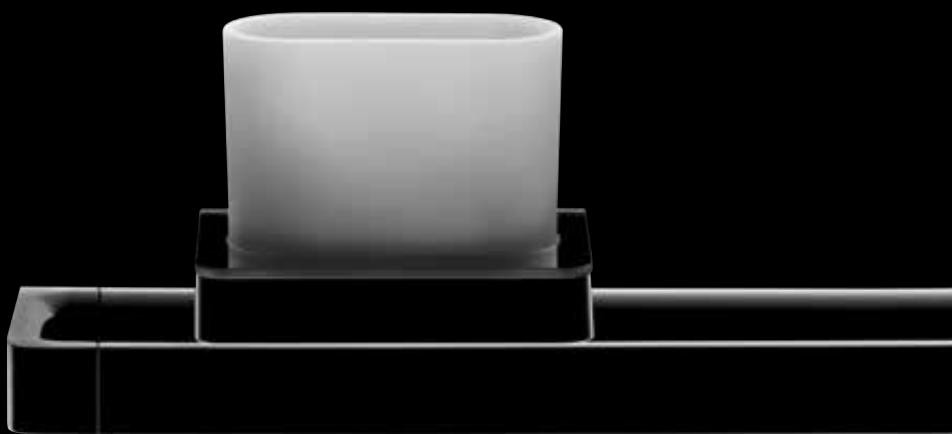

# AXOR Accessories

AXOR Universal	340
AXOR Universal Circular	350
AXOR Montreux	355
AXOR ShowerCollection	359






## AXOR Universal Accessories

# AXOR Universal Accessories

A new way of looking at unique aspects of everyday life. With AXOR Universal Accessories, all possibilities are open. Twelve elements that are more than just appendages - a unique

system of individual masterpieces. Combined by an intelligent construction. Resolutely linear.  
Design: Antonio Citterio

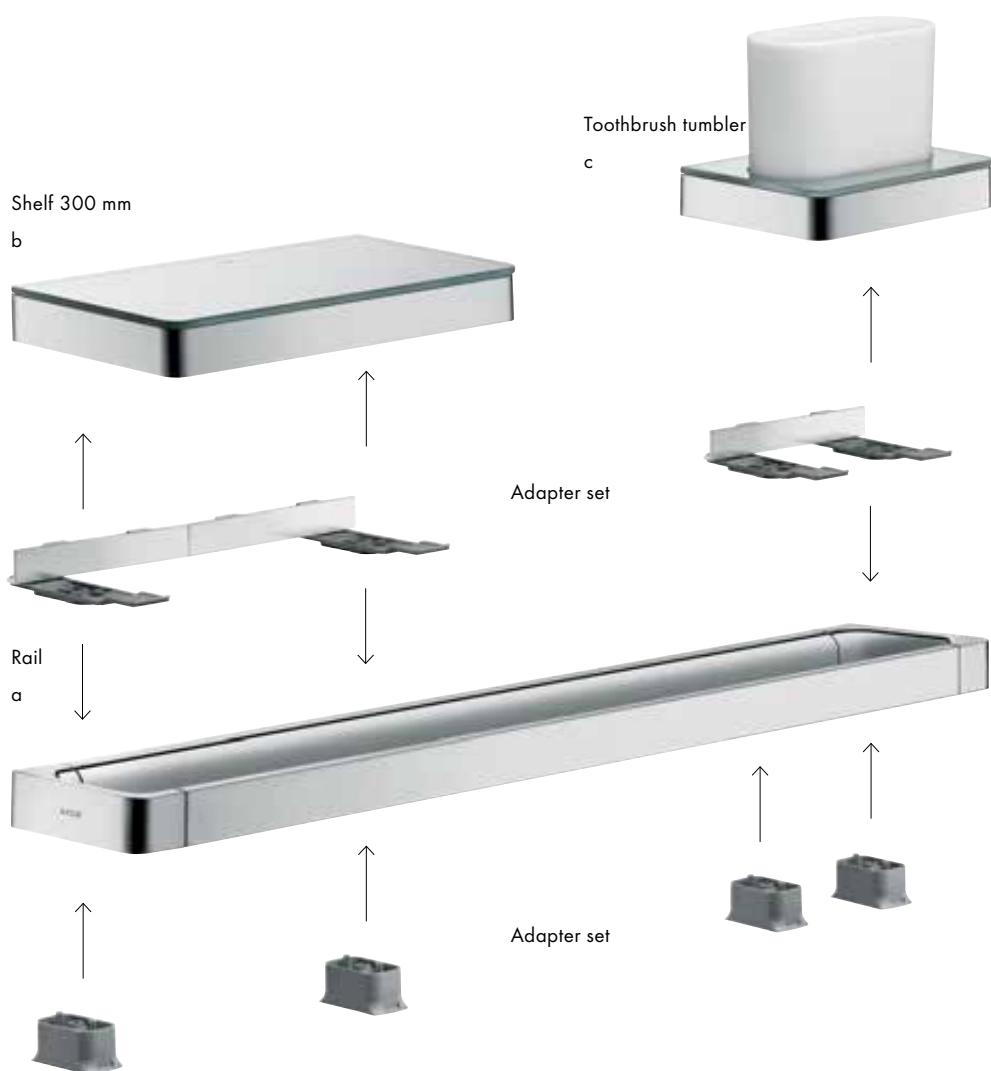

Products required:

- a. Rail
- b. # 42838000 + 2 x # 42870000 adapter set
- c. # 42834000 + 1 x # 42870000 adapter set

# AXOR Universal Accessories

1

---

Removable glass cover for  
convenient filling and cleaning

The scratch-proof white glass  
is dishwasher-friendly and is  
therefore exceptionally hygienic

Spacious  
shelf area

Thanks to their timeless design, AXOR  
Universal Accessories dovetail elegantly  
with any style of bathroom



Liquid soap dispenser  
# 42819000

Adapter set # 42870000  
is also required.

Metal frame  
for single-hand  
operation

180 ml volume for  
liquid soap or  
washing-up liquid

It is possible to install AXOR Universal  
Accessories as an individual solution or  
as a system on a rail - with adapter set  
# 42870000

2

---




Asymmetrical placement of 300 mm shelf on the  
rail. 1 adapter set required.

Products required:

- a. # 42838000 + 1 x # 42870000 adapter set
- b. Rail

3

---

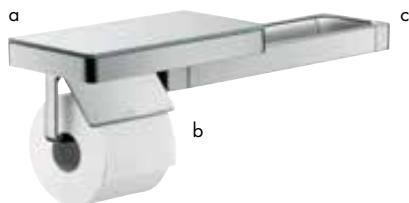

Elegant combination of rail with 300 mm shelf  
(installed asymmetrically), roll holder. 2 adapter sets  
required.

Products required:

- a. # 42838000 + 1 x # 42870000 adapter set
- b. # 42836000 + 1 x # 42870000 adapter set
- c. Rail

4




Spacious shelf areas through 300 mm shelf and liquid soap dispenser on the rail. 3 adapter sets required.

Products required:

- a. # 42838000 + 2 x # 42870000 adapter set
- b. # 42819000 + 1 x # 42870000 adapter set
- c. Rail

5




Triple function: Shelf 300 mm with two roll holders. 2 adapter sets required. One roll holder is fitted back to front.

Products required:

- a. # 42838000 + 2 x # 42870000 adapter set
- b. # 42836000

6

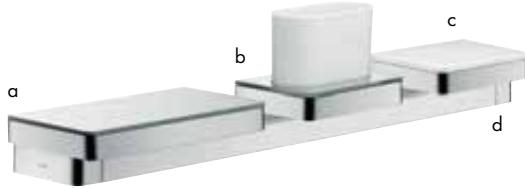

Everything within easy reach in one place: multifunctional combination of rail with 300 mm shelf, toothbrush tumbler and soap dish/shelf 150 mm. 4 adapter sets required.

Products required:

- a. # 42838000 + 2 x # 42870000 adapter set
- b. # 42836000 + 1 x # 42870000 adapter set
- c. # 42803000 + 1 x # 42870000 adapter set
- d. Rail

7




Roll holder with soap dish/shelf 150 mm – the space-saving combination for guest bathrooms. 1 adapter set required.

Products required:

- a. # 42803000 + 1 x # 42870000 adapter set
- b. # 42836000

## AXOR Universal Accessories

**Toothbrush tumbler**

- / wall-mounted
- / adapter set # 42870XXX must be used when installing on a rail
- / material: glass
- / material holder: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 108 mm
- / diameter drill hole: 6 mm


finish

Chrome  
AXOR FinishPlus\*

code no.

42834000  
42834XXX**Optional parts:**


- / Adapter set Chrome 42870000  
AXOR FinishPlus\* 42870XXX
- / Rail grab bar 300 mm Chrome 42830000  
AXOR FinishPlus\* 42830XXX
- / Rail bath towel holder 600 mm Chrome 42832000  
AXOR FinishPlus\* 42832XXX
- / Rail bath towel holder 800 mm Chrome 42833000  
AXOR FinishPlus\* 42833XXX

**Soap dish/ shelf**

- / wall-mounted
- / adapter set # 42870XXX must be used when installing on a rail
- / combinable with roll holder # 42836XXX (adapter # 42870XXX necessary)
- / material recess: ceramic
- / with mounting material
- / concealed fastening
- / drilling distance: 108 mm
- / diameter drill hole: 6 mm

Chrome  
AXOR FinishPlus\*42803000  
42803XXX**Optional parts:**

- / Adapter set Chrome 42870000  
AXOR FinishPlus\* 42870XXX
- / Rail grab bar 300 mm Chrome 42830000  
AXOR FinishPlus\* 42830XXX
- / Rail bath towel holder 600 mm Chrome 42832000  
AXOR FinishPlus\* 42832XXX
- / Rail bath towel holder 800 mm Chrome 42833000  
AXOR FinishPlus\* 42833XXX
- / Toilet paper holder with cover Chrome 42836000  
AXOR FinishPlus\* 42836XXX


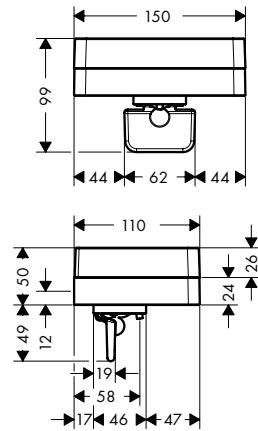
**Liquid soap dispenser with shelf**




- / wall-mounted
- / adapter set # 42870XXX must be used when installing on a rail
- / material: glass
- / material holder: metal
- / type of soap: liquid soap
- / filling capacity 180 ml
- / dosage 0.5 ml
- / with mounting material
- / drilling distance: 108 mm
- / diameter drill hole: 6 mm
- / can be used additional as a shelf
- / suitable for shower

Chrome  
AXOR FinishPlus\*42819000  
42819XXX**Optional parts:**








- / Adapter set Chrome 42870000  
AXOR FinishPlus\* 42870XXX
- / Rail grab bar 300 mm Chrome 42830000  
AXOR FinishPlus\* 42830XXX
- / Rail bath towel holder 600 mm Chrome 42832000  
AXOR FinishPlus\* 42832XXX
- / Rail bath towel holder 800 mm Chrome 42833000  
AXOR FinishPlus\* 42833XXX





Measurements within scale drawings are in mm.

	finish	code no.
	<b>Shelf 300</b>	
	/ wall-mounted / two adapter sets # 42870XXX must be used when installing on a rail (for asymmetric installation only one adapter set) / combinable with roll holder # 42836XXX (adapter # 42870XXX necessary) / material frame: solid brass / material shelf: safety glass / length: 300 mm / with mounting material / concealed fastening / drilling distance: 258 mm / diameter drill hole: 6 mm / suitable for shower	Chrome AXOR FinishPlus* 42838000 42838XXX
	<b>Optional parts:</b>	
	/ Adapter set	Chrome 42870000 AXOR FinishPlus* 42870XXX
	/ Rail grab bar 300 mm	Chrome 42830000 AXOR FinishPlus* 42830XXX
	/ Rail bath towel holder 600 mm	Chrome 42832000 AXOR FinishPlus* 42832XXX
	/ Rail bath towel holder 800 mm	Chrome 42833000 AXOR FinishPlus* 42833XXX
	/ Toilet paper holder with cover	Chrome 42836000 AXOR FinishPlus* 42836XXX
	<b>Shelf 150</b>	Chrome 42840000 AXOR FinishPlus* 42840XXX
	/ wall-mounted / adapter set # 42870XXX must be used when installing on a rail / combinable with roll holder # 42836XXX (adapter # 42870XXX necessary) / material frame: solid brass / material shelf: safety glass / length: 150 mm / with mounting material / concealed fastening / drilling distance: 108 mm / diameter drill hole: 6 mm / suitable for shower	
	<b>Optional parts:</b>	
	/ Adapter set	Chrome 42870000 AXOR FinishPlus* 42870XXX
	/ Rail grab bar 300 mm	Chrome 42830000 AXOR FinishPlus* 42830XXX
	/ Rail bath towel holder 600 mm	Chrome 42832000 AXOR FinishPlus* 42832XXX
	/ Rail bath towel holder 800 mm	Chrome 42833000 AXOR FinishPlus* 42833XXX
	/ Toilet paper holder with cover	Chrome 42836000 AXOR FinishPlus* 42836XXX

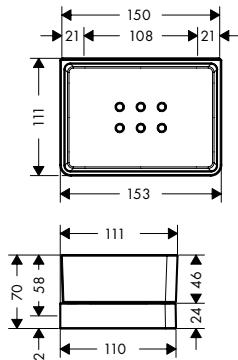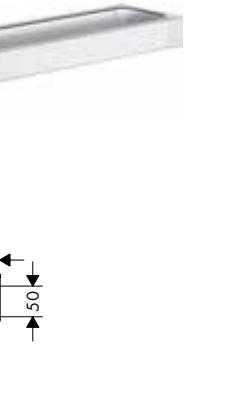
	finish	code no.
 	<b>Shelf 150/70 for shower</b> / wall-mounted / adapter set # 42870XXX must be used when installing on a rail / material holder: metal / material shelf: glass / with drain holes / with mounting material / concealed fastening / drilling distance: 108 mm / diameter drill hole: 6 mm / suitable for shower	Chrome 42802000 AXOR FinishPlus* 42802XXX
	<b>Optional parts:</b> / Adapter set / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm	Chrome 42870000 AXOR FinishPlus* 42870XXX Chrome 42830000 AXOR FinishPlus* 42830XXX Chrome 42832000 AXOR FinishPlus* 42832XXX Chrome 42833000 AXOR FinishPlus* 42833XXX
 	<b>Rail grab bar 300 mm</b> / wall-mounted / across or upright mountable / material: metal / material holder: metal / length: 374 mm / with mounting material / concealed fastening / drilling distance: 280 mm / diameter drill hole: 6 mm / use as a rail for accessories and grab bar / TÜV certified	Chrome 42830000 AXOR FinishPlus* 42830XXX
	<b>Optional parts:</b> / Mounting kit for two-sided glass installation / Cover for rail	42841000 Chrome 42871000 AXOR FinishPlus* 42871XXX
 	<b>Rail bath towel holder 600 mm</b> / wall-mounted / material: metal / material holder: metal / length: 694 mm / with mounting material / concealed fastening / drilling distance: 600 mm / diameter drill hole: 6 mm / use as a rail for accessories and bath towel holder	Chrome 42832000 AXOR FinishPlus* 42832XXX
	<b>Optional parts:</b> / Mounting kit for two-sided glass installation / Cover for rail	42841000 Chrome 42871000 AXOR FinishPlus* 42871XXX


Measurements within scale drawings are in mm.

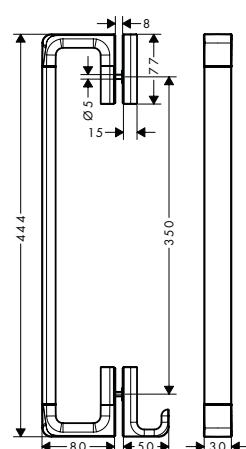	finish	code no.
 	Rail bath towel holder 800 mm / wall-mounted / material: metal / material holder: metal / fixed / length: 894 mm / with mounting material / concealed fastening / drilling distance: 800 mm / diameter drill hole: 6 mm / use as a rail for accessories and bath towel holder	Chrome AXOR FinishPlus* 42833000 42833XXX
 	Optional parts: / Mounting kit for two-sided glass installation / Cover for rail	42841000 Chrome AXOR FinishPlus* 42871000 42871XXX
 	Shower door handle 444 mm / material: metal / material holder: metal / fixed / length: 444 mm / with mounting material / thickness of glass: 6 - 12 mm / concealed fastening / drilling distance: 350 mm / can be used simultaneously as a bath towel holder	Chrome AXOR FinishPlus* 42837000 42837XXX
 	Bath towel shelf / wall-mounted / material: glass, metal / length: 600 mm / thickness of glass: 6 mm / with mounting material / drilling distance: 400 mm / diameter drill hole: 6 mm / for hanging bathrobes	Chrome AXOR FinishPlus* 42842000 42842XXX
 	Towel holder twin-handle / wall-mounted / material: metal / material holder: metal / swivelling / length: 409 mm / with mounting material / concealed fastening / drilling distance: 80 mm / diameter drill hole: 6 mm	Chrome AXOR FinishPlus* 42821000 42821XXX
 	Towel hook / wall-mounted / material: metal / with mounting material / concealed fastening / drilling distance: 35 mm / diameter drill hole: 6 mm	Chrome AXOR FinishPlus* 42801000 42801XXX

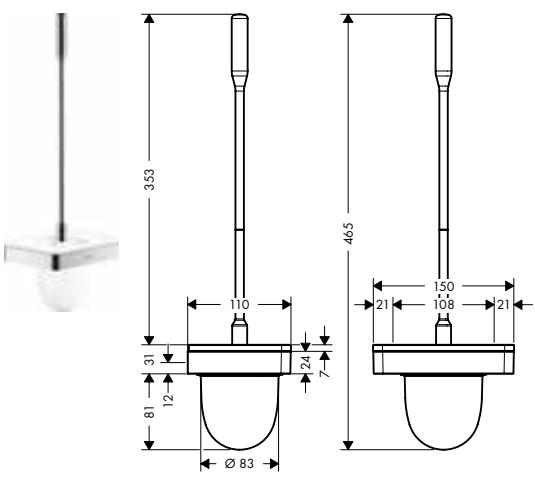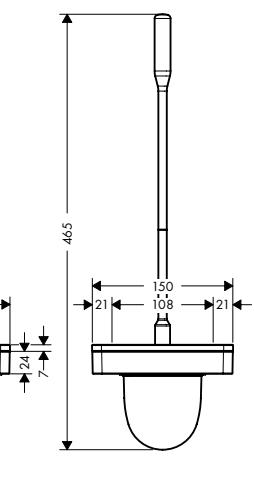	finish	code no.
 	Toilet paper holder with shelf	Chrome AXOR FinishPlus* 42436000 42436XXX
<ul style="list-style-type: none"> <li>/ wall-mounted</li> <li>/ material: brass</li> <li>/ material holder: metal</li> <li>/ with mounting material</li> <li>/ concealed fastening</li> <li>/ drilling distance: 35 mm</li> <li>/ diameter drill hole: 6 mm</li> </ul>		
 	Toilet paper holder with cover	Chrome AXOR FinishPlus* 42836000 42836XXX
<ul style="list-style-type: none"> <li>/ wall-mounted</li> <li>/ mirror-inverted installation possible</li> <li>/ combinable with soap dish / shelf # 42803XXX and shelf 300 mm # 42838XXX (adapter set # 42870XXX necessary)</li> <li>/ material: metal</li> <li>/ with mounting material</li> <li>/ concealed fastening</li> <li>/ drilling distance: 35 mm</li> <li>/ diameter drill hole: 6 mm</li> </ul>		
<b>Optional parts:</b> <ul style="list-style-type: none"> <li>/ Soap dish/ shelf</li> <li>/ Shelf 300</li> <li>/ Adapter set</li> </ul>		
	Chrome AXOR FinishPlus* 42803000 42803XXX	42803000 42803XXX
	Chrome AXOR FinishPlus* 42838000 42838XXX	42838000 42838XXX
	Chrome AXOR FinishPlus* 42870000 42870XXX	42870000 42870XXX
 	Toilet paper holder	Chrome AXOR FinishPlus* 42846000 42846XXX
<ul style="list-style-type: none"> <li>/ wall-mounted</li> <li>/ material: metal</li> <li>/ with mounting material</li> <li>/ concealed fastening</li> <li>/ drilling distance: 35 mm</li> <li>/ diameter drill hole: 6 mm</li> </ul>		
 	Toilet brush holder wall-mounted	Chrome AXOR FinishPlus* 42835000 42835XXX
<ul style="list-style-type: none"> <li>/ wall-mounted</li> <li>/ material: metal</li> <li>/ material recess: glass</li> <li>/ with removable insert</li> <li>/ with mounting material</li> <li>/ concealed fastening</li> <li>/ drilling distance 108 mm</li> <li>/ diameter drill hole: 6 mm</li> </ul>		

Measurements within scale drawings are in mm.

	finish	code no.
	<b>Adapter set</b> / for assembling AXOR Universal Accessories on a rail / for combination of soap dish/shelf # 42803XXX or shelf 300 mm # 42838XXX with roll holder # 42836XXX  <b>Optional parts:</b> / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm	Chrome AXOR FinishPlus* 42870000 42870XXX  Chrome AXOR FinishPlus* 42830000 42830XXX Chrome AXOR FinishPlus* 42832000 42832XXX Chrome AXOR FinishPlus* 42833000 42833XXX
	<b>Cover for rail</b> / for covering the mounting holes if a continuous cover is not desired  <b>Required parts:</b> / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm / Shower set 0.90 m with hand shower 120 3jet / Shower bar 0.90 m with shower hose 1.60 m	Chrome AXOR FinishPlus* 42871000 42871XXX  Chrome AXOR FinishPlus* 42830000 42830XXX Chrome AXOR FinishPlus* 42832000 42832XXX Chrome AXOR FinishPlus* 42833000 42833XXX Chrome AXOR FinishPlus* 36735000 36735XXX Chrome AXOR FinishPlus* 36736000 36736XXX
	<b>Mounting kit for two-sided glass installation</b> / thickness of glass: 6 - 12 mm / diameter drill hole: 6 mm  <b>Required parts:</b> / Rail grab bar 300 mm / Rail bath towel holder 600 mm / Rail bath towel holder 800 mm	42841000  Chrome AXOR FinishPlus* 42830000 42830XXX Chrome AXOR FinishPlus* 42832000 42832XXX Chrome AXOR FinishPlus* 42833000 42833XXX
	<b>Cover 150 mm</b> / suitable for AXOR Universal Accessories with a length of 150 mm / material: metal / gluing / for covering the mounting holes of an accessory (only necessary in combination with two rails, when installed on glass)	Chrome AXOR FinishPlus* 42890000 42890XXX



	finish	code no.
<b>Cover 300 mm</b>	Chrome AXOR FinishPlus*	42891000 42891XXX
/ suitable for AXOR Universal Accessories with a length of 300 mm / material: metal / gluing / for covering the mounting holes of an accessory (only necessary in combination with two rails, when installed on glass)		

Measurements within scale drawings are in mm.





**AXOR Universal Circular  
Accessories**

# AXOR Universal Circular Accessories

With its minimalist, filigree and timeless design combined with high precision, the AXOR Universal Circular Accessories offer simplicity of form for a harmonious overall impression in the bathroom. The products are characterized by one consistent and recognizable design language throughout all bathroom areas with slender silhouettes, rounded corners and balanced proportions.

Due to its generic and timeless design, the products can be combined freely with different styles and will match perfectly to already existing AXOR collections. AXOR FinishPlus allows the possibility of individualization with different PVD surfaces as well as the new lacquered finish Matt Black as a standard surface.

Design: Barber Osgerby



**Double hook:**

- / Minimalist design
- / Slender silhouettes



**Wall mirror:**

- / Diameter: 600 mm
- / New lacquered surface finish Matt Black




**Liquid soap dispenser:**

- / 300 ml filling capacity
- / dosage 2 ml
- / non-corroding outlet pipe

## AXOR Universal Circular Accessories

NEW

**Toothbrush tumbler**

- / wall-mounted
- / material: glass
- / material holder: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm


finish

Chrome  
Matt Black  
AXOR FinishPlus\*

code no.  
42804000  
42804670  
42804XXX

available from  
February 2022

NEW


**Soap dish**

- / wall-mounted
- / with mounting material
- / concealed fastening
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm

Chrome  
Matt Black  
AXOR FinishPlus\*

code no.  
42805000  
42805670  
42805XXX

NEW

**Liquid soap dispenser**


- / wall-mounted
- / material: metal, plastic
- / material holder: metal
- / type of soap: liquid soap
- / filling capacity 300 ml
- / dosage 2 ml
- / with mounting material
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm

Chrome  
Matt Black  
AXOR FinishPlus\*

code no.  
42810000  
42810670  
42810XXX

available from  
March 2022

NEW

**Grab bar**

- / wall-mounted
- / material: metal
- / material holder: metal
- / length: 355 mm
- / with mounting material
- / concealed fastening
- / drilling distance: 300 mm
- / diameter drill hole: 6 mm
- / TÜV certified


Chrome  
Matt Black  
AXOR FinishPlus\*

code no.  
42813000  
42813670  
42813XXX

NEW



NEW

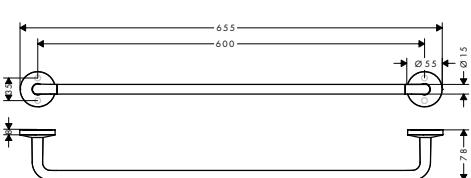**Bath towel rail 600 mm**

- / wall-mounted
- / material: metal
- / length: 655 mm
- / with mounting material
- / drilling distance: 600 mm
- / diameter drill hole: 6 mm

Chrome  
Matt Black  
AXOR FinishPlus\*

code no.  
42860000  
42860670  
42860XXX







**Alternative sizes:**

- / Bath towel rail 800 mm


Chrome  
Matt Black  
AXOR FinishPlus\*

code no.  
42880000  
42880670  
42880XXX

Measurements within scale drawings are in mm.

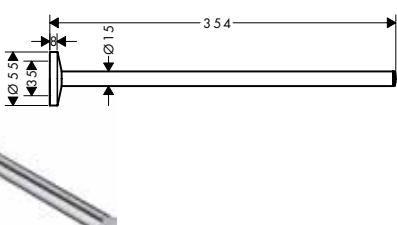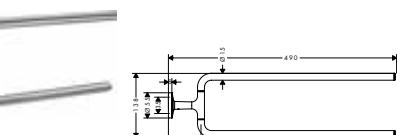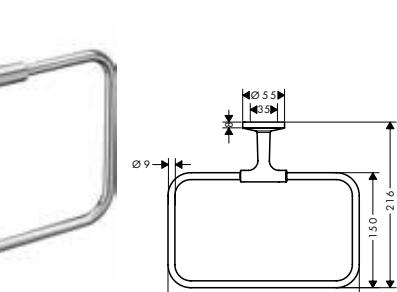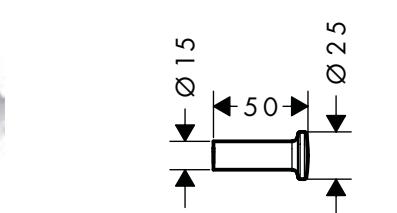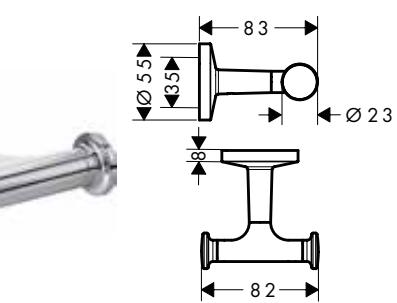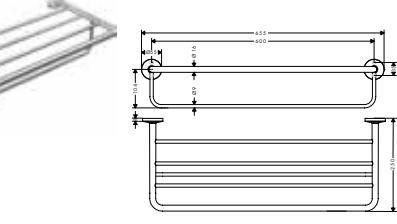		finish	code no.
	 <b>Towel holder</b> / wall-mounted / material: metal / fixed / length: 354 mm / with mounting material / concealed fastening / drilling distance: 35 mm / diameter drill hole: 6 mm	Chrome Matt Black AXOR FinishPlus*	42826000 42826670 42826XXX
	 <b>Towel holder twin-handle</b> / wall-mounted / material: metal / material holder: metal / swivelling / length: 490 mm / with mounting material / concealed fastening / drilling distance: 35 mm / diameter drill hole: 6 mm	Chrome Matt Black AXOR FinishPlus*	42822000 42822670 42822XXX
	 <b>Towel ring</b> / wall-mounted / material: metal / swivelling / with mounting material / concealed fastening / drilling distance: 35 mm / diameter drill hole: 6 mm	Chrome Matt Black AXOR FinishPlus*	42823000 42823670 42823XXX
	 <b>Towel hook</b> / wall-mounted / material: metal / with mounting material / concealed fastening / diameter drill hole: 6 mm	Chrome Matt Black AXOR FinishPlus*	42811000 42811670 42811XXX
	 <b>Towel hook double</b> / wall-mounted / material: metal / with mounting material / concealed fastening / drilling distance: 35 mm / diameter drill hole: 6 mm	Chrome Matt Black AXOR FinishPlus*	42812000 42812670 42812XXX
	 <b>Towel rack with towel holder</b> / wall-mounted / material: metal / length: 655 mm / with mounting material / concealed fastening / drilling distance: 600 mm / diameter drill hole: 6 mm	Chrome Matt Black AXOR FinishPlus*	42843000 42843670 42843XXX

available from  
April 2022

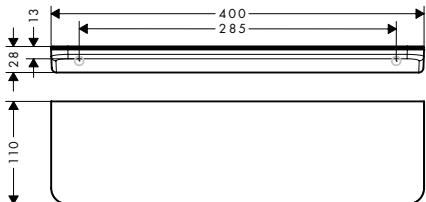
**Shelf**

- / wall-mounted
- / material frame: solid brass
- / material shelf: metal
- / length: 400 mm
- / with mounting material
- / concealed fastening
- / drilling distance: 340 mm
- / diameter drill hole: 6 mm
- / suitable for shower

finish

Chrome  
Matt Black  
AXOR FinishPlus\*


code no.  
42844000  
42844670  
42844XXX

**Toilet paper holder with cover**

- / wall-mounted
- / material: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm

Chrome  
Matt Black  
AXOR FinishPlus\*


42858000  
42858670  
42858XXX

**Toilet paper holder**

- / wall-mounted
- / installation horizontal or vertical possible
- / material: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm
- / can also be used as spare roll holder

Chrome  
Matt Black  
AXOR FinishPlus\*


42856000  
42856670  
42856XXX

**Toilet paper holder double**

- / wall-mounted
- / material: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm
- / for 2 paper rolls

Chrome  
Matt Black  
AXOR FinishPlus\*

42857000  
42857670  
42857XXX

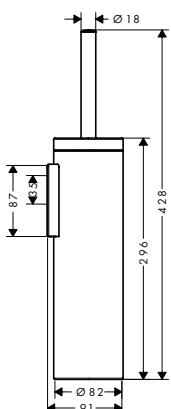**Toilet brush holder  
wall-mounted**





- / wall-mounted
- / material: metal
- / material recess: matt plastic
- / with cover lid
- / with removable insert
- / with mounting material
- / concealed fastening
- / drilling distance 35 mm
- / diameter drill hole: 6 mm

Chrome  
Matt Black  
AXOR FinishPlus\*


42855000  
42855670  
42855XXX

available from  
February 2022

Measurements within scale drawings are in mm.


	finish	code no.
 	<b>Tissue box</b> / wall-mounted / screw fastening / material: metal, plastic / with mounting material / concealed fastening / drilling distance 200 mm / diameter drill hole: 6 mm	Chrome 42873000 Matt Black 42873670 AXOR FinishPlus* 42873XXX
 	<b>Waste bin</b> / free-standing / material: metal / material recess: plastic / capacity: 5 l / with removable insert	Chrome 42872000 Matt Black 42872670 AXOR FinishPlus* 42872XXX
 	<b>Shaving mirror</b> / wall-mounted / material: mirror glass / material frame: metal / mirror is inclinable / swivelling / enlargement: 1.7-times / with mounting material / concealed fastening / drilling distance: 51 mm / diameter drill hole: 6 mm	Chrome 42849000 Matt Black 42849670 AXOR FinishPlus* 42849XXX
 	<b>Wall mirror</b> / wall-mounted / material: mirror glass / material frame: metal / with mounting material / concealed fastening / drilling distance: 260 mm / diameter drill hole: 6 mm	Chrome 42848000 Matt Black 42848670

available from  
April 2022

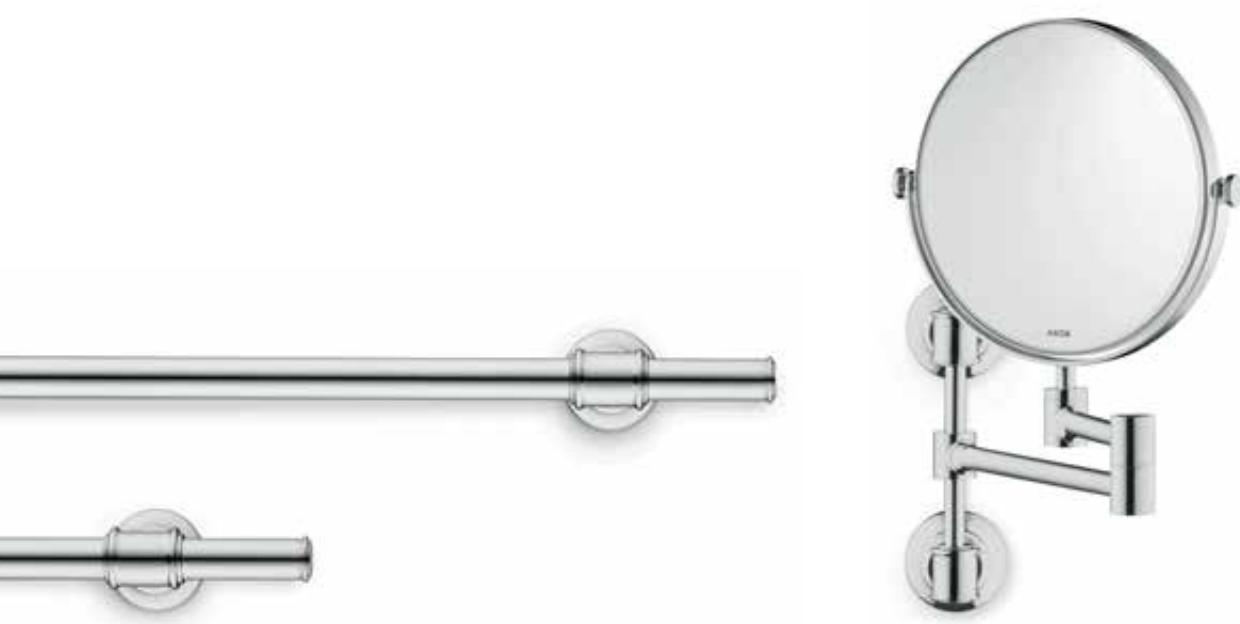

**AXOR Montreux**  
**Accessories**

## AXOR Montreux Accessories


**Toothbrush tumbler**

- / wall-mounted
- / material: glass
- / material holder: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm

finish


code no.

Chrome 42134000  
 Brushed Nickel 42134820  
 AXOR FinishPlus\* 42134XXX

**Liquid soap dispenser**


- / wall-mounted
- / material: glass
- / material holder: metal
- / type of soap: liquid soap
- / filling capacity 300 ml
- / with mounting material
- / concealed fastening
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm

Chrome 42019000  
 Brushed Nickel 42019820  
 AXOR FinishPlus\* 42019XXX

**Soap dish**



- / wall-mounted
- / material recess: ceramic
- / material holder: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm

Chrome 42033000  
 Brushed Nickel 42033820  
 AXOR FinishPlus\* 42033XXX

**Corner basket 160/101**


- / wall-mounted
- / with mounting material
- / drilling distance: 35 mm
- / diameter drill hole: 6 mm

Chrome 42065000  
 Brushed Nickel 42065820  
 AXOR FinishPlus\* 42065XXX

**Corner basket 160/83**




- / with mounting material
- / suitable for mounting on Unica wall bar Ø 22 mm

Chrome 42066000  
 Brushed Nickel 42066820  
 AXOR FinishPlus\* 42066XXX




**Grab bar**

- / wall-mounted
- / material: metal
- / material holder: metal
- / length: 463 mm
- / concealed fastening
- / drilling distance: 280 x 170 mm
- / TÜV certified

Chrome 42030000  
 Brushed Nickel 42030820  
 AXOR FinishPlus\* 42030XXX

	finish	code no.
 	<b>Bath towel rail 600 mm</b> / wall-mounted / material: metal / material holder: metal / length: 783 mm / with mounting material / concealed fastening / drilling distance: 600 mm / diameter drill hole: 6 mm	Chrome Brushed Nickel AXOR FinishPlus* 42060000 42060820 42060XXX
	<b>Alternative sizes:</b> / Bath towel rail 800 mm	Chrome Brushed Nickel AXOR FinishPlus* 42080000 42080820 42080XXX
 	<b>Towel holder</b> / wall-mounted / material: metal / material holder: metal / fixed / length: 433 mm / with mounting material / concealed fastening / diameter drill hole: 10 mm	Chrome Brushed Nickel AXOR FinishPlus* 42020000 42020820 42020XXX
 	<b>Towel ring</b> / wall-mounted / material: metal / material holder: metal / swivelling / with mounting material / concealed fastening / drilling distance: 35 mm / diameter drill hole: 6 mm	Chrome Brushed Nickel AXOR FinishPlus* 42021000 42021820 42021XXX
 	<b>Towel hook</b> / wall-mounted / material: metal / material holder: metal / with mounting material / concealed fastening / diameter drill hole: 6 mm	Chrome Brushed Nickel AXOR FinishPlus* 42137000 42137820 42137XXX
 	<b>Toilet paper holder with cover</b> / wall-mounted / material: metal / with mounting material / concealed fastening / drilling distance: 35 mm / diameter drill hole: 6 mm	Chrome Brushed Nickel AXOR FinishPlus* 42036000 42036820 42036XXX


Measurements within scale drawings are in mm.

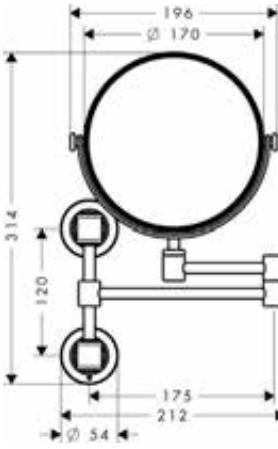	finish	code no.
 	<b>Toilet paper holder</b> / wall-mounted / material: metal / material holder: metal / with mounting material / concealed fastening / diameter drill hole: 10 mm / length 159 mm / for spare rolls	Chrome 42028000 Brushed Nickel 42028820 AXOR FinishPlus* 42028XXX
 	<b>Toilet brush holder wall-mounted</b> / wall-mounted / material: metal / material recess: matt glass / with removable insert / with mounting material / concealed fastening / drilling distance 35 mm / diameter drill hole: 6 mm	Chrome 42035000 Brushed Nickel 42035820 AXOR FinishPlus* 42035XXX
 	<b>Shaving mirror</b> / wall-mounted / material: mirror glass / material frame: metal / mirror is inclinable / swivelling / enlargement: 1.7-times / with mounting material / concealed fastening / drilling distance: 35 mm / diameter drill hole: 6 mm	Chrome 42090000 Brushed Nickel 42090820 AXOR FinishPlus* 42090XXX



## **AXOR ShowerCollection Accessories**

## AXOR ShowerCollection Accessories designed by Philippe Starck

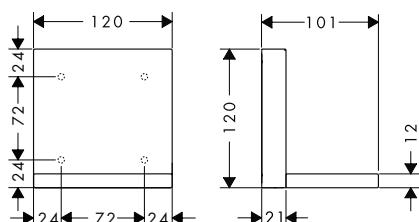

## Shelf 120/120

finish

Chrome  
AXOR FinishPlus\*

code no.


40872000  
40872XXX

- / when positioning the shelf between waterconducting parts (# 10755XXX, # 10751XXX, # 10942XXX, # 10972XXX, # 10651XXX, # 28491XXX) in joined installation (10 mm distance), it is recommended to use basic set # 40877180
- / suitable for installation with or without basic set # 40877180
- / for use with either vertical or horizontal installation of the basic set
- / material frame: solid brass
- / material shelf: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 72 mm
- / diameter drill hole: 6 mm

## Optional parts:

- / Basic set/ waterconducting unit for shelf 120/120 for concealed installation


40877180



## Basic set/ waterconducting unit for shelf 120/120 for concealed installation

40877180

- / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning. In combination with: # 40872000

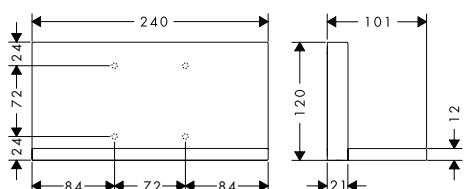

## Shelf 240/120

Chrome  
AXOR FinishPlus\*40873000  
40873XXX

- / for use with either vertical or horizontal installation of the basic set
- / when positioning the shelf between waterconducting parts (# 10755XXX, # 10751XXX, # 10942XXX, # 10972XXX, # 10651XXX, # 28491XXX) in joined installation (10 mm distance), it is recommended to use basic set # 40878180
- / suitable for installation with or without basic set # 40878180
- / material frame: solid brass
- / material shelf: metal
- / with mounting material
- / concealed fastening
- / drilling distance: 72 mm
- / diameter drill hole: 6 mm

## Optional parts:

- / Basic set/ waterconducting unit for shelf 240/120 for concealed installation


40878180



## Basic set/ waterconducting unit for shelf 240/120 for concealed installation

40878180

- / in a joined installation it serves as a waterconducting unit, allows dimensionally accurate positioning. In combination with: # 40873XXX

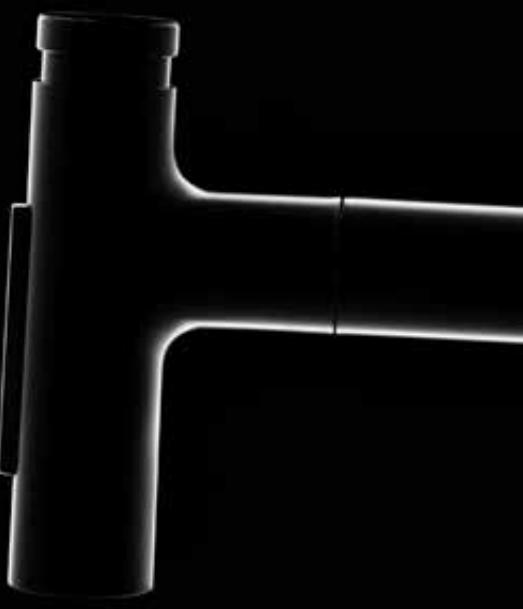

# AXOR Kitchen faucets



AXOR Starck	364
AXOR Citterio	365
AXOR Citterio M	367
AXOR Montreux	368
AXOR Accessories for kitchen mixers	368



Single lever kitchen mixer  
Select 230 2jet with pull-out spray

Pulls out up to 76 cm from the faucet for freedom of movement and fluidity of operation

The hose is protected from damage and runs silently

Four separately-adjustable fixings for flexible sBox positioning



Flat housing profile (less than 30 mm) for installation in tight spaces

Designed to fit all standard base cabinets while leaving space for any waste-disposal system


Hose weight for secure and easy hose retraction



#### Expert Hose Guidance for Ease and Comfort.

The sBox contains an innovative hose guidance system, available with the AXOR Citterio Select kitchen faucet with multifunction pull-out spray. Housed in the base cabinet, the sBox ensures the smooth, quiet extraction and retraction of the hose. Inside the sBox, the hose weight safely guards and guides the hose from any obstacles and hindrances. It cannot be caught or damaged. The 52cm box fits conveniently in any standard base cabinet.

## AXOR Starck

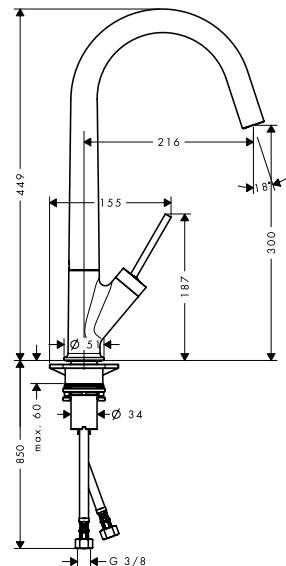

**Single lever kitchen mixer 300  
with swivel spout Eco**

- / consists of: single lever kitchen mixer
- / handle can be positioned on the right or left
- / ComfortZone 300
- / swivel range adjustable in 3 steps 110°, 150° or 360°
- / normal spray
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 4,5 l/min
- / joystick ceramic cartridge
- / connection type: G 3/8 connections
- / integrated non-return valve
- / not suitable for continuous flow water heaters
- / flow rate limited to maximum 6 l/min

finish

code no.


Chrome 12801000  
Stainless Steel Finish 12801800  
AXOR FinishPlus\* 12801XXX

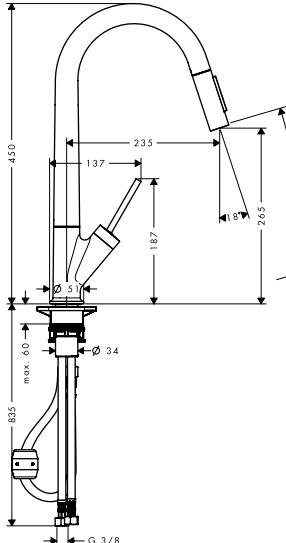
**Single lever kitchen mixer 270  
with pull-out spray Eco**

- / consists of: single lever kitchen mixer
- / handle can be positioned on the right or left
- / ComfortZone 270
- / swivel range adjustable in 2 steps to 110° or 150°
- / normal spray, shower spray
- / lockable shower spray, spray returns through pressing spray diverter
- / MagFit magnetic shower support
- / quick connect hose
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 4,5 l/min
- / joystick ceramic cartridge
- / connection type: G 3/8 connections
- / integrated non-return valve
- / not suitable for continuous flow water heaters
- / flow rate limited to maximum 6 l/min

Chrome 12800000  
Stainless Steel Finish 12800800  
AXOR FinishPlus\* 12800XXX



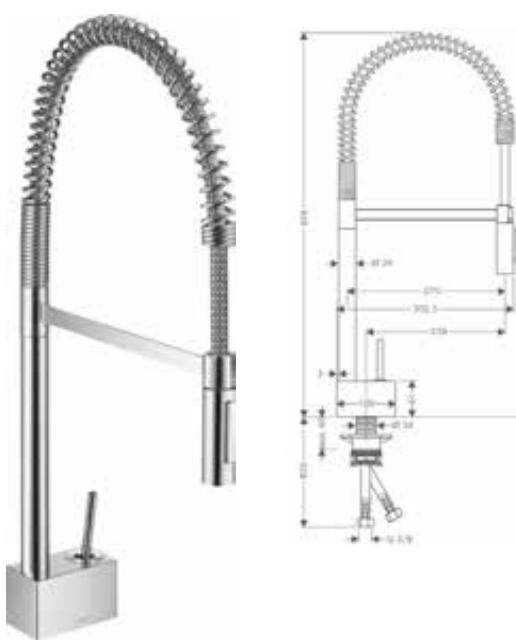

## Single lever kitchen mixer 240 Semi-Pro Eco

- / consists of: single lever kitchen mixer
- / ComfortZone 240
- / swivel range 360°
- / normal spray, shower spray
- / lockable shower spray, spray returns through pressing spray diverter
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 5 l/min
- / joystick ceramic cartridge
- / connection type: G 3/8 connections
- / integrated non-return valve
- / not suitable for continuous flow water heaters
- / flow rate limited to maximum 6 l/min

This product is only available in AXOR FinishPlus surfaces via AXOR Signature.

finish

code no.

Chrome	12803000
Stainless Steel Finish	12803800
AXOR FinishPlus*	12803XXX




## AXOR Citterio Select




## Single lever kitchen mixer Select 230 with swivel spout 2 ticks

- / ComfortZone 230
- / swivel range adjustable in 3 steps 110°, 150° or 360°
- / normal spray
- / Select button for a comfortable start/stop of the water flow
- / connection dimension: DN15
- / ceramic cartridge
- / connection type: G 1/2 connections
- / integrated non-return valve
- / not suitable for continuous flow water heaters

Chrome  
AXOR FinishPlus\* 39866009  
39866XXX

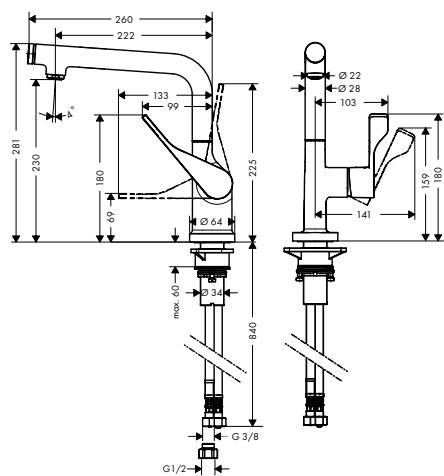

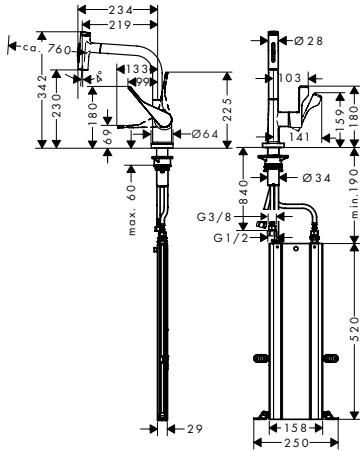


### Single lever kitchen mixer Select 230 2jet with pull-out spray and sBox 2 ticks

- / consists of: single lever kitchen mixer, hose box
- / ComfortZone 230
- / l-spout
- / swivel range adjustable in 2 steps to 110° or 150°
- / laminar spray, shower spray
- / lockable shower spray, spray returns through pressing spray diverter and spray returns automatically through handle closing
- / Select button for a comfortable start/stop of the water flow
- / MagFit magnetic shower support
- / connection dimension: DN15
- / ceramic cartridge
- / connection type: G 1/2 connections
- / integrated non-return valve
- / not suitable for continuous flow water heaters
- / sBox for quiet, smooth and protected hose guidance in the cabinet, under the countertop
- / extension length up to 76 cm

finish

code no.



Chrome 39867009  
Stainless Steel Finish 39867809  
AXOR FinishPlus\* 39867XXX

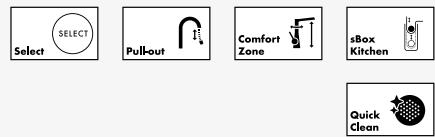

### Single lever kitchen mixer 230 with pull-out spout Eco


- / ComfortZone 230
- / swivel range adjustable in 2 steps to 110° or 150°
- / normal spray
- / Select button for a comfortable start/stop of the water flow
- / MagFit magnetic shower support
- / quick connect hose
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 4,5 l/min
- / ceramic cartridge
- / connection type: G 3/8 connections
- / temperature limitation adjustable
- / integrated non-return valve
- / not suitable for continuous flow water heaters
- / flow rate limited to maximum 6 l/min

Chrome 39864000  
Stainless Steel Finish 39864800  
AXOR FinishPlus\* 39864XXX

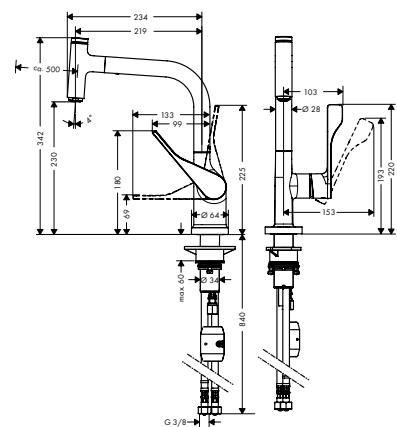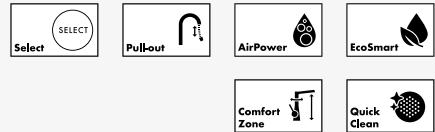

Measurements within scale drawings are in mm.

## AXOR Citterio

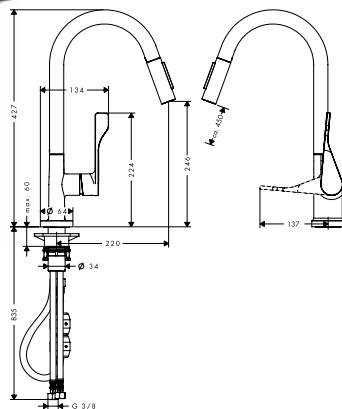
**Single lever kitchen mixer 250  
with pull-out spray Eco**

- / ComfortZone 250
- / swivel range adjustable in 2 steps to 110° or 150°
- / normal spray, shower spray
- / lockable shower spray, spray returns through pressing spray diverter
- / MagFit magnetic shower support
- / quick connect hose
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 4,8 l/min
- / ceramic cartridge
- / connection type: G 3/8 connections
- / temperature limitation adjustable
- / integrated non-return valve
- / not suitable for continuous flow water heaters
- / flow rate limited to maximum 6 l/min


finish

Chrome 39832000  
Stainless Steel Finish 39832800  
AXOR FinishPlus\* 39832XXX

**Alternative products:**

- / Single lever kitchen mixer 250 with pull-out spray 3 ticks

Chrome 39831009  
AXOR FinishPlus\* 39831XXX



**Single lever kitchen mixer 260  
with swivel spout Eco**

- / ComfortZone 260
- / swivel range adjustable in 3 steps 110°, 150° or 360°
- / normal spray
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 4,5 l/min
- / ceramic cartridge
- / connection type: G 3/8 connections
- / temperature limitation adjustable
- / integrated non-return valve
- / not suitable for continuous flow water heaters
- / flow rate limited to maximum 6 l/min

Chrome 39853000  
Stainless Steel Finish 39853800  
AXOR FinishPlus\* 39853XXX




## AXOR Citterio M


**2-hole single lever kitchen mixer 240 with swivel spout Eco**

- / ComfortZone 240
- / swivel range adjustable in 3 steps 110°, 150° or 360°
- / flexible position of faucet controls, 2 tap holes with Ø 35 mm required
- / normal spray
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 4,5 l/min
- / ceramic cartridge
- / connection type: G 3/8 connections
- / temperature limitation adjustable
- / not suitable for continuous flow water heaters
- / flow rate limited to maximum 6 l/min

Chrome 34823000  
Stainless Steel Finish 34823800  
AXOR FinishPlus\* 34823XXX



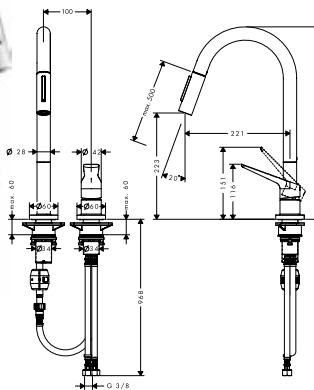

## 2-hole single lever kitchen mixer 220 with pull-out spray Eco

- / ComfortZone 220
- / swivel range adjustable in 2 steps to 110° or 150°
- / flexible position of faucet controls, 2 tap holes with Ø 35 mm required
- / normal spray, shower spray
- / lockable shower spray, spray returns through pressing spray diverter
- / MagiFit magnetic shower support
- / quick connect hose
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 4,8 l/min
- / ceramic cartridge
- / connection type: G 3/8 connections
- / temperature limitation adjustable
- / integrated non-return valve
- / not suitable for continuous flow water heaters
- / flow rate limited to maximum 6 l/min


finish

code no.

Chrome 34824000  
 Stainless Steel Finish 34824800  
 AXOR FinishPlus\* 34824XXX



## AXOR Montreux

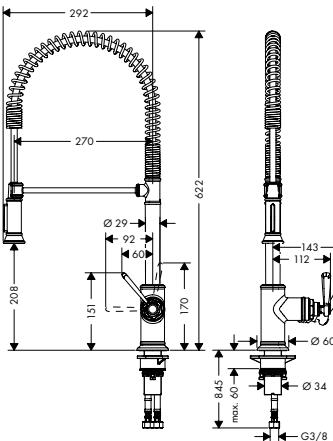

## Single lever kitchen mixer 210 Semi-Pro Eco


- / ComfortZone 210°
- / swivel range 360°
- / normal spray, shower spray
- / lockable shower spray, spray returns through pressing spray diverter
- / connection dimension: DN15
- / maximum flow rate at 3 bar: 4,7 l/min
- / ceramic cartridge
- / connection type: G 3/8 connections
- / temperature limitation adjustable
- / integrated non-return valve
- / not suitable for continuous flow water heaters
- / flow rate limited to maximum 6 l/min

Chrome 16585000  
 Stainless Steel Finish 16585800  
 AXOR FinishPlus\* 16585XXX



This product is only available in AXOR FinishPlus surfaces via AXOR Signature.

## Accessories

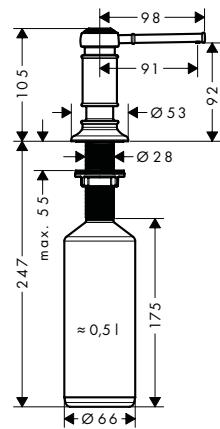


## Liquid soap dispenser/ washing-up liquid dispenser

- / suitable for matched design to selected kitchen mixers
- / projection 91 mm
- / material: durable metal construction
- / non-corroding outlet pipe
- / filling capacity 500 ml
- / dosage 2 ml
- / easy to fill up from the top
- / for installation in worktops up to 55 mm
- / easy and save installation without tools needed
- / mounting hole with 28 - 35 mm diameter needed

Chrome 42018000  
 Polished Black 42018330  
 Chrome 42018340  
 Brushed Black 42018340  
 Chrome 42018800  
 Stainless Steel Finish 42018800

Measurements within scale drawings are in mm.

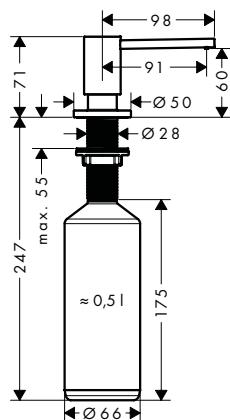


### Liquid soap dispenser/ washing-up liquid dispenser

- / suitable for matched design to selected kitchen mixers
- / projection 91 mm
- / material: durable metal construction
- / non-corroding outlet pipe
- / filling capacity 500 ml
- / dosage 2 ml
- / easy to fill up from the top
- / for installation in worktops up to 55 mm
- / easy and save installation without tools needed
- / mounting hole with 28 - 35 mm diameter needed

finish

code no.

Chrome	42818000
Polished Black	42818330
Chrome	42818340
Brushed Black	42818340
Chrome	Stainless Steel Finish 42818800



### Kitchen device shut-off valve

- / for counter surfaces up to 47 mm thick
- / shaft Ø 27 mm
- / non-return valve
- / connection dimension DN15
- / device connection DN20

Chrome	10823000
Stainless Steel Finish	10823800
AXOR FinishPlus*	10823XXX

This product is only available in the AXOR FinishPlus surface Polished Gold Optic via AXOR Signature.



# **AXOR Basic sets, wastes and overflows**

iBox universal	377
Bath filler with wastes and overflow for bath tubs	381
Wastes and overflow for bath tubs	382
Wastes for basin / bidet	383
Traps	383

# AXOR basic sets and accessories

## Technology with a system

The perfection of AXOR continues in the wall and beneath the bath tub or wash basin. Where mixers and showers are installed. With AXOR basic sets, siphons and waste sets. Based on AXOR's many years of know-how. Produced to the highest quality standards.

### Basic sets

---



Basic set for basin mixers  
for concealed installation



Basic set for floor-standing  
basin and bath tub mixers



Basic sets for rim-mounted and  
tile-mounted bath tub mixers



Basic set for rim  
and tile mounted sBox bath set



iBox universal basic sets for mixers  
and thermostatic mixers for concealed  
installation



Basic sets for  
thermostatic modules



Basic sets for AXOR ShowerCollection  
thermostatic modules



Basic sets for overhead  
showers

In addition, AXOR offers accessories for different bathroom applications.

#### Waste and overflow sets

---



Inflow, waste and overflow sets  
for bathtubs



Waste and overflow sets  
for bathtubs



Waste sets  
for wash basins/bidets



Traps



## iBox universal

The design. The function. The technology in the wall.  
For AXOR, perfection extends to all dimensions.

A prime example of this is the iBox® universal. One basic set. For a variety of concealed-installation solutions. Uncompromisingly reliable. Consistently easy to install. Technology. In perfection.

- / A basic set for over 15 different concealed-installation shower, bath tub and thermostat sets
- / Suitable for all AXOR mixers
- / This means that it is still possible to choose an AXOR product after installation

AXOR ShowerSelect Soft thermostatic mixer for 1 outlet	AXOR ShowerSelect Soft thermostatic mixer for 2 outlets	AXOR ShowerSelect Soft thermostatic mixer highflow for 1 outlet	AXOR ShowerSelect Soft thermostatic mixer highflow for 1 outlet and 1 additional outlet	AXOR ShowerSelect Soft valve for 3 outlets
				

no.36705000      no.36707000      no.36711000      no.36706000      no.36773000

AXOR ShowerSelect Round thermostatic mixer for 1 outlet	AXOR ShowerSelect Round thermostatic mixer for 2 outlets	AXOR ShowerSelect Round thermostatic mixer highflow for 1 outlet	AXOR ShowerSelect Round thermostatic mixer highflow for 1 outlet and 1 additional outlet	AXOR ShowerSelect Round valve for 3 outlets
				

no.36722000      no.36723000      no.36721000      no.36726000      no.36727000

AXOR ShowerSelect Square thermostatic mixer for 1 outlet	AXOR ShowerSelect Square thermostatic mixer for 2 outlets	AXOR ShowerSelect Square thermostatic mixer highflow for 1 outlet	AXOR ShowerSelect Square thermostatic mixer highflow for 1 outlet and 1 additional outlet	AXOR ShowerSelect Square valve for 3 outlets	AXOR ShowerSelect Square thermostatic mixer for 2 outlets with FixFit and porter unit
					

no.36714000      no.36715000      no.36718000      no.36716000      no.36717000      no.36712000

AXOR Edge bath mixer	AXOR Edge shower mixer	AXOR Edge thermostatic mixer highflow	AXOR Edge thermostatic mixer with shut-off valve	AXOR Edge thermostatic mixer with shut-off/ diverter valve	
					

no.46450000  
no.46451000  
no.46420000  
no.46421000      no.46650000  
no.46651000      no.46740000  
no.46741000      no.46750000  
no.46751000      no.46760000  
no.46761000

AXOR Starck bath mixer	AXOR Starck shower mixer	AXOR Starck thermostatic mixer	AXOR Starck thermostatic mixer highflow	AXOR Starck thermostatic mixer with shut-off valve	AXOR Starck thermostatic mixer with shut-off/ diverter valve
					

no.10416000  
no.10418000  
no.10414000, no.10427000\*      no.10616000  
no.10614000\*      no.10710000      no.10715000      no.10700000      no.10720000

\*lever handles without image

AXOR Starck Organic bath mixer	AXOR Starck Organic shower mixer	AXOR Starck Organic thermostatic mixer highflow	AXOR Starck Organic thermostatic mixer with shut-off valve	AXOR Starck Organic thermostatic mixer with shut-off/ diverter valve	
					

no.12415000  
no.12416000      no.12605000      no.12711000      no.12715000      no.12716000

AXOR Citterio bath mixer	AXOR Citterio shower mixer	AXOR Citterio thermostatic mixer highflow	AXOR Citterio thermostatic mixer with shut-off valve	AXOR Citterio thermostatic mixer with shut-off/ diverter valve
 no.39455000 no.39457000	 no.39655000	 no.39716000 no.39711000*	 no.39705000 no.39700000*	 no.39725000 no.39720000*

AXOR Citterio E bath mixer	AXOR Citterio E shower mixer
 no.36455000 no.36457000	 no.36655000

AXOR Citterio M bath mixer	AXOR Citterio M shower mixer	AXOR Citterio M thermostatic mixer	AXOR Citterio M thermostatic mixer highflow	AXOR Citterio M thermostatic mixer with shut-off valve	AXOR Citterio M thermostatic mixer with shut-off/ diverter valve
 no.34425000 no.34427000	 no.34625000	 no.34715000	 no.34716000	 no.34705000	 no.34725000

AXOR Urquiola bath mixer	AXOR Urquiola shower mixer	AXOR Urquiola thermostatic mixer highflow	AXOR Urquiola thermostatic mixer with shut-off valve	AXOR Urquiola thermostatic mixer with shut-off/ diverter valve
 no.11425000	 no.11625000	 no.11731000	 no.11732000	 no.11733000


AXOR Uno bath mixer	AXOR Uno bath mixer	AXOR Uno shower mixer	AXOR Uno shower mixer	AXOR Uno thermostatic mixer	AXOR Uno thermostatic mixer highflow	AXOR Uno thermostatic mixer with shut-off valve	AXOR Uno thermostatic mixer with shut-off/ diverter valve
 no.38426000, -820 no.38428000, -820	 no.45405000, -820 no.45407000, -820	 no.38626000, -820	 no.45605000, -820	 no.38375000	 no.38715000	 no.38700000	 no.38720000

AXOR Montreux thermostatic mixer	AXOR Montreux thermostatic mixer highflow	AXOR Montreux thermostatic mixer with shut-off valve	AXOR Montreux thermostatic mixer with shut-off/ diverter valve	AXOR Montreux thermostatic mixer	AXOR Montreux thermostatic mixer highflow	AXOR Montreux thermostatic mixer with shut-off valve	AXOR Montreux thermostatic mixer with shut-off / diverter valve
 no.16810000, -820 no.16823000, -820*	 no.16815000, -820 no.16824000, -820*	 no.16800000, -820 no.16801000, -820*	 no.16820000, -820 no.16821000, -820	 no.16823000, -820	 no.16824000, -820	 no.16801000, -820	 no.16821000, -820

## iBox universal

finish

code no.




## Basic set iBox universal

01700180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / rotationally-symmetric installation
- / sound-decoupled installation
- / connection dimension: DN20

## Optional parts:

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |
| / Reduction coupling iBox universal            | 97759000 |


Basic set iBox universal  
with shut-off unit

01750180

- / suitable for all shower, bath tub and thermostat finish sets for concealed installation
- / connection thread Rp 3/4
- / sound-decoupled installation
- / connection dimension: DN20


## Optional parts:

- |  |          |
|--|----------|
| / Extension 25 mm for basic set iBox universal | 13587000 |
| / Fastening rail set for iBox universal        | 93171000 |
| / Reduction coupling iBox universal            | 97759000 |

Extension 25 mm for basic set  
iBox universal

13587000


- / extension for basic set
- / extension length: 25 mm



## Extension element round 1-hole

Chrome	14960000
Brushed Nickel	14960820
AXOR FinishPlus*	14960XXX







- / for situations of limited depth for concealed installation
- / diameter: 170 mm
- / dimension: 18 mm higher than the default escutcheon
- / extension length: 33 mm
- / material: metal escutcheon









## Extension element round 2-hole

Chrome	14961000
Brushed Nickel	14961820
AXOR FinishPlus*	14961XXX


- / for situations of limited depth for concealed installation
- / diameter: 170 mm
- / dimension: 18 mm higher than the default escutcheon
- / extension length: 33 mm
- / material: metal escutcheon

		finish	code no.
		Extension element round 2-hole 0-1-2	Chrome Brushed Nickel AXOR FinishPlus* 14962000 14962820 14962XXX
		Extension element round 2-hole arrow	Chrome Brushed Nickel AXOR FinishPlus* 14963000 14963820 14963XXX
		Extension element square 1-hole	Chrome AXOR FinishPlus* 14964000 14964XXX
		Extension element square 1-hole red/blue	Chrome AXOR FinishPlus* 14965000 14965XXX
		Extension element square 1-hole arrow	Chrome AXOR FinishPlus* 14966000 14966XXX
		Extension element square 2-hole	Chrome AXOR FinishPlus* 14967000 14967XXX

Measurements within scale drawings are in mm.


	finish	code no.
	Chrome AXOR FinishPlus*	14968000 14968XXX
	<b>Extension element square 2-hole red blue</b> <ul style="list-style-type: none"> <li>/ for situations of limited depth</li> <li>/ for concealed installation</li> <li>/ diameter: 170 mm</li> <li>/ dimension: 18 mm higher than the default escutcheon</li> <li>/ extension length: 33 mm</li> <li>/ material: metal escutcheon</li> </ul>	
	Chrome AXOR FinishPlus*	14969000 14969XXX
	<b>Extension element square 2-hole 0-1-2</b> <ul style="list-style-type: none"> <li>/ for situations of limited depth</li> <li>/ for concealed installation</li> <li>/ diameter: 170 mm</li> <li>/ dimension: 18 mm higher than the default escutcheon</li> <li>/ extension length: 33 mm</li> <li>/ material: metal escutcheon</li> </ul>	
	Chrome AXOR FinishPlus*	14970000 14970XXX
	<b>Extension element square 2-hole arrow</b> <ul style="list-style-type: none"> <li>/ for situations of limited depth</li> <li>/ for concealed installation</li> <li>/ diameter: 170 mm</li> <li>/ dimension: 18 mm higher than the default escutcheon</li> <li>/ extension length: 33 mm</li> <li>/ material: metal escutcheon</li> </ul>	
	Chrome AXOR FinishPlus*	14971000 14971XXX
	<b>Extension element softcube 1-hole</b> <ul style="list-style-type: none"> <li>/ for situations of limited depth</li> <li>/ for concealed installation</li> <li>/ diameter: 170 mm</li> <li>/ dimension: 18 mm higher than the default escutcheon</li> <li>/ extension length: 33 mm</li> <li>/ material: metal escutcheon</li> </ul>	
	Chrome AXOR FinishPlus*	14972000 14972XXX
	<b>Extension element softcube 2-hole</b> <ul style="list-style-type: none"> <li>/ for situations of limited depth</li> <li>/ for concealed installation</li> <li>/ diameter: 170 mm</li> <li>/ dimension: 18 mm higher than the default escutcheon</li> <li>/ extension length: 33 mm</li> <li>/ material: metal escutcheon</li> </ul>	
	Chrome AXOR FinishPlus*	14973000 14973XXX
	<b>Extension element softcube 2-hole 0-1-2</b> <ul style="list-style-type: none"> <li>/ for situations of limited depth</li> <li>/ for concealed installation</li> <li>/ diameter: 170 mm</li> <li>/ dimension: 18 mm higher than the default escutcheon</li> <li>/ extension length: 33 mm</li> <li>/ material: metal escutcheon</li> </ul>	

finish	code no.
Chrome AXOR FinishPlus*	14974000 14974XXX



**Extension element softcube  
2-hole arrow**



- / for situations of limited depth for concealed installation
- / diameter: 170 mm
- / dimension: 18 mm higher than the default escutcheon
- / extension length: 33 mm
- / material: metal escutcheon



**Fastening rail set for iBox  
universal**

93171000

Measurements within scale drawings are in mm.

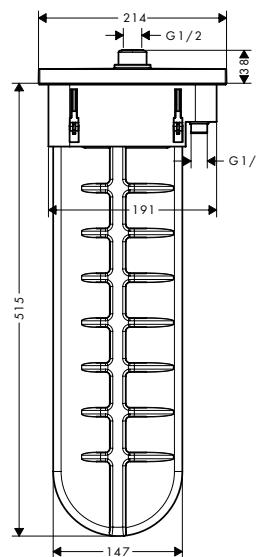**Bath filler with wastes and overflow for bath tubs****Finish set square**

- / consists of: hose box, shower hose, escutcheon
- / suitable for rim or tile mounted installation
- / 1 function
- / sBox for quiet, smooth and protected hose guidance
- / no additional maintenance opening required
- / bath rim width at least 100 mm
- / clamping range: 0 - 30 mm
- / connection dimension: DN15
- / maximum pull-out length of hand shower 1.45 m
- / removable for service at any time
- / protected against backflow, according to DIN EN1717
- / maximum flow rate at 3 bar: 9,5 l/min

**finish**Chrome  
AXOR FinishPlus\***code no.**28012000  
28012XXX**Alternative products:**

- / Finish set oval

Chrome  
AXOR FinishPlus\*28022000  
28022XXX**Required parts:**

- / Rim and tile mounted bath basic set



15490180

**Optional parts:**

- / Installation plate for tile mounted installation
- / Mounting angle set for installation plate for tile mounted installation

28014000

28011000

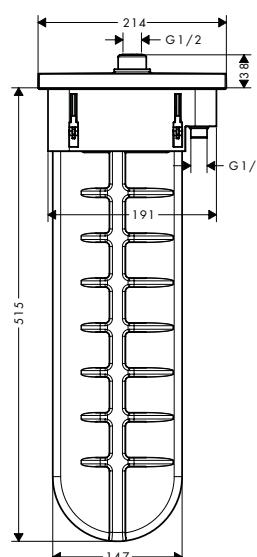**Finish set oval**

- / consists of: hose box, shower hose, escutcheon
- / suitable for rim or tile mounted installation
- / 1 function
- / sBox for quiet, smooth and protected hose guidance
- / no additional maintenance opening required
- / bath rim width at least 100 mm
- / clamping range: 0 - 30 mm
- / connection dimension: DN15
- / maximum pull-out length of hand shower 1.45 m
- / removable for service at any time
- / protected against backflow, according to DIN EN1717
- / maximum flow rate at 3 bar: 9,5 l/min

Chrome  
AXOR FinishPlus\*28022000  
28022XXX**Alternative products:**

- / Finish set square

Chrome  
AXOR FinishPlus\*28012000  
28012XXX**Required parts:**

- / Rim and tile mounted bath basic set


15490180

**Optional parts:**

- / Installation plate for tile mounted installation
- / Mounting angle set for installation plate for tile mounted installation

28014000

28011000

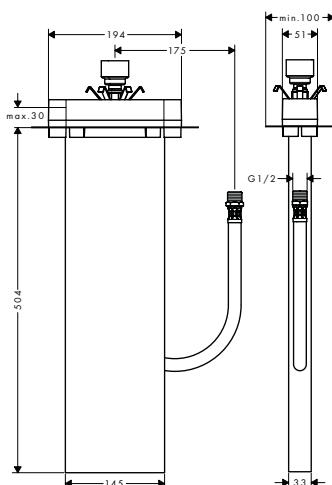


### Rim and tile mounted bath basic set

- / suitable for rim or tile mounted installation
- / 1 function
- / connection thread R 1/2
- / connection hose length: 600 mm
- / bath rim width at least 100 mm
- / drilling diameter on bath tub: two drilled holes Ø 50/51 mm and connection by sawing out required (consider template)
- / clamping range: 0 - 30 mm
- / connection dimension: DN15

#### Optional parts:

- |   |          |
|---|----------|
| / Installation plate for tile mounted installation                        | 28014000 |
| / Mounting angle set for installation plate for tile mounted installation | 28011000 |


15490180



### Installation plate for tile mounted installation

28014000

- / dimension: 350 x 120 mm

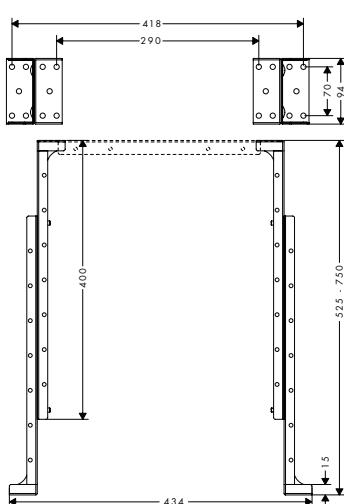


### Mounting angle set for installation plate for tile mounted installation

28011000

- / maximum mounting height: 750 mm
- / minimum mounting height: 400 mm
- / packaging unit: 2 pieces

## Wastes and overflow for bath tubs




### Complete set waste and overflow set for standard bath tubs

- / consists of: basic set, finish set
- / TÜV certified
- / suitable for standard bath tubs
- / PE screw connection G 1 1/2 x 40/ 50 mm
- / flexible overflow hose
- / bowden cable length 520 mm
- / odour trap - backwater height is 50 mm

Chrome	58316000
Matt Black	58316670
Brushed Nickel	58316820
AXOR FinishPlus*	58316XXX

Measurements within scale drawings are in mm.

**NEW**

### Complete set waste and overflow set for special bath tubs


- / consists of: basic set, bath tub trap, finish set
- / suitable for special bath tubs
- / PE screw connection G 1½ x 40/ 50 mm
- / flexible overflow hose
- / bowden cable length 780 mm

finish

Chrome  
Matt Black  
AXOR FinishPlus\*

code no.  
58318000  
58318670  
58318XXX

### Wastes for basin/ bidet




### Waste set pop-up for basin and bidet mixers

- / operation via pull-rod
- / for basins with overflow hole
- / drain plug material brass
- / connection dimension G 1¼

Chrome  
AXOR FinishPlus\*

51302000  
51302XXX



### Waste set push-open for basin and bidet mixers

- / operation with pressure plug
- / for basins with overflow hole
- / drain plug material brass
- / connection dimension G 1¼

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

51300000  
51300820  
51300XXX




### Waste set non-closing for washbasins

Chrome  
AXOR FinishPlus\*

51301000  
51301XXX

### Traps




### Design trap Flowstar

- / adjustment distance 65 - 165 mm
- / distance to wall 330 mm
- / odour trap - backwater height is 70 mm
- / connection dimension entry: G 1¼

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

51303000  
51303820  
51303XXX

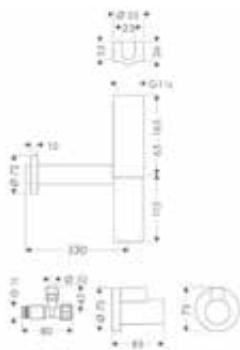

### Design trap set Flowstar

- / consists of: design trap, angle valve, cover
- / adjustment distance 65 - 165 mm
- / distance to wall 330 mm
- / odour trap - backwater height is 70 mm
- / connection dimension entry: G 1 1/4

#### Consisting of:


- / Design trap Flowstar (# 51303XXX)
- / Angle valve with cover outlet G 3/8 (# 51307XXX)

finish

code no.

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

51304000  
51304820  
51304XXX




### Design trap Flowstar S

- / adjustment distance 60 - 165 mm
- / distance to wall 330 mm
- / odour trap - backwater height is 70 mm
- / connection dimension entry: G 1 1/4

Chrome  
Matt Black  
Brushed Nickel  
AXOR FinishPlus\*

51305000  
51305670  
51305820  
51305XXX




### Cover

- / for angle valve
- / packaging unit: 1 piece

Chrome  
Matt Black  
AXOR FinishPlus\*

51306000  
51306670  
51306XXX



### Angle valve with cover outlet G 3/8


- / consists of: angle valve, cover
- / self-sealing connection thread
- / connection dimension entry: G 1/2
- / connection dimension outlet G 3/8
- / packaging unit: 1 piece

#### Consisting of:

- / Cover (# 51306000)

Chrome  
Brushed Nickel  
AXOR FinishPlus\*

51307000  
51307820  
51307XXX



### Angle valve with microfilter outlet G 3/8

- / for protection of mixers against dirt inlet, e.g. for electronic basin mixers
- / filter element can be removed and cleaned
- / self-sealing connection thread
- / connection dimension entry: G 1/2
- / connection dimension outlet G 3/8
- / packaging unit: 1 piece

Chrome

51308000

	finish	code no.
	Angle valve E outlet G 3/8 / self-sealing connection thread / connection dimension entry: G 1/2 / connection dimension outlet G 3/8 / main material: brass / material handle and escutcheon: plastic / packaging unit: 1 piece	Chrome 51312000
	Angle valve E outlet G 1/2 / connection dimension entry: G 1/2 / connection dimension outlet G 1/2 / main material: brass / material handle and escutcheon: plastic / packaging unit: 1 piece	Chrome 51309000
	Angle valve S outlet G 3/8 / self-sealing connection thread / connection dimension entry: G 1/2 / connection dimension outlet G 3/8 / main material: brass / material handle and escutcheon: plastic / packaging unit: 1 piece	Chrome 51310000

AXOR Singapore Product Catalogue 2022 SGP en-EN . Subject to change in the interest of technical advancement .  
Printed in Singapore

AXOR / Hansgrohe Pte Ltd  
69 Mohamed Sultan Road  
Singapore 239015  
Tel. +65 6884 5060  
Fax +65 6884 5071  
[info@hansgrohe.com.sg](mailto:info@hansgrohe.com.sg)

AXOR-DESIGN.COM / ASIA