

hansgrohe

Life is waterful.



News Product Catalogue 2025

hansgrohe.com.sg

Hansgrohe contact

Hansgrohe Headquarters



The Hansgrohe Master Service - Headquarters

Service hours:

Monday-Thursday: 8:00 am - 4:00 pm

Friday: 8:00 am - 3:00 pm

Phone: +49 7836 51-1282

Fax: +49 7836 51-1440

info@hansgrohe.com

You will also find technical information at

pro.hansgrohe-int.com



Global Projects Services - Headquarters

gpservices@hansgrohe.com

You will also find tender texts and planning details at

pro.hansgrohe-int.com/planning-data



Hansgrohe Aquademie - Headquarters

Monday-Friday: 7:30 am - 7:00 pm

Saturday-Sunday: 10:00 am - 4:00 pm

Hansgrohe SE

Hansgrohe Aquademie

Austr. 9

77761 Schiltach/Germany

Phone: +49 7836 51-3272

Fax: +49 7836 51-1505

The Aquademie is our adventure centre on all aspects of water.

pro.hansgrohe-int.com/aquademie

Errors and omissions excepted.

Upon publication of this price list, all previously published price lists are no longer valid.

Figures given for dimensional drawings are in mm.

When installing the products, please follow the instructions in the installation manual.

All products are subject to availability.

The availability may be temporarily impacted by material shortages, interruptions in the supply chain or other force majeure events. Please contact us for further details.

The following general terms and conditions apply:

<https://www.hansgrohe.com/terms-of-conditions>

News Product Catalogue 2025

Contents

Showers	Raindance Alive	9
	Rainfinity Extensions	25
	Raindance Extensions	31
	Pulsify Extensions	39
	FixFit Fine Porter Fine	45
Wastes & overflows	Flexaplus	49
Thermostats concealed installation	EcoStat Comfort	55
Mixers	Finoris	61
	Zesis	67

Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
01			
HG	01500180	4059625316900	60
24			
HG	24125340	4059625604359	41
HG	24125990	4059625604342	41
HG	24126340	4059625604335	41
HG	24126990	4059625604328	41
HG	24132140	4059625604311	43
HG	24305000	4059625604304	42
HG	24305670	4059625604298	42
HG	24305700	4059625604281	42
HG	24306000	4059625604274	42
HG	24306670	4059625604267	42
HG	24306700	4059625604250	42
HG	24307000	4059625604243	42
HG	24307670	4059625604236	42
HG	24307700	4059625604229	42
HG	24320340	4059625600832	41
HG	24320990	4059625600849	41
HG	24321340	4059625600856	41
HG	24321990	4059625600931	41
HG	24337000	4059625395264	20
HG	24337140	4059625467763	20
HG	24337340	4059625533253	20
HG	24337670	4059625395271	20
HG	24337700	4059625395288	20
HG	24337990	4059625533246	20
HG	24338000	4059625410790	20
HG	24338140	4059625467749	20
HG	24338340	4059625533239	20
HG	24338670	4059625410769	20
HG	24338700	4059625410738	20
HG	24338990	4059625533222	20
HG	24339000	4059625410707	20
HG	24339140	4059625467725	20
HG	24339340	4059625628928	20
HG	24339670	4059625410677	20
HG	24339700	4059625410646	20
HG	24339990	4059625628454	20
HG	24500000	4059625479179	12
HG	24500140	4059625479209	12
HG	24500340	4059625560389	12
HG	24500670	4059625479186	12
HG	24500700	4059625479193	12
HG	24500990	4059625560372	12
HG	24511000	4059625443804	12
HG	24511140	4059625473351	12
HG	24511340	4059625562604	12
HG	24511670	4059625473337	12
HG	24511700	4059625473344	12
HG	24511990	4059625560396	12
HG	24512000	4059625486818	12
HG	24512140	4059625486849	12
HG	24512340	4059625562703	12
HG	24512670	4059625486825	12
HG	24512700	4059625486832	12
HG	24512990	4059625562697	12
HG	24520000	4059625449134	16
HG	24520140	4059625449165	16
HG	24520340	4059625568064	16

brand	Code no.	EAN	page
HG	24520670	4059625449141	16
HG	24520700	4059625449158	16
HG	24520990	4059625568057	16
HG	24521000	4059625449172	16
HG	24521140	4059625449202	16
HG	24521340	4059625568385	16
HG	24521670	4059625449189	16
HG	24521700	4059625449196	16
HG	24521990	4059625568378	16
HG	24523000	4059625568361	16
HG	24523140	4059625568354	16
HG	24523340	4059625568347	16
HG	24523670	4059625568330	16
HG	24523700	4059625568323	16
HG	24523990	4059625568316	16
HG	24530000	4059625449219	18
HG	24530140	4059625449257	18
HG	24530340	4059625568309	18
HG	24530670	4059625449233	18
HG	24530700	4059625449240	18
HG	24530990	4059625568293	18
HG	24531000	4059625449264	18
HG	24531140	4059625449295	18
HG	24531340	4059625568286	18
HG	24531670	4059625449271	18
HG	24531700	4059625449288	18
HG	24531990	4059625568279	18
HG	24540000	4059625449349	17
HG	24540140	4059625449370	17
HG	24540340	4059625568262	17
HG	24540670	4059625449356	17
HG	24540700	4059625449363	17
HG	24540990	4059625568255	17
HG	24541000	4059625449387	17
HG	24541140	4059625449417	17
HG	24541340	4059625568248	17
HG	24541670	4059625449394	17
HG	24541700	4059625449400	17
HG	24541990	4059625568231	17
HG	24550000	4059625449424	19
HG	24550140	4059625449455	19
HG	24550340	4059625568224	19
HG	24550670	4059625449431	19
HG	24550700	4059625449448	19
HG	24550990	4059625568217	19
HG	24551000	4059625449462	19
HG	24551140	4059625449493	19
HG	24551340	4059625568200	19
HG	24551670	4059625449479	19
HG	24551700	4059625449486	19
HG	24551990	4059625568194	19
HG	24573180	4059625568583	23
HG	24600000	4059625562994	13
HG	24600140	4059625562987	13
HG	24600340	4059625562970	13
HG	24600670	4059625562963	13
HG	24600700	4059625562956	13
HG	24600990	4059625562949	13
HG	24601000	4059625562932	13
HG	24601140	4059625562925	13

Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
HG	24601340	4059625562918	13
HG	24601670	4059625562901	13
HG	24601700	4059625562895	13
HG	24601990	4059625562888	13
HG	24602000	4059625562871	14
HG	24602140	4059625562864	14
HG	24602340	4059625562857	14
HG	24602670	4059625562840	14
HG	24602700	4059625562833	14
HG	24602990	4059625562826	14
HG	24603000	4059625562819	14
HG	24603140	4059625562802	14
HG	24603340	4059625557891	14
HG	24603670	4059625557884	14
HG	24603700	4059625557877	14
HG	24603990	4059625557860	14
HG	24611000	4059625569146	15
HG	24611140	4059625569139	15
HG	24611340	4059625569122	15
HG	24611670	4059625569115	15
HG	24611700	4059625569108	15
HG	24611990	4059625569092	15
HG	24620670	4059625569078	21
HG	24630000	4059625569061	22
HG	24630670	4059625569153	22
26			
HG	26226140	4059625602232	29
HG	26226340	4059625602249	29
HG	26226670	4059625602256	29
HG	26226990	4059625602263	29
HG	26227140	4059625602287	29
HG	26227340	4059625603109	29
HG	26227670	4059625602294	29
HG	26227990	4059625602270	29
HG	26232140	4059625603345	28
HG	26232340	4059625603352	28
HG	26232670	4059625603369	28
HG	26232990	4059625603376	28
HG	26233140	4059625603383	28
HG	26233340	4059625603390	28
HG	26233670	4059625603406	28
HG	26233990	4059625603413	28
HG	26239140	4059625604212	36
HG	26239340	4059625328835	36
HG	26239670	4059625604205	36
HG	26239700	4059625604199	36
HG	26239990	4059625604182	36
HG	26251140	4059625357576	36
HG	26251340	4059625604175	36
HG	26251670	4059625604168	36
HG	26251700	4059625604151	36
HG	26251990	4059625604144	36
HG	26252140	4059625604137	37
HG	26252340	4059625604120	37
HG	26252670	4059625604113	37
HG	26252700	4059625604106	37
HG	26252990	4059625604090	37
HG	26253140	4059625604083	37
HG	26253340	4059625604076	37
HG	26253670	4059625604069	37

brand	Code no.	EAN	page
HG	26253700	4059625604052	37
HG	26253990	4059625604045	37
HG	26515140	4059625604038	33
HG	26515340	4059625604021	33
HG	26515670	4059625604014	33
HG	26515700	4059625604007	33
HG	26515990	4059625603994	33
HG	26516140	4059625603987	33
HG	26516340	4059625603970	33
HG	26516670	4059625603963	33
HG	26516700	4059625603956	33
HG	26516990	4059625603949	33
HG	26862000	4059625603932	27
HG	26862140	4059625603925	27
HG	26862340	4059625603918	27
HG	26862670	4059625603901	27
HG	26862700	4059625603895	27
HG	26862990	4059625603888	27
27			
HG	27623140	4059625603833	34
HG	27623340	4059625603826	34
HG	27623990	4059625603819	34
HG	27624000	4059625603802	34
HG	27624140	4059625603796	34
HG	27624340	4059625603789	34
HG	27624670	4059625603772	34
HG	27624700	4059625603765	34
HG	27624990	4059625603758	34
28			
HG	28728000	4059625603741	35
HG	28728140	4059625603734	35
HG	28728340	4059625603727	35
HG	28728670	4059625603710	35
HG	28728700	4059625603703	35
HG	28728990	4059625603697	35
HG	28729000	4059625603680	35
HG	28729140	4059625603673	35
HG	28729340	4059625603666	35
HG	28729670	4059625603659	35
HG	28729700	4059625603642	35
HG	28729990	4059625603635	35
HG	28821000	4059625603628	34
HG	28821140	4059625603611	34
HG	28821340	4059625603604	34
HG	28821670	4059625603598	34
HG	28821700	4059625603581	34
HG	28821990	4059625603574	34
HG	28882000	4059625616420	46
HG	28882140	4059625616567	46
HG	28882340	4059625616390	46
HG	28882670	4059625616376	46
HG	28882700	4059625616369	46
HG	28882990	4059625616550	46
HG	28883000	4059625616543	46
HG	28883140	4059625616536	46
HG	28883340	4059625616529	46
HG	28883670	4059625616512	46
HG	28883700	4059625616505	46
HG	28883990	4059625616499	46
HG	28884000	4059625616284	46

Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
HG	28884140	4059625616277	46
HG	28884340	4059625616260	46
HG	28884670	4059625616253	46
HG	28884700	4059625616246	46
HG	28884990	4059625616239	46
HG	28885000	4059625616482	47
HG	28885140	4059625616475	47
HG	28885340	4059625616468	47
HG	28885670	4059625616451	47
HG	28885700	4059625616444	47
HG	28885990	4059625616437	47
33			
HG	33710000	4059625624319	58
HG	33710140	4059625624302	58
HG	33710340	4059625624296	58
HG	33710670	4059625624289	58
HG	33710700	4059625624272	58
HG	33710990	4059625624265	58
HG	33711000	4059625624258	58
HG	33711140	4059625624234	58
HG	33711340	4059625624210	58
HG	33711670	4059625624203	58
HG	33711700	4059625624180	58
HG	33711990	4059625624166	58
HG	33712000	4059625624142	59
HG	33712140	4059625624135	59
HG	33712340	4059625624128	59
HG	33712670	4059625624586	59
HG	33712700	4059625624579	59
HG	33712990	4059625624562	59
HG	33713000	4059625624555	59
HG	33713140	4059625624531	59
HG	33713340	4059625624524	59
HG	33713670	4059625624517	59
HG	33713700	4059625624494	59
HG	33713990	4059625624470	59
HG	33714000	4059625624463	57
HG	33714140	4059625624456	57
HG	33714340	4059625624449	57
HG	33714670	4059625624784	57
HG	33714700	4059625624777	57
HG	33714990	4059625624760	57
HG	33715000	4059625624753	57
HG	33715140	4059625624739	57
HG	33715340	4059625624722	57
HG	33715670	4059625624715	57
HG	33715700	4059625624692	57
HG	33715990	4059625624678	57
58			
HG	58152180	4059625514184	53
HG	58154000	4059625514177	52
HG	58187000	4059625514160	51
HG	58187140	4059625514153	51
HG	58187340	4059625514146	51
HG	58187670	4059625514139	51
HG	58187700	4059625514122	51
HG	58187990	4059625514115	51
HG	58188000	4059625514108	51
60			
HG	60058000	4059625513484	54

brand	Code no.	EAN	page
HG	60058140	4059625513477	54
HG	60058340	4059625513460	54
HG	60058670	4059625513453	54
HG	60058700	4059625513446	54
HG	60058990	4059625513439	54
HG	60090180	4059625513422	54
74			
HG	74410000	4059625563274	71
HG	74415000	4059625563267	70
HG	74420009	4059625563847	70
HG	74616000	4059625563427	72
HG	74617000	4059625563403	72
HG	74621009	4059625563816	71
HG	74624009	4059625563809	71
HG	74712009	4059625563779	69
HG	74721009	4059625563755	69
HG	74722009	4059625563731	69
HG	74731009	4059625563700	69
HG	74997000	4059625557716	72
76			
HG	76022009	4059625751282	63
HG	76022149	4059625751275	63
HG	76022349	4059625751268	63
HG	76075009	4059625751701	63
HG	76075149	4059625751695	63
HG	76075349	4059625751688	63
HG	76410000	4059625337738	64
HG	76410140	4059625751572	64
HG	76410340	4059625751565	64
HG	76410670	4059625337714	64
HG	76410700	4059625337691	64
HG	76415000	4059625337637	64
HG	76415140	4059625751954	64
HG	76415340	4059625751930	64
HG	76415670	4059625337644	64
HG	76415700	4059625337651	64
HG	76420009	4059625336779	63
HG	76420149	4059625751886	63
HG	76420349	4059625751862	63
HG	76444000	4059625337592	65
HG	76444140	4059625751855	65
HG	76444340	4059625751848	65
HG	76444670	4059625337585	65
HG	76444700	4059625337578	65
HG	76615000	4059625337606	65
HG	76615140	4059625751817	65
HG	76615340	4059625751794	65
HG	76615670	4059625337613	65
HG	76615700	4059625337620	65



Raindance Alive

Highlights

Special feature



Actively regulates water consumption – the amount of water can be adjusted via the control dial.



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Thermostat with integrated temperature control for constant water temperature.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



This innovative function reduces the dripping after stopping the shower to just a few seconds.




Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.



Quick and safe installation - several features ensure easy installation.



Mixes water with air. For a smooth, lower-splash water spray and light yet full shower droplets.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



A playful way to control the water flow, shower or spray type at the simple touch of a button.

Installation



The high-quality installation set features a pre-assembled seal and is 100% water-proof.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Invigorating, focused and powerful spray for the home spa that allows the day's stresses to simply drain off.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Full shower rain with droplets enriched with air for soft yet efficient and indulgent showering.


Finish



Brushed Black
Chrome
-340




Brushed Bronze
-140



Chrome
-000



Matt Black
-670



Matt White
-700




Polished Gold
Optic
-990

Raindance Alive Select S Hand showers 3jet

Features of all variants

- shower head size: 125 mm
 - spray type: RainAir, PowderRain, Massage spray
 - convenient spray selection via Select button
 - spray disc surface: graphite
- QuickClean: Limescale deposits can simply be rubbed off with your finger
 - design cover conceals the nozzles
 - design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
 - with internal water conduction
 - rinseable filter washer
 - connection thread: G 1/2
 - suitable for continuous flow water heaters



Special feature



Technologies



Spray types





Overview variants

	Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	125	3	RainAir, PowderRain, Massage spray	4.6	5.9	1.3	Chrome	Q2/2025	24512000
							Brushed Bronze	Q2/2025	24512140
							Brushed Black Chrome	Q2/2025	24512340
							Matt Black	Q2/2025	24512670
							Matt White	Q2/2025	24512700
							Polished Gold Optic	Q2/2025	24512990
	125	3	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome	Q2/2025	24511000
							Brushed Bronze	Q2/2025	24511140
							Brushed Black Chrome	Q2/2025	24511340
							Matt Black	Q2/2025	24511670
							Matt White	Q2/2025	24511700
							Polished Gold Optic	Q2/2025	24511990
	125	3	RainAir, PowderRain, Massage spray	5.6	10.3	1.2	Chrome	Q2/2025	24500000
							Brushed Bronze	Q2/2025	24500140
							Brushed Black Chrome	Q2/2025	24500340
							Matt Black	Q2/2025	24500670
							Matt White	Q2/2025	24500700
							Polished Gold Optic	Q2/2025	24500990

Raindance Alive Select S Shower sets 3jet with shower bar Unica E**Features of all variants**

- consists of: hand shower, slider, shower bar, textile shower hose
- shower head size: 125 mm
- spray type: RainAir, PowderRain, Massage spray
- convenient spray selection via Select button
- spray disc surface: graphite
- QuickClean: Limescale deposits can simply be rubbed off with your finger
- flow regulator: 8 l/min (with possible tolerances -20 %)
- maximum flow rate at 3 bar: 7,1 l/min
- minimum flow pressure: 1,9 bar
- design cover conceals the nozzles
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- slider for right- and left-hand installation
- slider steplessly adjustable
- slider with locking mechanism
- wall supports made of plastic
- wall bar type: swivelling shower bar, profile made of aluminium
- profile pipe: square
- Designflex textile shower hose, water-resistant and water-repellant material
- unique design with multi-colored braided yarns
- yarns are made of recycled PET
- warm, cotton-like material feels great to the skin
- 1x conical nut, 1x cylindrical nut
- pivot connector prevents hose from tangling
- EU taxonomy: max. 8 l/min - Do No Significant Harm (DNSH)
- rinseable filter washer
- metal hand shower holder

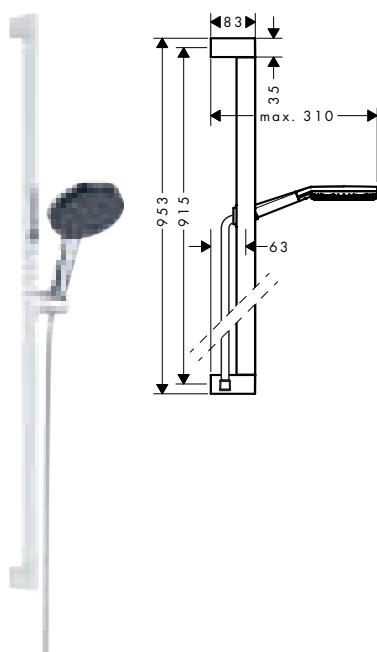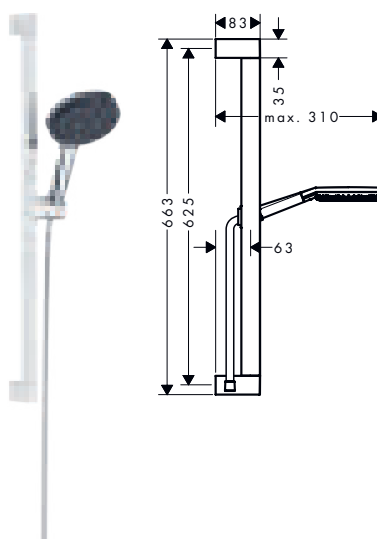90**65****Special feature****Technologies****Spray types****Overview variants**

Version	Drilling distance (mm)	Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
90	915	125	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome	Q2/2025	24601000
							Brushed Bronze	Q2/2025	24601140
							Brushed Black Chrome	Q2/2025	24601340
							Matt Black	Q2/2025	24601670
							Matt White	Q2/2025	24601700
							Polished Gold Optic	Q2/2025	24601990
65	625	125	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome	Q2/2025	24600000
							Brushed Bronze	Q2/2025	24600140
							Brushed Black Chrome	Q2/2025	24600340
							Matt Black	Q2/2025	24600670
							Matt White	Q2/2025	24600700
							Polished Gold Optic	Q2/2025	24600990

Consisting of:

Raindance Alive Select S Hand shower 125 3jet EcoSmart

Included in

24601XXX
24600XXX

Code no.


24511XXX

Raindance Alive Select S Shower sets 3jet with shower bar S Puro


Features of all variants

- consists of: hand shower, slider, shower bar, shower hose
 - shower head size: 125 mm
 - spray type: RainAir, PowderRain, Massage spray
 - convenient spray selection via Select button
 - spray disc surface: graphite
 - QuickClean: Limescale deposits can simply be rubbed off with your finger
 - flow regulator: 8 l/min (with possible tolerances -20 %)
- maximum flow rate at 3 bar: 7,1 l/min
 - minimum flow pressure: 1,9 bar
 - design cover conceals the nozzles
 - design cover can be removed easily and without tools for cleaning
 - design cover surface: graphite
 - silder in reduced, cylindrical design rotatable in all directions
 - slider with locking mechanism
 - slider steplessly adjustable
- wall supports made of plastic
 - profile pipe: round
 - shower bar diameter: 22 mm
 - shower hose with conical nut on both ends
 - pivot connector prevents hose from tangling
 - EU taxonomy: max. 8 l/min - Do No Significant Harm (DNSH)
 - rinseable filter washer
 - metal hand shower holder

90

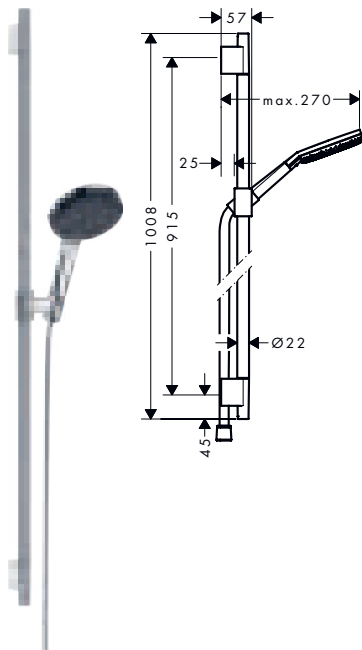

65

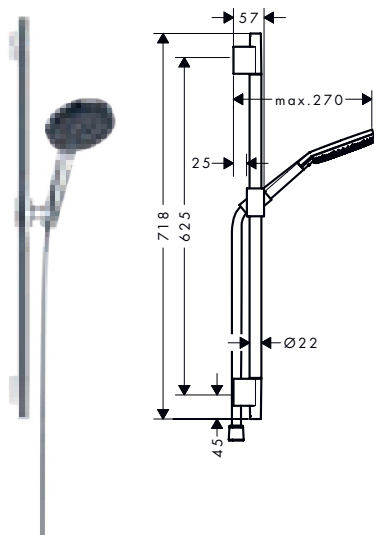

Special feature



Technologies



Spray types



Overview variants

Version	Drilling distance (mm)	Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
90	915	125	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome	Q2/2025	24603000
							Brushed Bronze	Q2/2025	24603140
							Brushed Black Chrome	Q2/2025	24603340
							Matt Black	Q2/2025	24603670
							Matt White	Q2/2025	24603700
							Polished Gold Optic	Q2/2025	24603990
65	625	125	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome	Q2/2025	24602000
							Brushed Bronze	Q2/2025	24602140
							Brushed Black Chrome	Q2/2025	24602340
							Matt Black	Q2/2025	24602670
							Matt White	Q2/2025	24602700
							Polished Gold Optic	Q2/2025	24602990

Consisting of:




Raindance Alive Select S Hand shower 125 3jet EcoSmart

Included in	Code no.
24603XXX	24511XXX
24602XXX	

Raindance Alive Select S Shower holder set 125 3jet EcoSmart with Designflex textil shower hose 1 60 cm

Features

- consists of: hand shower, shower holder, textile shower hose
 - shower head size: 125 mm
 - spray type: RainAir, PowderRain, Massage spray
 - convenient spray selection via Select button
 - spray disc surface: graphite
 - QuickClean: Limescale deposits can simply be rubbed off with your finger
 - flow regulator: 8 l/min (with possible tolerances -20 %)
 - maximum flow rate at 3 bar: 7,1 l/min
- minimum flow pressure: 1,9 bar
 - design cover conceals the nozzles
 - design cover can be removed easily and without tools for cleaning
 - design cover surface: graphite
 - suitable for continuous flow water heaters
 - Designflex textile shower hose, water-resistant and water-repellant material
 - unique design with multi-colored braided yarns
 - yarns are made of recycled PET
 - warm, cotton-like material feels great to the skin
- fitting side: cylindric nut, hand shower side: conical nut
 - pivot connector prevents hose from tangling
 - shower hose length: 1600 mm
 - Porter Fine S shower holder in minimalist design
 - integrated support function
 - wall mounting: screw fastening
 - rinseable filter washer
 - EU taxonomy: max. 8 l/min - Do No Significant Harm (DNSH)
 - metal hand shower holder

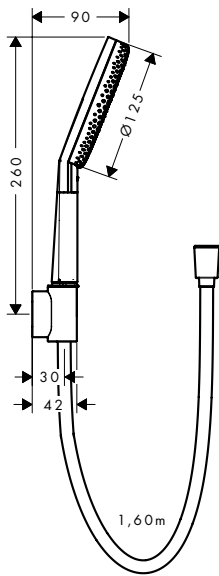

Special feature



Technologies



Spray types



Finish	Available from	Code no.
Chrome	Q2/2025	24611000
Brushed Bronze	Q2/2025	24611140
Brushed Black Chrome	Q2/2025	24611340
Matt Black	Q2/2025	24611670
Matt White	Q2/2025	24611700
Polished Gold Optic	Q2/2025	24611990

Consisting of:



Raindance Alive Select S Hand shower 125 3jet EcoSmart

Included in	Code no.
24611XXX	24511XXX




Porter Fine Shower holder

24611XXX	28885XXX
----------	----------

Raindance Alive S Overhead showers 1jet

Features of all variants

- shower head size: 300 mm
 - DropGuard reduces the dripping after stopping the shower to just a few seconds
 - overhead shower angle adjustable
 - material spray disc: anodized aluminium
- spray disc surface: graphite
 - design cover can be removed easily and without tools for cleaning
 - design cover surface: graphite
 - design cover conceals the nozzles
- flat, minimalist design
 - installation: ceiling or wall
 - connection thread: G 1/2
 - suitable for continuous flow water heaters



Special feature



Technologies



Spray types



Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	300	1	Rain, or PowderRain	5.2	5.9	1.6	Chrome	Q1/2026 24523000
							Brushed Bronze	Q1/2026 24523140
							Brushed Black Chrome	Q1/2026 24523340
							Matt Black	Q1/2026 24523670
							Matt White	Q1/2026 24523700
							Polished Gold Optic	Q1/2026 24523990
	300	1	Rain, or PowderRain	1	6.8	1	Chrome	Q2/2025 24521000
							Brushed Bronze	Q2/2025 24521140
							Brushed Black Chrome	Q2/2025 24521340
							Matt Black	Q2/2025 24521670
							Matt White	Q2/2025 24521700
							Polished Gold Optic	Q2/2025 24521990
	300	1	RainAir, or PowderRain	5.4	11	0.6	Chrome	Q2/2025 24520000
							Brushed Bronze	Q2/2025 24520140
							Brushed Black Chrome	Q2/2025 24520340
							Matt Black	Q2/2025 24520670
							Matt White	Q2/2025 24520700
							Polished Gold Optic	Q2/2025 24520990

Required parts (choose one):		Finish	Code no.
	Shower arm E 39 cm	Chrome	24337000
		Brushed Bronze	24337140
		Brushed Black Chrome	24337340
		Matt Black	24337670
		Matt White	24337700
		Polished Gold Optic	24337990
	Ceiling connector E 10 cm	Chrome	24338000
		Brushed Bronze	24338140
		Brushed Black Chrome	24338340
		Matt Black	24338670
		Matt White	24338700
		Polished Gold Optic	24338990



Raindance Alive S Overhead showers 1jet**Required parts (choose one):**

Ceiling connector E 30 cm

Finish	Code no.
Chrome	24339000
Brushed Bronze	24339140
Brushed Black Chrome	24339340
Matt Black	24339670
Matt White	24339700
Polished Gold Optic	24339990

Raindance Alive S Overhead showers 2jet with shower arm**Features of all variants**

- consists of: overhead shower, shower arm
- shower head size: 300 mm
- DropGuard reduces the dripping after stopping the shower to just a few seconds
- material spray disc: anodized aluminium
- spray disc surface: graphite
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- design cover conceals the nozzles
- flat, minimalist design
- shower arm length: 390 mm
- installation: wall
- mounting type: concealed
- connection type: basic set
- suitable for continuous flow water heaters

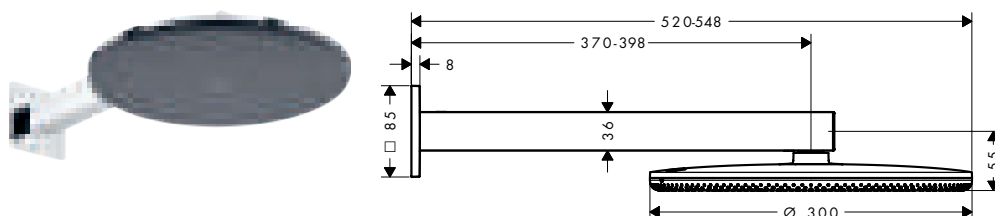**Special feature****Technologies****Spray types****Overview variants**

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
300	2	Rain, PowderRain	5.3	6.6	0.8	Chrome	Q2/2025	24541000
						Brushed Bronze	Q2/2025	24541140
						Brushed Black Chrome	Q2/2025	24541340
						Matt Black	Q2/2025	24541670
						Matt White	Q2/2025	24541700
						Polished Gold Optic	Q2/2025	24541990
300	2	RainAir, PowderRain	6.9	10.1	1	Chrome	Q2/2025	24540000
						Brushed Bronze	Q2/2025	24540140
						Brushed Black Chrome	Q2/2025	24540340
						Matt Black	Q2/2025	24540670
						Matt White	Q2/2025	24540700
						Polished Gold Optic	Q2/2025	24540990

Required parts:

Basic set for overhead shower 2jet


Code no.

24573180

Raindance Alive Q Overhead showers 1jet

Features of all variants

- shower head size: 214 x 343 mm
 - DropGuard reduces the dripping after stopping the shower to just a few seconds
 - overhead shower angle adjustable
 - material spray disc: anodized aluminium
- spray disc surface: graphite
 - design cover can be removed easily and without tools for cleaning
 - design cover surface: graphite
 - design cover conceals the nozzles
- flat, minimalist design
 - installation: ceiling or wall
 - connection thread: G 1/2
 - suitable for continuous flow water heaters



Special feature



Technologies



Spray types




Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
210/340	1	Rain, or PowderRain	6	8	1	Chrome	Q2/2025	24531000
						Brushed Bronze	Q2/2025	24531140
						Brushed Black Chrome	Q2/2025	24531340
						Matt Black	Q2/2025	24531670
						Matt White	Q2/2025	24531700
						Polished Gold Optic	Q2/2025	24531990
210/340	1	RainAir, or PowderRain	5.4	11	0.5	Chrome	Q2/2025	24530000
						Brushed Bronze	Q2/2025	24530140
						Brushed Black Chrome	Q2/2025	24530340
						Matt Black	Q2/2025	24530670
						Matt White	Q2/2025	24530700
						Polished Gold Optic	Q2/2025	24530990

Required parts (choose one):		Finish	Code no.
	Shower arm E 39 cm	Chrome	24337000
		Brushed Bronze	24337140
		Brushed Black Chrome	24337340
		Matt Black	24337670
		Matt White	24337700
		Polished Gold Optic	24337990
	Ceiling connector E 10 cm	Chrome	24338000
		Brushed Bronze	24338140
		Brushed Black Chrome	24338340
		Matt Black	24338670
		Matt White	24338700
		Polished Gold Optic	24338990
	Ceiling connector E 30 cm	Chrome	24339000
		Brushed Bronze	24339140
		Brushed Black Chrome	24339340
		Matt Black	24339670
		Matt White	24339700
		Polished Gold Optic	24339990

Raindance Alive Q Overhead showers 2jet with shower arm**Features of all variants**

- consists of: overhead shower, shower arm
- shower head size: 214 x 343 mm
- DropGuard reduces the dripping after stopping the shower to just a few seconds
- material spray disc: anodized aluminium
- spray disc surface: graphite
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- design cover conceals the nozzles
- flat, minimalist design
- shower arm length: 390 mm
- installation: wall
- connection type: basic set
- suitable for continuous flow water heaters

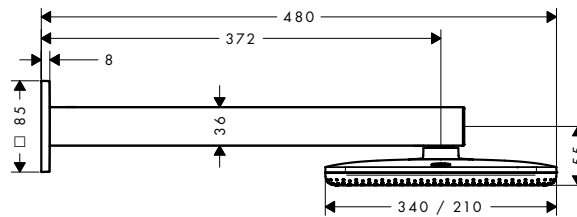**Special feature****Technologies****Spray types****Overview variants**

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
210/340	2	PowderRain, Rain	5.3	6.6	0.8	Chrome	Q2/2025	24551000
						Brushed Bronze	Q2/2025	24551140
						Brushed Black Chrome	Q2/2025	24551340
						Matt Black	Q2/2025	24551670
						Matt White	Q2/2025	24551700
						Polished Gold Optic	Q2/2025	24551990
210/340	2	RainAir, PowderRain	6.9	10.1	1	Chrome	Q2/2025	24550000
						Brushed Bronze	Q2/2025	24550140
						Brushed Black Chrome	Q2/2025	24550340
						Matt Black	Q2/2025	24550670
						Matt White	Q2/2025	24550700
						Polished Gold Optic	Q2/2025	24550990

Required parts:



Basic set for overhead shower 2jet

Code no.

24573180

Shower arm E 39 cm**Features**

- length: 390 mm
- material: brass/ plastic
- installation type: concealed installation
- connection type: G 1/2

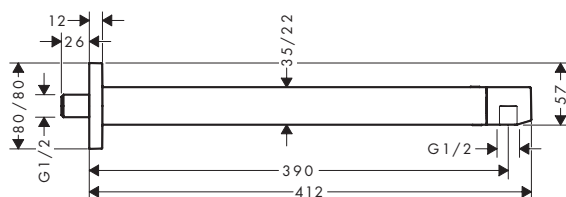


Finish	Available from	Code no.
Chrome		24337000
Brushed Bronze		24337140
Brushed Black Chrome	Q2/2025	24337340
Matt Black		24337670
Matt White		24337700
Polished Gold Optic	Q2/2025	24337990

Ceiling connectors E

Features of all variants

- installation type: concealed installation
- connection type: G 1/2
- ceiling connector not extendable, ceiling connector not shortenable

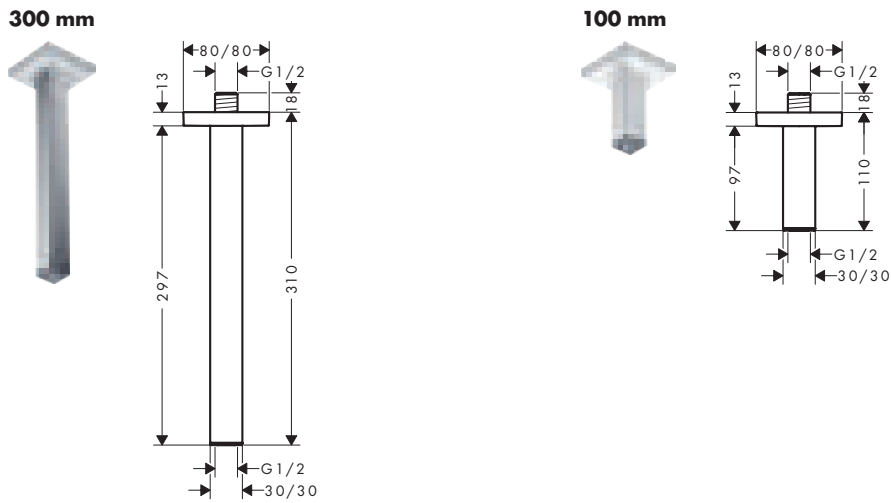


Overview variants

Length (mm)	Shape	Finish	Available from	Code no.
300	square	Chrome		24339000
		Brushed Bronze		24339140
		Brushed Black Chrome	Q2/2025	24339340
		Matt Black		24339670
		Matt White		24339700
		Polished Gold Optic	Q2/2025	24339990
100	square	Chrome		24338000
		Brushed Bronze		24338140
		Brushed Black Chrome	Q2/2025	24338340
		Matt Black		24338670
		Matt White		24338700
		Polished Gold Optic	Q2/2025	24338990

- consists of: overhead shower, shower arm, hand shower, wall outlet with shower holder, textile shower hose, shower thermostat, basic set
- shower head size: 214 x 343 mm
- shower arm length: 390 mm
- spray type overhead shower: RainAir, or PowderRain
- Spray Type Switch: RainAir (preset), change to PowderRain can be selected upon installation or changed easily at any later stage
- QuickClean: Limescale deposits can simply be rubbed off with your finger
- flow rate PowderRain spray at 3 bar: 11 l/min
- material spray disc overhead shower: anodized aluminum

- spray type hand shower: RainAir, PowderRain, Massage spray
- maximum flow rate at 3 bar: 15 l/min
- minimum flow pressure: 0,7 bar
- max. operating pressure: 10 bar
- comfortable turning on / off of outlets with large Select-paddle
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- design cover conceals the nozzles
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- thermostat: ShowerSelect Comfort E

- SafetyStop at 40 °C
- Designflex textile shower hose, water-resistant and water-repellant material, unique design with multi-colored braided yarns, yarns are made of recycled PET, warm, cotton-like material feels great to the skin
- shower hose length: 1600 mm
- 1x conical nut, 1x cylindrical nut
- pivot connector prevents hose from tangling
- material handles: metal
- connection type: basic set iBox universal 2 (# 01500180)
- simultaneous use of several outlets
- flow regulator: 12 l/min (with possible tolerances $\pm 10\%$)

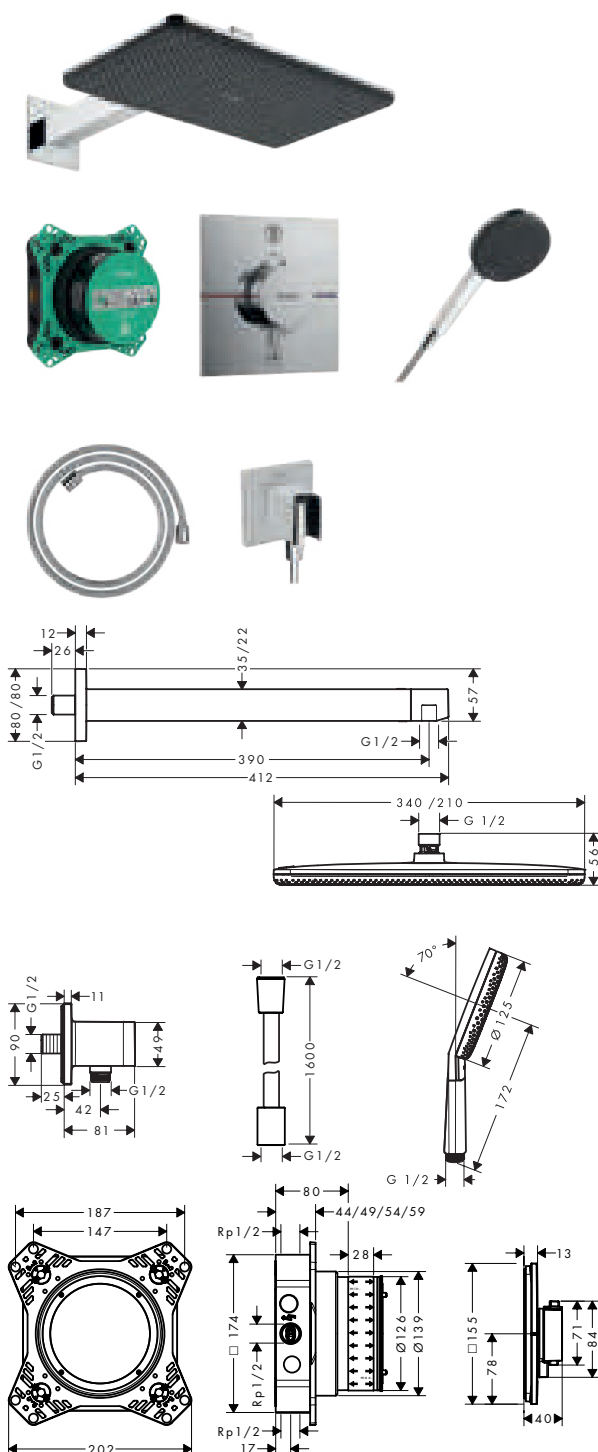

Water Flow Control

Thermostat	AirPower	XXL Performance	Select
Quick Clean	Safety Stop	Easy Installation	

**Water
Damage
Protection**

Finish	Available from	Code no.
 Matt Black	Q2/2025	24620670

Measurements within scale drawings are in mm.
Technical specifications and units of measure are subject to change.

Raindance Alive Q Design ShowerSet 210/340 1jet with thermostat and basic set iBox universal 2

Consisting of:		Included in	Code no.
	Raindance Alive Q Overhead shower 210/340 1jet	24620670	24530670
	Shower arm E 39 cm	24620670	24337670
	Raindance Alive Select S Hand shower 125 3jet EcoSmart	24620670	24511670
	iBox universal 2 Basic set	24620670	01500180

Raindance Alive S Design ShowerSet 300 1jet with thermostat and basic set iBox universal 2


Consisting of:		Included in	Code no.
	Raindance Alive S Overhead shower 300 1jet	24630XXX	24520XXX
	Shower arm E 39 cm	24630XXX	24337XXX
	Raindance Alive Select S Hand shower 125 3jet EcoSmart	24630XXX	24511XXX
	FixFit Fine E Wall outlet with non-return valve	24630XXX	28883XXX
	Porter Fine Shower holder	24630XXX	28885XXX
	iBox universal 2 Basic set	24630XXX	01500180

Basic set for overhead shower 2jet

Features

- wall-mounted
 - no shortening necessary thanks to sliding sleeve
 - sound-decoupled installation
- minimum mounting depth: 80 mm
 - maximum mounting depth: 108 mm
 - connection dimension: Rp 1/2
- sealing foil permanently fixed



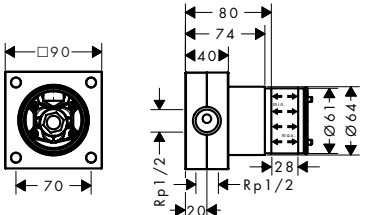

Available from	Code no.
Q2/2025	24573180



Rainfinity Extensions

Highlights

Special feature



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/ min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies




Elastic spray nozzles open and close themselves and prevent limescale buildup.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



Flexible, elastic nozzles in the spray head ensure greater comfort and efficiency when showering.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



A playful way to control the water flow, shower or spray type at the simple touch of a button.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Intense spray consisting of thousands of micro-fine droplets. Thorough, soothing and low-splash.



Focused and extremely gentle spray soothing wellness moments and hydrotherapeutic showering.



Lavish downpour consisting of individual pearl-like droplets that invigorate mind, body and soul.

Finish



Brushed Black Chrome
-340




Brushed Bronze
-140



Chrome
-000



Matt Black
-670



Matt White
-700




Polished Gold Optic
-990

Rainfinity Hand shower 130 3jet EcoSmart+

Features

- shower head size: 130 mm
 - spray type: PowderRain, Intense PowderRain, MonoRain
 - convenient spray selection via Select button
 - spray disc surface: easy cleanable aluminium spray disc, graphite
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
 - QuickClean+: avoid limescale deposits thanks to the elasticity of the nozzles
 - maximum flow rate at 3 bar: 6 l/min
 - minimum flow pressure: 1,5 bar
- with internal water conduction
 - rinseable filter washer
 - connection thread: G 1/2
 - suitable for continuous flow water heaters
 - EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

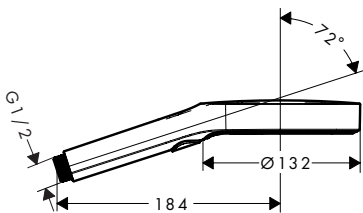

Special feature



Technologies



Spray types




Finish	Available from	Code no.
 Chrome	Q4/2025	26862000
 Brushed Bronze	Q4/2025	26862140
 Brushed Black Chrome	Q4/2025	26862340
 Matt Black	Q4/2025	26862670
 Matt White	Q4/2025	26862700
 Polished Gold Optic	Q4/2025	26862990

Rainfinity Overhead showers 3jet with wall connector

Features of all variants

- consists of: overhead shower, wall outlet
 - shower head size: 250 mm
 - spray type: PowderRain, Intense PowderRain, RainStream
 - projection: 273 mm
- middle spray disc: 151 mm
 - frame: metal
 - material spray disc: aluminium
 - spray disc surface: graphite
 - overhead shower removable for cleaning
- shower head vertically inclinable by 10-30°
 - the 3 spray zones must be controlled via 3 valves or a diverter valve with 3 outlets
 - installation: wall-mounted - based on iBox
 - not suitable for continuous flow water heaters

250

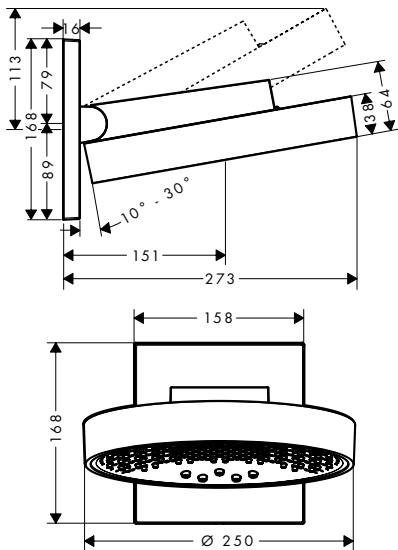

Special feature



Technologies



Spray types



Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
250	3	PowderRain, Intense PowderRain, RainStream	8.9	9	1.9	Brushed Bronze	Q4/2025	26233140
						Brushed Black Chrome	Q4/2025	26233340
						Matt Black	Q4/2025	26233670
						Polished Gold Optic	Q4/2025	26233990
250	3	PowderRain, Intense PowderRain, RainStream	12	20	1.7	Brushed Bronze	Q4/2025	26232140
						Brushed Black Chrome	Q4/2025	26232340
						Matt Black	Q4/2025	26232670
						Polished Gold Optic	Q4/2025	26232990


Required parts (choose one):			Code no.
Option 1		iBox universal 2 Basic set	01500180
		Adapter plate for iBox universal 2	13588000
Option 2		iBox universal Basic set	01800180

Rainfinity Overhead showers 1 jet with wall connector

Features of all variants

- consists of: overhead shower, wall outlet
 - shower head size: 250 mm
 - spray type: PowderRain
 - projection: 273 mm
 - middle spray disc: 151 mm
- frame: metal
 - material spray disc: aluminium
 - spray disc surface: graphite
 - overhead shower removable for cleaning
 - shower head vertically inclinable by 10-30°
- installation: wall
 - connection thread: G 1/2
 - connection dimension: DN15
 - not suitable for continuous flow water heaters

250

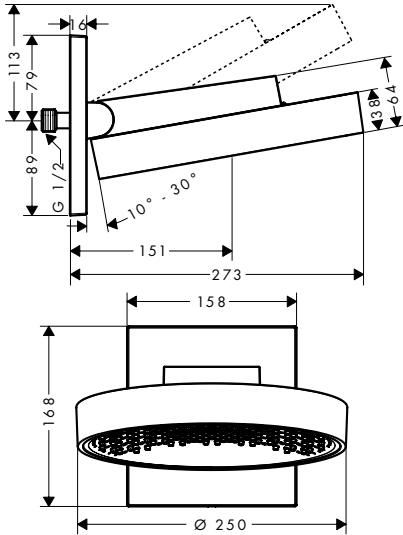

Special feature



Technologies



Spray types



Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
250	1	PowderRain	8.5	9.4	1.8	Brushed Bronze	Q4/2025	26227140
						Brushed Black Chrome	Q4/2025	26227340
						Matt Black	Q4/2025	26227670
						Polished Gold Optic	Q4/2025	26227990
250	1	PowderRain	11.5	19	1.4	Brushed Bronze	Q4/2025	26226140
						Brushed Black Chrome	Q4/2025	26226340
						Matt Black	Q4/2025	26226670
						Polished Gold Optic	Q4/2025	26226990



Raindance Extensions

Highlights

Special feature



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



Mixes water with air. For a smooth, lower-splash water spray and light yet full shower droplets.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



A playful way to control the water flow, shower or spray type at the simple touch of a button.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Concentrated massage spray that helps to nicely and gently wash away everyday tensions and stress.



Full shower rain with droplets enriched with air for soft yet efficient and indulgent showering.


Finish



Brushed Black
Chrome
-340




Brushed Bronze
-140



Chrome
-000



Matt Black
-670



Matt White
-700




Polished Gold
Optic
-990

Raindance Select S Hand showers 3jet

Features of all variants

- shower head size: 125 mm
 - spray type: PowderRain, Rain, Whirl
 - convenient spray selection via Select button
- QuickClean: Limescale deposits can simply be rubbed off with your finger
 - with internal water conduction
- rinseable filter washer
 - connection thread: G 1/2
 - suitable for continuous flow water heaters

120



Special feature



Technologies



Spray types



Overview variants



	Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	120	3	PowderRain, Rain, Whirl	5	5.7	1.5	Brushed Bronze	Q1/2025	26516140
							Brushed Black Chrome	Q1/2025	26516340
							Matt Black	Q1/2025	26516670
							Matt White	Q1/2025	26516700
							Polished Gold Optic	Q1/2025	26516990
	120	3	PowderRain, Rain, Whirl	6	8	1.4	Brushed Bronze	Q1/2025	26515140
							Brushed Black Chrome	Q1/2025	26515340
							Matt Black	Q1/2025	26515670
							Matt White	Q1/2025	26515700
							Polished Gold Optic	Q1/2025	26515990

Raindance S Overhead showers 1jet

Features of all variants

- shower head size: 240 mm
 - spray type: PowderRain
 - overhead shower angle adjustable
- material spray disc: metal
 - spray disc removable for cleaning
 - installation: ceiling or wall
- connection thread: G 1/2
 - connection dimension: DN15
 - suitable for continous flow water heaters

PowderRain



Special feature



Technologies



Spray types





Overview variants

	Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	240	1	PowderRain	5.7	5.8	1.5	 Chrome	Q1/2025	28821000
							 Brushed Bronze	Q1/2025	28821140
							 Brushed Black Chrome	Q1/2025	28821340
							 Matt Black	Q1/2025	28821670
							 Matt White	Q1/2025	28821700
							 Polished Gold Optic	Q1/2025	28821990
	240	1	PowderRain		8	1.1	 Chrome	Q1/2025	27624000
							 Brushed Bronze	Q1/2025	27624140
							 Brushed Black Chrome	Q1/2025	27624340
							 Matt Black	Q1/2025	27624670
							 Matt White	Q1/2025	27624700
							 Polished Gold Optic	Q1/2025	27624990
	240	1	PowderRain	11.8	18.1	1.1	 Brushed Bronze	Q1/2025	27623140
							 Brushed Black Chrome	Q1/2025	27623340
							 Polished Gold Optic	Q1/2025	27623990

Raindance Select E Hand showers 3jet**Features of all variants**

- shower head size: 120 mm
- spray type: PowderRain, Rain, Whirl
- convenient spray selection via Select button
- QuickClean: Limescale deposits can simply be rubbed off with your finger
- minimum flow pressure: 1,5 bar
- with internal water conduction
- rinseable filter washer
- connection thread: G 1/2
- suitable for continuous flow water heaters

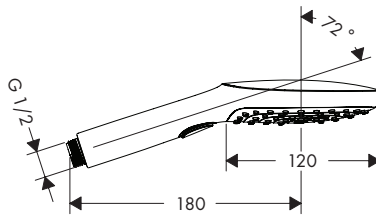
120**Special feature****Technologies****Spray types****Overview variants**

	Shower head size	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	120	3	PowderRain, Rain, Whirl	6	1.5	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	Q2/2025	28729000 28729140 28729340 28729670 28729700 28729990
	120	3	PowderRain, Rain, Whirl	8	1.5	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	Q2/2025	28728000 28728140 28728340 28728670 28728700 28728990

Raindance E Overhead shower 300 1jet EcoSmart with shower arm

Features

- consists of: overhead shower, shower arm
 - shower head size: 300 x 300 mm
 - spray type: RainAir
 - flow rate RainAir spray at 3 bar: 7,4 l/min
 - function from: 5,7 l/min
 - maximum flow rate at 3 bar: 7,4 l/min
- minimum flow pressure: 1,3 bar
 - overhead shower angle adjustable
 - material spray disc: metal
 - spray disc removable for cleaning
 - shower arm length: 390 mm
 - installation: wall
- connection thread: G 1/2
 - connection dimension: DN15
 - suitable for continous flow water heaters
 - EU taxonomy: max. 8 l/min - Do No Significant Harm (DNSH)

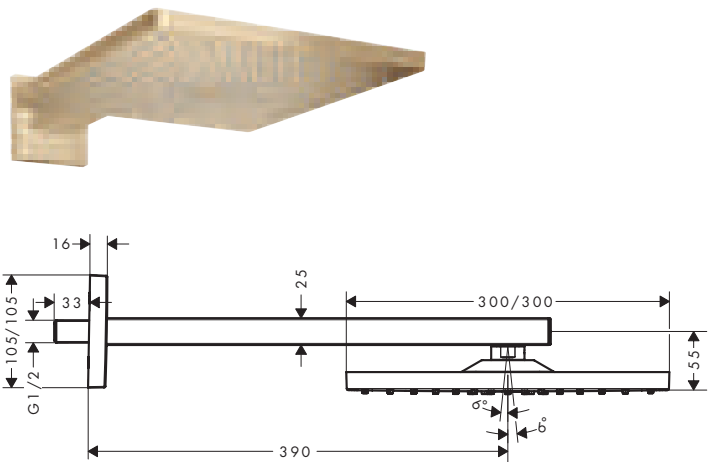

Special feature



Technologies



Spray types




Finish	Available from	Code no.
Brushed Bronze	Q2/2025	26239140
Brushed Black Chrome	Q2/2025	26239340
Matt Black	Q2/2025	26239670
Matt White	Q2/2025	26239700
Polished Gold Optic	Q2/2025	26239990

Raindance E Overhead shower 300 1jet EcoSmart with ceiling connector

Features


- consists of: overhead shower, ceiling connector
 - shower head size: 300 x 300 mm
 - spray type: RainAir
 - flow rate RainAir spray at 3 bar: 7,4 l/min
 - function from: 5,7 l/min
 - maximum flow rate at 3 bar: 7,4 l/min
- minimum flow pressure: 1,3 bar
 - overhead shower angle adjustable
 - material spray disc: metal
 - spray disc removable for cleaning
 - metal ceiling connector
 - ceiling connection length: 100 mm
- installation: ceiling mounting
 - connection thread: G 1/2
 - connection dimension: DN15
 - suitable for continous flow water heaters
 - EU taxonomy: max. 8 l/min - Do No Significant Harm (DNSH)

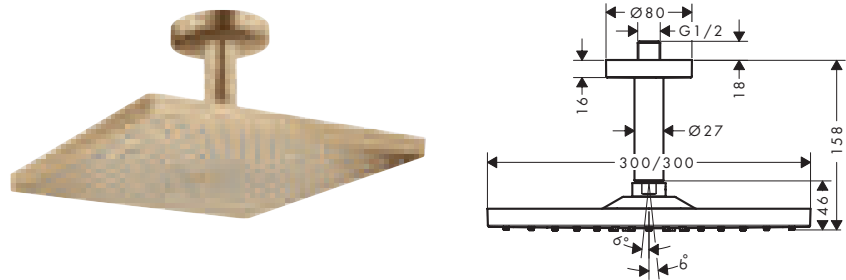

Special feature



Technologies





Spray types



Finish	Available from	Code no.
Brushed Bronze	Q2/2025	26251140
Brushed Black Chrome	Q2/2025	26251340
Matt Black	Q2/2025	26251670
Matt White	Q2/2025	26251700
Polished Gold Optic	Q2/2025	26251990

Raindance E Overhead showers 1jet**Features of all variants**

- shower head size: 400 x 400 mm
- spray type: RainAir
- material spray disc: metal
- spray disc removable for cleaning
- installation: flush with the ceiling
- connection thread: G 1/2
- connection dimension: DN15
- connection type: basic set
- suitable for continuous flow water heaters

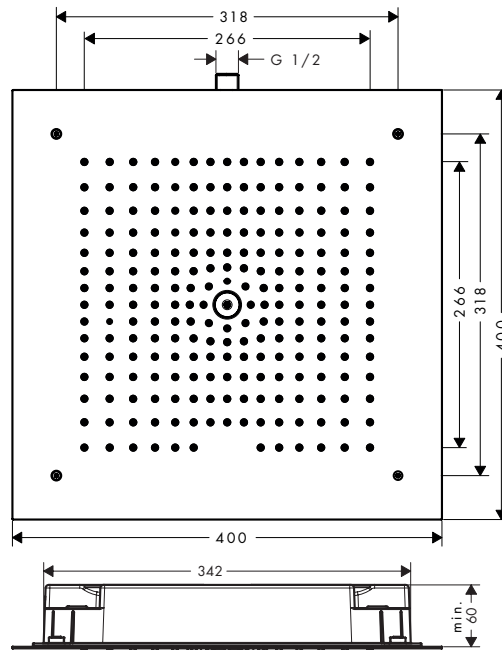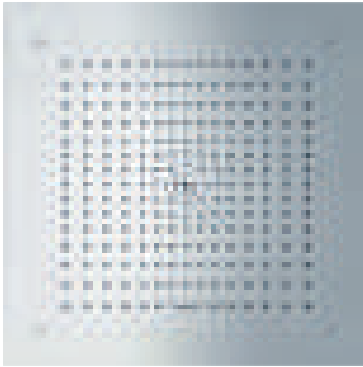**Special feature****Technologies****Spray types****Overview variants**

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
400/400	1	RainAir	6.5	8	2	Brushed Bronze	Q2/2025	26253140
						Brushed Black Chrome	Q2/2025	26253340
						Matt Black	Q2/2025	26253670
						Matt White	Q2/2025	26253700
						Polished Gold Optic	Q2/2025	26253990
400/400	1	RainAir	12	20	1.2	Brushed Bronze	Q2/2025	26252140
						Brushed Black Chrome	Q2/2025	26252340
						Matt Black	Q2/2025	26252670
						Matt White	Q2/2025	26252700
						Polished Gold Optic	Q2/2025	26252990



Pulsify Extensions

Highlights

Special feature



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



The angle of the overhead shower can be adjusted and the water spray can be individually adapted.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



A playful way to control the water flow, shower or spray type at the simple touch of a button.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Powerful, stimulating water spray that washes away tiredness and leaves people feeling fit.



Invigorating, focused and powerful spray for the home spa that allows the day's stresses to simply drain off.


Finish



Brushed Black
Chrome
-340




Brushed Bronze
-140



Chrome
-000



Matt Black
-670



Matt White
-700




Polished Gold
Optic
-990

Pulsify S / Pulsify E Baton hand showers 1 jet


Features of all variants

- spray type: PowderRain
 - QuickClean: Limescale deposits can simply be rubbed off with your finger
- with internal water conduction
 - rinseable sieve insert
 - connection thread: G 1/2
- suitable for continous flow water heaters

round



square

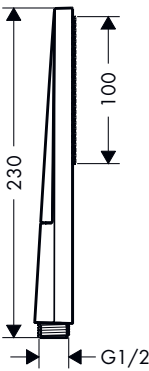

Special feature



Technologies



Spray types



Overview variants

	Shower head size	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Shape	Finish	Available from	Code no.
	100	1	PowderRain	5.4	0.5	round	Brushed Black Chrome	Q1/2025	24126340
							Polished Gold Optic	Q1/2025	24126990
	100	1	PowderRain	7.9	0.5	round	Brushed Black Chrome	Q1/2025	24125340
							Polished Gold Optic	Q1/2025	24125990
	100	1	PowderRain	5	0.9	square	Brushed Black Chrome	Q1/2025	24321340
							Polished Gold Optic	Q1/2025	24321990
	100	1	PowderRain	8	0.8	square	Brushed Black Chrome	Q1/2025	24320340
							Polished Gold Optic	Q1/2025	24320990

Pulsify Select S / Pulsify S Shower holder sets 3jet, 1jet


Features of all variants

- consists of: hand shower, shower holder, shower hose
 - shower head size: 105 mm
- QuickClean: Limescale deposits can simply be rubbed off with your finger
 - pivot connector prevents hose from tangling
- integrated support function
 - wall supports made of plastic
 - rinseable sieve insert

Relaxation



1jet

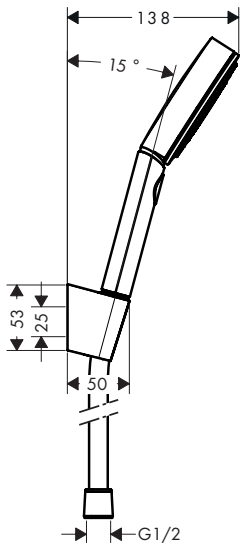

Special feature



Technologies



Spray types




Overview variants

	Shower head size	Shower hose length (mm)	Shower effect	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	105	1600	Relaxation	3	PowderRain, IntenseRain, Massage spray	6.9	1.6	Chrome	Q1/2025	24305000
								Matt Black	Q1/2025	24305670
								Matt White	Q1/2025	24305700
	105	1250	Relaxation	3	PowderRain, IntenseRain, Massage spray	6.9	1.6	Chrome	Q1/2025	24306000
								Matt Black	Q1/2025	24306670
								Matt White	Q1/2025	24306700
	105	1250	1jet	1	PowderRain	5.7	1	Chrome	Q1/2025	24307000
								Matt Black	Q1/2025	24307670
								Matt White	Q1/2025	24307700

Pulsify S Overhead shower 105 1jet EcoSmart+

Features

- shower head size: 105 mm
 - spray type: PowderRain
 - function from: 4,8 l/min
 - maximum flow rate at 3 bar: 6 l/min
 - minimum flow pressure: 1 bar
- overhead shower angle adjustable
 - material spray disc: plastic
 - spray disc surface: graphite
 - installation: ceiling or wall
 - connection thread: G 1/2
- connection dimension: DN15
 - suitable for continous flow water heaters
 - EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible



Special feature



Technologies



Spray types



Finish	Available from	Code no.
 Brushed Bronze	Q1/2025	24132140




FixFit Fine | Porter Fine

FixFit Fine S / FixFit Fine E / FixFit Fine Q Wall outlets with non-return valve


Features of all variants

- metal connection angle
 - material escutcheon: metal
- with non-return valve
 - connection type: G 1/2
- slim, minimalist design

round

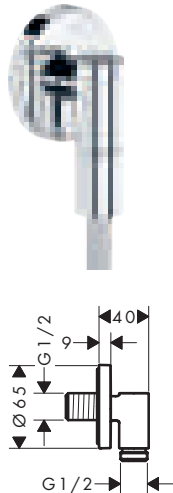

square

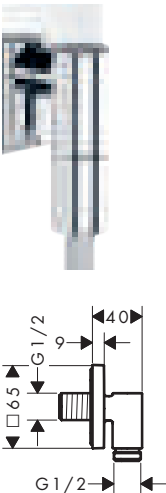

softsquare




Overview variants

Shape	Non-return valve	Finish	Available from	Code no.
round	non-return valve	Chrome	Q2/2025	28882000
		Brushed Bronze	Q2/2025	28882140
		Brushed Black Chrome	Q2/2025	28882340
		Matt Black	Q2/2025	28882670
		Matt White	Q2/2025	28882700
		Polished Gold Optic	Q2/2025	28882990
square	non-return valve	Chrome	Q2/2025	28883000
		Brushed Bronze	Q2/2025	28883140
		Brushed Black Chrome	Q2/2025	28883340
		Matt Black	Q2/2025	28883670
		Matt White	Q2/2025	28883700
		Polished Gold Optic	Q2/2025	28883990
softsquare	non-return valve	Chrome	Q2/2025	28884000
		Brushed Bronze	Q2/2025	28884140
		Brushed Black Chrome	Q2/2025	28884340
		Matt Black	Q2/2025	28884670
		Matt White	Q2/2025	28884700
		Polished Gold Optic	Q2/2025	28884990

Porter Fine Shower holder

Features

- universal design fitting perfectly to FixFit Fine S, E or Q
 - fixed holding position
- for shower hoses with conical nut
 - material: metal
 - dimensions: 52 x 31 x 42 mm (HxWxD)
- diameter drill hole: 23 mm
 - 2 drill holes
 - conical mount



Finish	Available from	Code no.
 Chrome	Q2/2025	28885000
 Brushed Bronze	Q2/2025	28885140
 Brushed Black Chrome	Q2/2025	28885340
 Matt Black	Q2/2025	28885670
 Matt White	Q2/2025	28885700
 Polished Gold Optic	Q2/2025	28885990



Flexaplus

Highlights

Technologies



Quick and safe installation - several features ensure easy installation.




Due to its surface texture, this product is easy to clean with a damp cloth.



A touch of a button is all it takes for the water in the bathtub to come out of the bath spout or shower.

Cover finish



Chrome

-XXX



High Gloss White

-XXX



The surfaces marked with XXX are described in the article text and are not recognizable in the article number. The accent surface can be found in the article number at position 6, 7.

Finish



Brushed Black Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670



Matt White

-700



Polished Gold Optic

-990

Frame Finish




Brushed Black Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670



Matt White

-700




Polished Gold Optic

-990

Flexaplus Finish sets waste and overflow set**Features of all variants**

- consists of: finish set overflow , push-open waste set
- suitable for bathtubs made of cast iron, steel and plastic, to fit to both standard and extra-large tubs, bathtubs with waste outlet diameter 52 mm
- push-open waste set
- easy cleaning with access for plumber's snake
- easy waste and overflow installation with included tool
- material waste set: Polypropylene (PP)
- material overflow and filler: ABS, Polypropylene (PP)

**Technologies****Overview variants**

Cover finish	Frame Finish	Available from	Code no.
Chrome	 Chrome	Q3/2025	58188000
High Gloss White	 Chrome	Q3/2025	58187000
	 Brushed Bronze	Q3/2025	58187140
	 Brushed Black Chrome	Q3/2025	58187340
	 Matt Black	Q3/2025	58187670
	 Matt White	Q3/2025	58187700
	 Polished Gold Optic	Q3/2025	58187990

! Required parts:

Tubset universal Basic set for waste and overflow set for bathtubs


Code no.

58152180

Flexaplus Complete set waste and overflow set for bathtub

Features

- consists of: basic set, finish set, odour trap
 - suitable for bathtubs made of cast iron, steel and plastic, to fit to both standard and extra-large tubs, bathtubs with waste outlet diameter 52 mm
 - easy waste and overflow installation with included tool
 - rotatable connection bent, diameter: 40/50 mm
- double-sided seals on outlet and overflow
 - flat version: only 46 mm is needed behind bathtub
 - shortenable and flexible overflow hose
 - rotatable siphon housing
 - easy cleaning with access for plumber's snake
 - connection siphon drain plug: clamp connection
 - pipe outer diameter drain pipe: 50 mm
- drainage capacity accumulation height 300 mm: 64 l/min
 - overflow capacity accumulation height 60 mm above centre of overflow hole: 36 l/min
 - water seal height: 50 mm
 - material waste set: Polypropylene (PP), ABS
 - material overflow: Polypropylene (PP), ABS

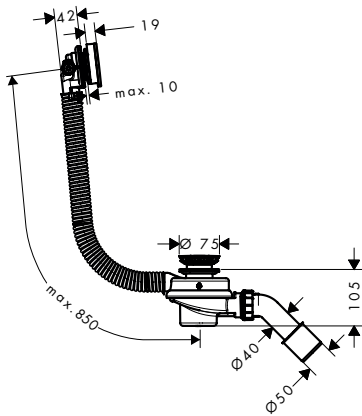


Finish	Available from	Code no.
 Chrome	Q3/2025	58154000

Consisting of:		Included in	Code no.
	Tubset universal Basic set for waste and overflow set for bathtubs	58154000	58152180
	Flexaplus Finish set chrome waste and overflow set	58154000	58188000

Tubset universal Basic set for waste and overflow set for bathtubs**Features**

- consists of: basic set, odour trap
- suitable for bathtubs made of cast iron, steel and plastic, to fit to both standard and extra-large tubs, bathtubs with waste outlet diameter 52 mm
- with G 1/2" male thread connection
- rotatable connection bent, diameter: 40/50 mm
- easy waste and overflow installation with included tool
- double-sided seals on outlet and overflow
- flat version: only 46 mm is needed behind bathtub
- easy cleaning with access for plumber's snake
- shortenable and flexible overflow hose
- rotatable siphon housing
- pipe outer diameter drain pipe: 50 mm
- odour trap backwater height is 50 mm
- drainage capacity accumulation height 300 mm: 64 l/min
- overflow capacity accumulation height 60 mm above centre of overflow hole: 36 l/min
- material: Polypropylene (PP)
- material waste set: Polypropylene (PP), ABS



Available
from
Q3/2025

Code no.
58152180

! Required parts (choose one):

Flexaplust Finish set waste and overflow set

Frame Finish

Code no.



Chrome

58187000



Brushed Bronze

58187140



Brushed Black Chrome

58187340



Matt Black

58187670



Matt White

58187700



Polished Gold Optic

58187990



Flexaplust Finish set chrome waste and overflow set



Chrome

58188000

RainDrain Staro Finish set waste set for shower tray

Features

- suitable for shower trays with Ø 90 mm waste outlet
- not included: basic set
 - easy to clean surface
- material of drain plug: Polypropylene (PP), ABS



Technologies



Finish	Available from	Code no.
Chrome	Q3/2025	60058000
Brushed Bronze	Q3/2025	60058140
Brushed Black Chrome	Q3/2025	60058340
Matt Black	Q3/2025	60058670
Matt White	Q3/2025	60058700
Polished Gold Optic	Q3/2025	60058990

Required parts:



RainDrain Staro Basic set for waste set for shower tray


Code no.

60090180

RainDrain Staro Basic set for waste set for shower tray

Features

- consists of: odour trap, trap
 - suitable for shower trays with Ø 90 mm waste outlet
 - nominal diameter connection: DN 50
 - screw connection M5x30
- clamp connection
 - rotatable connection
 - waste pipe Ø 50 mm
 - type of odour seal: fluid
 - drainage capacity 57 l/min
- installation height: 80 mm
 - removable and cleanable water seal
 - water seal height: 50 mm
 - material siphon: Polypropylene (PP)
 - not included: finish set



Technologies



	Available from	Code no.
	Q3/2025	60090180

Required parts:



RainDrain Staro Finish set waste set for shower tray

Finish	Code no.
Chrome	60058000
Brushed Bronze	60058140
Brushed Black Chrome	60058340
Matt Black	60058670
Matt White	60058700
Polished Gold Optic	60058990



Ecostat Comfort

Highlights

Special feature



Actively regulates water consumption – the amount of water can be adjusted via the control dial.

Technologies



Thermostat with integrated temperature control for constant water temperature.



Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.



Quick and safe installation - several features ensure easy installation.

Installation



The high-quality installation set features a pre-assembled seal and is 100% water-proof.

Finish



Brushed Black
Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670



Matt White

-700



Polished Gold
Optic


-990

EcoStat Comfort S Thermostats for concealed installation


Features of all variants

- temperature and water flow control
 - thermostat cartridge
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
 - handles always at the same height regardless of the installation depth of the basic set
 - Safety stop at 40 °C
- temperature limitation adjustable
 - material handles: metal
 - connection type: basic set iBox universal 2 (# 01500180)


1 function

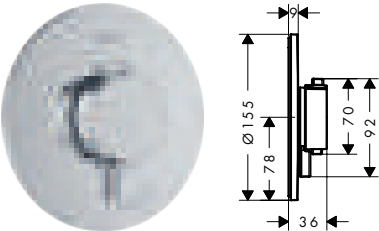

2 functions

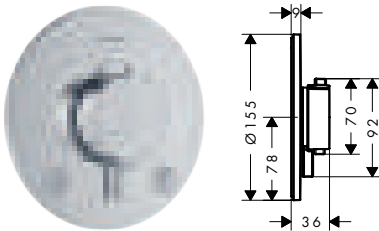

Special feature



Technologies

Overview variants

Number of functions	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
1 function	21.3	 Chrome	Q2/2025	33714000
		 Brushed Bronze	Q2/2025	33714140
		 Brushed Black Chrome	Q2/2025	33714340
		 Matt Black	Q2/2025	33714670
		 Matt White	Q2/2025	33714700
		 Polished Gold Optic	Q2/2025	33714990
2 functions	25.7	 Chrome	Q2/2025	33715000
		 Brushed Bronze	Q2/2025	33715140
		 Brushed Black Chrome	Q2/2025	33715340
		 Matt Black	Q2/2025	33715670
		 Matt White	Q2/2025	33715700
		 Polished Gold Optic	Q2/2025	33715990

Required parts:


	iBox universal 2 Basic set	Code no. 01500180
--	----------------------------	----------------------

Ecostat Comfort E
 Thermostats for concealed installation


Features of all variants

- temperature and water flow control
 · thermostat cartridge
 · min. operating pressure: 1 bar
 · max. operating pressure: 10 bar
 · escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
 · handles always at the same height regardless of the installation depth of the basic set
 · Safety stop at 40 °C
- temperature limitation adjustable
 · material handles: metal
 · connection type: basic set iBox universal 2 (# 01500180)

1 function

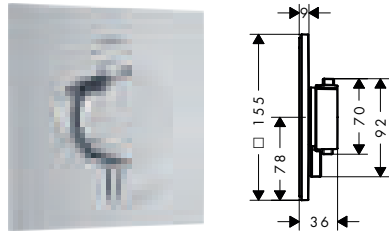

2 functions

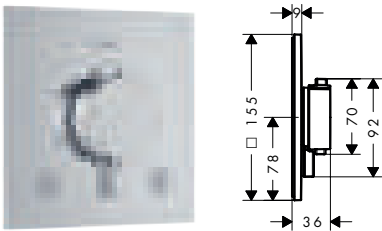

Special feature

Water Flow Control

Thermostat

Safety Stop

Technologies




Overview variants

Number of functions	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
1 function	21.3	Chrome	Q2/2025	33710000
		Brushed Bronze	Q2/2025	33710140
		Brushed Black Chrome	Q2/2025	33710340
		Matt Black	Q2/2025	33710670
		Matt White	Q2/2025	33710700
		Polished Gold Optic	Q2/2025	33710990
2 functions	25.7	Chrome	Q2/2025	33711000
		Brushed Bronze	Q2/2025	33711140
		Brushed Black Chrome	Q2/2025	33711340
		Matt Black	Q2/2025	33711670
		Matt White	Q2/2025	33711700
		Polished Gold Optic	Q2/2025	33711990

Required parts:	Code no.
iBox universal 2 Basic set	01500180

EcoStat Comfort Q Thermostats for concealed installation**Features of all variants**

- temperature and water flow control
- thermostat cartridge
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- escutcheon can be aligned by $\pm 3^\circ$
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- Safety stop at 40°C
- temperature limitation adjustable
- material handles: metal
- connection type: basic set iBox universal 2 (# 01500180)

1 function**2 functions****Special feature****Technologies****Overview variants**

Number of functions	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
1 function	21.3	Chrome	Q2/2025	33712000
		Brushed Bronze	Q2/2025	33712140
		Brushed Black Chrome	Q2/2025	33712340
		Matt Black	Q2/2025	33712670
		Matt White	Q2/2025	33712700
		Polished Gold Optic	Q2/2025	33712990
2 functions	25.7	Chrome	Q2/2025	33713000
		Brushed Bronze	Q2/2025	33713140
		Brushed Black Chrome	Q2/2025	33713340
		Matt Black	Q2/2025	33713670
		Matt White	Q2/2025	33713700
		Polished Gold Optic	Q2/2025	33713990

Required parts:

iBox universal 2 Basic set


Code no.

01500180

iBox universal 2 Basic set

Features

- suitable for all new shower, bath tub and thermostat finish sets for concealed installation (ShowerSelect Comfort, DuoTurn)
 - in conjunction with adapter plate (# 13588000) compatible with other concealed shower, bath tub and thermostat finish sets
 - material: dezincification brass, EPP foam, heat and sound insulating
 - connection thread: Rp 1/2
- connection dimension: DN15
 - rotationally-symmetric installation
 - sound-decoupled installation
 - flexible mounting ring for different mounting situations
 - mounting ring adjustable in 5 mm steps
 - mounting ring suitable for front and rear installation
 - no shortening necessary thanks to sliding sleeve
- support aid for the spirit level
 - integrated spirit level for correct horizontal and vertical alignment
 - sealing foil permanently fixed
 - power supply: M16 flexible conduit
 - minimum mounting depth: 80 mm
 - maximum mounting depth: 108 mm

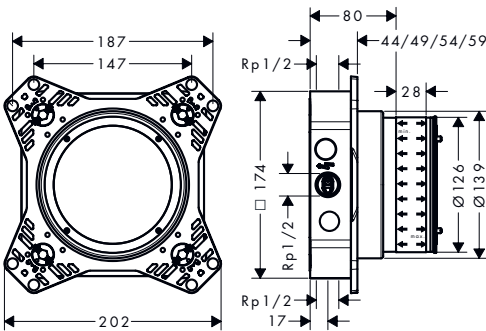

Technologies



Installation



Optional parts:



Adapter plate for iBox universal 2

Code no.

01500180

Code no.

13588000



Finoris

Highlights

Special feature



Faucet that helps save energy by only allowing hot water to flow when the lever is actively moved.



Tap that only uses 5 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.



A touch of a button is all it takes for the water in the bathtub to come out of the bath spout or shower.



Mixes air into the water. For a soft, less splashing water jet and full, light drops.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.

Finish




Brushed Black
Chrome

-349



Brushed Bronze

-149




Chrome

-009



Matt Black

-670





Matt White

-700

Finoris Single lever basin mixers**Features of all variants**



- consists of: single lever basin mixer, waste set
- handle variant: lever handle
- spray type: laminar spray
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- material waste set: metal
- connection type: G 3/8 hose connections
- connection dimension: DN15
- cold water in basic handle position

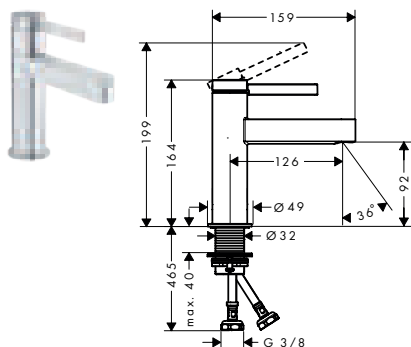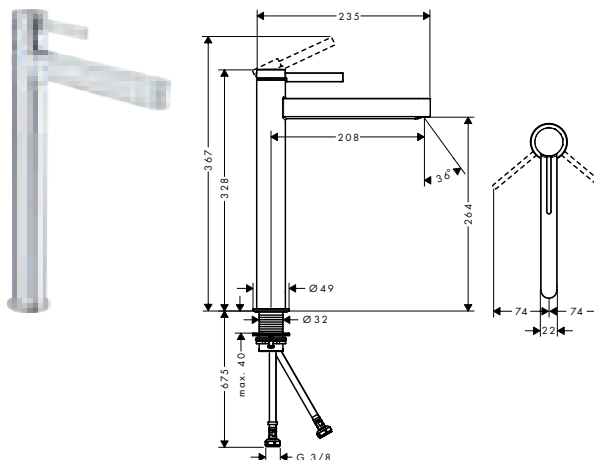100**260****Special feature****Technologies****Overview variants**

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	CoolStart	For wash bowls	Finish	Available from	Code no.
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome	Q2/2025 Q3/2025 Q3/2025	76022009 76022149 76022349
260	208	264	push-open	■	■	● Chrome ● Brushed Bronze ● Brushed Black Chrome	Q2/2025 Q3/2025 Q3/2025	76075009 76075149 76075349

Finoris Single lever bath mixer for exposed installation 2 ticks**Features**

- 2 functions
- projection: 194 mm
- centre distance: 150 ± 12 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 21,5 l/min
- flow rate of hand shower at 3 bar: 5,9 l/min
- ceramic cartridge
- pressure diverter Select with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: S-connections
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

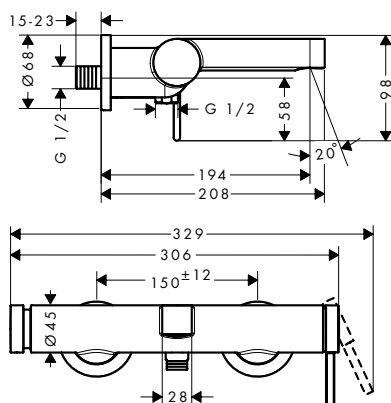
**Technologies**

Finish	Available from	Code no.
● Chrome		76420009
● Brushed Bronze	Q3/2025	76420149
● Brushed Black Chrome	Q3/2025	76420349

Finoris Single lever bath mixer for concealed installation for iBox universal

Features

- 2 functions
 - flow rate upper outlet: 21 l/min
 - flow rate lower outlet: 29 l/min
 - maximum flow rate at 3 bar: 29 l/min
- temperature limitation adjustable
 - diverter with automatic resetting
 - with silencer
 - suitable for continous flow water heaters
- connection type: basic set
 - wall-mounted
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar





Finish	Available from	Code no.
Chrome		76415000
Brushed Bronze	Q3/2025	76415140
Brushed Black Chrome	Q3/2025	76415340
Matt Black		76415670
Matt White		76415700

! Required parts (choose one):			Code no.
Option 1		iBox universal 2 Basic set	01500180
	+		13588000
Option 2		iBox universal Basic set	01800180

Finoris Bath spout

Features

- 1 function
 - connection type: G 1/2
 - with escutcheon
- projection: 174 mm
 - wall-mounted
 - maximum flow rate at 3 bar: 20,3 l/min
- spray type: normal spray



Technologies




Finish	Available from	Code no.
Chrome		76410000
Brushed Bronze	Q3/2025	76410140
Brushed Black Chrome	Q3/2025	76410340
Matt Black		76410670
Matt White		76410700

Finoris 4-hole rim mounted bath mixer with sBox

Features

- consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, hose box
- 2 functions
- projection: 152 mm
- spray type mixer: normal spray
- maximum pull-out length of hand shower: 1,45 m
- maximum flow rate at 3 bar: 23,5 l/min
- flow rate for bath spout at 3 bar: 23,5 l/min
- flow rate of hand shower at 3 bar: 10,2 l/min
- ceramic valves hot/cold 90°
- non-return valve
- connection dimension: DN15
- connection type: basic set
- installation on bath rim
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- spray type hand shower: PowderRain

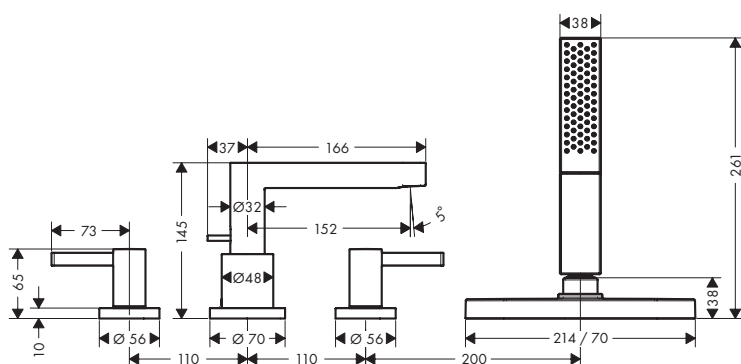

Technologies



Spray types



Finish	Available from	Code no.
 Chrome		76444000
 Brushed Bronze	Q3/2025	76444140
 Brushed Black Chrome	Q3/2025	76444340
 Matt Black		76444670
 Matt White		76444700

Required parts:



Basic set for 4-hole rim mounted bath mixer


Code no.

13440180

Finoris Single lever shower mixer for concealed installation for iBox universal

Features

- 1 function
 - maximum flow rate at 3 bar: 29,3 l/min
 - maximum flow rate at 1 bar: 15,5 l/min
 - ceramic cartridge
- temperature limitation adjustable
 - with silencer
 - suitable for continous flow water heaters
 - min. operating pressure: 1 bar
- max. operating pressure: 10 bar
 - connection type: basic set



Finish	Available from	Code no.
 Chrome		76615000
 Brushed Bronze	Q3/2025	76615140
 Brushed Black Chrome	Q3/2025	76615340
 Matt Black		76615670
 Matt White		76615700

! Required parts (choose one):			Code no.
Option 1		iBox universal 2 Basic set	01500180
	+ 	Adapter plate for iBox universal 2	13588000
Option 2		iBox universal Basic set	01800180



Zesis

Highlights

Special feature



Faucet that helps save energy by only allowing hot water to flow when the lever is actively moved.



Tap that saves up to 20% more water compared to our conventional models thanks to a flow limiter.

Technologies



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.



Mixes air into the water. For a soft, less splashing water jet and full, light drops.

Finish








Chrome

-009

Zesis S Single lever basin mixers**Features of all variants**

- consists of: single lever basin mixer, waste set
- handle variant: lever handle
- spray type: normal spray
- ceramic cartridge
- suitable for continuous flow water heaters
- push-open waste set G 1 1/4
- material waste set: synthetic
- connection type: G 3/8 hose connections
- connection dimension: DN15
- cold water in basic handle position

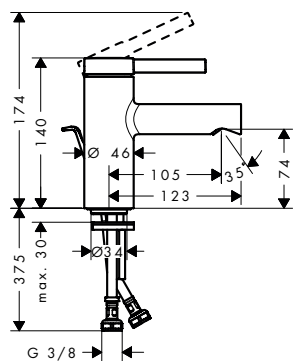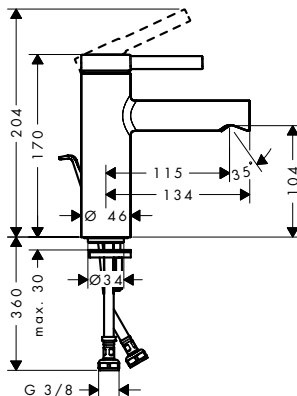
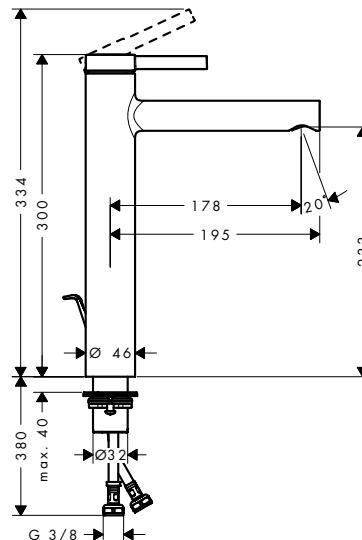
70**100****230****Special feature****Technologies****Overview variants**

	ComfortZone	Projection (mm)	Spout height (mm)	Waste set	Material waste set	CoolStart	For wash bowls	Finish	Available from	Code no.
	70	105	74	push-open	synthetic	■	–	● Chrome		74712009
	100	115	104	push-open	synthetic	■	–	● Chrome	Q1/2025	74721009
	100	115	104	push-open	synthetic	■	–	● Chrome		74722009
	230	178	233	push-open	synthetic	■	■	● Chrome	Q1/2025	74731009

Zesis S Single lever bath mixer for exposed installation 2 ticks

Features

- 2 functions
 - projection: 175 mm
 - centre distance: 150 ± 12 mm
 - spray type mixer: normal spray
 - maximum flow rate at 3 bar: 19,5 l/min
 - flow rate for bath spout at 3 bar: 19,5 l/min
- flow rate of hand shower at 3 bar: 5,5 l/min
 - ceramic cartridge
 - temperature limitation adjustable
 - diverter with automatic resetting
 - non-return valve
 - with silencer
- suitable for continous flow water heaters
 - connection dimension: DN15
 - connection type: S-connections
 - wall-mounted
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar

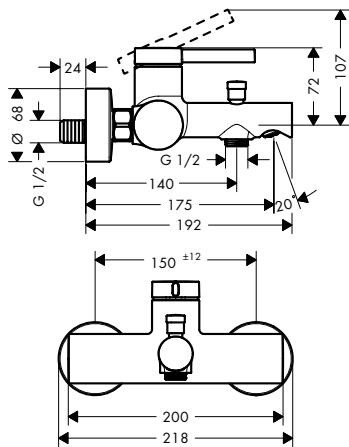

Technologies




Finish	Available from	Code no.
Chrome	Q1/2025	74420009

Zesis S Single lever bath mixer for concealed installation for iBox universal

Features

- 2 functions
 - flow rate upper outlet: 21 l/min
 - flow rate lower outlet: 29 l/min
 - maximum flow rate at 3 bar: 29 l/min
- ceramic cartridge
 - temperature limitation adjustable
 - diverter with automatic resetting
 - non-return valve
- connection type: basic set
 - wall-mounted
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar





Finish	Available from	Code no.
Chrome	Q1/2025	74415000

! Required parts (choose one):			Code no.	
Option 1		iBox universal 2 Basic set	01500180	
	+		Adapter plate for iBox universal 2	13588000
Option 2		iBox universal Basic set	01800180	

Zesis S Bath spout

Features

- 1 function
 - connection type: G 1/2
 - with escutcheon
- projection: 181 mm
 - wall-mounted
 - maximum flow rate at 3 bar: 22,5 l/min
- connection dimension: DN15
 - spray type: normal spray

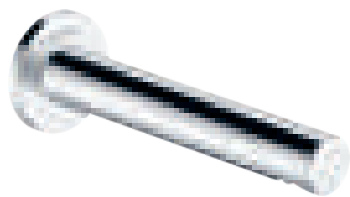

Technologies





Finish	Available from	Code no.
● Chrome	Q1/2025	74410000

Zesis S Single lever shower mixers for exposed installation

Features of all variants

- 1 function
 - centre distance: 150 ± 12 mm
 - ceramic cartridge
 - temperature limitation adjustable
- non-return valve
 - with silencer
 - hose connection DN15
 - connection dimension: DN15
- min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - connection type: S-connections

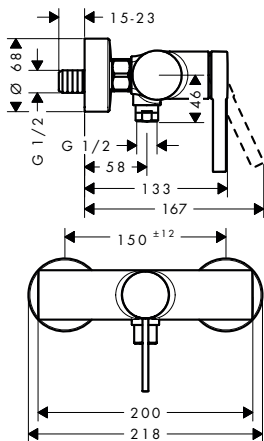

Overview variants


Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
5.8	● Chrome	Q1/2025	74621009
5.5	● Chrome		74624009

Zesis S | Single lever shower mixer, Shut-off valve

Zesis S Single lever shower mixer for concealed installation for iBox universal

Features

- 1 function
 - maximum flow rate at 3 bar: 27,9 l/min
 - maximum flow rate at 1 bar: 15,7 l/min
- ceramic cartridge
 - temperature limitation adjustable
 - with silencer
- min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - connection type: basic set




Finish	Available from	Code no.
● Chrome	Q1/2025	74616000

! Required parts (choose one):			Code no.
Option 1		iBox universal 2 Basic set	01500180
		Adapter plate for iBox universal 2	13588000
Option 2		iBox universal Basic set	01800180

Zesis S Single lever shower mixer for concealed installation

Features

- 1 function
 - maximum flow rate at 3 bar: 28,7 l/min
 - maximum flow rate at 1 bar: 16,9 l/min
- temperature limitation adjustable
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
- connection type: basic set




Finish	Code no.
● Chrome	74617000

! Required parts:		Code no.
	Basic set for single lever shower mixer for concealed installation	13620180

Zesis S Shut-off valve for concealed installation

Features

- connection type: DN15/DN20
- noise class: II



Finish	Available from	Code no.
 Chrome	Q1/2025	74997000

 Required parts (choose one):

	Code no.
 Basic set 40 l/min for shut-off valve for concealed installation ceramic	15974180
 Basic set 52 l/min for shut-off valve for concealed installation spindle	15973180
 Basic set 130 l/min for shut-off valve for concealed installation spindle	15970180

hansgrohe

Life is waterful.

Singapore News Product Book 2025 - Effective 1 January 2025

Hansgrohe Pte Ltd
69 Mohamed Sultan Road
Singapore 239015
Tel. +65 6884 5060
Fax +65 68845071
info@hansgrohe.com.sg
www.hansgrohe.com.sg



Discover hansgrohe online and on social media.
Find out more about the hansgrohe world at pro.hansgrohe.com.sg