



hansgrohe

# Planning and installing RainDrain / XtraStoris

---

Technical Manual

[pro.hansgrohe.com](https://pro.hansgrohe.com)  
[pro.hansgrohe.co.uk](https://pro.hansgrohe.co.uk)

# RainDrain: A sophisticated shower drain

## A sensational sight in the shower

A cohesive bathroom design is key to creating that special feel-good factor – and this is particularly true for your customer's shower. So it's not at all surprising to witness the increasing popularity of visually appealing shower drains that integrate seamlessly into any shower floor. RainDrain offers the right color and finish to match its surroundings - especially other hansgrohe products such as showers or faucets. And it is not just the perfectly coordinated look that's important, but also the durability.

With RainDrain, you benefit from a wide range of designs and drainage solutions to meet the requirements of any bathroom project. You also benefit from easy and safe installation, as there is one basic set (uBox universal) for the linear drains. As for safety, you can rely on the proven technologies that guarantee the drain will remain leak-free for years to come.



One base set for the linear shower drains.



RainDrain is a high quality shower drainage system that seamlessly blends into your shower.

#### **RainDrain at a glance:**

- High quality shower drains system developed in collaboration with ESS drainage specialists.
- The perfect drainage solution for any bathroom project with a floor-level shower.
- Two water seal options for new construction (standard) and renovation projects (flat).
- Optional Dryphon technology for minimal cleaning with a capacity up to 60 l/min.
- Secure, integrated waterproofing with factory-assembled sealing membrane according to DIN 18534.
- uBox universal base set for a wide range of linear shower drains.
- Floor-level showers with RainDrain offer greater mobility and accessibility.
- Various surfaces and finishes that perfectly match the mixers.



# Pretty.

One base set for all.




# Clever.

One bathroom, one look.



# uBox universal

One base set for all installation scenarios

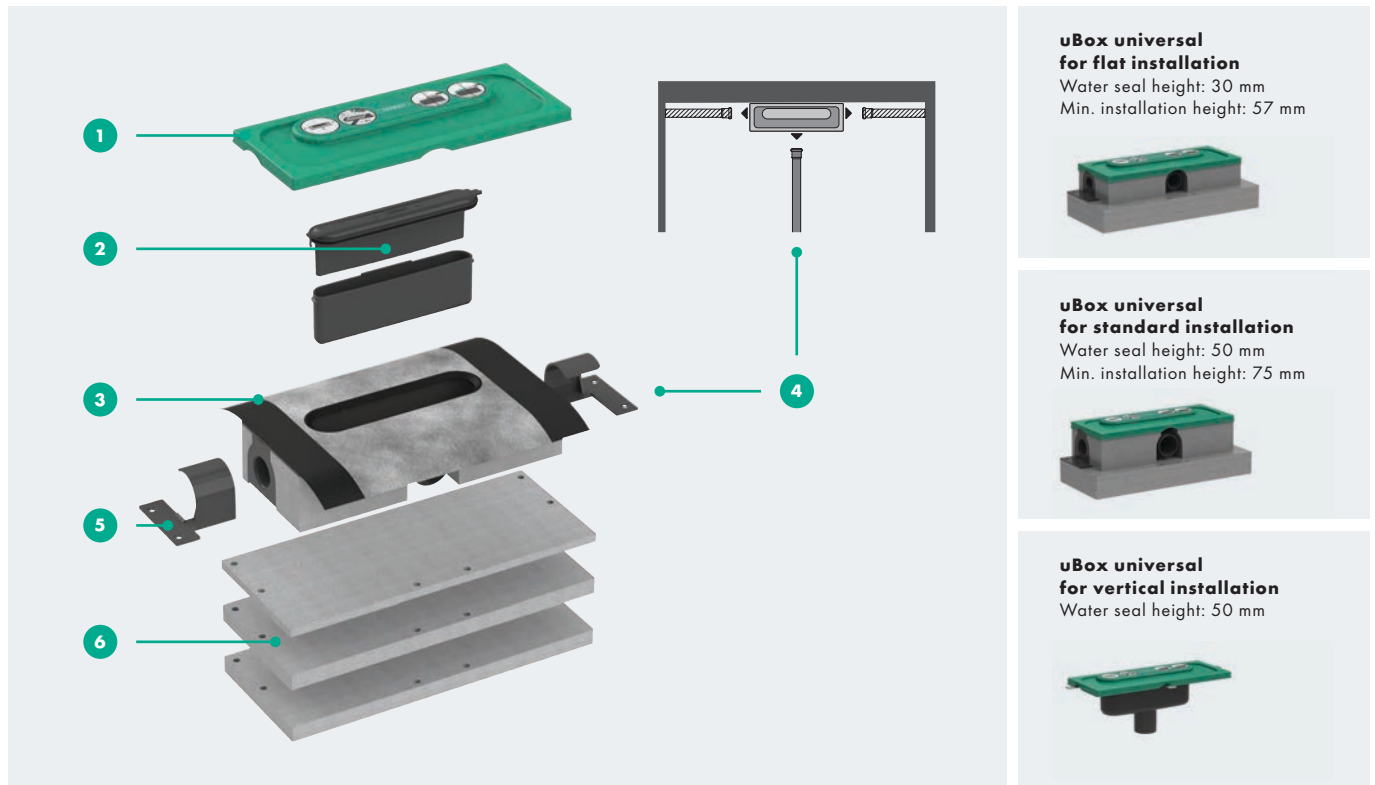

## Features

- 1 Screed cover protects from dirt during shell construction
- 2 Easy-to-clean siphon included as standard
- 3 Pre-assembled sealing membrane as per DIN 18534
- 4 Flexible connection options with outlets on three sides
- 5 Easy attachment to the floor with mounting bracket
- 6 Easy height adjustment with three plates (2 x 20 mm, 1 x 10 mm)

## Specifications

### uBox universal for flat installation


Minimum installation height: 57 mm  
Siphon drainage capacity: up to 33 l/min  
Dryphon drainage capacity: up to 55 l/min

### uBox universal for standard installation


Minimum installation height: 75 mm  
Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min

### uBox universal for vertical installation


Minimum installation height: –  
Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min

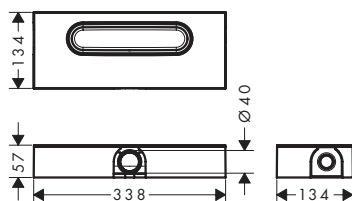

uBox universal for flat installation

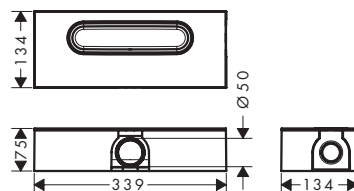

uBox universal for standard installation

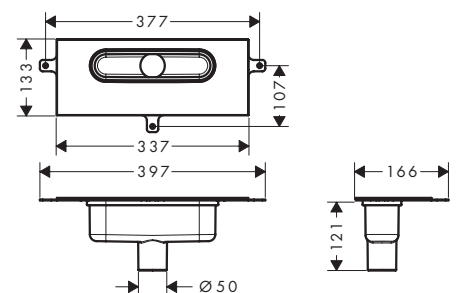

uBox universal for vertical installation

# RainDrain

8	Product overview
12	Technology
14	Parts to order
16	RainDrain Flex
18	RainDrain Match
20	RainDrain Rock
22	RainDrain Original
24	RainDrain Compact
26	RainDrain Allround
28	RainDrain Spot
30	RainDrain Brilliance
32	RainDrain Point





# XtraStoris

10	Product overview
34	XtraStoris
36	XtraStoris Original
38	XtraStoris Minimalistic
40	XtraStoris Individual
42	XtraStoris Rock
44	XtraStoris Rock
46	XtraStoris Original
48	XtraStoris Safe
50	Article codes RainDrain
54	Article codes XtraStoris



# RainDrain overview



Product name	RainDrain Flex	RainDrain Match	RainDrain Rock	RainDrain Original	RainDrain Compact
Perfect for	Easy to shorten on site	Perfectly flush with the tile thickness	Developed for use with natural stone	Effortless installation with maximum hygiene	Problem solver for renovation projects
Length (mm)	700 - 1200	600 - 1200	600 - 1200	600 - 1200	600 - 1200
Finish					
Installation	Free in floor / Wall	Free in floor / Wall	Free in floor	Free in floor	Free in floor
Min. installation height	67 mm (flat) 85 mm (standard)	84 mm (flat) 102 mm (standard)	77 mm (flat) 95 mm (standard)	72 mm (flat) 90 mm (standard)	63 mm (flat) 83 mm (standard)
Drain Capacity up to (l/min)	33 l/min (flat) 42 l/min (standard)	33 l/min (flat) 42 l/min (standard)	33 l/min (flat) 42 l/min (standard)	32 l/min (flat) 49 l/min (standard)	27 l/min (flat) 37 l/min (standard)
Parts to order	uBox Finish Set	uBox Installation Set Finish Set	uBox Installation Set Finish Set	uBox Finish Set	Complete Set
uBox Technology	■	■	■	■	
Dryphon Technology	■	■	■	■	
Tileable Grate		■	■		■





RainDrain Allround



RainDrain Spot



RainDrain Brilliance



RainDrain Point

Complete waterproof solution

Maximum placement flexibility

Perfectly flush with the tile thickness

Suitable for any bathroom

700 - 1200

150 x 150

100 x 100  
150 x 150

100 x 100  
150 x 150



Free in floor

Free in floor

Free in floor

Free in floor

66 mm (flat)  
95 mm (standard)

80 mm (standard)

83 mm (standard)

65 mm (standard)

32 l/min (flat)  
33 l/min (standard)

35 l/min

35 l/min

41 l/min

Complete Set

Complete Set

Complete Set

Complete Set



# XtraStoris overview



Product name	XtraStoris Original	XtraStoris Minimalistic	XtraStoris Individual	XtraStoris Rock	XtraStoris Rock
Type	Wall niche with frame	Frameless wall niche	Wall niche with frame	Wall niche with tileable door	Toilet paper and brush holder with tileable door
Dimensions (mm)	300 x 150 x 100/70 300 x 300 x 100/70 300 x 600 x 100 300 x 900 x 100	300 x 150 x 100 300 x 300 x 100 300 x 150 x 140 300 x 300 x 140	300 x 150 x 100 300 x 300 x 100	300 x 150 x 100 300 x 300 x 100 300 x 150 x 140 300 x 300 x 140	595 x 145 x 140
Finish					
Install Depth (mm)	100 70	100 140	100	100 140	140
Variable Installation Depth (mm)		■			
Complete Set	■	■	■	■	■





XtraStoris Original

Toilet paper holder

150 x 150 x 140



140



XtraStoris Safe

Wall niche with  
tileable door

150 x 300 x 100



100



# Technology

## Drainage reinvented: Dryphon

The design and high flow rate prevent dirt and hair from attaching, minimising cleaning efforts. The patented design offers a significant improvement in drainage capacity up to 60 litres per minute, exceeding all standard requirements and regulations.


The Dryphon system opens and closes with a flexible membrane. This membrane allows water to pass through when needed while blocking sewer gases when no water is flowing through. Also, because it does not rely on a traditional water seal to seal the connection to the sewer, it cannot dry out while still controlling pressure differences in the sewer.

Minimum cleaning  
combined with higher  
drainage capacity




### **hansgrohe Siphon technology**


- High drainage capacity up to 42 l/min
- Low dirt adhesion, as manufactured without seams
- Easy to clean, as can be dismantled
- Removable
- Minimal installation depth

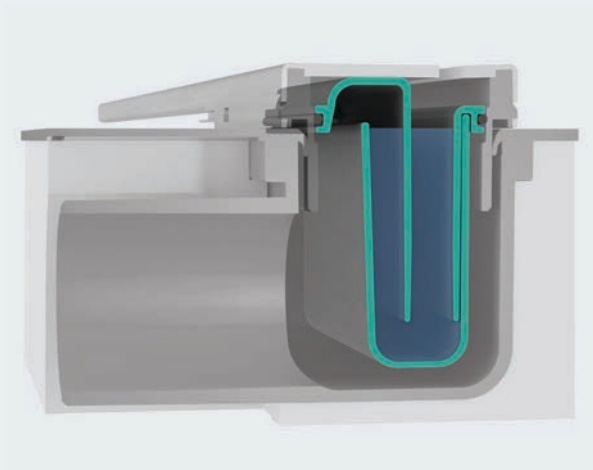

### **hansgrohe Dryphon technology**

- Significantly higher drainage capacity up to 60 l/min
- Durable and temperature-resistant membrane
- Minimal cleaning required, no siphon resistance
- Removable
- Minimal installation depth
- Full odour barrier
- Cannot dry out

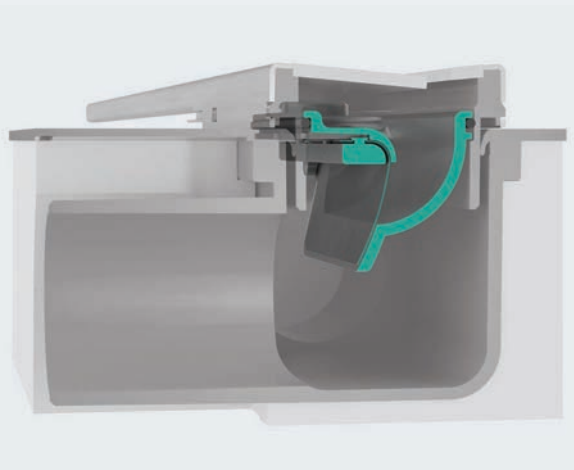

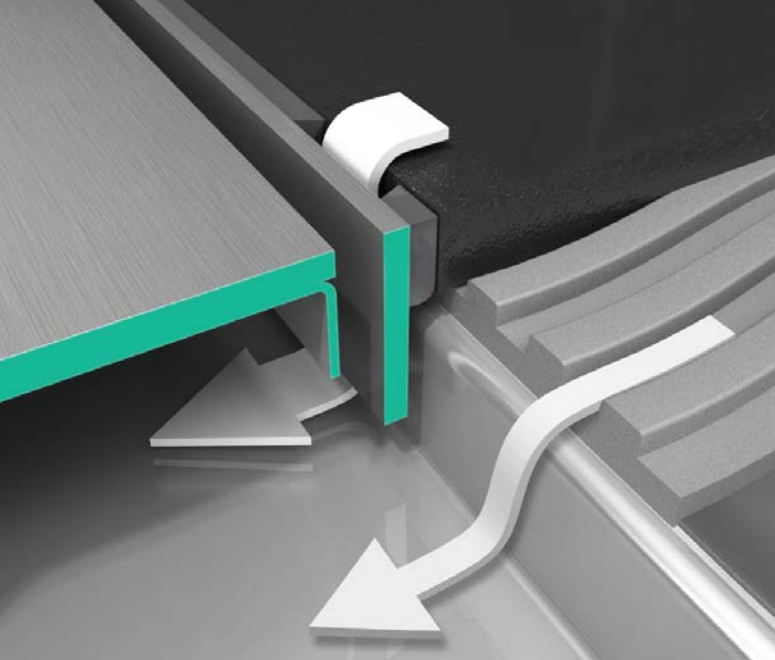


## Secondary drainage

With the RainDrain Match and Brilliance, the height-adjustable frame is not only used to level to tile thickness, but also for secondary drainage. With secondary drainage, water entering through the sealing joints or faulty tile joints will drain into the shower channel thanks to the slope.

For secondary drainage, the entire wet area must be professionally sealed and no sealing must be applied below the service joint between the frame and the installation set.

## Pre-assembled sealing membrane as per DIN 18534


Planners and contractors are required to comply with numerous works contract provisions. The pre-assembled sealing membrane was developed as a standard to prevent mistakes when installing shower drains in combination with waterproofing system.

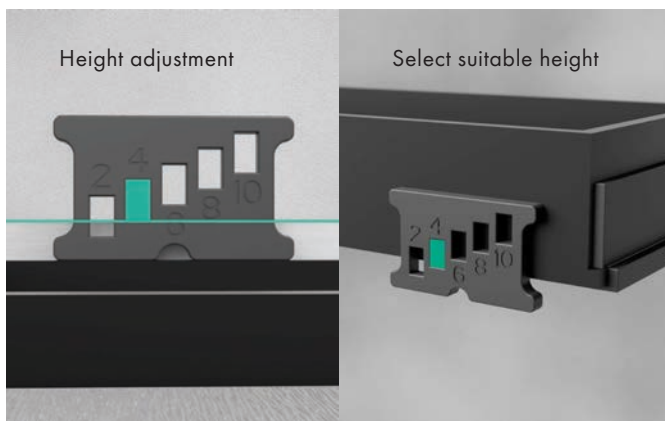

## Height flexibility

The finish set can be easily adjusted to different heights by using either the grate or the height adjustable frame. The sturdy stainless steel frame adapts to tile thicknesses of 7-18 mm, making installation easy and safe.

## Easy to clean siphon and surface

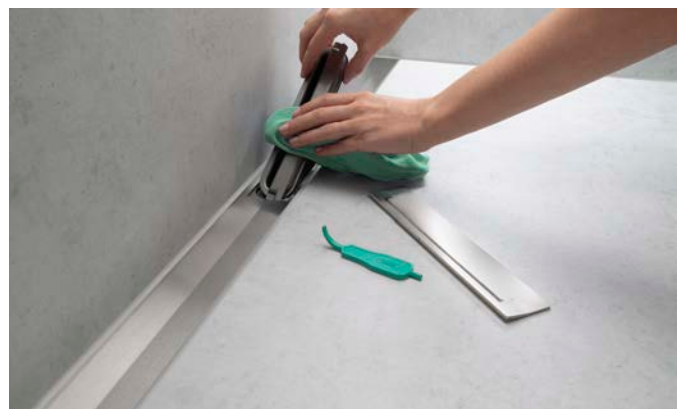

# Parts to order

When ordering a linear shower drain together the uBox system, there are two part numbers:

1. finished set
2. base set / uBox universal (with or without an installation set, depending in on the product line)

Choose between the uBox for standard installation (50 mm water seal), uBox for low installation (30 mm water seal) or the uBox with vertical outlet.

## uBox + Finish set



**RainDrain Original**



**RainDrain Flex**

Installation in thin bed



**uBox universal**

Installation in screed


## Installation set + Finish set



**RainDrain Match**



**RainDrain Rock**

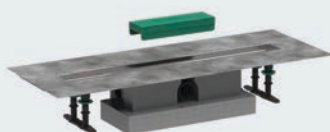

**uBox universal and installation set**

Installation in screed


## Complete set




**RainDrain Compact**



**RainDrain Allround**



**RainDrain Spot**

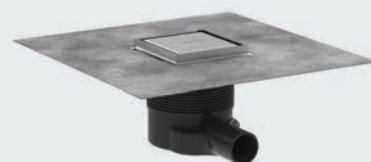


**RainDrain Brilliance**




**RainDrain Point**

RainDrain Match wall mounted

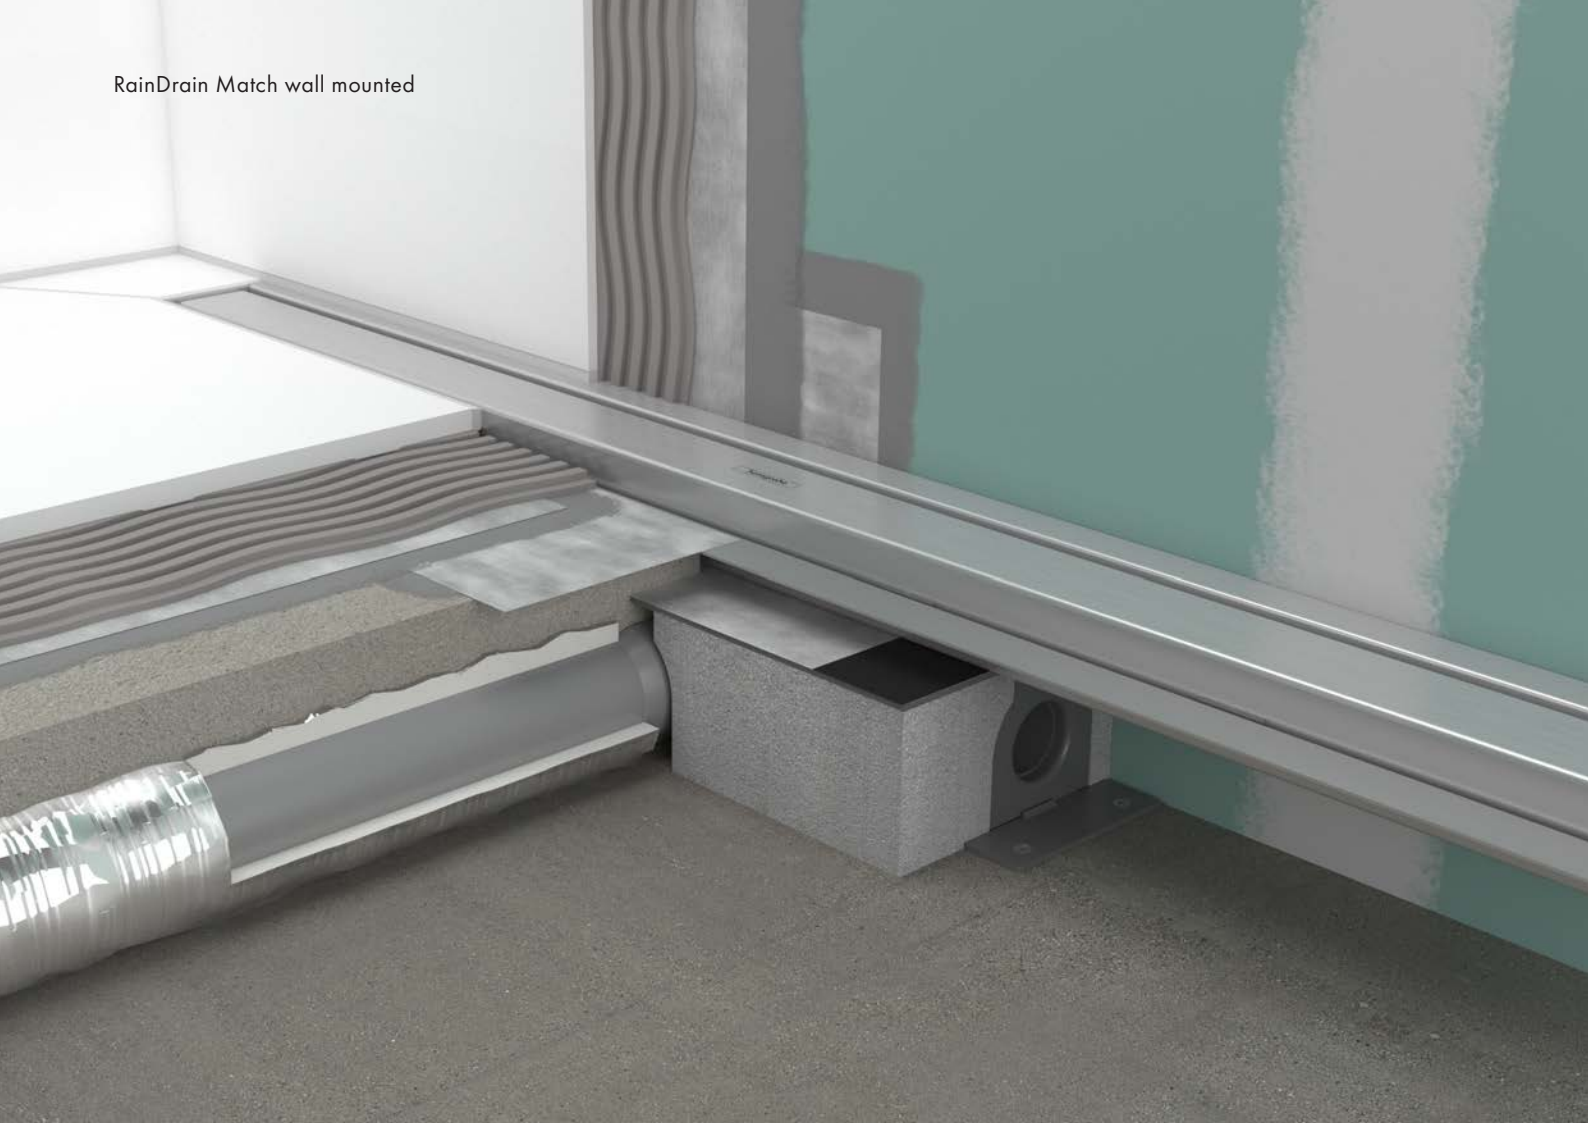


RainDrain Flex wall mounted

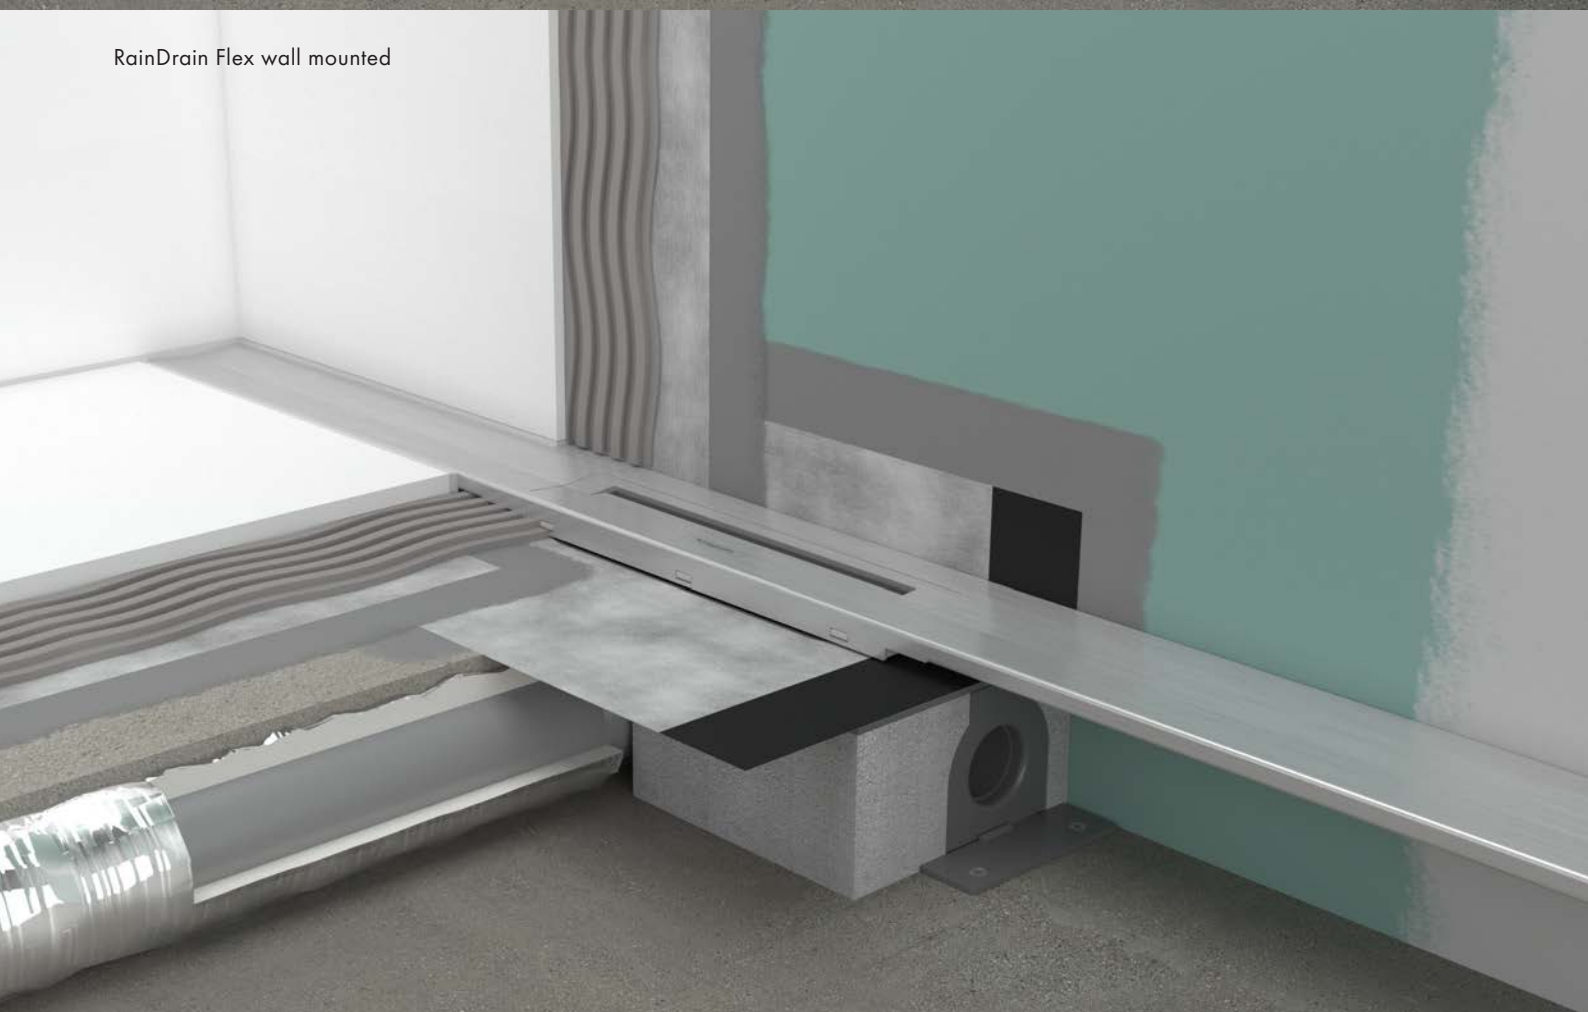

# RainDrain Flex


Easy to shorten on site

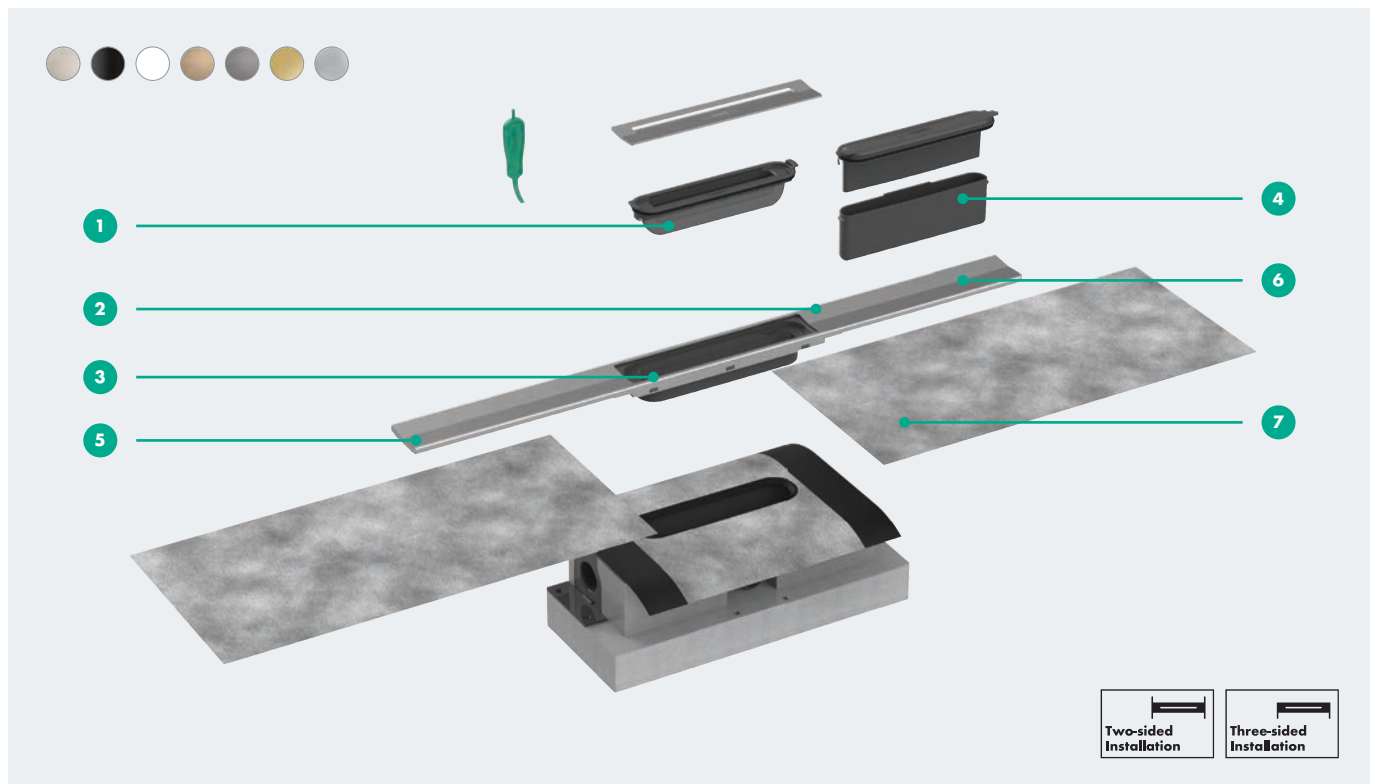

## Features

- 1 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 2 Design grate: Brushed Stainless Steel, Matt Black, Matt White, Brushed Bronze, Brushed Black Chrome, Polished Gold Optic, Chrome
- 3 Base set adapter: easy levelling to tile thickness 7 - 18 mm
- 4 Siphon 50 mm (as per EN 1253), also available in 30 mm
- 5 Installation: wall-mounted or in-floor. Both versions available
- 6 Design grate made of stainless steel 304 (1.4301) with built-in slope. Can be shortened on site.
- 7 Sealing membrane extension for uBox as per DIN 18534

## Required sets

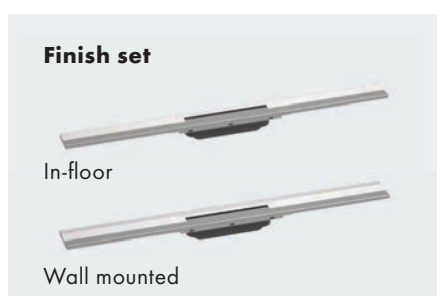


+





Simply scan the code and check out RainDrain Flex.

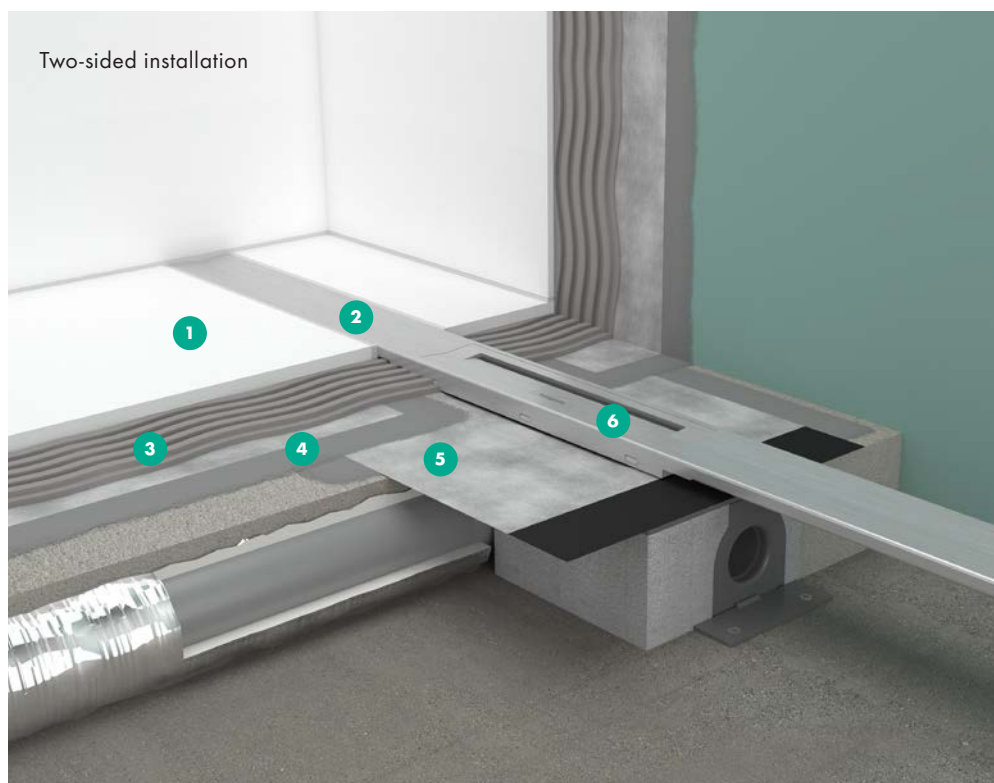

- 1 Tile thickness up to 18 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Removable cover

## Specifications

### Dimensions

700, 800, 900, 1000, 1200 mm

### Tile thickness

up to 18 mm

### uBox universal for flat installation

Minimum installation height: 67 mm  
Siphon drainage capacity: up to 33 l/min  
Dryphon drainage capacity: up to 55 l/min

### Connection

Horizontal  
Vertical

### Grate width


60 mm (In-floor)  
76 mm (Wall mounted)

### uBox universal for standard installation


Minimum installation height: 85 mm  
Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min

### uBox universal for vertical installation

Minimum installation height: -  
Siphon drainage capacity: up to 42 l/min (as per EN 1253)  
Dryphon drainage capacity: up to 60 l/min

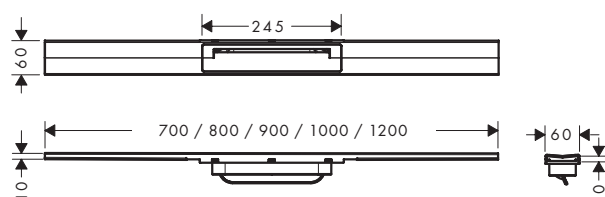


RainDrain Flex

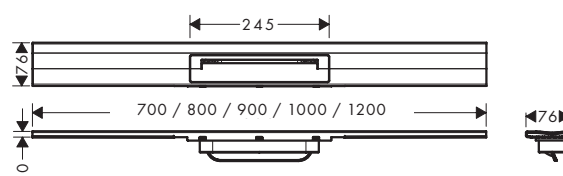

RainDrain Flex for wall mounting

# RainDrain Match

Perfectly flush with the tile thickness

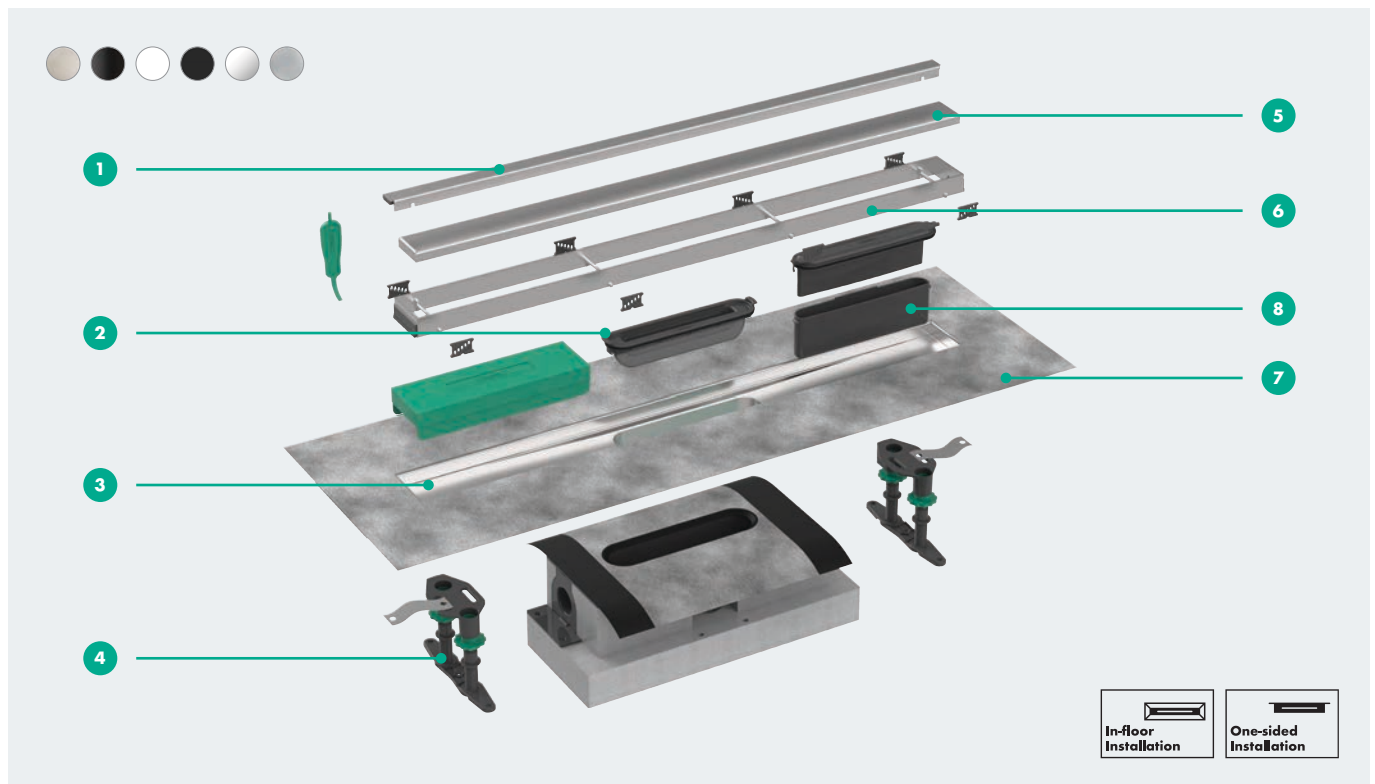

## Features


- 1 Installation: wall-mounted or in-floor. Wall flange included
- 2 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 3 Installation set: stainless steel 304 (1.4301) with built-in slope
- 4 Height-adjustable feet: easy adjustment and fixing to the floor
- 5 Design grate: Brushed Stainless Steel, Matt Black, Matt White, two glass surfaces (Black, White), Chrome. Design grate can be tiled on the back (except glass surfaces)
- 6 Height-adjustable frame: easy adjustment to tile thickness 7-18 mm
- 7 Pre-assembled sealing membrane as per DIN 18534
- 8 Siphon 50 mm (as per EN 1253), also available in 30 mm

## Required sets





Simply scan the code and check out RainDrain Match.

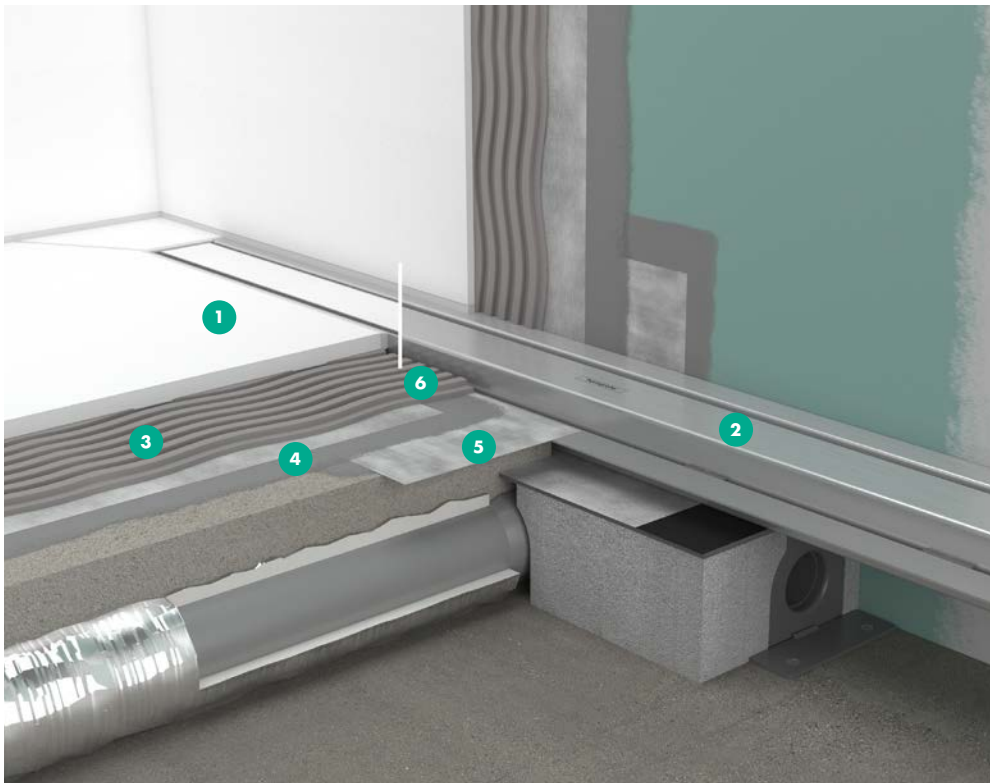

- 1 Tile thickness up to 18 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Secondary drainage possible

## Specifications

### Dimensions

600, 700, 800, 900, 1000, 1200 mm

### Tile thickness

up to 18 mm

### uBox universal for flat installation

Minimum installation height: 84 mm

Drainage capacity up to 33 l/min

Dryphon drainage capacity: up to 55 l/min

### Tile inlay depth

12 mm

### Grate width

46 mm

### uBox universal for standard installation

Minimum installation height: 102 mm

Drainage capacity up to 42 l/min (as per EN 1253)

Dryphon drainage capacity: up to 60 l/min

### Connection

Horizontal

Vertical

### Frame width

62 mm (In-floor)



81 mm (Wall flange included)

### uBox universal for vertical installation

Minimum installation height: -

Drainage capacity up to 42 l/min (as per EN 1253)


Dryphon drainage capacity: up to 60 l/min

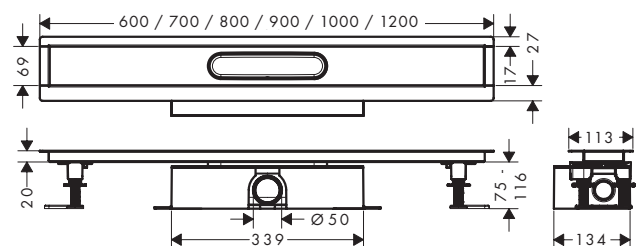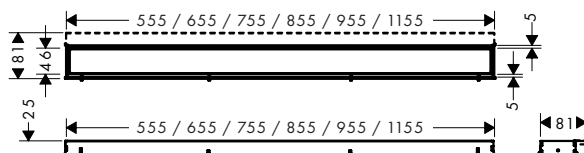

RainDrain Match

# RainDrain Rock

Developed for use with natural stone

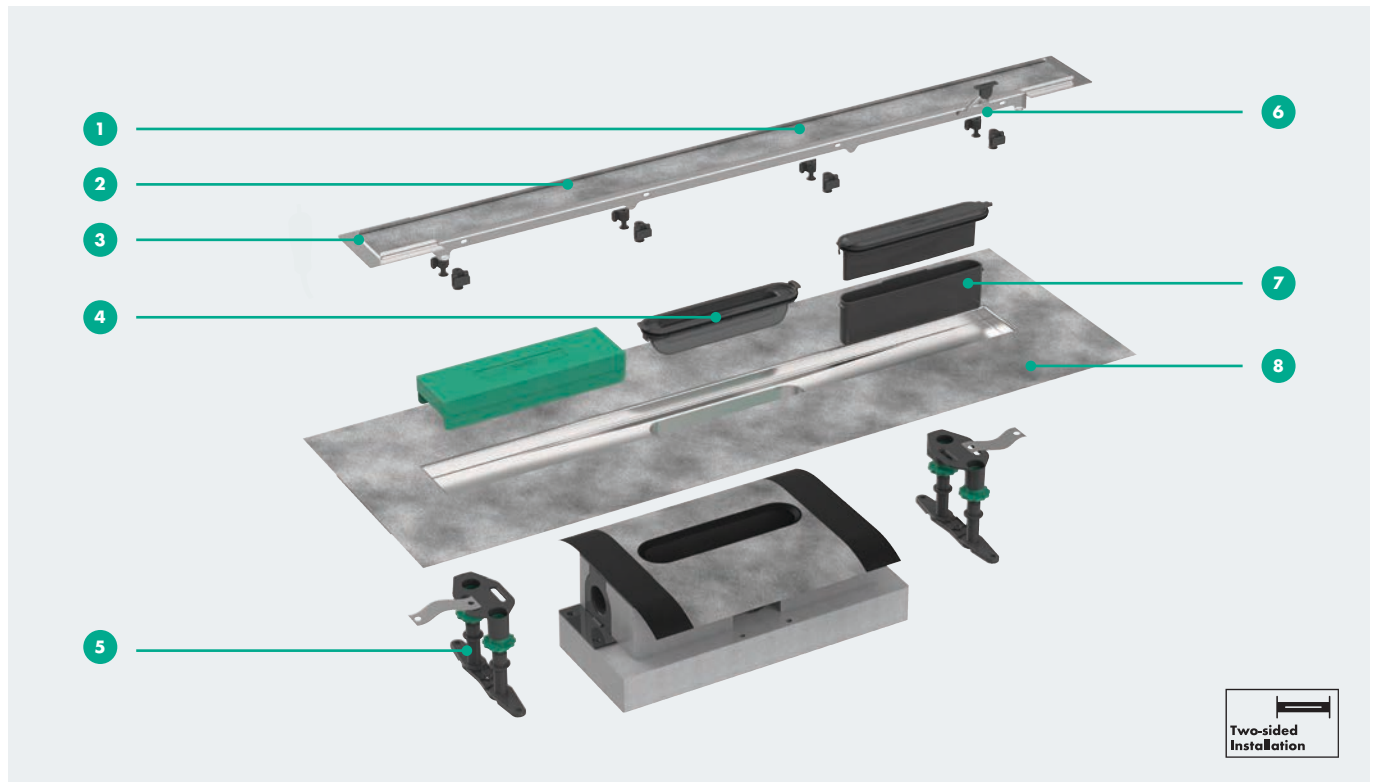

## Features


- 1 Design grate can be tiled, with tiles up to 40 mm thick.
- 2 304 stainless steel design grate with membrane for strong attachment to the tile adhesive
- 3 Cover: can be shortened on site, with 50 mm excess length on both sides
- 4 Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 5 Height-adjustable feet: easy adjustment and fixing to the floor
- 6 Lifting tool for easy removal of the design grate
- 7 Siphon 50 mm (as per EN 1253), also available in 30 mm
- 8 Pre-assembled sealing membrane as per DIN 18534

## Required sets





Simply scan the code and check out RainDrain Rock.

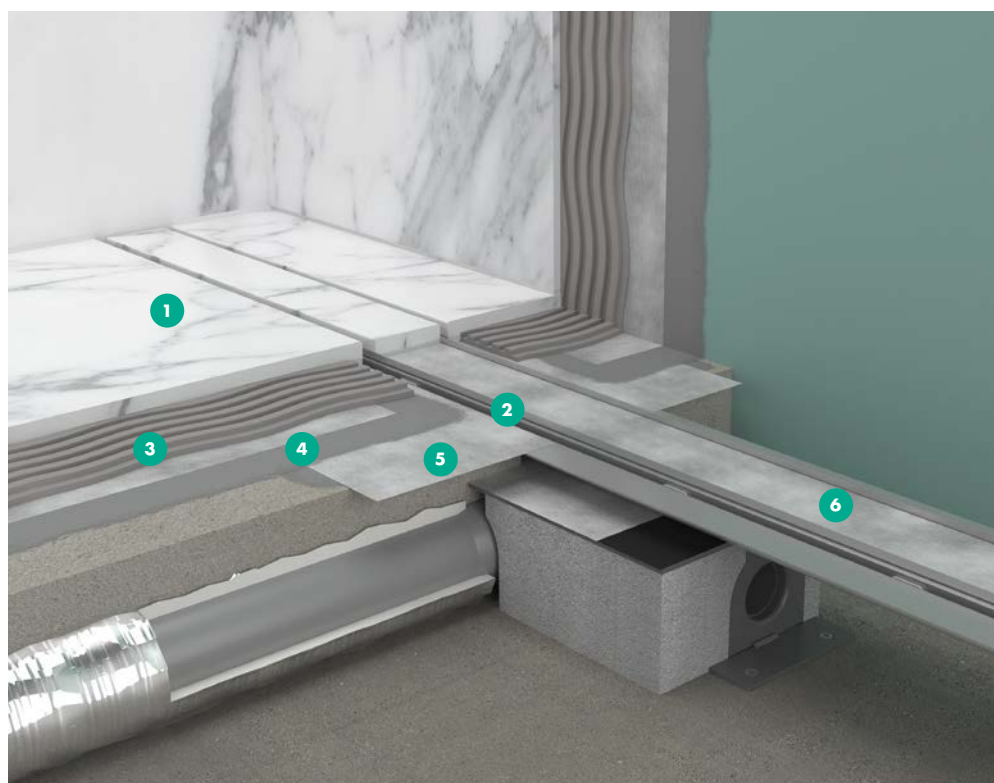

- 1 Tile thickness up to 40 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Tileable design grate

## Specifications

### Dimensions

600, 700, 800, 900, 1000, 1200 mm

### Grate width

58 mm

### Connection

Horizontal  
Vertical

### Tile thickness

up to 40 mm

### uBox universal for flat installation

Minimum installation height: 77 mm

Siphon drainage capacity: up to 33 l/min

Dryphon drainage capacity: up to 55 l/min

### uBox universal for standard installation

Minimum installation height: 95 mm

Siphon drainage capacity: up to 42 l/min (as per EN 1253)



Dryphon drainage capacity: up to 60 l/min

### uBox universal for vertical installation

Minimum installation height: -


Siphon drainage capacity: up to 42 l/min (as per EN 1253)

Dryphon drainage capacity: up to 60 l/min

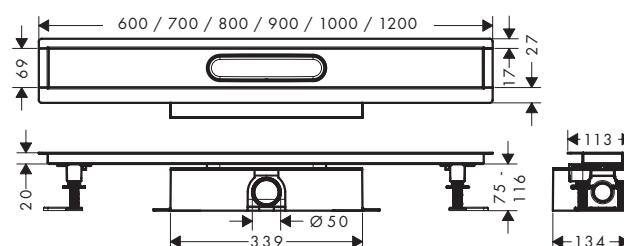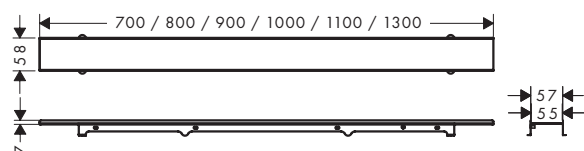

# RainDrain Original


Effortless installation with maximum hygiene

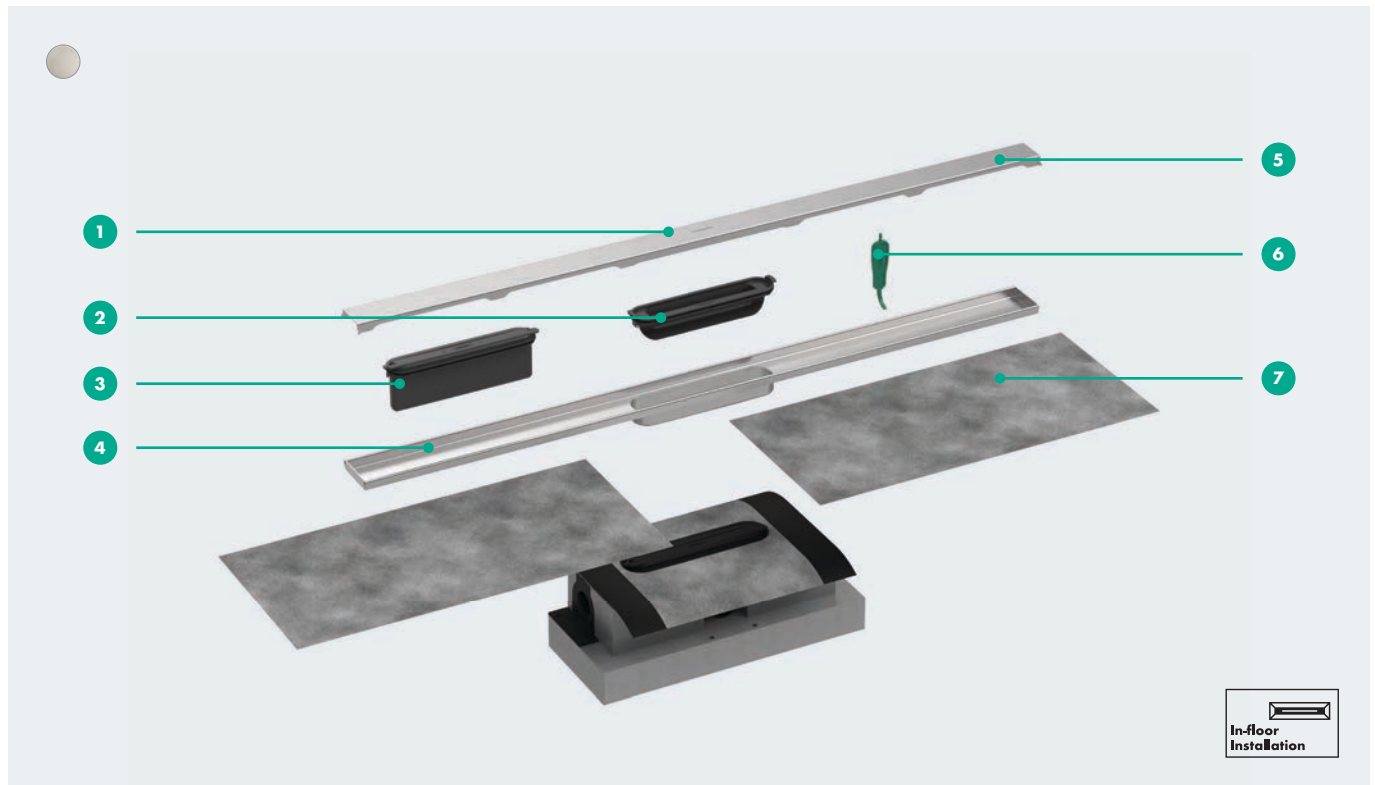

## Features


- 1** Design grate: Brushed Stainless Steel
- 2** Dryphon technology: high drainage capacity (up to 60 l/min), minimal cleaning required
- 3** Siphon 50 mm, siphon also available in 30 mm
- 4** Installation set: stainless steel 304 (1.4301)
- 5** Installation: in-floor
- 6** Grate removal tool: allows easy removal of the finish set
- 7** Sealing membrane extension for uBox as per DIN 18534

## Required sets

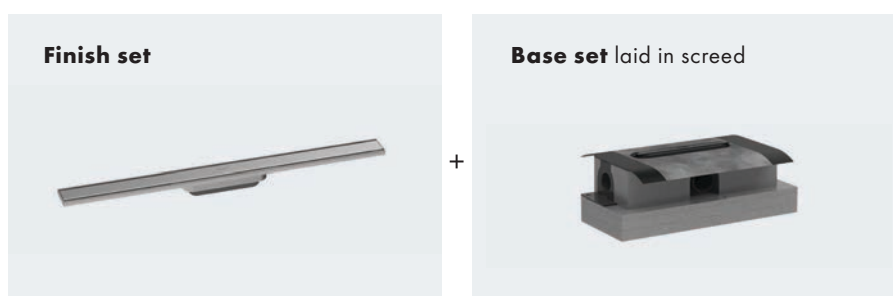



Simply scan the code and check out RainDrain Original.

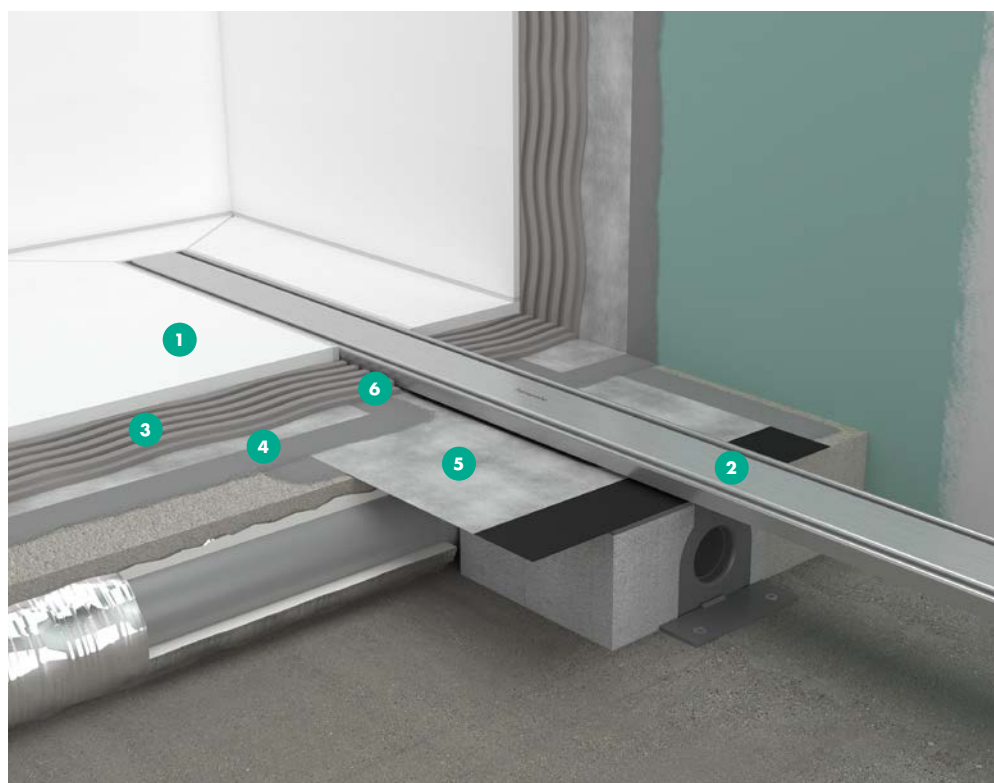

- 1 Tile thickness up to 18 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane

## Specifications

### Dimensions

600, 700, 800, 900, 1000, 1200 mm

### Tile thickness

up to 18 mm

### uBox universal for flat installation

Minimum installation height: 72 mm  
 Drainage capacity up to 32 l/min  
 Dryphon drainage capacity: up to 55 l/min

### Connection

Horizontal  
 Vertical

### Grate width


65 mm

### uBox universal for standard installation

Minimum installation height: 90 mm  
 Drainage capacity up to 49 l/min  
 Dryphon drainage capacity: up to 60 l/min

### uBox universal for vertical installation

Minimum installation height: -  
 Drainage capacity up to 42 l/min  
 Dryphon drainage capacity: up to 60 l/min

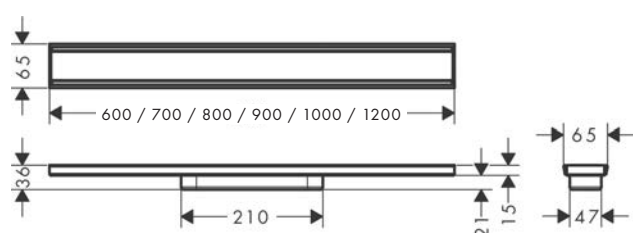

RainDrain Original


# RainDrain Compact

Problem solver for renovation projects




## Features

- 1 Design grate: Brushed Stainless Steel, Tileable inlay
- 2 Siphon 50 mm, siphon also available in 30 mm
- 3 Installation set: stainless steel 304 (1.4301) with built-in slope
- 4 Installation: in-floor
- 5 Grate removal tool: allows easy removal of the finish set
- 6 Pre-assembled sealing membrane as per DIN 18534
- 7 Height-adjustable feet: easy adjustment and fixing to the floor

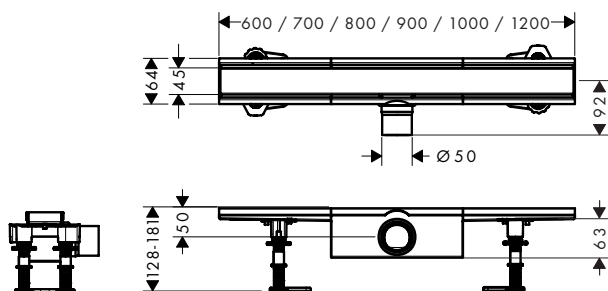


RainDrain Compact standard installation

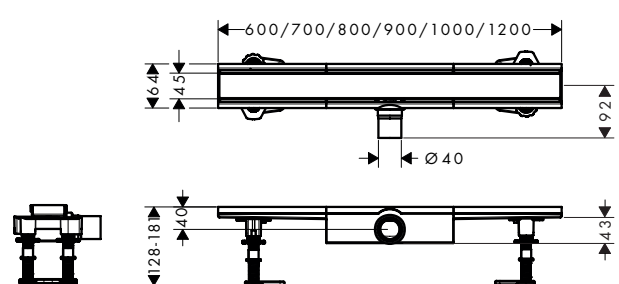

RainDrain Compact flat installation



Simply scan the code and check out RainDrain Compact.

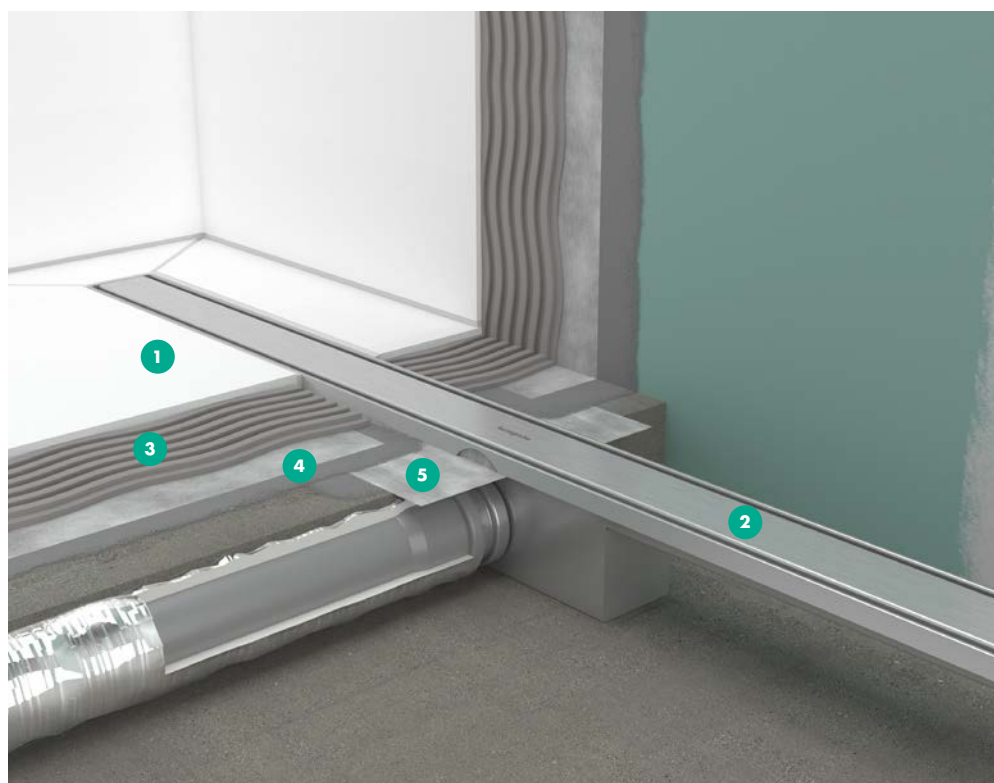

- 1** Tile thickness up to 18 mm
- 2** Design grate stainless steel 304 (1.4301)
- 3** Tile adhesive
- 4** Waterproofing membrane
- 5** Pre-assembled sealing membrane

## Specifications

### Dimensions

600, 700, 800, 900, 1000, 1200 mm

### Tile thickness

up to 18 mm

### Complete set for flat installation

Minimum installation height: 63 mm

Drainage capacity up to 27 l/min

### Tile inlay depth

12 mm

### Grate width

45 mm


### Complete set for standard installation

Minimum installation height: 83 mm


Drainage capacity up to 37 l/min

### Connection

Horizontal

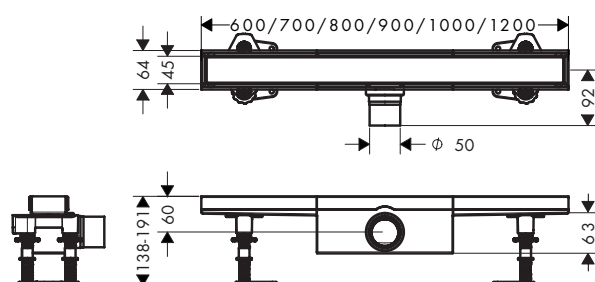


RainDrain Compact standard installation tile

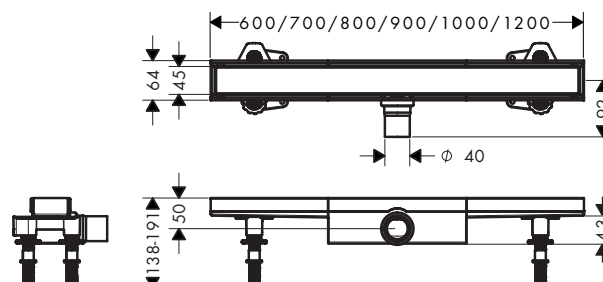

RainDrain Compact flat installation tile

# RainDrain Allround

Complete waterproof solution

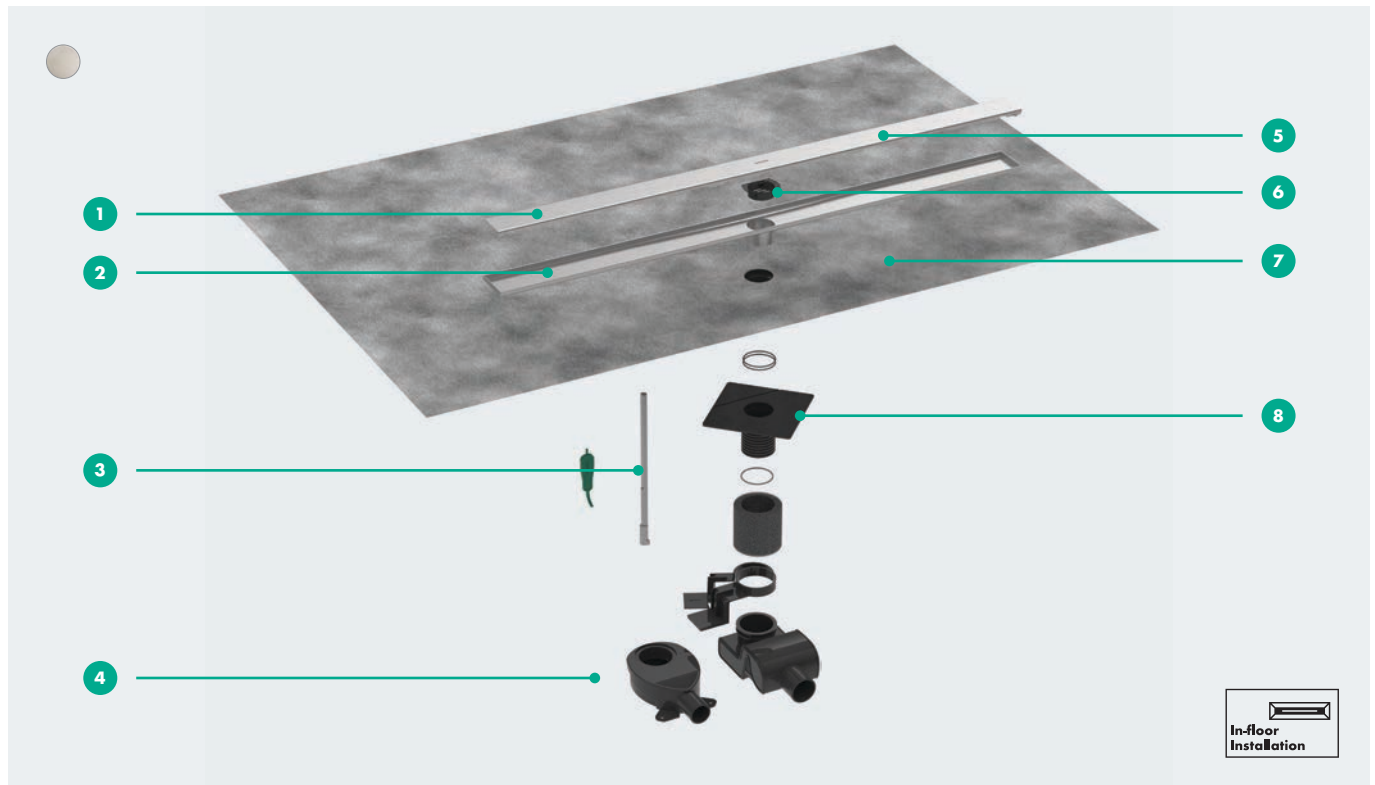


## Features

- 1 Design grate: Brushed Stainless Steel
- 2 Installation set: stainless steel 304 (1.4301) with built-in slope
- 3 Cleaning plug for access to siphon
- 4 Two siphons included: water seal 28 and 50 mm
- 5 Installation: in-floor
- 6 Hair catcher
- 7 Pre-assembled sealing membrane 1500 x 1300 mm as per DIN 18534
- 8 Screed adapter: for easy height adjustment of screed floor to the shower drain



Simply scan the code and check out RainDrain Allround.

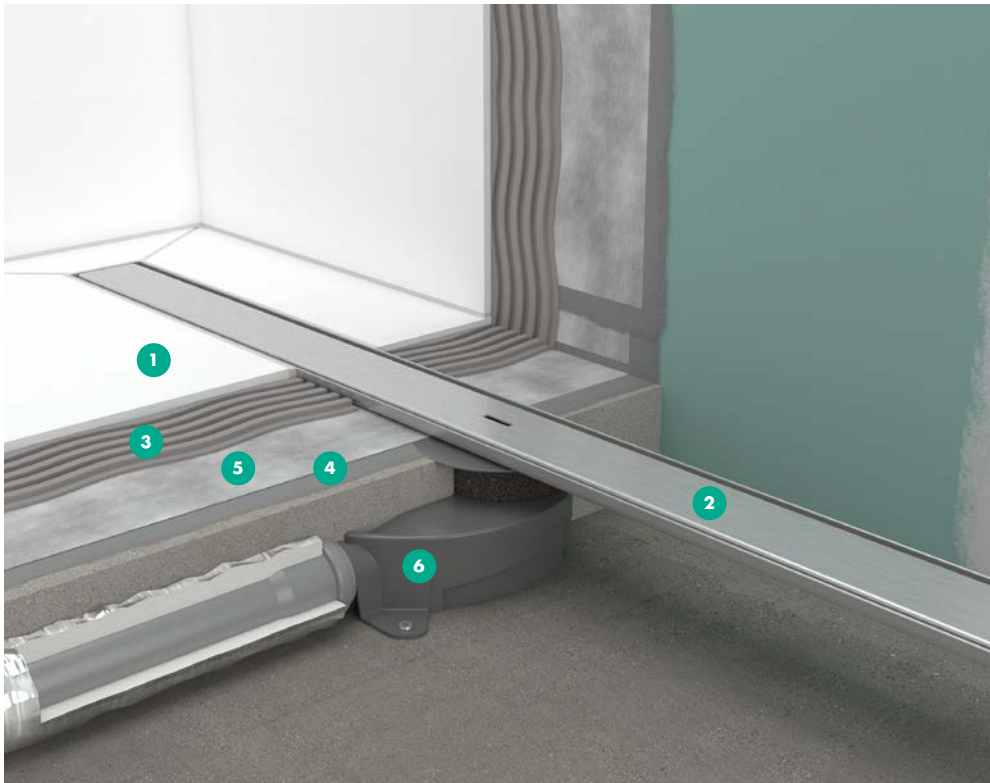

- 1** Tile thickness up to 18 mm
- 2** Design grate stainless steel 304 (1.4301)
- 3** Tile adhesive
- 4** Waterproofing membrane
- 5** Pre-assembled sealing membrane
- 6** Rotatable siphon

## Specifications

### Dimensions

700, 800, 900, 1000, 1200 mm

### Grate width

69 mm

### Complete set for flat installation

Minimum installation height: 66 mm  
Drainage capacity up to 32 l/min

### Connection


Horizontal

### Tile thickness


up to 18 mm

### Complete set for standard installation

Minimum installation height: 95 mm  
Drainage capacity up to 33 l/min

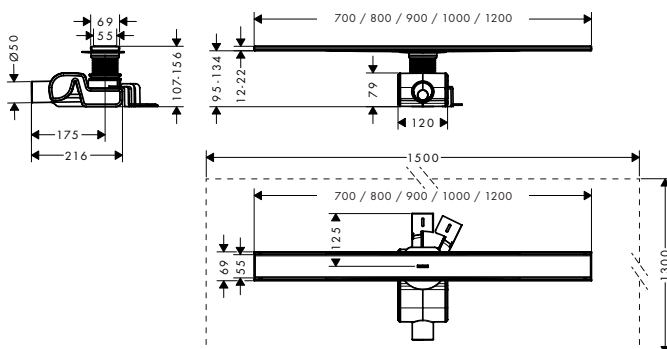


RainDrain Allround standard installation

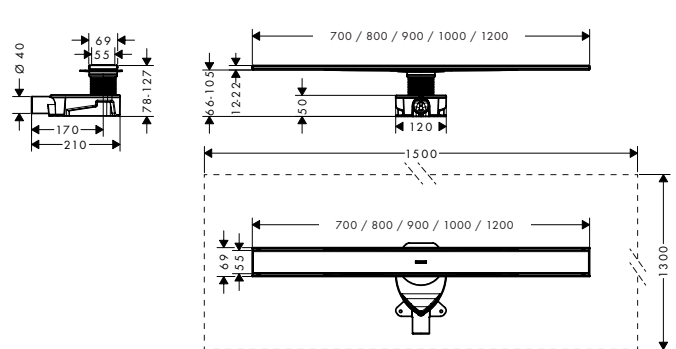

RainDrain Allround flat installation

# RainDrain Spot

Maximum placement flexibility

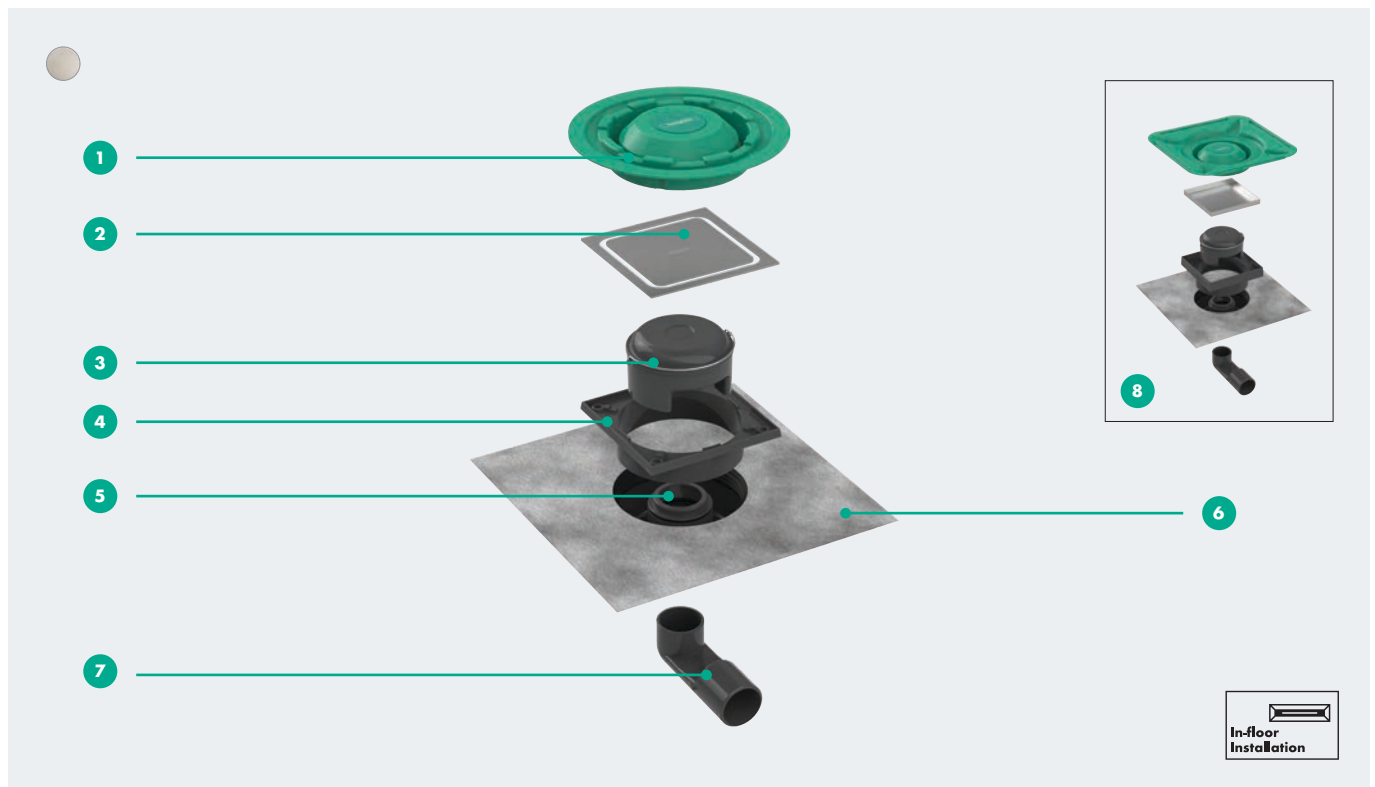


## Features

- 1 Screed cover protects from dirt during installation
- 2 Design grate: Brushed Stainless Steel
- 3 Siphon: removable for easy cleaning
- 4 Height adjustment: easy to adjust the design grate to the tile level
- 5 Siphon body: rotatable and adjustable
- 6 Pre-assembled sealing membrane as per DIN 18534
- 7 Variable connection: both horizontal and vertical outlet in one shower drain
- 8 Rotatable grate: tileable or Brushed Stainless Steel



Simply scan the code and check out RainDrain Spot.

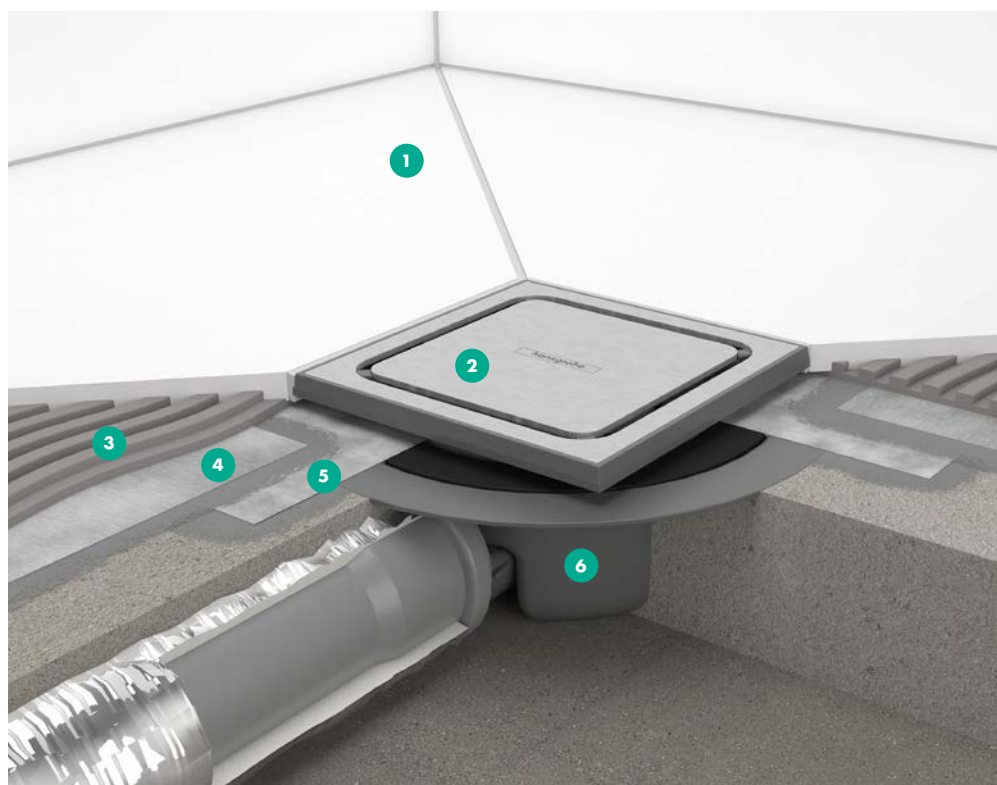

- 1 Tile thickness up to 18 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Siphon body ABS

## Specifications

**Dimensions**  
150 x 150 mm

**Minimum height**  
80 mm

**Grate width**  
146 mm

**Connection**  
Horizontal  
Vertical


**Drainage capacity**  
up to 35 l/min

**Tile thickness**  
up to 18 mm


**Water seal height**  
50 mm

**Connection nominal diameter**  
DN50

**Tile inlay depth**  
12 mm




RainDrain Spot

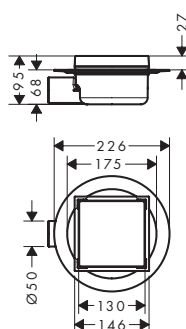

RainDrain Spot with tileable grate

# RainDrain Brilliance

Perfectly flush with the tile thickness

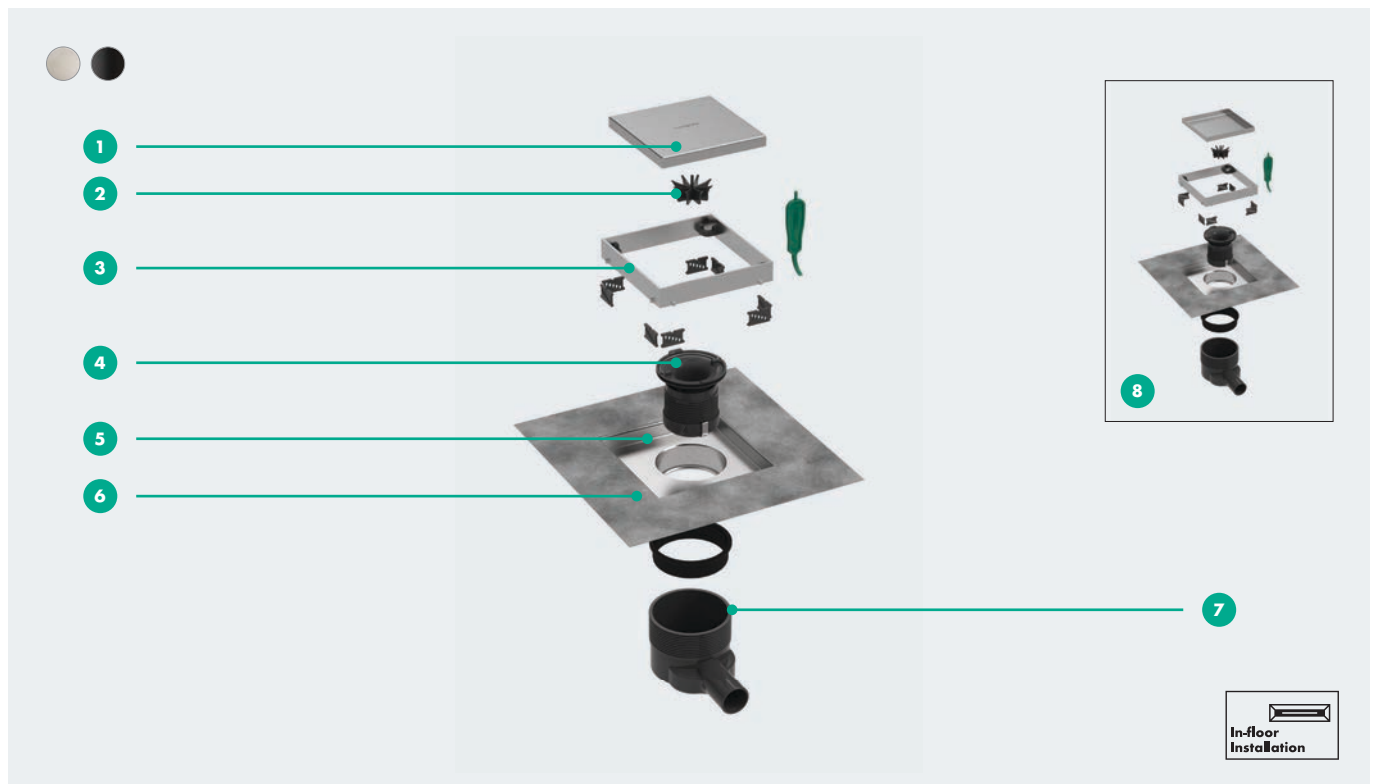


## Features

- 1 Design grate: Brushed Stainless Steel, Matt Black
- 2 Hair catcher
- 3 Height-adjustable frame: easy adjustment to tile thickness 7-18 mm
- 4 Siphon: removable for easy cleaning, can be shortened (50-25 mm water seal height)
- 5 Installation set: stainless steel 304 (1.4301)
- 6 Pre-assembled sealing membrane as per DIN 18534
- 7 Siphon body: rotatable and adjustable. Siphon with vertical outlet is optional
- 8 Reversible grate: tileable or Brushed Stainless Steel



Simply scan the code and check out RainDrain Brilliance.

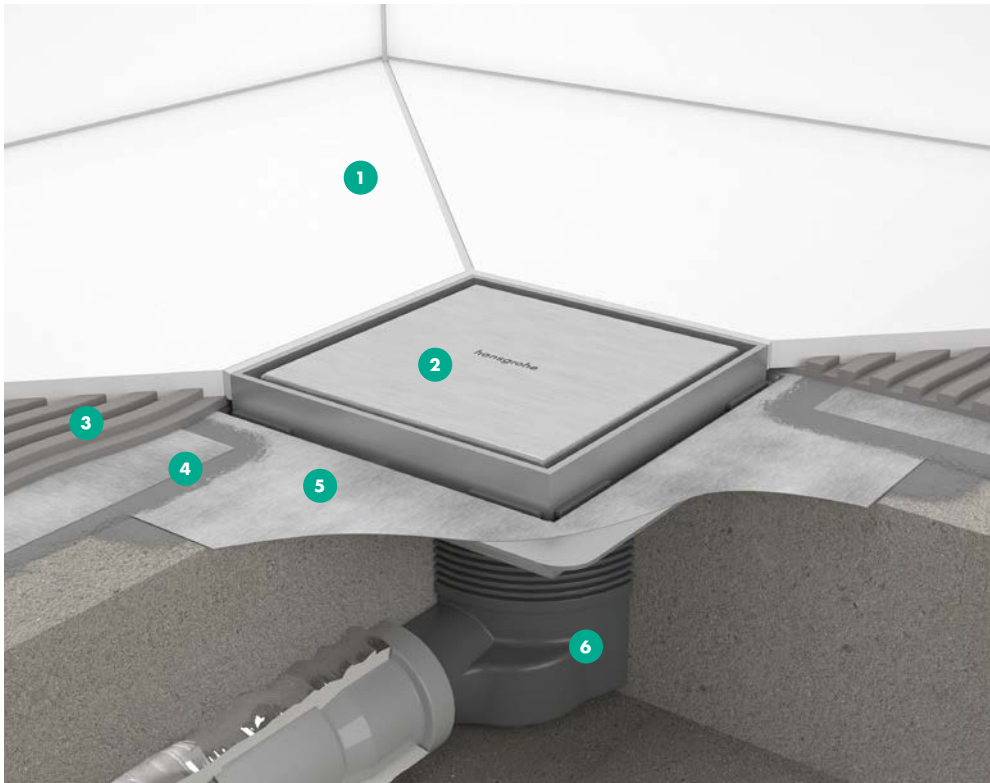

- 1 Tile thickness up to 18 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Siphon body ABS

## Specifications

### Dimensions

100 x 100 mm  
150 x 150 mm

### Minimum height

83 mm

### Grate width

84 mm  
134 mm

### Connection

Horizontal  
Vertical (optional)

### Drainage capacity

up to 35 l/min

### Tile thickness

up to 18 mm

### Water seal height


50 - 25 mm

### Connection nominal diameter


DN40

### Tile inlay depth

12 mm




RainDrain Brilliance  
100 x 100

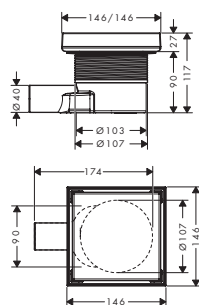

RainDrain Brilliance  
150 x 150

# RainDrain Point

Suitable for any bathroom

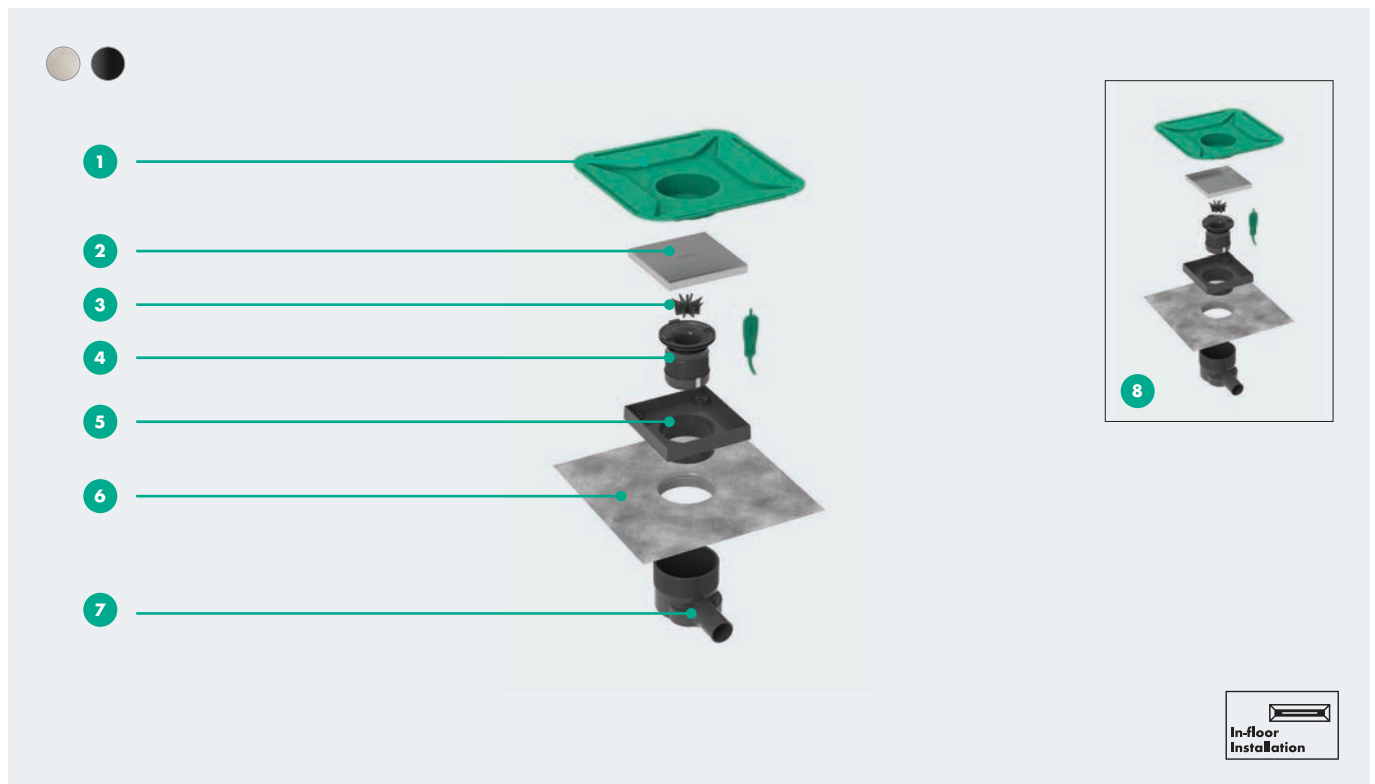


## Features

- 1 Screed cover protects from dirt during installation
- 2 Design grate: Brushed Stainless Steel, Matt Black
- 3 Hair catcher
- 4 Siphon: removable for easy cleaning, can be shortened (50-25 mm water seal height)
- 5 Height adjustment: easy to adjust the grate to the tile level
- 6 Pre-assembled sealing membrane as per DIN 18534
- 7 Siphon body: rotatable and adjustable. Siphon with vertical outlet is optional
- 8 Reversible grate: tileable or Brushed Stainless Steel



Simply scan the code and check out RainDrain Point.

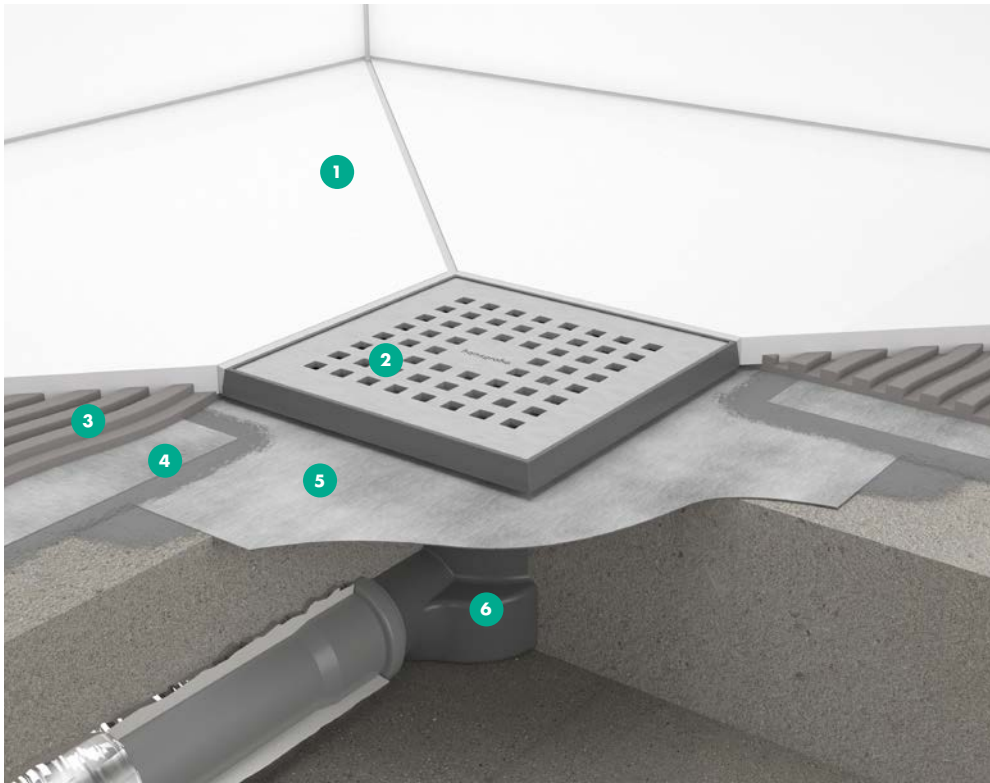

- 1 Tile thickness up to 18 mm
- 2 Design grate stainless steel 304 (1.4301)
- 3 Tile adhesive
- 4 Waterproofing membrane
- 5 Pre-assembled sealing membrane
- 6 Siphon body ABS

## Specifications

### Dimensions

100 x 100 mm  
150 x 150 mm

### Minimum height

65 mm

### Tile thickness

up to 18 mm

### Connection

Horizontal  
Vertical (optional)

### Drainage capacity

up to 41 l/min

### Tile inlay depth


12 mm

### Water seal height


50 - 25 mm

### Connection nominal diameter


DN40




RainDrain Point  
100 x 100



RainDrain Point  
with tileable grate  
100 x 100



RainDrain Point  
150 x 150



RainDrain Point  
with tileable grate  
150 x 150

# XtraStoris: storage space for your dream bathroom

XtraStoris complements the overall look of the shower place and toilet area. This accessories range is all about high-quality materials and manufacturing processes. These niches are reliable and protected against water damage thanks to the waterproof installation set and sealing membrane supplied.

**XtraStoris Original:** Wall niche with integrated frame up to 90 cm wide available in the colors Matt Black, Matt White and Concretegrey.

**XtraStoris Minimalistic:** Frameless wall niche available in various formats and finishes. This niche has a variable installation depth which means it can be installed flush with the tile or protruding as a design element.

**XtraStoris Individual:** The XtraStoris Individual body and frame finishes are to be combined individually. The design frames are available in Brushed Stainless Steel plus all hansgrohe FinishPlus surface finishes. The body is available in Matt Black, Matt White and Brushed Stainless Steel.

**XtraStoris Rock:** Tileable wall niche and toilet brush holder with push-open door. The installation depth can be adapted to the tile thickness. The storage space either merges almost seamlessly with the wall or is used as a design accent.

Time-saving and watertight installation






For brick-wall and  
dry-wall construction

#### **XtraStoris at a glance:**

- Waterproof installation set that is safe and ensures comfortable showering in the long term.
- Simple, time-saving installation.
- Suitable for brick-wall and dry-wall construction.
- Easy-to-clean surface.
- Space-saving solution for design-conscious bathroom owners who appreciate optimum freedom of movement when showering.
- High-quality solution available in four versions, numerous surface finishes and dimensions.


# XtraStoris Original

Wall niche with frame

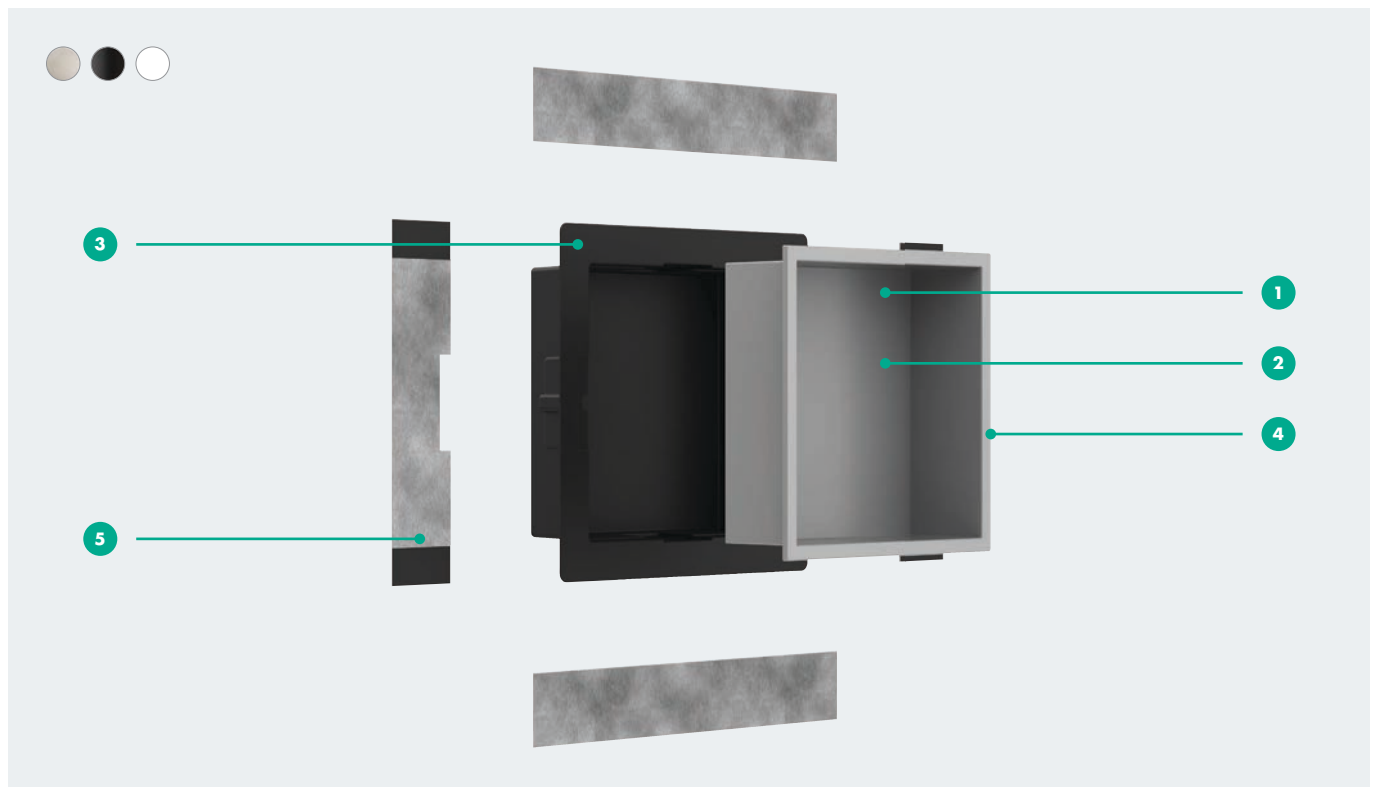


## Features

- 1 Finish: Concretegrey, Matt Black, Matt White
- 2 Surface: easy to clean and maintain stainless steel and powder coating
- 3 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 4 Integrated frame: seamless one-piece construction
- 5 Sealing membrane: straightforward sealing and protection from water damage (always included)

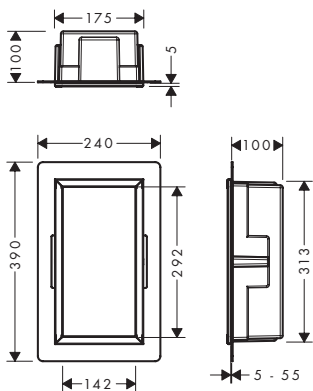


XtraStoris Original 300 x 150 x 100 mm

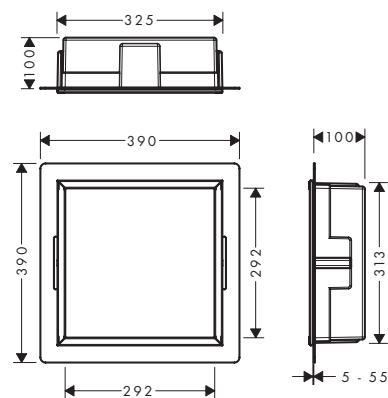

XtraStoris Original 300 x 300 x 100 mm



Simply scan the code and check out XtraStoris Original.

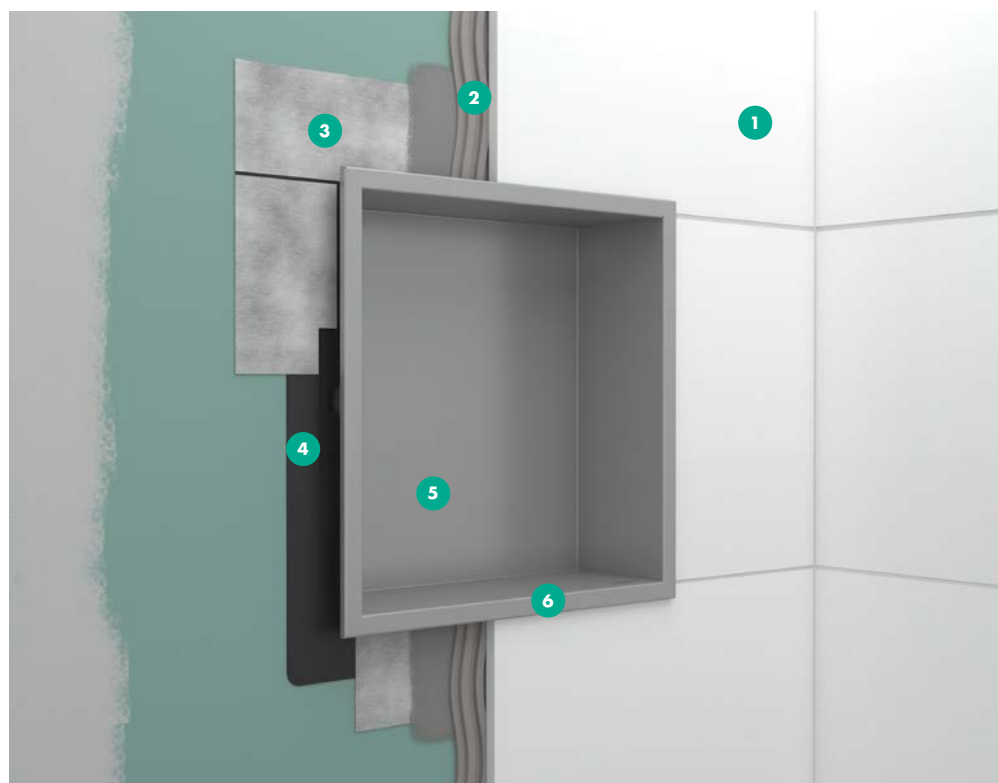

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Body stainless steel 304 (1.4301)
- 6 Frame

## Specifications

### Dimensions

300 x 150 x 100 mm  
300 x 300 x 100 mm  
300 x 600 x 100 mm  
300 x 900 x 100 mm

300 x 150 x 70 mm  
300 x 300 x 70 mm

### Installation depth


100 mm  
70 mm

### Area of application


New build  
Renovation

### Wall type

Brick-wall construction  
Dry-wall construction

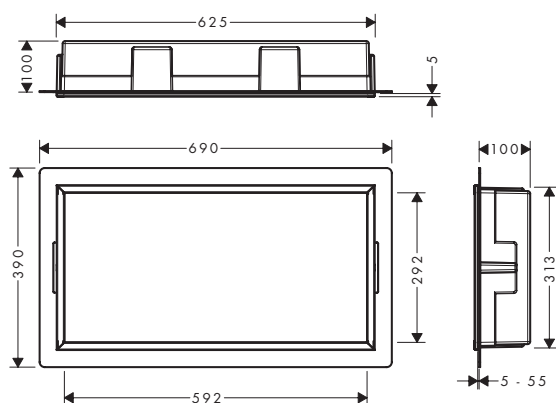


XtraStoris Original 300 x 600 x 100 mm

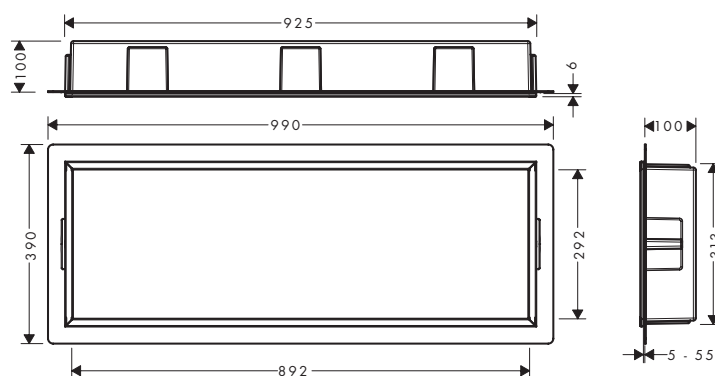

XtraStoris Original 300 x 900 x 100 mm


# XtraStoris Minimalistic

Wall niche frameless

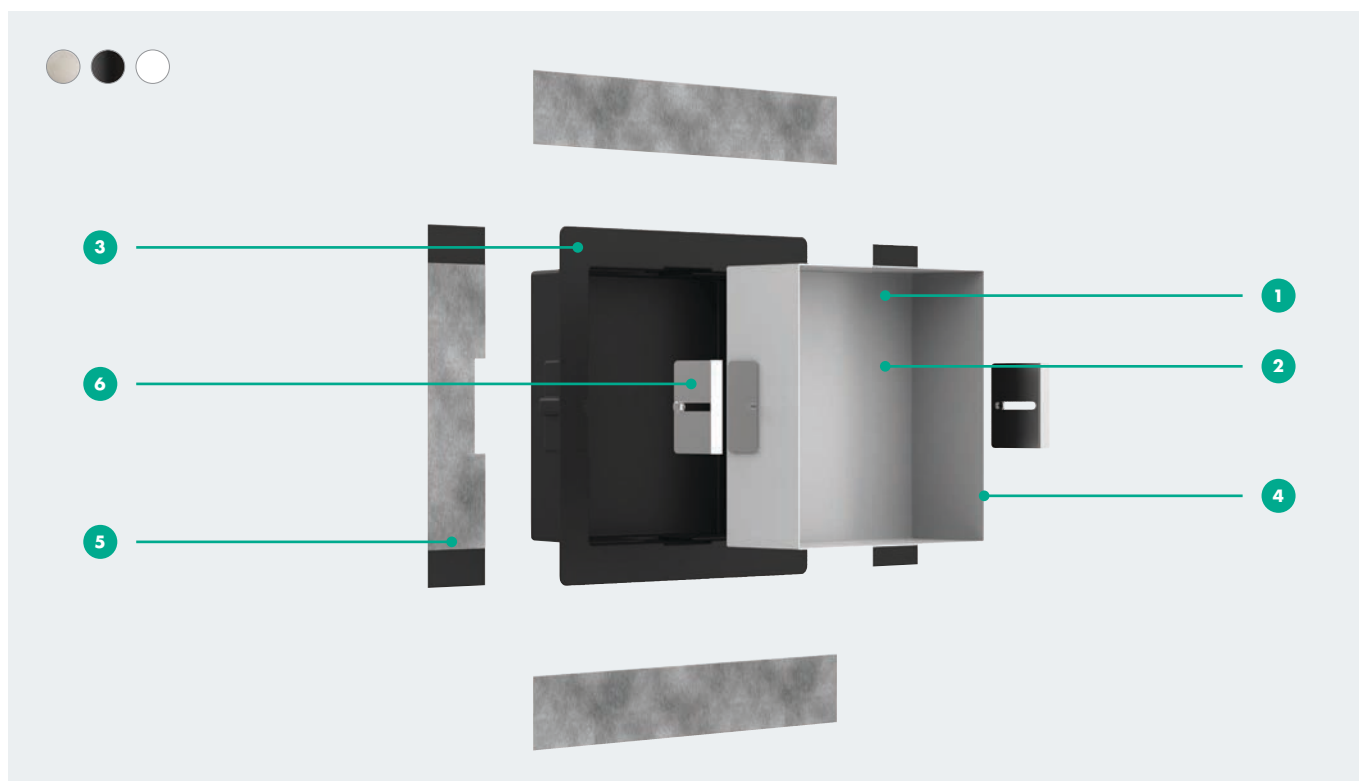


## Features

- 1 Finish: Brushed Stainless Steel, Matt Black, Matt White
- 2 Surface: easy to clean and maintain stainless steel and powder coating
- 3 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 4 Frameless: minimalist design
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)
- 6 Wall niche can be installed flush with the tile, or as a designelement protruding up to 55 mm




XtraStoris Minimalistic 300 x 150 x 100 mm



XtraStoris Minimalistic 300 x 300 x 100 mm



Simply scan the code and check out XtraStoris Minimalistic.

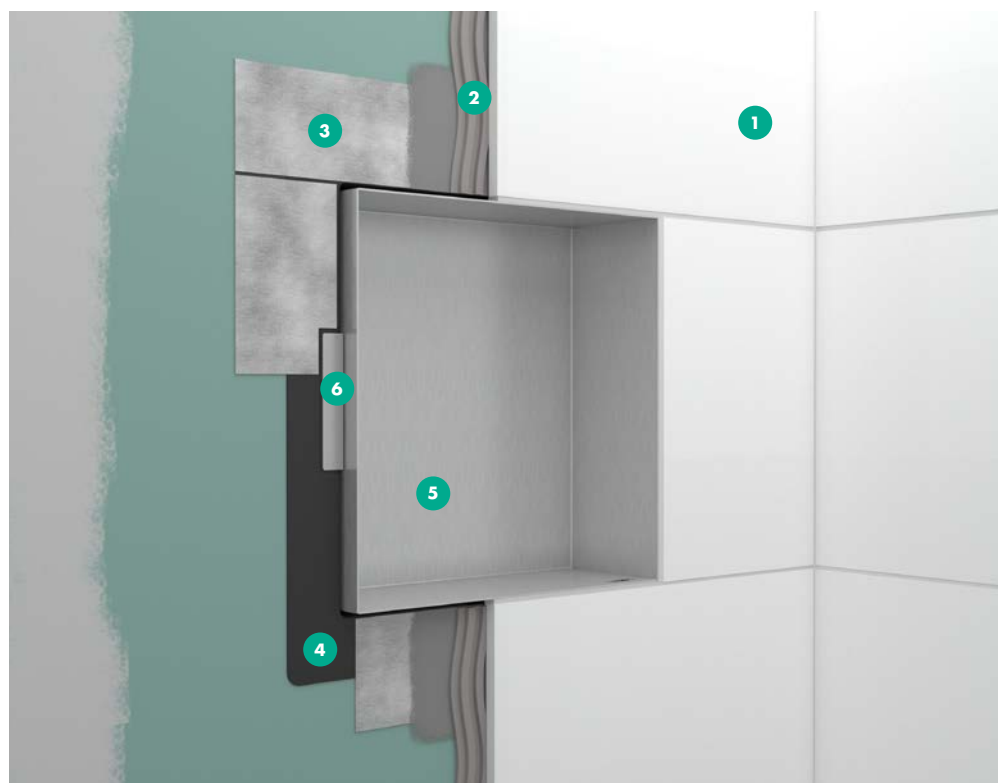

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Body stainless steel 304 (1.4301)
- 6 Mounting bracket

## Specifications

### Dimensions

300 x 150 x 100 mm  
300 x 300 x 100 mm  
300 x 150 x 140 mm  
300 x 300 x 140 mm

### Wall type

Brick-wall construction  
Dry-wall construction

### Area of application


New build  
Renovation

### Installation depth


100 mm  
140 mm

### Variable installation depth

Protruding up to 55 mm




XtraStoris Minimalistic 300 x 150 x 140 mm



XtraStoris Minimalistic 300 x 300 x 140 mm

# XtraStoris Individual

Wall niche with design frame

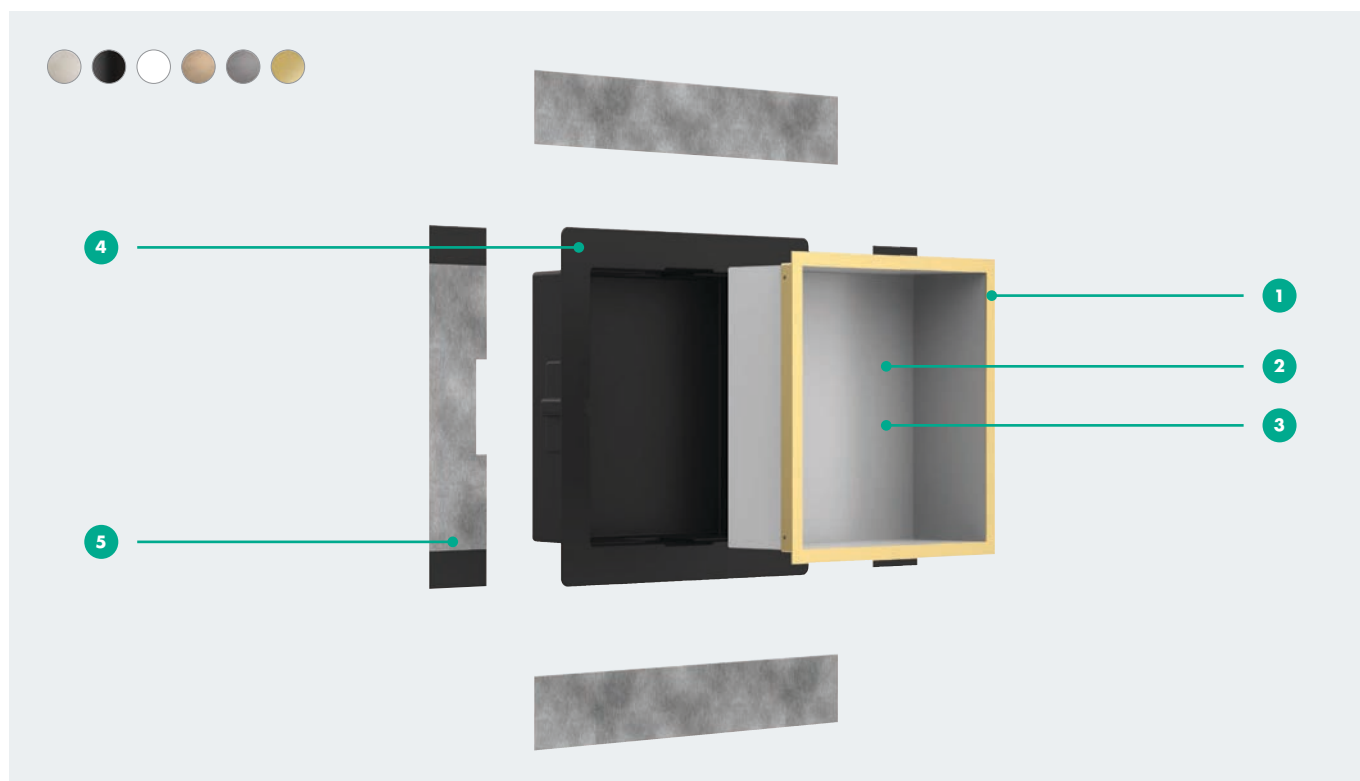


## Features

- 1 Design frame finish: Brushed Stainless Steel, Matt Black, Matt White, Brushed Bronze, Brushed Black Chrome, Polished Gold Optic
- 2 Body finish: Brushed Stainless Steel, Matt black, Matt White
- 3 Surface: easy to clean and maintain stainless steel and powder coating
- 4 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)



Simply scan the code and check out XtraStoris Individual.

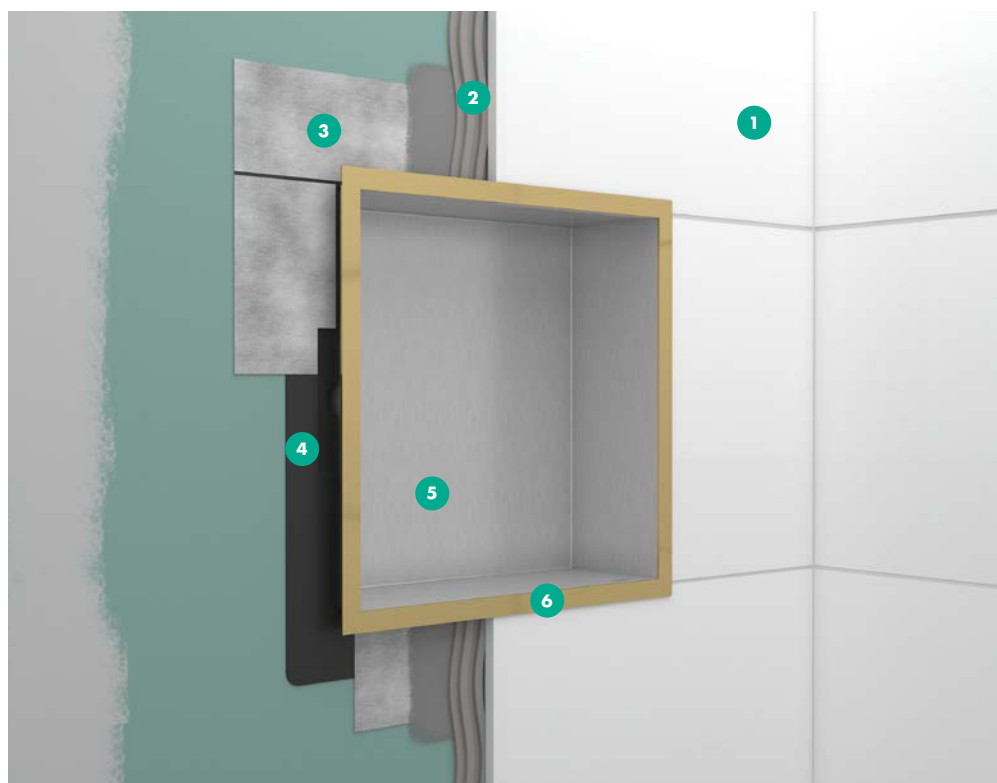

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Body stainless steel 304 (1.4301)
- 6 Frame

## Specifications

### Dimensions

300 x 150 x 100 mm  
300 x 300 x 100 mm

### Wall type


Brick-wall construction  
Dry-wall construction

### Installation depth


100 mm

### Area of application

New build  
Renovation




XtraStoris Individual 300 x 150 x 100 mm



XtraStoris Individual 300 x 300 x 100 mm


# XtraStoris Rock

Wall niche with tileable door

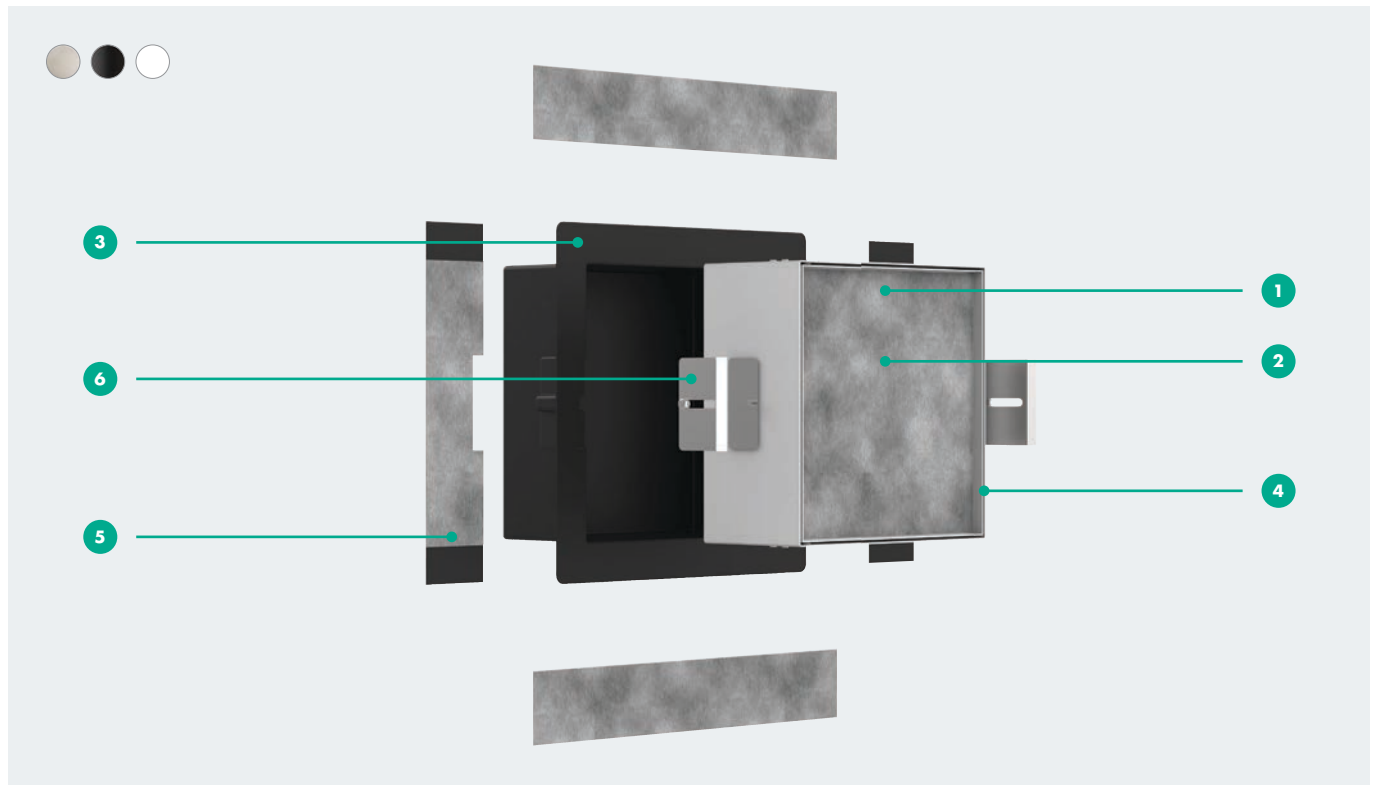


## Features

- 1 Finish: Brushed Stainless Steel, Matt Black, Matt White
- 2 Surface: easy to clean and maintain stainless steel and powder coating
- 3 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 4 Tileable door: push-open technology  
Tile thickness max. 12 mm
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)
- 6 Wall niche can be installed flush with the tile




XtraStoris Rock 300 x 150 x 100 mm



XtraStoris Rock 300 x 300 x 100 mm



Simply scan the code and check out XtraStoris Rock.

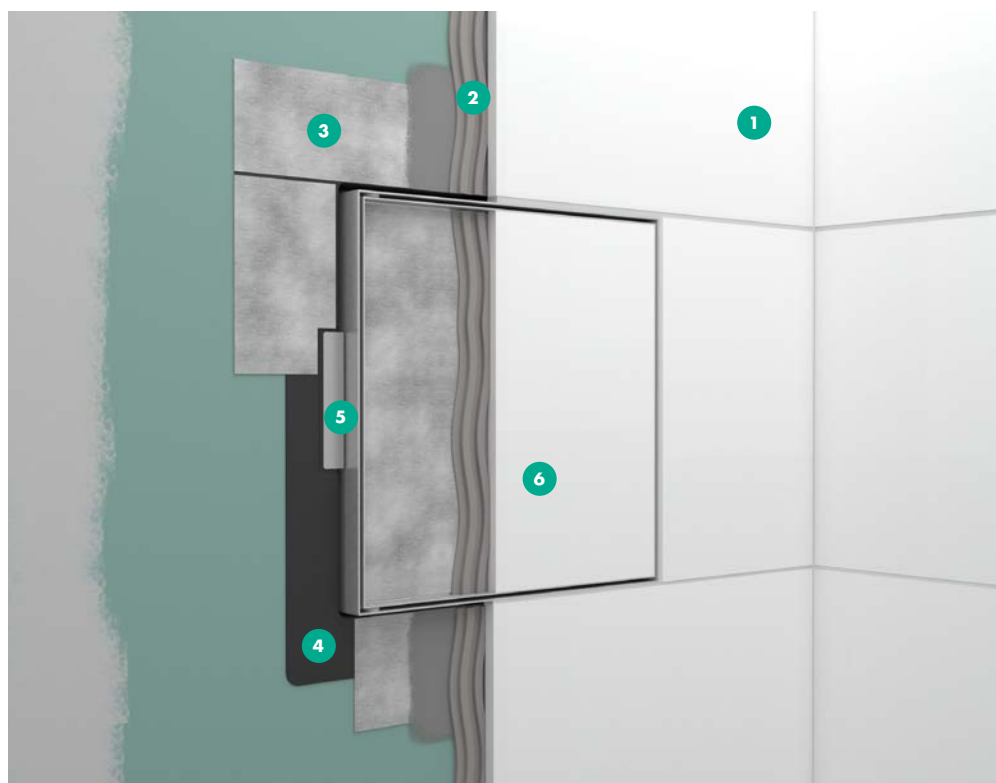

- 1 Tile
- 2 Tile adhesive
- 3 Sealing membrane
- 4 Installation set
- 5 Mounting bracket
- 6 Tileable door

## Specifications

### Dimensions

300 x 150 x 100 mm  
300 x 300 x 100 mm  
300 x 150 x 140 mm  
300 x 300 x 140 mm

### Wall type

Brick-wall construction  
Dry-wall construction

### Tile inlay depth


12 mm

### Installation depth


100 mm  
140 mm

### Area of application

New build  
Renovation




XtraStoris Rock 300 x 150 x 140 mm



XtraStoris Rock 300 x 300 x 140 mm



# XtraStoris Rock

Recessed toilet brush and paper holder with tileable door

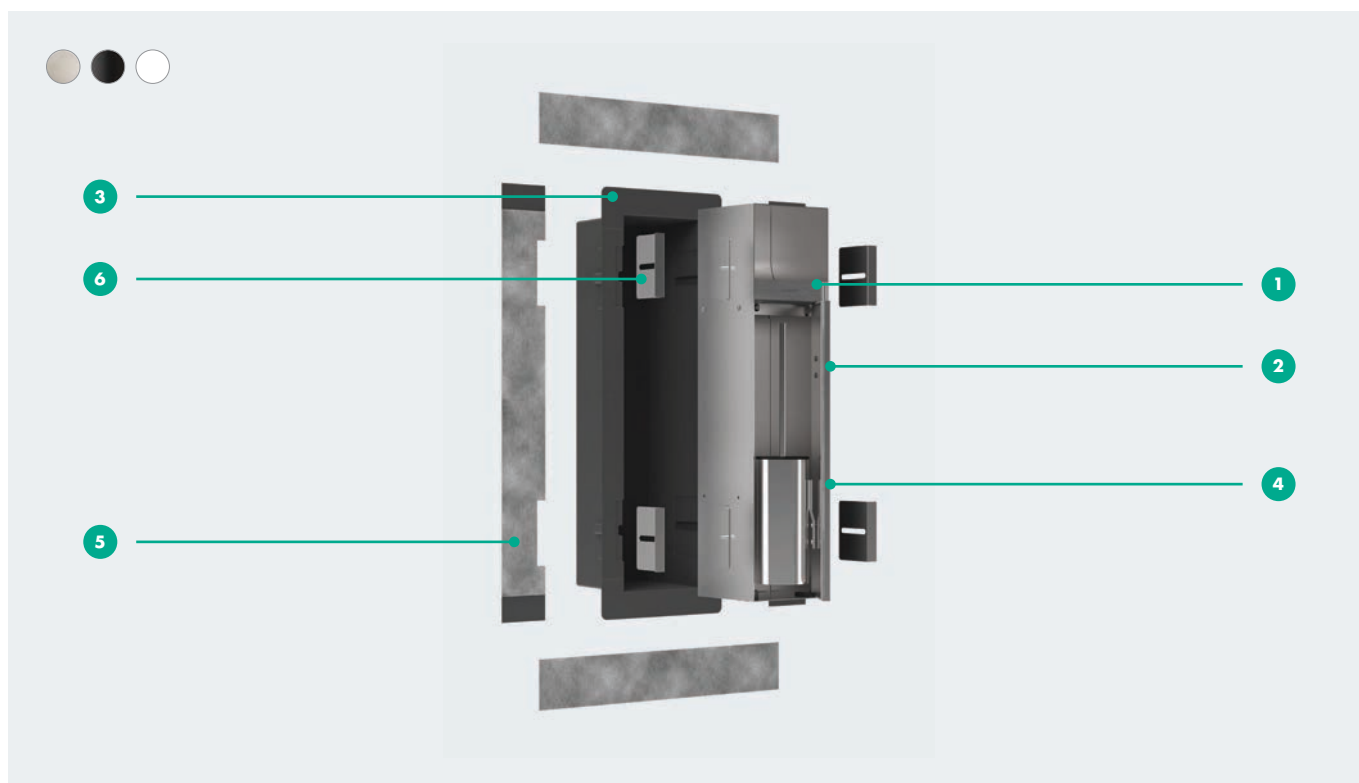

## Features

- 1 Finish: Brushed Stainless Steel, Matt Black, Matt White
- 2 Surface: easy to clean and maintain stainless steel and powder coating
- 3 Installation set: easy mounting installation element made of polystyrene (PE/PS blend).
- 4 Tileable door: push-open technology  
Tile thickness max. 12 mm
- 5 Sealing membrane: straightforward sealing, protection from water damage (always included)
- 6 Can be installed flush with the tile

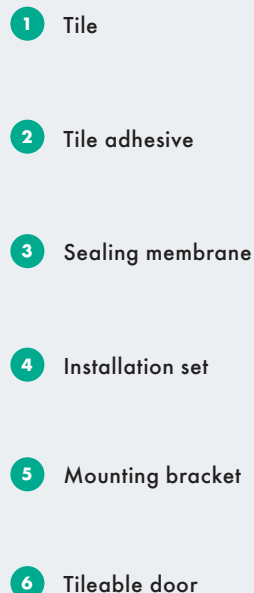


**Dimensions**  
595 x 145 x 140 mm

<b>Dimensions</b>	<b>Wall type</b>
595 x 145 x 140 mm	Brick-wall construction
	Dry-wall construction

**Tile inlay depth**  
12 mm

**Installation depth**  
140 mm


**Area of application**  
New build  
Renovation

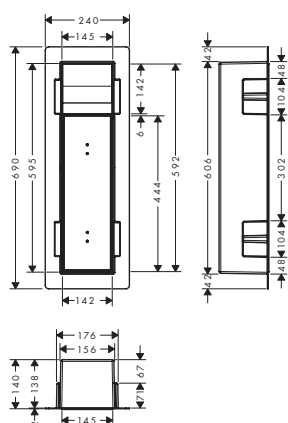

XtraStoris Rock 595 x 145 x 140 mm

# XtraStoris Original

Recessed toilet paper holder

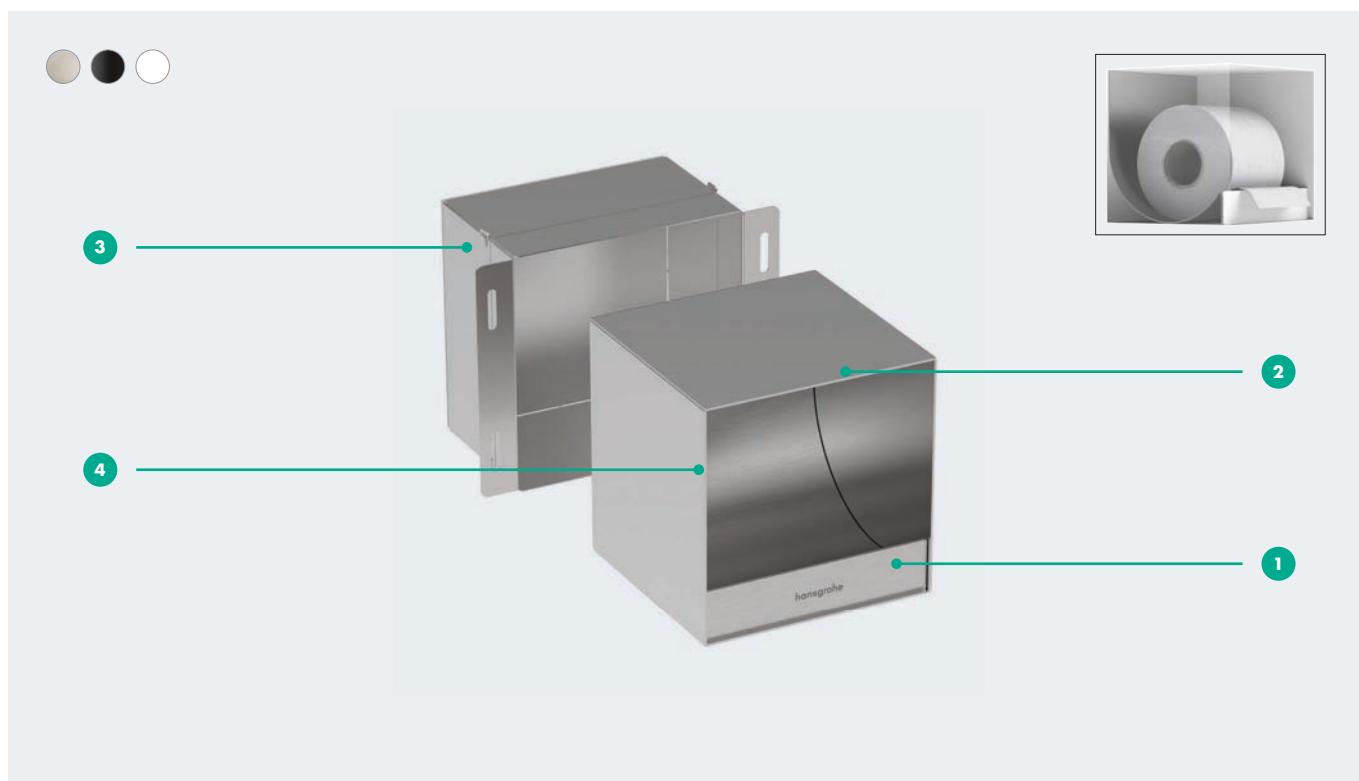


## Features

- 1 Finish: Brushed Stainless Steel, Matt Black, Matt White
- 2 Surface: easy to clean and maintain stainless steel and powder coating
- 3 Easy installation: stainless mounting bracket allows for installation at depth of 70, 100 and 140 mm
- 4 Frameless: minimalist design



Simply scan the  
code and check out  
XtraStoris Original.

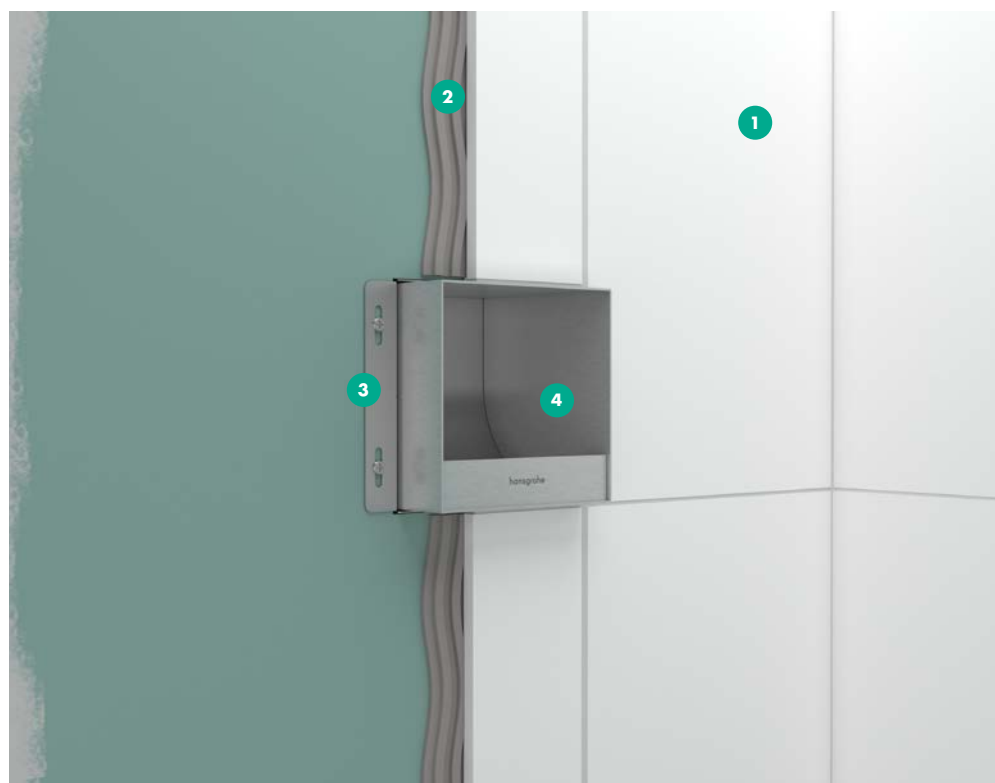

- 1 Tile
- 2 Tile adhesive
- 3 Mounting bracket
- 4 Body stainless steel 304 (1.4301)

## Specifications

### Dimensions

150 x 150 x 140 mm

### Wall type


Brick-wall construction  
Dry-wall construction

### Installation depth

70/100/140 mm

### Area of application


New build  
Renovation



XtraStoris Original 150 x 150 x 140 mm


# XtraStoris Safe

Wall niche with tileable door and integrated water valves

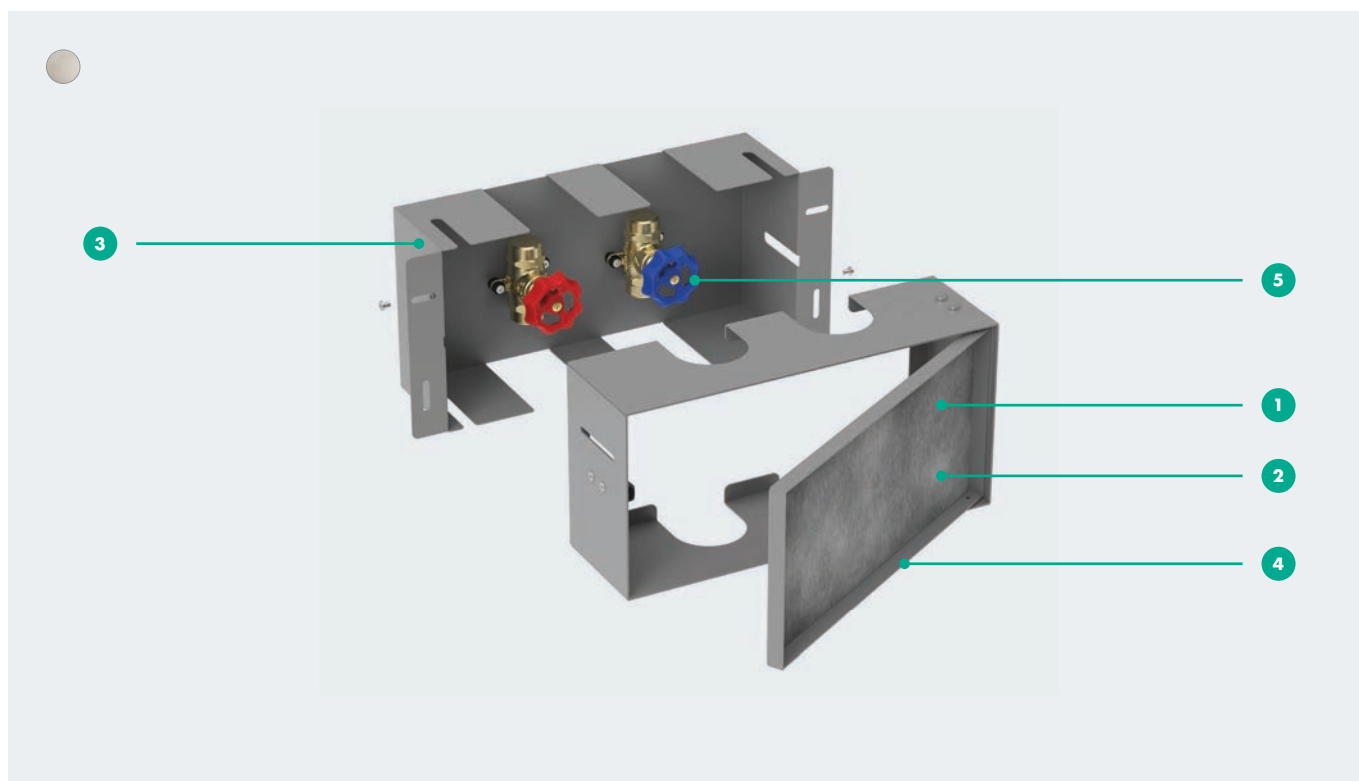

## Features

- 1 Finish: Stainless Steel Optic
- 2 Surface: the powder-coated stainless steel on the wall niche is easy to clean
- 3 Stainless steel built-in box
- 4 Tileable door: push-open technology  
Tile thickness max. 12 mm
- 5 Shut-off valve

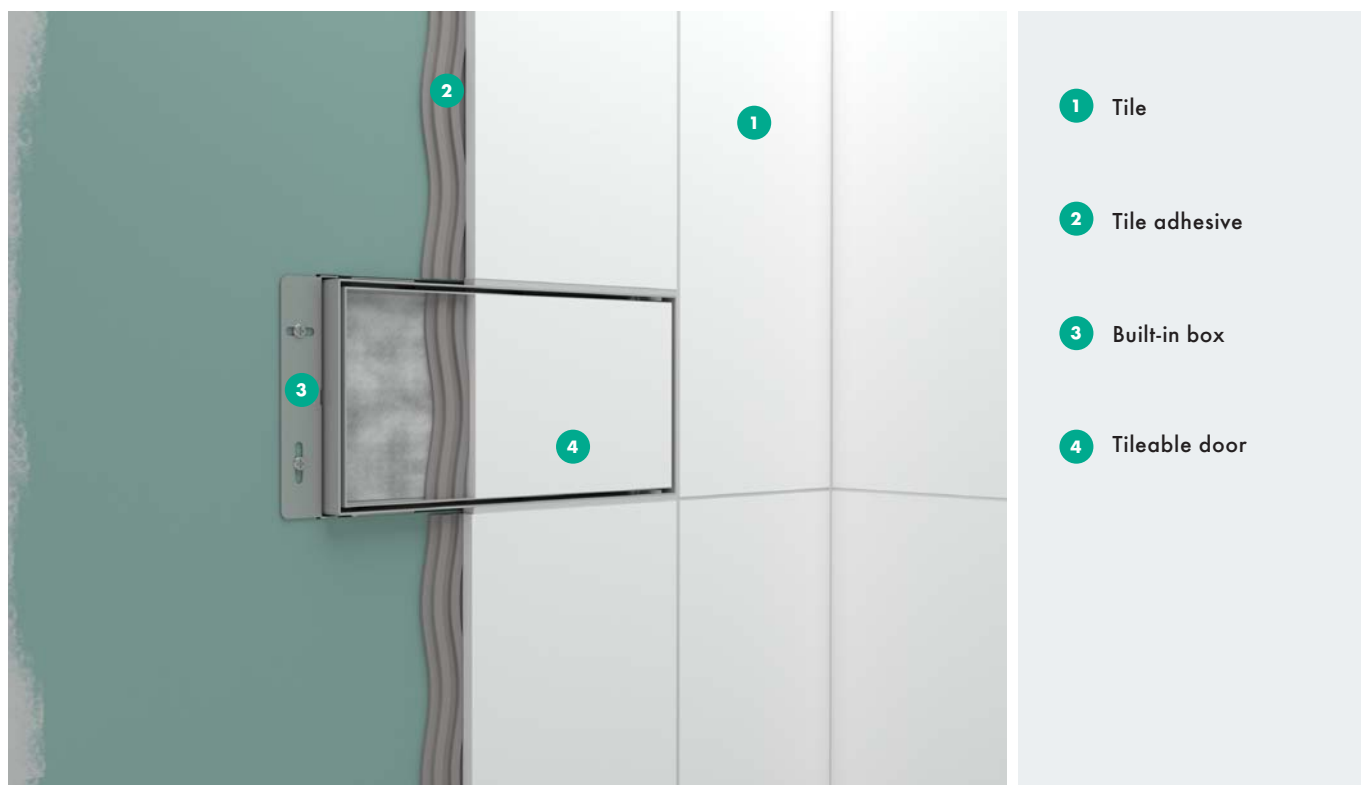

## Specifications

### Dimensions

150 x 300 x 100 mm

### Wall type

Dry-wall construction

### Tile inlay depth

12 mm


### Installation depth

90 mm

### Area of application


New build

Renovation

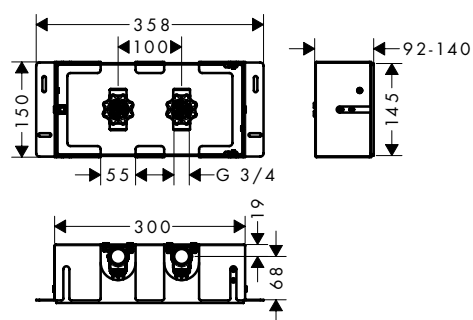

XtraStoris Safe 150 x 300 x 100 mm

# RainDrain

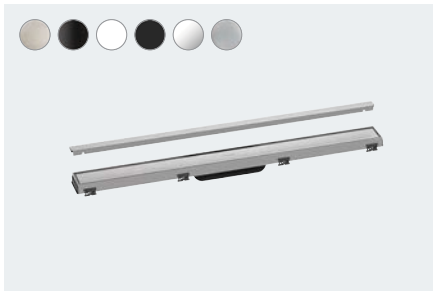

## RainDrain Match

Finish set shower drain 600  
with height adjustable frame  
# 56036, -000, -450, -610, -670, -700, -800

Finish set shower drain 700  
with height adjustable frame  
# 56037, -000, -450, -610, -670, -700, -800  
(not shown)

Finish set shower drain 800  
with height adjustable frame  
# 56038, -000, -450, -610, -670, -700, -800  
(not shown)

Finish set shower drain 900  
with height adjustable frame  
# 56040, -000, -450, -610, -670, -700, -800  
(not shown)

Finish set shower drain 1000  
with height adjustable frame  
# 56041, -000, -450, -610, -670, -700, -800  
(not shown)

Finish set shower drain 1200  
with height adjustable frame  
# 56042, -000, -450, -610, -670, -700, -800  
(not shown)



## RainDrain Rock

Finish set shower drain 600 cut to size and tileable  
# 56029, -000

Finish set shower drain 700 cut to size and tileable  
# 56030, -000 (not shown)

Finish set shower drain 800 cut to size and tileable  
# 56031, -000 (not shown)

Finish set shower drain 900 cut to size and tileable  
# 56032, -000 (not shown)

Finish set shower drain 1000 cut to size and tileable  
# 56033, -000 (not shown)

Finish set shower drain 1200 cut to size and tileable  
# 56034, -000 (not shown)



## Installation accessories\*

Pipe coupler to connect UK pipe to  
European dimensions  
# 07003354

\*Only available in the United Kingdom



## Fire protection adapter

Fire protection adapter (PP socket DN50)  
# 94343



## Complete set for flat installation

Complete set for flat installation -  
600 for shower drains finish sets  
# 56016180

Complete set for flat installation -  
700 for shower drains finish sets  
# 56017180 (not shown)

Complete set for flat installation -  
800 for shower drains finish sets  
# 56018180 (not shown)

Complete set for flat installation -  
900 for shower drains finish sets  
# 56019180 (not shown)

Complete set for flat installation -  
1000 for shower drains finish sets  
# 56020180 (not shown)

Complete set for flat installation -  
1200 for shower drains finish sets  
# 56021180 (not shown)



## Complete set for standard installation

Complete set for standard installation -  
600 for shower drains finish sets  
# 56022180

Complete set for standard installation -  
700 for shower drains finish sets  
# 56023180 (not shown)

Complete set for standard installation -  
800 for shower drains finish sets  
# 56024180 (not shown)

Complete set for standard installation -  
900 for shower drains finish sets  
# 56025180 (not shown)

Complete set for standard installation -  
1000 for shower drains finish sets  
# 56026180 (not shown)

Complete set for standard installation -  
1200 for shower drains finish sets  
# 56027180 (not shown)




## Waterproofing\*

SEAL Set self-adhesive for bathrooms  
with 5 m<sup>2</sup> floor surface  
# 07003376

SEAL Set self-adhesive for bathrooms  
with 7,5 m<sup>2</sup> floor surface  
# 07003377

SEAL Set self-adhesive for bathrooms  
with 10 m<sup>2</sup> floor surface  
# 07003378

\*Only available in the United Kingdom

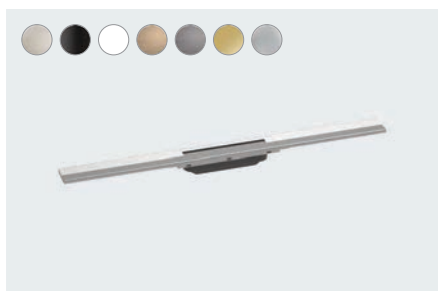

### RainDrain Flex

Finish set shower drain 700 cuttable

# 56043, -000, -140, -340, -670, -700, -800, -990

Finish set shower drain 800 cuttable

# 56044, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 900 cuttable


# 56045, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 1000 cuttable

# 56046, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 1200 cuttable

# 56047, -000, -140, -340, -670, -700, -800, -990 (not shown)

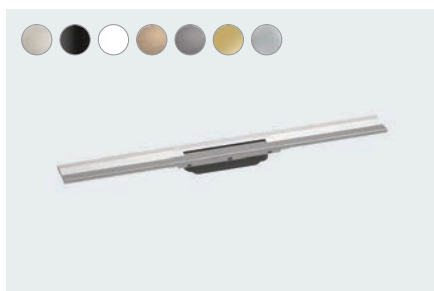

### RainDrain Flex

Finish set shower drain 700 cuttable

for wall mounting

# 56050, -000, -140, -340, -670, -700, -800, -990

Finish set shower drain 800 cuttable

for wall mounting

# 56051, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 900 cuttable

for wall mounting

# 56052, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 1000 cuttable

for wall mounting

# 56053, -000, -140, -340, -670, -700, -800, -990 (not shown)

Finish set shower drain 1200 cuttable

for wall mounting

# 56054, -000, -140, -340, -670, -700, -800, -990 (not shown)



### RainDrain Spot

Complete set 150/150 point drain and installation set

# 56055, -800

Complete set 150/150 point drain tileable rear cover and installation set

# 56112, -800 (not shown)



### uBox universal for flat installation

Base set for finish sets for flat installation

# 01000180



### uBox universal for standard installation

Base set for finish sets for standard installation

# 01001180



### uBox universal for vertical installation

Base set for finish sets for vertical installation

# 01002180



# RainDrain



## RainDrain Original

Finish set shower drain 600  
# 56196, -800

Finish set shower drain 700  
# 56197, -800 (not shown)

Finish set shower drain 800  
# 56198, -800 (not shown)

Finish set shower drain 900  
# 56199, -800 (not shown)

Finish set shower drain 1000  
# 56200, -800 (not shown)

Finish set shower drain 1200  
# 56201, -800 (not shown)



## RainDrain Compact standard installation

Complete set shower drain 600  
# 56174, # 56175 (tile), -800

Complete set shower drain 700  
# 56176, # 56177 (tile), -800 (not shown)

Complete set shower drain 800  
# 56178, # 56179 (tile), -800 (not shown)

Complete set shower drain 900  
# 56180, # 56181 (tile), -800 (not shown)

Complete set shower drain 1000  
# 56182, # 56183 (tile), -800 (not shown)

Complete set shower drain 1200  
# 56184, # 56185 (tile), -800 (not shown)



## RainDrain Compact flat installation

Complete set shower drain 600  
# 56162, # 56163 (tile), -800

Complete set shower drain 700  
# 56164, # 56165 (tile), -800 (not shown)

Complete set shower drain 800  
# 56166, # 56167 (tile), -800 (not shown)

Complete set shower drain 900  
# 56168, # 56169 (tile), -800 (not shown)

Complete set shower drain 1000  
# 56170, # 56171 (tile), -800 (not shown)

Complete set shower drain 1200  
# 56172, # 56173 (tile), -800 (not shown)



## RainDrain Allround


Complete set shower drain 700  
for standard/flat installation  
# 56186, -800

Complete set shower drain 800  
for standard/flat installation  
# 56187, -800 (not shown)

Complete set shower drain 900  
for standard/flat installation  
# 56188, -800 (not shown)

Complete set shower drain 1000  
for standard/flat installation  
# 56189, -800 (not shown)

Complete set shower drain 1200  
for standard/flat installation  
# 56190, -800 (not shown)



## RainDrain Brilliance

Complete set point drain 100/100 tileable rear cover  
# 56250, -800, -670

Complete set point drain 150/150 tileable rear cover  
# 56251, -800, -670 (not shown)






# **RainDrain Point**

Complete set point drain 100/100  
# 56246, -800

Complete set point drain 150/150  
# 56248, -800 (not shown)

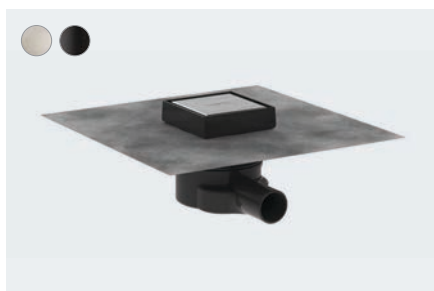


# **RainDrain Point**

Complete set point drain 100/100 tileable rear cover  
# 56247, -800, -670

Complete set point drain 150/150 tileable rear cover  
and installation set  
# 56249, -800, -670 (not shown)



# XtraStoris

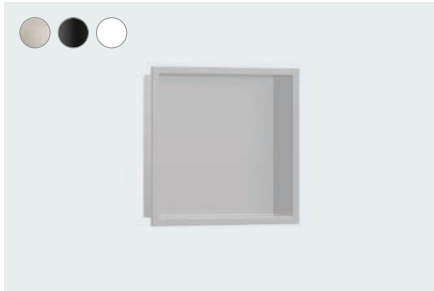

## XtraStoris Original

Wall niche with frame 300/150/100  
# 56057, -670, -700, -380

Wall niche with frame 300/300/100  
# 56061, -670, -700, -380 (not shown)

Wall niche with frame 300/600/100  
# 56064, -670, -700, -380 (not shown)

Wall niche with frame 300/900/100  
# 56067, -670, -700, -380 (not shown)

Wall niche with frame 300/150/70  
# 56092, -670, -700, -380 (not shown)

Wall niche with frame 300/300/70  
# 56093, -670, -700, -380 (not shown)




## XtraStoris Minimalistic

Wall niche frameless 300/300/100  
# 56073, -670, -700, -800

Wall niche frameless 300/300/140  
# 56079, -670, -700, -800 (not shown)

Wall niche frameless 300/150/100  
# 56070, -670, -700, -800 (not shown)

Wall niche frameless 300/150/140  
# 56076, -670, -700, -800 (not shown)

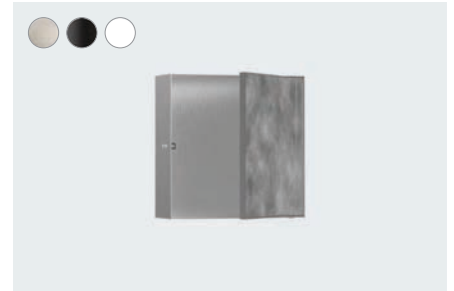


## XtraStoris Rock

Wall niche with tileable door 300/300/100  
# 56085, -670, -700, -800

Wall niche with tileable door 300/300/140  
# 56091, -670, -700, -800 (not shown)

Wall niche with tileable door 300/150/100  
# 56082, -670, -700, -800 (not shown)

Wall niche with tileable door 300/150/140  
# 56088, -670, -700, -800 (not shown)

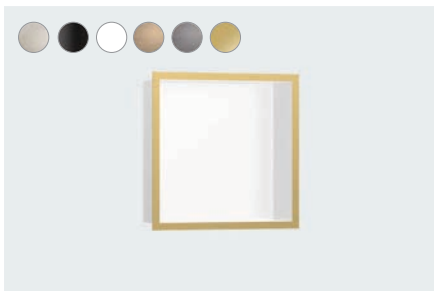

## XtraStoris Individual

Wall niche Brushed Stainless Steel  
with design frame 300/150/100  
# 56094, -140, -340, -670, -700, -800, -990  
(not shown)


Wall niche Brushed Stainless Steel  
with design frame 300/300/100  
# 56097, -140, -340, -670, -700, -800, -990  
(not shown)

Wall niche Matt Black  
with design frame 300/150/100  
# 56095, -140, -340, -670, -700, -800, -990  
(not shown)

Wall niche Matt Black  
with design frame 300/300/100  
# 56098, -140, -340, -670, -700, -800, -990  
(not shown)


Wall niche Matt White  
with design frame 300/150/100  
# 56096, -140, -340, -670, -700, -800, -990  
(not shown)

Wall niche Matt White  
with design frame 300/300/100  
# 56099, -140, -340, -670, -700, -800, -990  
(not shown)

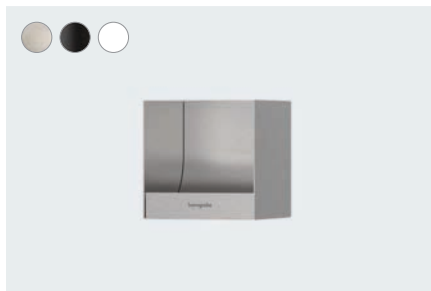


## XtraStoris Original

Recessed toilet paper holder 300/150/140  
# 56065, -670, -700, -800

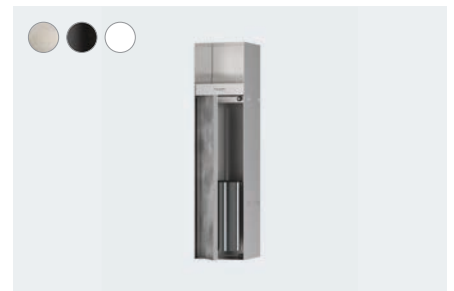

## XtraStoris Rock

Recessed toilet brush holder with toilet paper holder  
and tileable door 595/145/140  
# 56062, -670, -700, -800

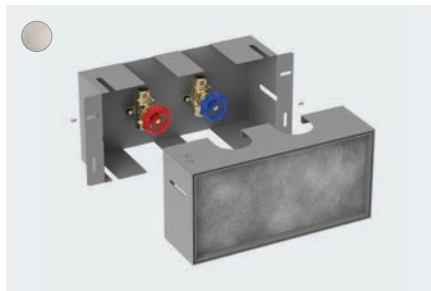

## XtraStoris Safe

Wall niche with tileable door and integrated shut-off  
valve 150/300/100  
# 56100, -800



## Technologies



For flush integration into the adjacent area.



High capacity drain.



Comfortable cleaning of the siphon.



Easy and fast cleaning and maintenance of surfaces.



Water damage protection via water proof basic set and preassembled sealing membrane.



In-floor installation as design highlight.



Wallbound installation for comfortable use of space.




Installation adapted to the integration between two walls.



Minimalistic installation against back and side walls.



Drain can be cut to length. For optimal adaptation to the installation surrounding.



Variable installation depth of finish set for an individual look.



## Headquarters

Hansgrohe SE · P.O. Box 1145 · D-77757 Schiltach  
Tel. +49 7836 51-0 · Fax +49 7836 51-1300 · [info@hansgrohe.com](mailto:info@hansgrohe.com) · [pro.hansgrohe.com](http://pro.hansgrohe.com)

## Hansgrohe Baltics

Hansgrohe Eesti · Mäealuse 2/1 · 12618 Tallinn  
Tel. +372 6826829 · [info@hansgrohe.ee](mailto:info@hansgrohe.ee) · [hansgrohe.ee](http://hansgrohe.ee)

## Australia

Hansgrohe Pty Ltd · Unit 4/71 Victoria Crescent · Abbotsford · VIC 3067 · Australia  
Tel. +61 03 8319 5753 · [info@hansgrohe.com.au](mailto:info@hansgrohe.com.au) · [hansgrohe.com.au](http://hansgrohe.com.au)

## India

Hansgrohe India (Pvt.) Ltd. · Office No. 5 · 7th Floor · Phoenix Fountainhead Tower II  
Nagar Road · Viman Nagar · Pune - 411 016 · Maharashtra · India  
Tel. +91 20 6625 9500 · [info@hansgrohe.in](mailto:info@hansgrohe.in) · [pro.hansgrohe.com](http://pro.hansgrohe.com)

## Singapore

Hansgrohe Pte. Ltd. · 69 Mohamed Sultan Road · Singapore 239015  
Tel. +65 6884 5060 · Fax +65 6884 5070 · [info@hansgrohe.com.sg](mailto:info@hansgrohe.com.sg) · [hansgrohe.com.sg](http://hansgrohe.com.sg)

## United Kingdom

Hansgrohe · Units D1 · Sandown Park Trading Estate · Royal Mills · Esher · Surrey · KT10 8BL  
Tel. +44 1372 472001 · Fax +44 1372 470670 · [enquiries@hansgrohe.co.uk](mailto:enquiries@hansgrohe.co.uk) · [hansgrohe.co.uk](http://hansgrohe.co.uk)

Please note that we can only present a selection of our products in this brochure.  
You can find our entire range at [hansgrohe.co.uk](http://hansgrohe.co.uk)



Find hansgrohe online and on social media.

