

hansgrohe

Life is waterful.



News Product Book 2025

Hansgrohe Headquarters



The Hansgrohe Master Service - Headquarters

Service hours:

Monday-Thursday: 8:00 am - 4:00 pm
Friday: 8:00 am - 3:00 pm

Phone: +49 7836 51-1282
Fax: +49 7836 51-1440
info@hansgrohe.com

You will also find technical information at
pro.hansgrohe-int.com



Global Projects Services - Headquarters

gpservices@hansgrohe.com

You will also find tender texts and planning
details at
pro.hansgrohe-int.com/planning-data



Hansgrohe Aquademy - Headquarters

Monday-Friday: 7:30 am - 7:00 pm
Saturday-Sunday: 10:00 am - 4:00 pm

Hansgrohe SE
Hansgrohe Aquademy
Austr. 9
77761 Schiltach/Germany
Phone: +49 7836 51-3272
Fax: +49 7836 51-1505

The Aquademy is our adventure centre on
all aspects of water.
pro.hansgrohe-int.com/aquademy

Errors and omissions excepted.

Upon publication of this price list, all previously published price lists are no longer valid.

Figures given for dimensional drawings are in mm.

When installing the products, please follow the instructions in the installation manual.

All products are subject to availability.

The availability may be temporarily impacted by material shortages, interruptions in the supply chain or other force majeure events. Please contact us for further details.

The following general terms and conditions apply:

<https://www.hansgrohe.com/terms-of-conditions>

News Product Book 2025

Contents

Showers	Raindance Alive	13
	Rainfinity Extensions	33
	Raindance Extensions	39
	Pulsify Extensions	49
	FixFit Fine Porter Fine	55
Wastes & overflows	Flexaplus Exafill	59
Thermostats concealed installation	Ecostat Comfort	69
Mixers	Vivenis	75
	Finoris	85
	Zesis	97
AquaUnit		
	Avalegra	105

Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
22			
HG	22472000	4059625626399	107
HG	22472140	4059625626429	107
HG	22472340	4059625626412	107
HG	22472670	4059625626405	107
HG	22472990	4059625626436	107
HG	22473000	4059625626474	107
HG	22473140	4059625626504	107
HG	22473340	4059625626498	107
HG	22473670	4059625626481	107
HG	22473990	4059625626511	107
24			
HG	24125340	4059625604359	51
HG	24125990	4059625604342	51
HG	24126340	4059625604335	51
HG	24126990	4059625604328	51
HG	24132140	4059625604311	53
HG	24305000	4059625604304	52
HG	24305670	4059625604298	52
HG	24305700	4059625604281	52
HG	24306000	4059625604274	52
HG	24306670	4059625604267	52
HG	24306700	4059625604250	52
HG	24307000	4059625604243	52
HG	24307670	4059625604236	52
HG	24307700	4059625604229	52
HG	24320340	4059625600832	51
HG	24320990	4059625600849	51
HG	24321340	4059625600856	51
HG	24321990	4059625600931	51
HG	24337000	4059625395264	24
HG	24337140	4059625467763	24
HG	24337340	4059625533253	24
HG	24337670	4059625395271	24
HG	24337700	4059625395288	24
HG	24337990	4059625533246	24
HG	24338000	4059625410790	24
HG	24338140	4059625467749	24
HG	24338340	4059625533239	24
HG	24338670	4059625410769	24
HG	24338700	4059625410738	24
HG	24338990	4059625533222	24
HG	24339000	4059625410707	24
HG	24339140	4059625467725	24
HG	24339340	4059625628928	24
HG	24339670	4059625410677	24
HG	24339700	4059625410646	24
HG	24339990	4059625628454	24
HG	24500000	4059625479179	16
HG	24500140	4059625479209	16
HG	24500340	4059625560389	16
HG	24500670	4059625479186	16
HG	24500700	4059625479193	16
HG	24500990	4059625560372	16
HG	24511000	4059625443804	16
HG	24511140	4059625473351	16
HG	24511340	4059625562604	16
HG	24511670	4059625473337	16
HG	24511700	4059625473344	16
HG	24511990	4059625560396	16

brand	Code no.	EAN	page
HG	24512000	4059625486818	16
HG	24512140	4059625486849	16
HG	24512340	4059625562703	16
HG	24512670	4059625486825	16
HG	24512700	4059625486832	16
HG	24512990	4059625562697	16
HG	24520000	4059625449134	20
HG	24520140	4059625449165	20
HG	24520340	4059625568064	20
HG	24520670	4059625449141	20
HG	24520700	4059625449158	20
HG	24520990	4059625568057	20
HG	24521000	4059625449172	20
HG	24521140	4059625449202	20
HG	24521340	4059625568385	20
HG	24521670	4059625449189	20
HG	24521700	4059625449196	20
HG	24521990	4059625568378	20
HG	24523000	4059625568361	20
HG	24523140	4059625568354	20
HG	24523340	4059625568347	20
HG	24523670	4059625568330	20
HG	24523700	4059625568323	20
HG	24523990	4059625568316	20
HG	24530000	4059625449219	22
HG	24530140	4059625449257	22
HG	24530340	4059625568309	22
HG	24530670	4059625449233	22
HG	24530700	4059625449240	22
HG	24530990	4059625568293	22
HG	24531000	4059625449264	22
HG	24531140	4059625449295	22
HG	24531340	4059625568286	22
HG	24531670	4059625449271	22
HG	24531700	4059625449288	22
HG	24531990	4059625568279	22
HG	24540000	4059625449349	21
HG	24540140	4059625449370	21
HG	24540340	4059625568262	21
HG	24540670	4059625449356	21
HG	24540700	4059625449363	21
HG	24540990	4059625568255	21
HG	24541000	4059625449387	21
HG	24541140	4059625449417	21
HG	24541340	4059625568248	21
HG	24541670	4059625449394	21
HG	24541700	4059625449400	21
HG	24541990	4059625568231	21
HG	24550000	4059625449424	23
HG	24550140	4059625449455	23
HG	24550340	4059625568224	23
HG	24550670	4059625449431	23
HG	24550700	4059625449448	23
HG	24550990	4059625568217	23
HG	24551000	4059625449462	23
HG	24551140	4059625449493	23
HG	24551340	4059625568200	23
HG	24551670	4059625449479	23
HG	24551700	4059625449486	23
HG	24551990	4059625568194	23

Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
HG	24573180	4059625568583	31
HG	24580000	4059625568576	31
HG	24580140	4059625568569	31
HG	24580340	4059625568552	31
HG	24580670	4059625568545	31
HG	24580700	4059625568538	31
HG	24580990	4059625568521	31
HG	24581000	4059625568514	31
HG	24581140	4059625568507	31
HG	24581340	4059625568491	31
HG	24581670	4059625568484	31
HG	24581700	4059625568477	31
HG	24581990	4059625568460	31
HG	24582000	4059625568453	28
HG	24582140	4059625568446	28
HG	24582340	4059625568439	28
HG	24582670	4059625568422	28
HG	24582700	4059625568415	28
HG	24582990	4059625568408	28
HG	24583000	4059625568392	28
HG	24583140	4059625568781	28
HG	24583340	4059625568774	28
HG	24583670	4059625568767	28
HG	24583700	4059625568750	28
HG	24583990	4059625568743	28
HG	24590000	4059625568736	30
HG	24590140	4059625568729	30
HG	24590340	4059625568712	30
HG	24590670	4059625568705	30
HG	24590700	4059625568699	30
HG	24590990	4059625568682	30
HG	24591000	4059625568675	30
HG	24591140	4059625568668	30
HG	24591340	4059625568651	30
HG	24591670	4059625568644	30
HG	24591700	4059625568637	30
HG	24591990	4059625568620	30
HG	24592000	4059625568613	29
HG	24592140	4059625568606	29
HG	24592340	4059625568590	29
HG	24592670	4059625568989	29
HG	24592700	4059625568972	29
HG	24592990	4059625568965	29
HG	24593000	4059625568958	29
HG	24593140	4059625568941	29
HG	24593340	4059625568934	29
HG	24593670	4059625568927	29
HG	24593700	4059625568910	29
HG	24593990	4059625568903	29
HG	24595000	4059625568835	27
HG	24595140	4059625568828	27
HG	24595340	4059625568811	27
HG	24595670	4059625568804	27
HG	24595700	4059625568798	27
HG	24595990	4059625569054	27
HG	24596000	4059625569047	27
HG	24596140	4059625569030	27
HG	24596340	4059625569023	27
HG	24596670	4059625569016	27
HG	24596700	4059625569009	27

brand	Code no.	EAN	page
HG	24596990	4059625568996	27
HG	24600000	4059625562994	17
HG	24600140	4059625562987	17
HG	24600340	4059625562970	17
HG	24600670	4059625562963	17
HG	24600700	4059625562956	17
HG	24600990	4059625562949	17
HG	24601000	4059625562932	17
HG	24601140	4059625562925	17
HG	24601340	4059625562918	17
HG	24601670	4059625562901	17
HG	24601700	4059625562895	17
HG	24601990	4059625562888	17
HG	24602000	4059625562871	18
HG	24602140	4059625562864	18
HG	24602340	4059625562857	18
HG	24602670	4059625562840	18
HG	24602700	4059625562833	18
HG	24602990	4059625562826	18
HG	24603000	4059625562819	18
HG	24603140	4059625562802	18
HG	24603340	4059625557891	18
HG	24603670	4059625557884	18
HG	24603700	4059625557877	18
HG	24603990	4059625557860	18
HG	24611000	4059625569146	19
HG	24611140	4059625569139	19
HG	24611340	4059625569122	19
HG	24611670	4059625569115	19
HG	24611700	4059625569108	19
HG	24611990	4059625569092	19
HG	24620000	4059625569085	25
HG	24620670	4059625569078	25
HG	24630000	4059625569061	26
HG	24630670	4059625569153	26
26			
HG	26226140	4059625602232	37
HG	26226340	4059625602249	37
HG	26226670	4059625602256	37
HG	26226990	4059625602263	37
HG	26227140	4059625602287	37
HG	26227340	4059625603109	37
HG	26227670	4059625602294	37
HG	26227990	4059625602270	37
HG	26232140	4059625603345	36
HG	26232340	4059625603352	36
HG	26232670	4059625603369	36
HG	26232990	4059625603376	36
HG	26233140	4059625603383	36
HG	26233340	4059625603390	36
HG	26233670	4059625603406	36
HG	26233990	4059625603413	36
HG	26239140	4059625604212	45
HG	26239340	4059625328835	45
HG	26239670	4059625604205	45
HG	26239700	4059625604199	45
HG	26239990	4059625604182	45
HG	26251140	4059625357576	45
HG	26251340	4059625604175	45
HG	26251670	4059625604168	45

Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
HG	26251700	4059625604151	45
HG	26251990	4059625604144	45
HG	26252140	4059625604137	46
HG	26252340	4059625604120	46
HG	26252670	4059625604113	46
HG	26252700	4059625604106	46
HG	26252990	4059625604090	46
HG	26253140	4059625604083	46
HG	26253340	4059625604076	46
HG	26253670	4059625604069	46
HG	26253700	4059625604052	46
HG	26253990	4059625604045	46
HG	26515140	4059625604038	41
HG	26515340	4059625604021	41
HG	26515670	4059625604014	41
HG	26515700	4059625604007	41
HG	26515990	4059625603994	41
HG	26516140	4059625603987	41
HG	26516340	4059625603970	41
HG	26516670	4059625603963	41
HG	26516700	4059625603956	41
HG	26516990	4059625603949	41
HG	26862000	4059625603932	35
HG	26862140	4059625603925	35
HG	26862340	4059625603918	35
HG	26862670	4059625603901	35
HG	26862700	4059625603895	35
HG	26862990	4059625603888	35
27			
HG	27361670	4059625603871	47
HG	27361700	4059625603864	47
HG	27362670	4059625603857	47
HG	27362700	4059625603840	47
HG	27623140	4059625603833	42
HG	27623340	4059625603826	42
HG	27623990	4059625603819	42
HG	27624000	4059625603802	42
HG	27624140	4059625603796	42
HG	27624340	4059625603789	42
HG	27624670	4059625603772	42
HG	27624700	4059625603765	42
HG	27624990	4059625603758	42
28			
HG	28728000	4059625603741	44
HG	28728140	4059625603734	44
HG	28728340	4059625603727	44
HG	28728670	4059625603710	44
HG	28728700	4059625603703	44
HG	28728990	4059625603697	44
HG	28729000	4059625603680	44
HG	28729140	4059625603673	44
HG	28729340	4059625603666	44
HG	28729670	4059625603659	44
HG	28729700	4059625603642	44
HG	28729990	4059625603635	44
HG	28821000	4059625603628	42
HG	28821140	4059625603611	42
HG	28821340	4059625603604	42
HG	28821670	4059625603598	42
HG	28821700	4059625603581	42

brand	Code no.	EAN	page
HG	28821990	4059625603574	42
HG	28825000	4059625603505	43
HG	28825140	4059625602690	43
HG	28825340	4059625602683	43
HG	28825670	4059625602676	43
HG	28825700	4059625602669	43
HG	28825990	4059625602652	43
HG	28882000	4059625616420	56
HG	28882140	4059625616567	56
HG	28882340	4059625616390	56
HG	28882670	4059625616376	56
HG	28882700	4059625616369	56
HG	28882990	4059625616550	56
HG	28883000	4059625616543	56
HG	28883140	4059625616536	56
HG	28883340	4059625616529	56
HG	28883670	4059625616512	56
HG	28883700	4059625616505	56
HG	28883990	4059625616499	56
HG	28884000	4059625616284	56
HG	28884140	4059625616277	56
HG	28884340	4059625616260	56
HG	28884670	4059625616253	56
HG	28884700	4059625616246	56
HG	28884990	4059625616239	56
HG	28885000	4059625616482	57
HG	28885140	4059625616475	57
HG	28885340	4059625616468	57
HG	28885670	4059625616451	57
HG	28885700	4059625616444	57
HG	28885990	4059625616437	57
33			
HG	33710000	4059625624319	72
HG	33710140	4059625624302	72
HG	33710340	4059625624296	72
HG	33710670	4059625624289	72
HG	33710700	4059625624272	72
HG	33710990	4059625624265	72
HG	33711000	4059625624258	72
HG	33711140	4059625624234	72
HG	33711340	4059625624210	72
HG	33711670	4059625624203	72
HG	33711700	4059625624180	72
HG	33711990	4059625624166	72
HG	33712000	4059625624142	73
HG	33712140	4059625624135	73
HG	33712340	4059625624128	73
HG	33712670	4059625624586	73
HG	33712700	4059625624579	73
HG	33712990	4059625624562	73
HG	33713000	4059625624555	73
HG	33713140	4059625624531	73
HG	33713340	4059625624524	73
HG	33713670	4059625624517	73
HG	33713700	4059625624494	73
HG	33713990	4059625624470	73
HG	33714000	4059625624463	71
HG	33714140	4059625624456	71
HG	33714340	4059625624449	71
HG	33714670	4059625624784	71

brand	Code no.	EAN	page
HG	33714700	4059625624777	71
HG	33714990	4059625624760	71
HG	33715000	4059625624753	71
HG	33715140	4059625624739	71
HG	33715340	4059625624722	71
HG	33715670	4059625624715	71
HG	33715700	4059625624692	71
HG	33715990	4059625624678	71
58			
HG	58119000	4059625514269	63
HG	58119140	4059625514252	63
HG	58119340	4059625514245	63
HG	58119670	4059625514238	63
HG	58119700	4059625514221	63
HG	58119990	4059625514214	63
HG	58130000	4059625514207	63
HG	58131000	4059625514191	63
HG	58152180	4059625514184	65
HG	58154000	4059625514177	62
HG	58187000	4059625514160	61
HG	58187140	4059625514153	61
HG	58187340	4059625514146	61
HG	58187670	4059625514139	61
HG	58187700	4059625514122	61
HG	58187990	4059625514115	61
HG	58188000	4059625514108	61
60			
HG	60057000	4059625513491	66
HG	60058000	4059625513484	66
HG	60058140	4059625513477	66
HG	60058340	4059625513460	66
HG	60058670	4059625513453	66
HG	60058700	4059625513446	66
HG	60058990	4059625513439	66
HG	60090180	4059625513422	67
74			
HG	74410000	4059625563274	102
HG	74415000	4059625563267	102
HG	74415007	4059625563670	102
HG	74415670	4059625563250	102
HG	74415677	4059625563663	102
HG	74420000	4059625557822	101
HG	74420007	4059625563656	101
HG	74420670	4059625563182	101
HG	74420677	4059625563649	101
HG	74445000	4059625557808	101
HG	74445670	4059625563434	101
HG	74616000	4059625563427	104
HG	74616670	4059625563410	104
HG	74617000	4059625563403	104
HG	74617670	4059625563397	104
HG	74621000	4059625557792	103
HG	74621007	4059625563588	103
HG	74621670	4059625563366	103
HG	74720000	4059625557778	99
HG	74720007	4059625557761	99
HG	74720670	4059625563076	99
HG	74720677	4059625563557	99
HG	74721000	4059625563069	99
HG	74724000	4059625564028	99

brand	Code no.	EAN	page
HG	74730000	4059625557754	99
HG	74730670	4059625563052	99
HG	74731000	4059625563045	99
HG	74732000	4059625564011	99
HG	74733000	4059625557747	100
HG	74733007	4059625563519	100
HG	74733677	4059625563502	100
HG	74750007	4059625563496	100
HG	74750677	4059625563489	100
HG	74997000	4059625557716	104
75			
HG	75020007	4059625334966	78
HG	75020147	4059625554951	78
HG	75020347	4059625554944	78
HG	75020677	4059625334928	78
HG	75020707	4059625334881	78
HG	75020997	4059625554937	78
HG	75023000	4059625399835	77
HG	75023140	4059625554982	77
HG	75023340	4059625555255	77
HG	75023670	4059625399828	77
HG	75023700	4059625399811	77
HG	75024000	4059625399804	77
HG	75024140	4059625555231	77
HG	75024340	4059625555217	77
HG	75024670	4059625399699	77
HG	75024700	4059625399682	77
HG	75033000	4059625322710	78
HG	75033140	4059625555453	78
HG	75033340	4059625555620	78
HG	75033670	4059625337387	78
HG	75033700	4059625337356	78
HG	75044000	4059625555132	77
HG	75044140	4059625555125	77
HG	75044340	4059625555446	77
HG	75044670	4059625555439	77
HG	75044700	4059625555422	77
HG	75045000	4059625555415	78
HG	75045140	4059625555392	78
HG	75045340	4059625555378	78
HG	75045670	4059625555361	78
HG	75045700	4059625555347	78
HG	75046007	4059625554890	78
HG	75046147	4059625554883	78
HG	75046347	4059625554876	78
HG	75046677	4059625554869	78
HG	75046707	4059625554852	78
HG	75050007	4059625337301	79
HG	75050147	4059625554838	79
HG	75050347	4059625554821	79
HG	75050677	4059625337288	79
HG	75050707	4059625337264	79
HG	75410000	4059625322727	82
HG	75410140	4059625555613	82
HG	75410340	4059625555606	82
HG	75410670	4059625337219	82
HG	75410700	4059625337196	82
HG	75415000	4059625358504	82
HG	75415140	4059625555590	82
HG	75415340	4059625555576	82

Code Numbers (HG = hansgrohe, AX = AXOR)

brand	Code no.	EAN	page
HG	75415670	4059625358511	82
HG	75415700	4059625358528	82
HG	75420000	4059625335291	81
HG	75420140	4059625555293	81
HG	75420340	4059625555286	81
HG	75420670	4059625335260	81
HG	75420700	4059625336199	81
HG	75423000	4059625693193	81
HG	75423140	4059625694107	81
HG	75423340	4059625694114	81
HG	75423670	4059625694121	81
HG	75423700	4059625694138	81
HG	75444000	4059625322703	83
HG	75444140	4059625555538	83
HG	75444340	4059625555521	83
HG	75444670	4059625337080	83
HG	75444700	4059625337073	83
HG	75445000	4059625322697	80
HG	75445140	4059625555514	80
HG	75445340	4059625555507	80
HG	75445670	4059625337035	80
HG	75445700	4059625336991	80
HG	75615000	4059625358566	84
HG	75615140	4059625555491	84
HG	75615340	4059625555477	84
HG	75615670	4059625358573	84
HG	75615700	4059625358580	84
HG	75620000	4059625336151	84
HG	75620140	4059625555279	84
HG	75620340	4059625555262	84
HG	75620670	4059625336137	84
HG	75620700	4059625336113	84
HG	75623000	4059625694145	83
HG	75623140	4059625694152	83
HG	75623340	4059625694169	83
HG	75623670	4059625694176	83
HG	75623700	4059625694183	83
76			
HG	76012000	4059625751350	87
HG	76012140	4059625751343	87
HG	76012340	4059625751336	87
HG	76012670	4059625751329	87
HG	76012700	4059625751312	87
HG	76013000	4059625335932	90
HG	76013140	4059625751305	90
HG	76013340	4059625751299	90
HG	76013670	4059625335925	90
HG	76013700	4059625335918	90
HG	76024000	4059625334461	87
HG	76024140	4059625751251	87
HG	76024340	4059625751244	87
HG	76024670	4059625334386	87
HG	76024700	4059625334379	87
HG	76025000	4059625751237	87
HG	76025140	4059625751220	87
HG	76025340	4059625751213	87
HG	76025670	4059625751206	87
HG	76025700	4059625751190	87
HG	76033000	4059625338124	90
HG	76033140	4059625751534	90

brand	Code no.	EAN	page
HG	76033340	4059625751527	90
HG	76033670	4059625338094	90
HG	76033700	4059625338063	90
HG	76034000	4059625338025	91
HG	76034140	4059625751510	91
HG	76034340	4059625751503	91
HG	76034670	4059625337998	91
HG	76034700	4059625337967	91
HG	76050000	4059625337929	91
HG	76050140	4059625751459	91
HG	76050340	4059625751442	91
HG	76050670	4059625337899	91
HG	76050700	4059625337868	91
HG	76051000	4059625337820	91
HG	76051140	4059625751435	91
HG	76051340	4059625751428	91
HG	76051670	4059625337813	91
HG	76051700	4059625337806	91
HG	76060000	4059625336564	89
HG	76060140	4059625751411	89
HG	76060340	4059625751404	89
HG	76060670	4059625336557	89
HG	76060700	4059625336540	89
HG	76063000	4059625336533	89
HG	76063140	4059625751398	89
HG	76063340	4059625751374	89
HG	76063670	4059625336496	89
HG	76063700	4059625336441	89
HG	76072000	4059625751756	88
HG	76072140	4059625751749	88
HG	76072340	4059625751732	88
HG	76072670	4059625751725	88
HG	76072700	4059625751718	88
HG	76200000	4059625336823	92
HG	76200140	4059625751633	92
HG	76200340	4059625751626	92
HG	76200670	4059625336816	92
HG	76200700	4059625336809	92
HG	76210000	4059625395233	88
HG	76210140	4059625751619	88
HG	76210340	4059625751602	88
HG	76210670	4059625395226	88
HG	76220000	4059625395219	88
HG	76220140	4059625751596	88
HG	76220340	4059625751589	88
HG	76220670	4059625395202	88
HG	76410000	4059625337738	94
HG	76410140	4059625751572	94
HG	76410340	4059625751565	94
HG	76410670	4059625337714	94
HG	76410700	4059625337691	94
HG	76415000	4059625357637	93
HG	76415140	4059625751954	93
HG	76415340	4059625751930	93
HG	76415670	4059625357644	93
HG	76415700	4059625357651	93
HG	76420000	4059625336793	93
HG	76420140	4059625751893	93
HG	76420340	4059625751879	93
HG	76420670	4059625336762	93

brand	Code no.	EAN	page
HG	76420700	4059625336731	93
HG	76444000	4059625337592	94
HG	76444140	4059625751855	94
HG	76444340	4059625751848	94
HG	76444670	4059625337585	94
HG	76444700	4059625337578	94
HG	76445000	4059625322734	92
HG	76445140	4059625751831	92
HG	76445340	4059625751824	92
HG	76445670	4059625337530	92
HG	76445700	4059625337493	92
HG	76615000	4059625357606	95
HG	76615140	4059625751817	95
HG	76615340	4059625751794	95
HG	76615670	4059625357613	95
HG	76615700	4059625357620	95
HG	76620000	4059625336694	95
HG	76620140	4059625751770	95
HG	76620340	4059625751763	95
HG	76620670	4059625336670	95
HG	76620700	4059625336656	95



Raindance Alive

Highlights

Special feature



Simple and precise control for saving water. The EcoStop+ function regulates the water flow to max. 6 l/min.



Actively regulates water consumption – the amount of water can be adjusted via the control dial.



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Thermostat with integrated temperature control for constant water temperature.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



This innovative function reduces the dripping after stopping the shower to just a few seconds.



Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.




The angle of the overhead shower can be adjusted and the water spray can be individually adapted.



Quick and safe installation - several features ensure easy installation.



Mixes water with air. For a smooth, lower-splash water spray and light yet full shower droplets.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



A playful way to control the water flow, shower or spray type at the simple touch of a button.

Installation



The high-quality installation set features a pre-assembled seal and is 100% water-proof.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Invigorating, focused and powerful spray for the home spa that allows the day's stresses to simply drain off.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Full shower rain with droplets enriched with air for soft yet efficient and indulgent showering.

Finish



Brushed Black
Chrome
-340




Brushed Bronze
-140



Chrome
-000



Matt Black
-670



Matt White
-700




Polished Gold
Optic
-990

Raindance Alive Select S Hand showers 3jet

Features of all variants

- shower head size: 125 mm
 - spray type: RainAir, PowderRain, Massage spray
 - convenient spray selection via Select button
 - spray disc surface: graphite
- QuickClean: Limescale deposits can simply be rubbed off with your finger
 - design cover conceals the nozzles
 - design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
 - with internal water conduction
 - rinseable filter washer
 - connection thread: G 1/2
 - suitable for continuous flow water heaters

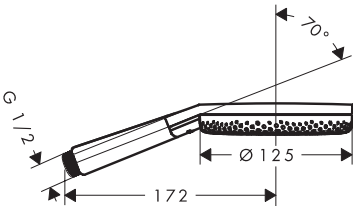

Special feature



Technologies



Spray types



Overview variants


Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	125	3	RainAir, PowderRain, Massage spray	4.6	5.9	1.3	Chrome	Q2/2025 24512000
							Brushed Bronze	Q2/2025 24512140
							Brushed Black Chrome	Q2/2025 24512340
							Matt Black	Q2/2025 24512670
							Matt White	Q2/2025 24512700
							Polished Gold Optic	Q2/2025 24512990
	125	3	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome	Q2/2025 24511000
							Brushed Bronze	Q2/2025 24511140
							Brushed Black Chrome	Q2/2025 24511340
							Matt Black	Q2/2025 24511670
							Matt White	Q2/2025 24511700
							Polished Gold Optic	Q2/2025 24511990
	125	3	RainAir, PowderRain, Massage spray	5.6	10.3	1.2	Chrome	Q2/2025 24500000
							Brushed Bronze	Q2/2025 24500140
							Brushed Black Chrome	Q2/2025 24500340
							Matt Black	Q2/2025 24500670
							Matt White	Q2/2025 24500700
							Polished Gold Optic	Q2/2025 24500990

Raindance Alive Select S Shower sets 3jet with shower bar Unica E


Features of all variants

- consists of: hand shower, slider, shower bar, textile shower hose
- shower head size: 125 mm
- spray type: RainAir, PowderRain, Massage spray
- convenient spray selection via Select button
- spray disc surface: graphite
- QuickClean: Limescale deposits can simply be rubbed off with your finger
- flow regulator: 8 l/min (with possible tolerances -20 %)
- maximum flow rate at 3 bar: 7,1 l/min
- minimum flow pressure: 1,9 bar
- design cover conceals the nozzles
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- slider for right- and left-hand installation
- slider steplessly adjustable
- slider with locking mechanism
- wall supports made of plastic
- wall bar type: swivelling shower bar, profile made of aluminium
- profile pipe: square
- Designflex textile shower hose, water-resistant and water-repellant material
- unique design with multi-colored braided yarns
- yarns are made of recycled PET
- warm, cotton-like material feels great to the skin
- 1x conical nut, 1x cylindrical nut
- pivot connector prevents hose from tangling
- EU taxonomy: max. 8 l/min - Do No Significant Harm (DNSH)
- rinseable filter washer
- metal hand shower holder

90

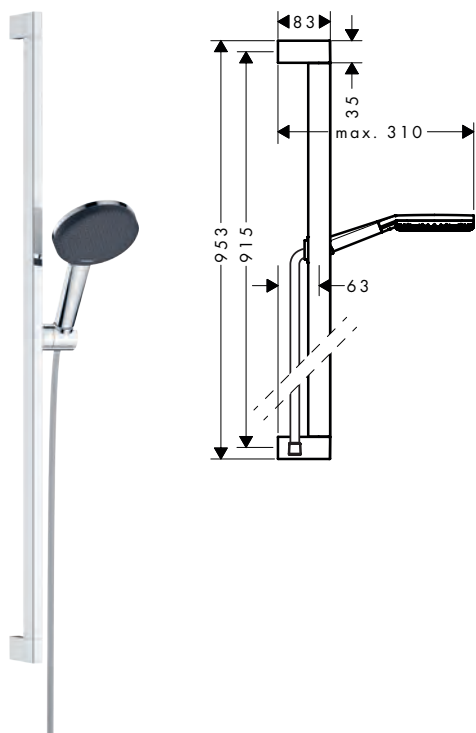


65

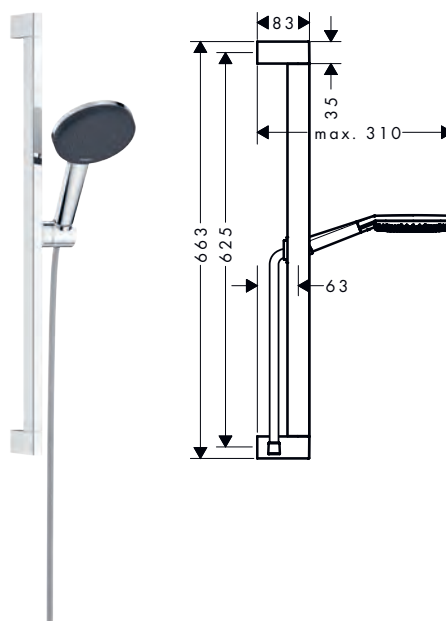


Special feature



Technologies



Spray types



Overview variants

Version	Drilling distance (mm)	Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
90	915	125	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	Q2/2025	24601000 24601140 24601340 24601670 24601700 24601990
65	625	125	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White Polished Gold Optic	Q2/2025	24600000 24600140 24600340 24600670 24600700 24600990

Consisting of:



Raindance Alive Select S Hand shower 125 3jet EcoSmart


Included in
24601XXX
24600XXX

Code no.
24511XXX

Raindance Alive Select S Shower sets 3jet with shower bar S Puro

Features of all variants


- consists of: hand shower, slider, shower bar, shower hose
 - shower head size: 125 mm
 - spray type: RainAir, PowderRain, Massage spray
 - convenient spray selection via Select button
 - spray disc surface: graphite
 - QuickClean: Limescale deposits can simply be rubbed off with your finger
 - flow regulator: 8 l/min (with possible tolerances -20 %)
- maximum flow rate at 3 bar: 7,1 l/min
 - minimum flow pressure: 1,9 bar
 - design cover conceals the nozzles
 - design cover can be removed easily and without tools for cleaning
 - design cover surface: graphite
 - silder in reduced, cylindrical design rotatable in all directions
 - slider with locking mechanism
 - slider steplessly adjustable
- wall supports made of plastic
 - profile pipe: round
 - shower bar diameter: 22 mm
 - shower hose with conical nut on both ends
 - pivot connector prevents hose from tangling
 - EU taxonomy: max. 8 l/min - Do No Significant Harm (DNSH)
 - rinseable filter washer
 - metal hand shower holder

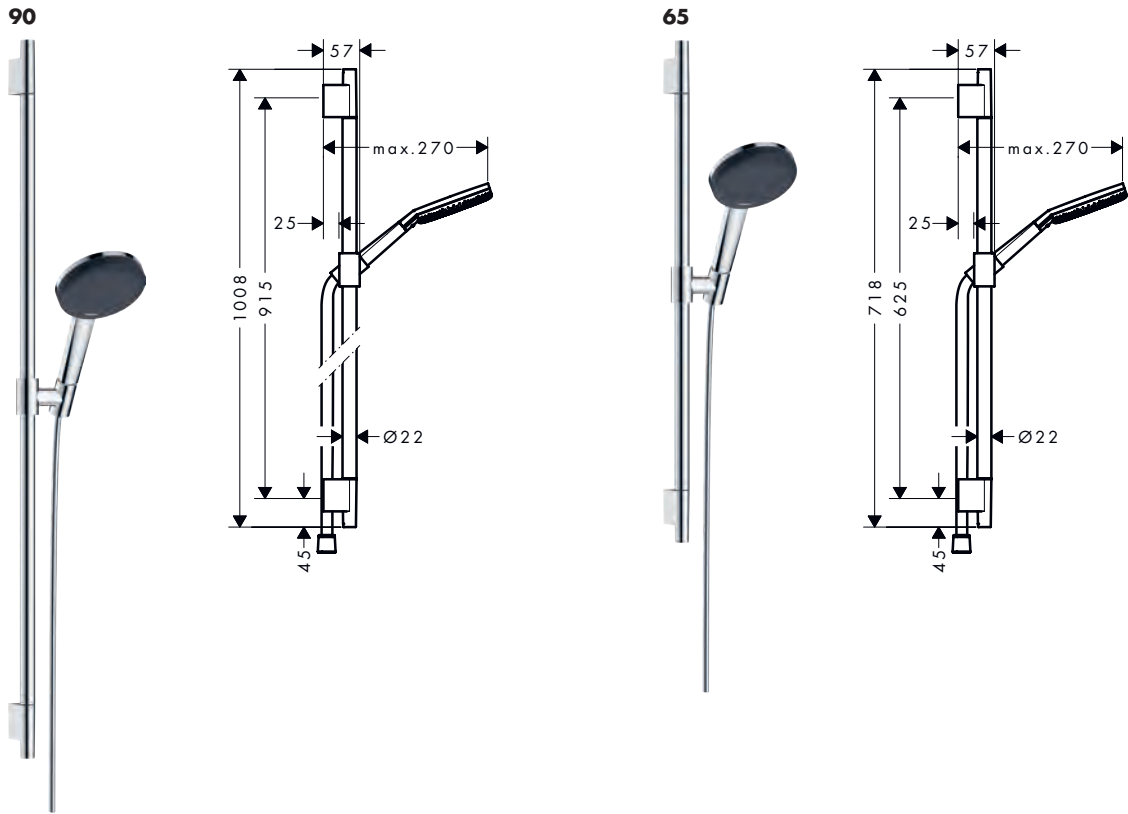

Special feature



Technologies



Spray types



Overview variants

Version	Drilling distance (mm)	Shower head size	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
90	915	125	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome	Q2/2025	24603000
							Brushed Bronze	Q2/2025	24603140
							Brushed Black Chrome	Q2/2025	24603340
							Matt Black	Q2/2025	24603670
							Matt White	Q2/2025	24603700
							Polished Gold Optic	Q2/2025	24603990
65	625	125	RainAir, PowderRain, Massage spray	6.4	7.1	1.9	Chrome	Q2/2025	24602000
							Brushed Bronze	Q2/2025	24602140
							Brushed Black Chrome	Q2/2025	24602340
							Matt Black	Q2/2025	24602670
							Matt White	Q2/2025	24602700
							Polished Gold Optic	Q2/2025	24602990

Consisting of:




Raindance Alive Select S Hand shower 125 3jet EcoSmart	Included in	Code no.
	24603XXX	24511XXX
	24602XXX	

Raindance Alive Select S Shower holder set 125 3jet EcoSmart with Designflex textil shower hose 1 60 cm

Features

- consists of: hand shower, shower holder, textile shower hose
 - shower head size: 125 mm
 - spray type: RainAir, PowderRain, Massage spray
 - convenient spray selection via Select button
 - spray disc surface: graphite
 - QuickClean: Limescale deposits can simply be rubbed off with your finger
 - flow regulator: 8 l/min (with possible tolerances -20 %)
 - maximum flow rate at 3 bar: 7,1 l/min
- minimum flow pressure: 1,9 bar
 - design cover conceals the nozzles
 - design cover can be removed easily and without tools for cleaning
 - design cover surface: graphite
 - suitable for continous flow water heaters
 - Designflex textile shower hose, water-resistant and water-repellant material
 - unique design with multi-colored braided yarns
 - yarns are made of recycled PET
 - warm, cotton-like material feels great to the skin
- fitting side: cylindric nut, hand shower side: conical nut
 - pivot connector prevents hose from tangling
 - shower hose length: 1600 mm
 - Porter Fine S shower holder in minimalist design
 - integrated support function
 - wall mounting: screw fastening
 - rinseable filter washer
 - EU taxonomy: max. 8 l/min - Do No Significant Harm (DNSH)
 - metal hand shower holder

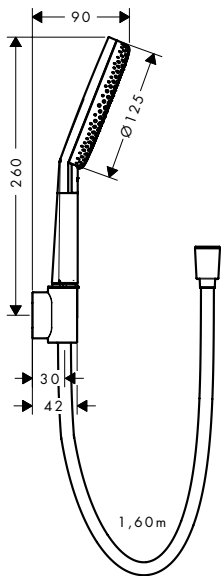

Special feature



Technologies



Spray types



Finish	Available from	Code no.
 Chrome	Q2/2025	24611000
 Brushed Bronze	Q2/2025	24611140
 Brushed Black Chrome	Q2/2025	24611340
 Matt Black	Q2/2025	24611670
 Matt White	Q2/2025	24611700
 Polished Gold Optic	Q2/2025	24611990

Consisting of:



Raindance Alive Select S Hand shower 125 3jet EcoSmart

Included in

Code no.

24611XXX

24511XXX



Porter Fine Shower holder


24611XXX

28885XXX

Raindance Alive S Overhead showers 1jet

Features of all variants

- shower head size: 300 mm
 - DropGuard reduces the dripping after stopping the shower to just a few seconds
 - overhead shower angle adjustable
 - material spray disc: anodized aluminium
- spray disc surface: graphite
 - design cover can be removed easily and without tools for cleaning
 - design cover surface: graphite
 - design cover conceals the nozzles
- flat, minimalist design
 - installation: ceiling or wall
 - connection thread: G 1/2
 - suitable for continuous flow water heaters



Special feature



Technologies



Spray types



Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	300	1	Rain, or PowderRain	5.2	5.9	1.6	Chrome	Q1/2026 24523000
							Brushed Bronze	Q1/2026 24523140
							Brushed Black Chrome	Q1/2026 24523340
							Matt Black	Q1/2026 24523670
							Matt White	Q1/2026 24523700
							Polished Gold Optic	Q1/2026 24523990
	300	1	Rain, or PowderRain	1	6.8	1	Chrome	Q2/2025 24521000
							Brushed Bronze	Q2/2025 24521140
							Brushed Black Chrome	Q2/2025 24521340
							Matt Black	Q2/2025 24521670
							Matt White	Q2/2025 24521700
							Polished Gold Optic	Q2/2025 24521990
	300	1	RainAir, or PowderRain	5.4	11	0.6	Chrome	Q2/2025 24520000
							Brushed Bronze	Q2/2025 24520140
							Brushed Black Chrome	Q2/2025 24520340
							Matt Black	Q2/2025 24520670
							Matt White	Q2/2025 24520700
							Polished Gold Optic	Q2/2025 24520990

Required parts (choose one):



Shower arm E 39 cm



Ceiling connector E 10 cm

Finish	Code no.
Chrome	24337000
Brushed Bronze	24337140
Brushed Black Chrome	24337340
Matt Black	24337670
Matt White	24337700
Polished Gold Optic	24337990
Chrome	24338000
Brushed Bronze	24338140
Brushed Black Chrome	24338340
Matt Black	24338670
Matt White	24338700
Polished Gold Optic	24338990



Raindance Alive S Overhead showers 1jet**Required parts (choose one):**

Ceiling connector E 30 cm

Finish	Code no.
Chrome	24339000
Brushed Bronze	24339140
Brushed Black Chrome	24339340
Matt Black	24339670
Matt White	24339700
Polished Gold Optic	24339990

Raindance Alive S Overhead showers 2jet with shower arm**Features of all variants**

- consists of: overhead shower, shower arm
- shower head size: 300 mm
- DropGuard reduces the dripping after stopping the shower to just a few seconds
- material spray disc: anodized aluminium
- spray disc surface: graphite
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- design cover conceals the nozzles
- flat, minimalist design
- shower arm length: 390 mm
- installation: wall
- mounting type: concealed
- connection type: basic set
- suitable for continuous flow water heaters

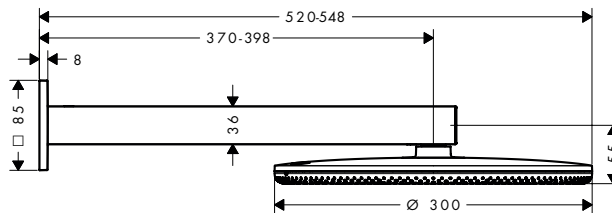**Special feature****Technologies****Spray types****Overview variants**

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	2	Rain, PowderRain	5.3	6.6	0.8	Chrome	Q2/2025	24541000
						Brushed Bronze	Q2/2025	24541140
						Brushed Black Chrome	Q2/2025	24541340
						Matt Black	Q2/2025	24541670
						Matt White	Q2/2025	24541700
						Polished Gold Optic	Q2/2025	24541990
	2	RainAir, PowderRain	6.9	10.1	1	Chrome	Q2/2025	24540000
						Brushed Bronze	Q2/2025	24540140
						Brushed Black Chrome	Q2/2025	24540340
						Matt Black	Q2/2025	24540670
						Matt White	Q2/2025	24540700
						Polished Gold Optic	Q2/2025	24540990

Required parts:


Basic set for overhead shower 2jet

Code no.
24573180

Raindance Alive Q Overhead showers 1jet

Features of all variants

- shower head size: 214 x 343 mm
 - DropGuard reduces the dripping after stopping the shower to just a few seconds
 - overhead shower angle adjustable
 - material spray disc: anodized aluminium
- spray disc surface: graphite
 - design cover can be removed easily and without tools for cleaning
 - design cover surface: graphite
 - design cover conceals the nozzles
- flat, minimalist design
 - installation: ceiling or wall
 - connection thread: G 1/2
 - suitable for continuous flow water heaters



Special feature



Technologies



Spray types



Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
210/340	1	Rain, or PowderRain	6	8	1	Chrome	Q2/2025	24531000
						Brushed Bronze	Q2/2025	24531140
						Brushed Black Chrome	Q2/2025	24531340
						Matt Black	Q2/2025	24531670
						Matt White	Q2/2025	24531700
						Polished Gold Optic	Q2/2025	24531990
210/340	1	RainAir, or PowderRain	5.4	11	0.5	Chrome	Q2/2025	24530000
						Brushed Bronze	Q2/2025	24530140
						Brushed Black Chrome	Q2/2025	24530340
						Matt Black	Q2/2025	24530670
						Matt White	Q2/2025	24530700
						Polished Gold Optic	Q2/2025	24530990

Required parts (choose one):



Shower arm E 39 cm

Finish	Code no.
Chrome	24337000
Brushed Bronze	24337140
Brushed Black Chrome	24337340
Matt Black	24337670
Matt White	24337700
Polished Gold Optic	24337990



Ceiling connector E 10 cm

Chrome	24338000
Brushed Bronze	24338140
Brushed Black Chrome	24338340
Matt Black	24338670
Matt White	24338700
Polished Gold Optic	24338990





Ceiling connector E 30 cm

Chrome	24339000
Brushed Bronze	24339140
Brushed Black Chrome	24339340
Matt Black	24339670
Matt White	24339700
Polished Gold Optic	24339990

Raindance Alive Q Overhead showers 2jet with shower arm

Features of all variants

- consists of: overhead shower, shower arm
 - shower head size: 214 x 343 mm
 - DropGuard reduces the dripping after stopping the shower to just a few seconds
 - material spray disc: anodized aluminium
- spray disc surface: graphite
 - design cover can be removed easily and without tools for cleaning
 - design cover surface: graphite
 - design cover conceals the nozzles
- flat, minimalist design
 - shower arm length: 390 mm
 - installation: wall
 - connection type: basic set
 - suitable for continuous flow water heaters

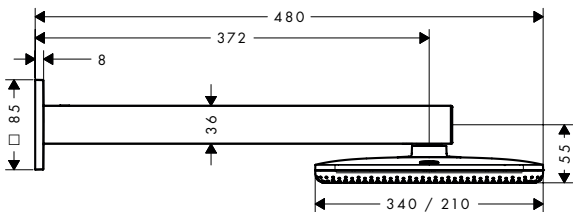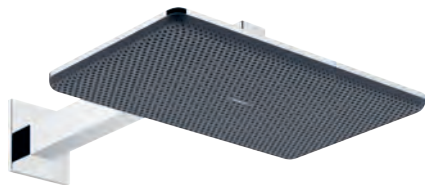

Special feature



Technologies



Spray types



Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
210/340	2	PowderRain, Rain	5.3	6.6	0.8	Chrome	Q2/2025	24551000
						Brushed Bronze	Q2/2025	24551140
						Brushed Black Chrome	Q2/2025	24551340
						Matt Black	Q2/2025	24551670
						Matt White	Q2/2025	24551700
						Polished Gold Optic	Q2/2025	24551990
210/340	2	RainAir, PowderRain	6.9	10.1	1	Chrome	Q2/2025	24550000
						Brushed Bronze	Q2/2025	24550140
						Brushed Black Chrome	Q2/2025	24550340
						Matt Black	Q2/2025	24550670
						Matt White	Q2/2025	24550700
						Polished Gold Optic	Q2/2025	24550990

Required parts:



Basic set for overhead shower 2jet


Code no.

24573180

Shower arm E 39 cm

Features

- length: 390 mm
 - installation type: concealed installation
- material: brass/ plastic
 - connection type: G 1/2

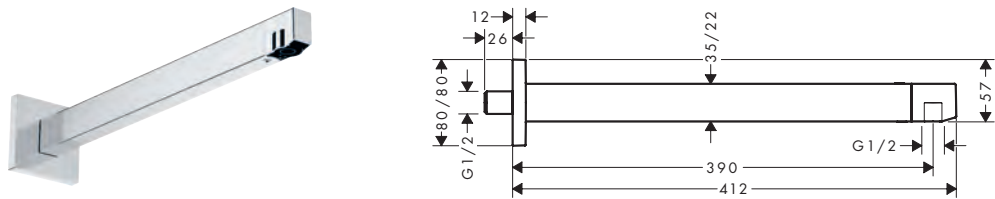


Finish	Available from	Code no.
Chrome		24337000
Brushed Bronze		24337140
Brushed Black Chrome	Q2/2025	24337340
Matt Black		24337670
Matt White		24337700
Polished Gold Optic	Q2/2025	24337990

Ceiling connectors E


Features of all variants

- installation type: concealed installation
 - material: brass/ plastic
- connection type: G 1/2
- ceiling connector not extendable, ceiling connector not shortenable

300 mm

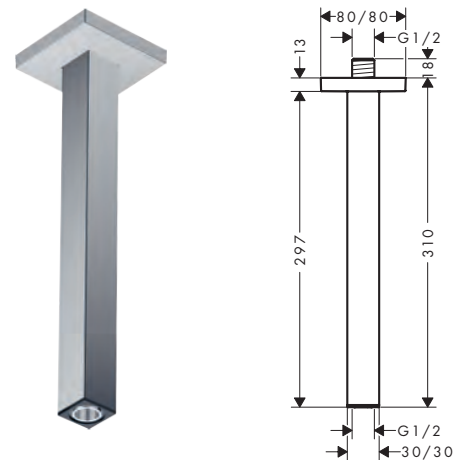

100 mm


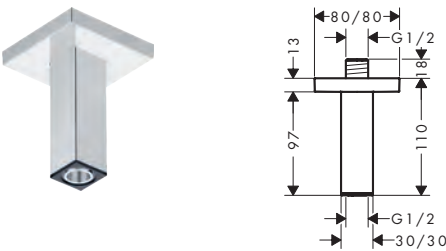


Overview variants

Length (mm)	Shape	Finish	Available from	Code no.
300	square	Chrome		24339000
		Brushed Bronze		24339140
		Brushed Black Chrome	Q2/2025	24339340
		Matt Black		24339670
		Matt White		24339700
		Polished Gold Optic	Q2/2025	24339990
100	square	Chrome		24338000
		Brushed Bronze		24338140
		Brushed Black Chrome	Q2/2025	24338340
		Matt Black		24338670
		Matt White		24338700
		Polished Gold Optic	Q2/2025	24338990

Raindance Alive Q Design ShowerSet 210/340 1jet with thermostat and basic set iBox universal 2**Features**

- consists of: overhead shower, shower arm, hand shower, wall outlet with shower holder, textile shower hose, shower thermostat, basic set
- shower head size: 214 x 343 mm
- shower arm length: 390 mm
- spray type overhead shower: RainAir, or PowderRain
- Spray Type Switch: RainAir (preset), change to PowderRain can be selected upon installation or changed easily at any later stage
- QuickClean: Limescale deposits can simply be rubbed off with your finger
- flow rate PowderRain spray at 3 bar: 11 l/min
- material spray disc overhead shower: anodized aluminium
- spray type hand shower: RainAir, PowderRain, Massage spray
- maximum flow rate at 3 bar: 11 l/min
- minimum flow pressure: 0,7 bar
- max. operating pressure: 10 bar
- comfortable turning on / off of outlets with large Select-paddle
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- design cover conceals the nozzles
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- thermostat: ShowerSelect Comfort E
- SafetyStop at 40 °C
- Designflex textile shower hose, water-resistant and water-repellant material, unique design with multi-colored braided yarns, yarns are made of recycled PET, warm, cotton-like material feels great to the skin
- shower hose length: 1600 mm
- 1x conical nut, 1x cylindrical nut
- pivot connector prevents hose from tangling
- material handles: metal
- connection type: basic set iBox universal 2 (# 01500180)
- simultaneous use of several outlets
- flow regulator: 12 l/min (with possible tolerances $\pm 10\%$)

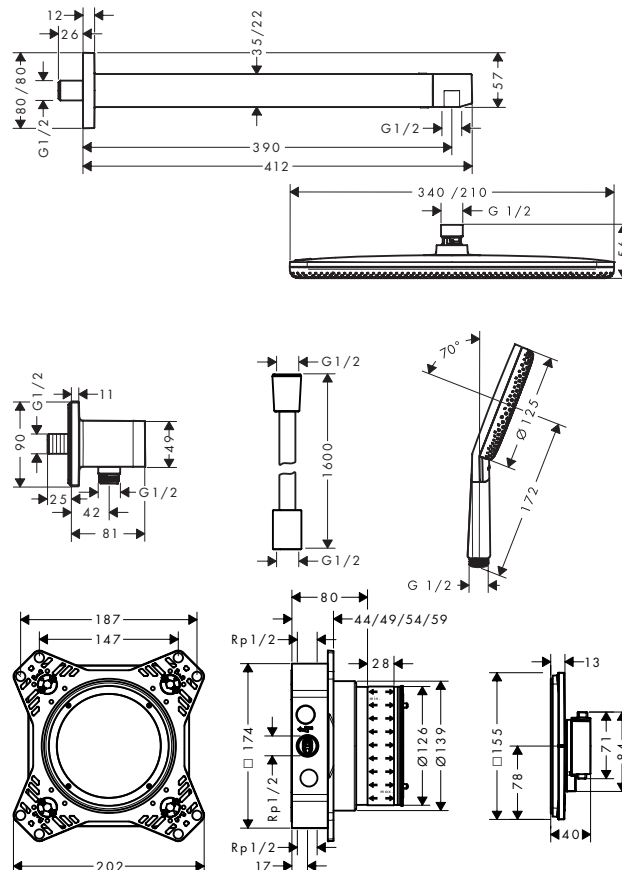**Special feature****Technologies****Spray types****Installation**

Finish	Available from	Code no.
Chrome	Q2/2025	24620000
Matt Black	Q2/2025	24620670

Consisting of:

Raindance Alive Q Overhead shower 210/340 1jet

Included in
24620XXX 24530XXX

Shower arm E 39 cm

24620XXX 24337XXX




Raindance Alive Select S Hand shower 125 3jet EcoSmart

24620XXX 24511XXX

Raindance Alive S Design ShowerSet 300 1jet with thermostat and basic set iBox universal 2

Features

- consists of: overhead shower, shower arm, hand shower, shower holder, wall outlet, textile shower hose, shower thermostat, basic set
- shower arm length: 390 mm
- spray type overhead shower: RainAir, or PowderRain
- Spray Type Switch: RainAir (preset), change to PowderRain can be selected upon installation or changed easily at any later stage
- QuickClean: Limescale deposits can simply be rubbed off with your finger
- flow rate PowderRain spray at 3 bar: 11 l/min
- material spray disc overhead shower: anodized aluminium
- spray type hand shower: RainAir, PowderRain, Massage spray
- maximum flow rate at 3 bar: 11 l/min
- minimum flow pressure: 0,7 bar
- max. operating pressure: 10 bar
- comfortable turning on / off of outlets with large Select-paddle
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- design cover conceals the nozzles
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- thermostat: ShowerSelect Comfort E
- SafetyStop at 40°C
- Porter Fine S shower holder in minimalist design
- Designflex textile shower hose, water-resistant and water-repellant material, unique design with multi-colored braided yarns, yarns are made of recycled PET, warm, cotton-like material feels great to the skin
- shower hose length: 1600 mm
- 1x conical nut, 1x cylindrical nut
- pivot connector prevents hose from tangling
- material handles: metal
- connection type: basic set iBox universal 2 (# 01500180)
- simultaneous use of several outlets
- flow regulator: 12 l/min (with possible tolerances $\pm 10\%$)
- DropGuard reduces the dripping after stopping the shower to just a few seconds

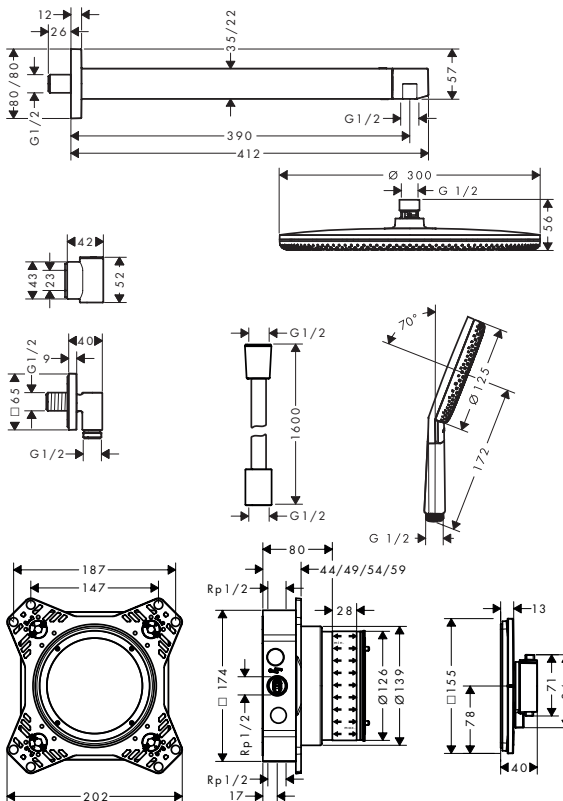

Special feature



Technologies



Spray types



Installation



Finish	Available from	Code no.
Chrome	Q2/2025	24630000
Matt Black	Q2/2025	24630670

Consisting of:

	Included in	Code no.
 Raindance Alive S Overhead shower 300 1jet	24630XXX	24520XXX
 Shower arm E 39 cm	24630XXX	24337XXX
 Raindance Alive Select S Hand shower 125 3jet EcoSmart	24630XXX	24511XXX
 FixFit Fine E Wall outlet with non-return valve	24630XXX	28883XXX
 Porter Fine Shower holder	24630XXX	28885XXX

Raindance Alive S Showerpipes 2jet, 1jet with ShowerSelect Comfort thermostat

Features of all variants

- consists of: overhead shower, hand shower, slider, shower thermostat, shower hose, shower bar
- shower head size overhead shower: 300 mm
- spray disc surface: graphite
- spray type hand shower: RainAir, PowderRain, Massage spray
- max. operating pressure: 10 bar
- DropGuard reduces the dripping after stopping the shower to just a few seconds
- convenient spray selection via Select button on the hand shower
- ball-joint: overhead shower angle adjustable
- design cover conceals the nozzles, flat, minimalist design
- spray disc removable for cleaning
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- height-adjustable, easy slide slider
- thermostat ShowerSelect Comfort E
- material thermostat cover, handle and Select buttons: metal
- SafetyStop at 40°C
- adjustable hot water limitation
- comfortable turning on / off of outlets with large Select-paddle
- simultaneous use of several outlets
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection thread: G 1/2
- centre distance: 150 ± 12 mm
- intrinsically safe against backflow
- Designflex textile shower hose, water-resistant and water-repellant material, unique design with multi-colored braided yarns
- 2 functions

2 spray types




1 spray type







Special feature



Technologies



Spray types

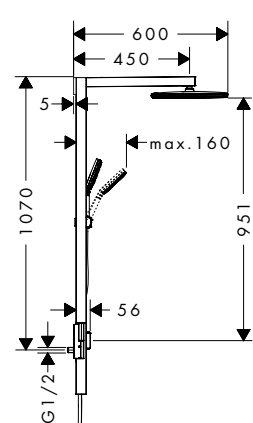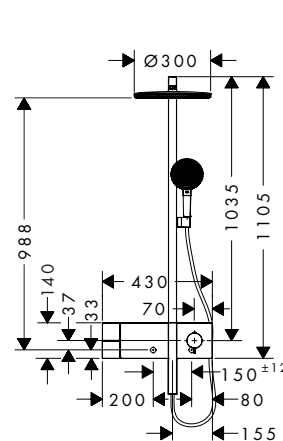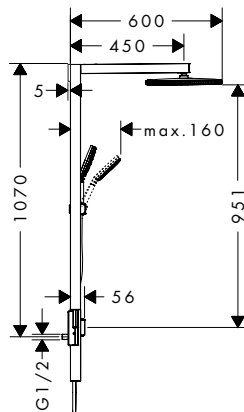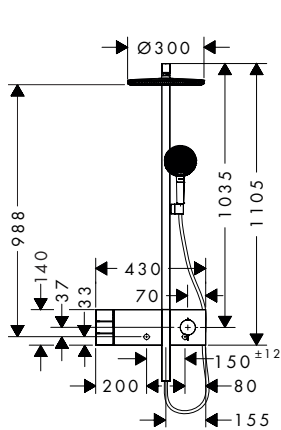

Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
300	2	Rain, PowderRain	6	7.7	1.5	Chrome	Q2/2025	24596000
						Brushed Bronze	Q2/2025	24596140
						Brushed Black Chrome	Q2/2025	24596340
						Matt Black	Q2/2025	24596670
						Matt White	Q2/2025	24596700
						Polished Gold Optic	Q2/2025	24596990

For more information about this product, please see the next page.

Raindance Alive S Showerpipes 2jet, 1jet with ShowerSelect Comfort thermostat

Overview variants


Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
300	2	RainAir, PowderRain	6	10.8	0.9	 Chrome	Q2/2025	24595000
						 Brushed Bronze	Q2/2025	24595140
						 Brushed Black Chrome	Q2/2025	24595340
						 Matt Black	Q2/2025	24595670
						 Matt White	Q2/2025	24595700
						 Polished Gold Optic	Q2/2025	24595990
	1	Rain, or PowderRain	5.9	7	1.9	 Chrome	Q2/2025	24583000
						 Brushed Bronze	Q2/2025	24583140
						 Brushed Black Chrome	Q2/2025	24583340
						 Matt Black	Q2/2025	24583670
						 Matt White	Q2/2025	24583700
						 Polished Gold Optic	Q2/2025	24583990
300	1	RainAir, or PowderRain	5.8	10.3	1	 Chrome	Q2/2025	24582000
						 Brushed Bronze	Q2/2025	24582140
						 Brushed Black Chrome	Q2/2025	24582340
						 Matt Black	Q2/2025	24582670
						 Matt White	Q2/2025	24582700
						 Polished Gold Optic	Q2/2025	24582990

Consisting of:		Included in	Code no.
	Raindance Alive Select S Hand shower 125 3jet EcoSmart	24596XXX 24583XXX	24511XXX
	Raindance Alive Select S Hand shower 125 1jet	24595XXX 24582XXX	24500XXX
	Raindance Alive S Overhead shower 300 1jet EcoSmart	24583XXX	24521XXX
	Raindance Alive S Overhead shower 300 1jet	24582XXX	24520XXX

Raindance Alive S Puro Showerpipes 1jet with Ecostat Element thermostat

Features of all variants

- consists of: overhead shower, hand shower, shower thermostat, slider, shower hose, shower bar
- overhead shower Raindance Alive S 300 1jet
- shower head size overhead shower: 300 mm
- spray disc surface: graphite
- spray type hand shower: RainAir, PowderRain, Massage spray
- DropGuard reduces the dripping after stopping the shower to just a few seconds
- convenient spray selection via Select button on the hand shower
- ball-joint: overhead shower angle adjustable
- design cover conceals the nozzles, flat, minimalist design
- spray disc removable for cleaning
- design cover can be removed easily and without tools for cleaning
- design cover surface: graphite
- height-adjustable slider
- thermostat Ecostat Element
- SafetyStop at 40°C
- adjustable hot water limitation
- temperature and water flow control
- with extra large handles
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection dimension: DN15
- connection thread: G 1/2
- centre distance: 150 ± 12 mm
- intrinsically safe against backflow
- shower bar diameter: 25 mm
- 2 functions

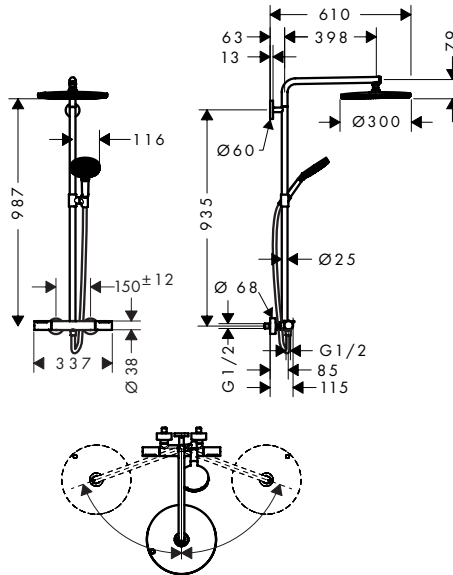

Special feature



Technologies



Spray types



Overview variants

Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
1	Rain	8	Chrome	Q2/2025	24593000
			Brushed Bronze	Q2/2025	24593140
			Brushed Black Chrome	Q2/2025	24593340
			Matt Black	Q2/2025	24593670
			Matt White	Q2/2025	24593700
			Polished Gold Optic	Q2/2025	24593990
1	RainAir	12	Chrome	Q2/2025	24592000
			Brushed Bronze	Q2/2025	24592140
			Brushed Black Chrome	Q2/2025	24592340
			Matt Black	Q2/2025	24592670
			Matt White	Q2/2025	24592700
			Polished Gold Optic	Q2/2025	24592990

Consisting of:

		Included in	Code no.
	Raindance Alive S Overhead shower 300 1jet EcoSmart	24593XXX	24521XXX
	Raindance Alive S Overhead shower 300 1jet	24592XXX	24520XXX
	Raindance Alive Select S Hand shower 125 3jet EcoSmart	24593XXX	24511XXX

For more information about this product, please see the next page.

Raindance Alive Q Showerpipes 2jet, 1jet with ShowerSelect Comfort thermostat**Overview variants**


Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
210/340	2	RainAir, PowderRain	5.8	12	1.7	Chrome	Q2/2025	24590000
						Brushed Bronze	Q2/2025	24590140
						Brushed Black Chrome	Q2/2025	24590340
						Matt Black	Q2/2025	24590670
						Matt White	Q2/2025	24590700
						Polished Gold Optic	Q2/2025	24590990
210/340	1	Rain, or PowderRain	6.1	7	1.9	Chrome	Q2/2025	24581000
						Brushed Bronze	Q2/2025	24581140
						Brushed Black Chrome	Q2/2025	24581340
						Matt Black	Q2/2025	24581670
						Matt White	Q2/2025	24581700
						Polished Gold Optic	Q2/2025	24581990
210/340	1	RainAir, or PowderRain		12		Chrome	Q2/2025	24580000
						Brushed Bronze	Q2/2025	24580140
						Brushed Black Chrome	Q2/2025	24580340
						Matt Black	Q2/2025	24580670
						Matt White	Q2/2025	24580700
						Polished Gold Optic	Q2/2025	24580990

Consisting of:

	Raindance Alive Select S Hand shower 125 3jet EcoSmart	Included in 24591XXX 24581XXX	Code no. 24511XXX
	Raindance Alive Select S Hand shower 125 3jet	24590XXX 24580XXX	24500XXX
	Raindance Alive Q Overhead shower 210/340 1jet EcoSmart	24581XXX	24531XXX
	Raindance Alive Q Overhead shower 210/340 1jet	24580XXX	24530XXX

Basic set for overhead shower 2jet**Features**

- wall-mounted
- no shortening necessary thanks to sliding sleeve
- sound-decoupled installation
- minimum mounting depth: 80 mm
- maximum mounting depth: 108 mm
- connection dimension: Rp 1/2
- sealing foil permanently fixed

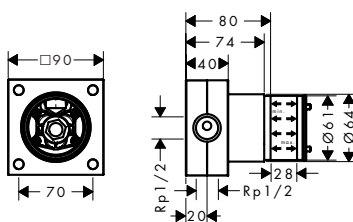

Available from	Code no.
Q2/2025	24573180



Rainfinity Extensions

Highlights

Special feature



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/ min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies




Elastic spray nozzles open and close themselves and prevent limescale buildup.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



Flexible, elastic nozzles in the spray head ensure greater comfort and efficiency when showering.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



A playful way to control the water flow, shower or spray type at the simple touch of a button.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Intense spray consisting of thousands of micro-fine droplets. Thorough, soothing and low-splash.



Focused and extremely gentle spray soothing wellness moments and hydrotherapeutic showering.



Lavish downpour consisting of individual pearl-like droplets that invigorate mind, body and soul.

Finish



Brushed Black Chrome
-340




Brushed Bronze
-140



Chrome
-000



Matt Black
-670



Matt White
-700




Polished Gold Optic
-990

Rainfinity Hand shower 130 3jet EcoSmart+

Features

- shower head size: 130 mm
 - spray type: PowderRain, Intense PowderRain, MonoRain
 - convenient spray selection via Select button
 - spray disc surface: easy cleanable aluminium spray disc, graphite
- FlexPower: nozzles automatically adjust to water pressure by opening and closing
 - QuickClean+: avoid limescale deposits thanks to the elasticity of the nozzles
 - maximum flow rate at 3 bar: 6 l/min
 - minimum flow pressure: 1,5 bar
- with internal water conduction
 - rinseable filter washer
 - connection thread: G 1/2
 - suitable for continuous flow water heaters
 - EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible



Special feature



Technologies



Spray types




Finish	Available from	Code no.
 Chrome	Q4/2025	26862000
 Brushed Bronze	Q4/2025	26862140
 Brushed Black Chrome	Q4/2025	26862340
 Matt Black	Q4/2025	26862670
 Matt White	Q4/2025	26862700
 Polished Gold Optic	Q4/2025	26862990

Rainfinity Overhead showers 3jet with wall connector

Features of all variants

- consists of: overhead shower, wall outlet
 - shower head size: 250 mm
 - spray type: PowderRain, Intense PowderRain, RainStream
 - projection: 273 mm
- middle spray disc: 151 mm
 - frame: metal
 - material spray disc: aluminium
 - spray disc surface: graphite
 - overhead shower removable for cleaning
- shower head vertically inclinable by 10-30°
 - the 3 spray zones must be controlled via 3 valves or a diverter valve with 3 outlets
 - installation: wall-mounted - based on iBox
 - not suitable for continuous flow water heaters

250

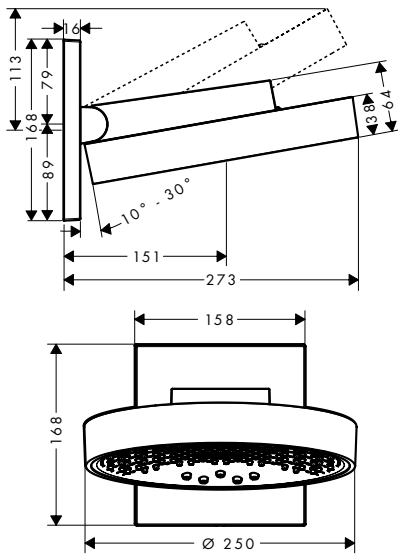

Special feature



Technologies



Spray types



Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	250	3	PowderRain, Intense PowderRain, RainStream	8.9	9	1.9	Brushed Bronze	Q4/2025 26233140
							Brushed Black Chrome	Q4/2025 26233340
							Matt Black	Q4/2025 26233670
							Polished Gold Optic	Q4/2025 26233990
	250	3	PowderRain, Intense PowderRain, RainStream	12	20	1.7	Brushed Bronze	Q4/2025 26232140
							Brushed Black Chrome	Q4/2025 26232340
							Matt Black	Q4/2025 26232670
							Polished Gold Optic	Q4/2025 26232990


! Required parts (choose one):			Code No.
Option 1		iBox universal 2 Basic set 1/2"	01500180
		Adapter plate for iBox universal 2	13588000
Option 2		iBox universal Basic set 1/2" and 3/4"	01800187

Rainfinity Overhead showers 1 jet with wall connector

Features of all variants

- consists of: overhead shower, wall outlet
 - shower head size: 250 mm
 - spray type: PowderRain
 - projection: 273 mm
 - middle spray disc: 151 mm
- frame: metal
 - material spray disc: aluminium
 - spray disc surface: graphite
 - overhead shower removable for cleaning
 - shower head vertically inclinable by 10-30°
- installation: wall
 - connection thread: G 1/2
 - connection dimension: DN15
 - not suitable for continuous flow water heaters

250

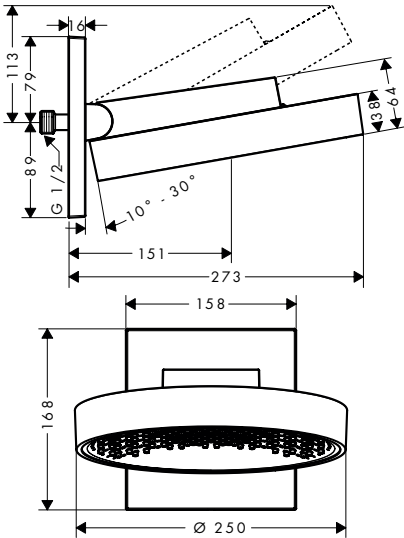

Special feature



Technologies



Spray types



Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
 250	1	PowderRain	8.5	9.4	1.8	 Brushed Bronze	Q4/2025	26227140
						 Brushed Black Chrome	Q4/2025	26227340
						 Matt Black	Q4/2025	26227670
						 Polished Gold Optic	Q4/2025	26227990
250	1	PowderRain	11.5	19	1.4	 Brushed Bronze	Q4/2025	26226140
						 Brushed Black Chrome	Q4/2025	26226340
						 Matt Black	Q4/2025	26226670
						 Polished Gold Optic	Q4/2025	26226990



Raindance Extensions

Highlights

Special feature



Actively regulates water consumption – the amount of water can be adjusted via the control dial.



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Thermostat with integrated temperature control for constant water temperature.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.



Thermostatic mixer with innovative cooling technology to prevent scalding and unpleasant touching.



Mixes water with air. For a smooth, lower-splash water spray and light yet full shower droplets.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



A playful way to control the water flow, shower or spray type at the simple touch of a button.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Concentrated massage spray that helps to nicely and gently wash away everyday tensions and stress.



Full shower rain with droplets enriched with air for soft yet efficient and indulgent showering.

Finish



Brushed Black Chrome
-340




Brushed Bronze
-140



Chrome
-000



Matt Black
-670



Matt White
-700




Polished Gold Optic
-990

Raindance Select S Hand showers 3jet

Features of all variants

- shower head size: 125 mm
 - spray type: PowderRain, Rain, Whirl
 - convenient spray selection via Select button
- QuickClean: Limescale deposits can simply be rubbed off with your finger
 - with internal water conduction
- rinseable filter washer
 - connection thread: G 1/2
 - suitable for continuous flow water heaters

120



Special feature



Technologies



Spray types



Overview variants


	Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	120	3	PowderRain, Rain, Whirl	5	5.7	1.5	Brushed Bronze	Q1/2025	26516140
							Brushed Black Chrome	Q1/2025	26516340
							Matt Black	Q1/2025	26516670
							Matt White	Q1/2025	26516700
							Polished Gold Optic	Q1/2025	26516990
	120	3	PowderRain, Rain, Whirl	6	8	1.4	Brushed Bronze	Q1/2025	26515140
							Brushed Black Chrome	Q1/2025	26515340
							Matt Black	Q1/2025	26515670
							Matt White	Q1/2025	26515700
							Polished Gold Optic	Q1/2025	26515990

Raindance S Overhead showers 1jet

Features of all variants

- shower head size: 240 mm
 - spray type: PowderRain
 - overhead shower angle adjustable
- material spray disc: metal
 - spray disc removable for cleaning
 - installation: ceiling or wall
- connection thread: G 1/2
 - connection dimension: DN15
 - suitable for continuous flow water heaters

PowderRain

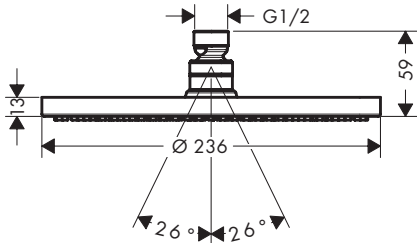

Special feature



Technologies



Spray types




Overview variants

	Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	240	1	PowderRain	5.7	5.8	1.5	Chrome	Q1/2025	28821000
							Brushed Bronze	Q1/2025	28821140
							Brushed Black Chrome	Q1/2025	28821340
							Matt Black	Q1/2025	28821670
							Matt White	Q1/2025	28821700
							Polished Gold Optic	Q1/2025	28821990
	240	1	PowderRain		8	1.1	Chrome	Q1/2025	27624000
							Brushed Bronze	Q1/2025	27624140
							Brushed Black Chrome	Q1/2025	27624340
							Matt Black	Q1/2025	27624670
							Matt White	Q1/2025	27624700
							Polished Gold Optic	Q1/2025	27624990
	240	1	PowderRain	11.8	18.1	1.1	Brushed Bronze	Q1/2025	27623140
							Brushed Black Chrome	Q1/2025	27623340
							Polished Gold Optic	Q1/2025	27623990

Raindance S Showerpipe 240 1jet PowderRain EcoSmart+ with thermostat

Features

- consists of: overhead shower, hand shower, shower thermostat, shower hose, slider, shower bar
- overhead shower Raindance S240 P
- shower head size overhead shower: 240 mm
- spray type overhead shower: PowderRain
- spray type hand shower: PowderRain, Rain, Whirl
- maximum flow rate for Showerpipe at 3 bar: 6 l/min
- minimum flow pressure: 1,5 bar
- max. operating pressure: 10 bar
- height-adjustable slider
- shower arm length overhead shower: 460 mm
- swivel shower arm
- thermostat Ecostat Comfort
- SafetyStop at 40°C
- adjustable hot water limitation
- outlets controlled via turning handle
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection dimension: DN15
- connection thread: G 1/2
- centre distance: 150 ± 12 mm
- pipe can be shortened in height
- intrinsically safe against backflow
- shower bar diameter: 25 mm
- 2 functions
- EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

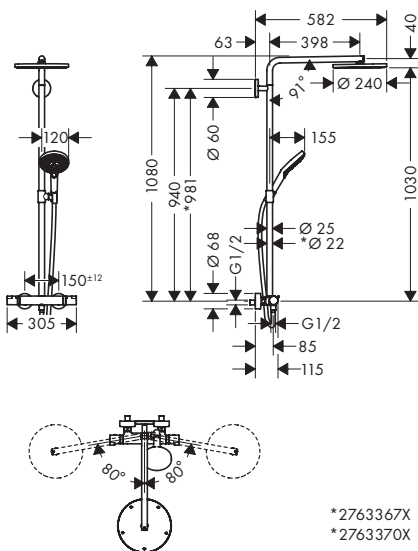

Special feature



Technologies



Spray types



Finish	Available from	Code no.
Chrome	Q1/2025	28825000
Brushed Bronze	Q1/2025	28825140
Brushed Black Chrome	Q1/2025	28825340
Matt Black	Q1/2025	28825670
Matt White	Q1/2025	28825700
Polished Gold Optic	Q1/2025	28825990

Consisting of:



Raindance Select S Hand shower 120 3jet PowderRain EcoSmart+


Included in
28825XXX 26516XXX

Raindance Select E Hand showers 3jet

Features of all variants

- shower head size: 120 mm
 - spray type: PowderRain, Rain, Whirl
 - convenient spray selection via Select button
- QuickClean: Limescale deposits can simply be rubbed off with your finger
 - minimum flow pressure: 1,5 bar
 - with internal water conduction
- rinseable filter washer
 - connection thread: G 1/2
 - suitable for continous flow water heaters

120

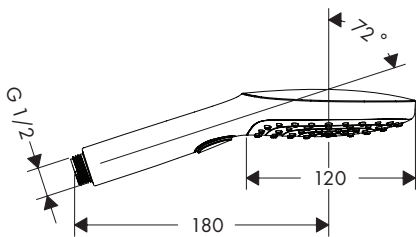

Special feature



Technologies



Spray types





Overview variants

	Shower head size	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	120	3	PowderRain, Rain, Whirl	6	1.5	Chrome	Q2/2025	28729000
						Brushed Bronze	Q2/2025	28729140
						Brushed Black Chrome	Q2/2025	28729340
						Matt Black	Q2/2025	28729670
						Matt White	Q2/2025	28729700
						Polished Gold Optic	Q2/2025	28729990
	120	3	PowderRain, Rain, Whirl	8	1.5	Chrome	Q2/2025	28728000
						Brushed Bronze	Q2/2025	28728140
						Brushed Black Chrome	Q2/2025	28728340
						Matt Black	Q2/2025	28728670
						Matt White	Q2/2025	28728700
						Polished Gold Optic	Q2/2025	28728990

Raindance E Overhead showers 1jet

Features of all variants

- shower head size: 400 x 400 mm
 - spray type: RainAir
 - material spray disc: metal
- spray disc removable for cleaning
 - installation: flush with the ceiling
 - connection thread: G 1/2
- connection dimension: DN15
 - connection type: basic set
 - suitable for continous flow water heaters

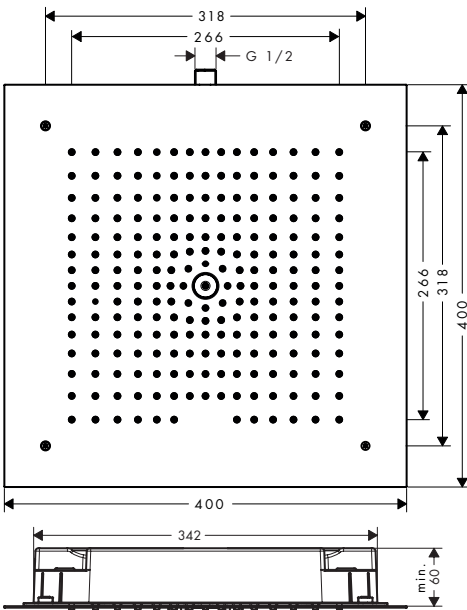

Special feature



Technologies



Spray types




Overview variants

Shower head size	Number of sprays	Spray types	Function from (l/min)	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
400/400	1	RainAir	6.5	8	2	Brushed Bronze	Q2/2025	26253140
						Brushed Black Chrome	Q2/2025	26253340
						Matt Black	Q2/2025	26253670
						Matt White	Q2/2025	26253700
						Polished Gold Optic	Q2/2025	26253990
400/400	1	RainAir	12	20	1.2	Brushed Bronze	Q2/2025	26252140
						Brushed Black Chrome	Q2/2025	26252340
						Matt Black	Q2/2025	26252670
						Matt White	Q2/2025	26252700
						Polished Gold Optic	Q2/2025	26252990

Raindance E Showerpipes 1jet with thermostat

Features of all variants


- overhead shower Raindance E 300 Air 1jet
- shower head size overhead shower: 300 x 300 mm
- spray type overhead shower: RainAir
- surface shelf: anodized aluminium
- spray type hand shower: RainAir, Rain, Whirl
- minimum flow pressure: 1,5 bar
- max. operating pressure: 10 bar
- 90° position adjustable slider, pivots left and right, up and down
- shower arm length overhead shower: 405 mm
- CoolContact thermostat: Prevents the housing from heating up, making showering even safer
- thermostat ShowerTablet 350
- SafetyStop at 40°C
- adjustable hot water limitation
- outlets controlled via turning handle
- Outlets may not be operated simultaneously
- suitable for continuous flow water heaters
- mounting type: exposed installation
- connection dimension: DN15
- connection thread: G 1/2
- centre distance: 150 ± 12 mm
- intrinsically safe against backflow
- bar width: 61 mm
- 2 functions

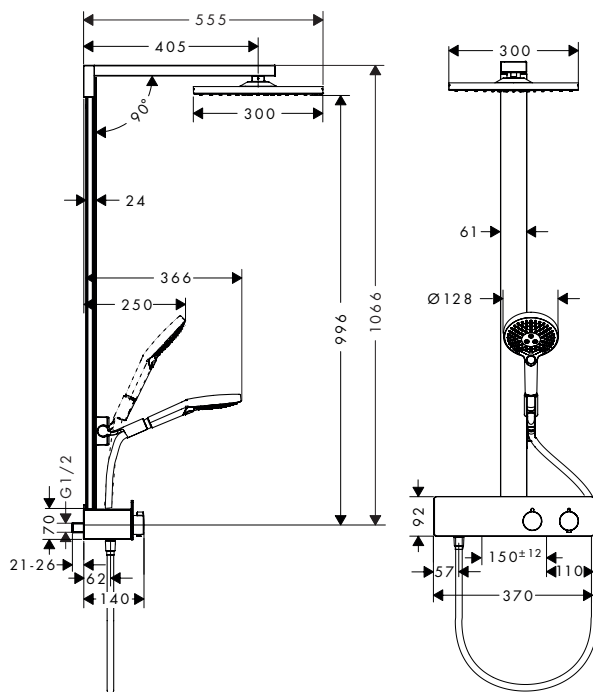

Special feature



Technologies



Spray types



Overview variants

Shower head size	Thermostat	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
300	ShowerTablet 350	1	RainAir	8	1.5	● Matt Black	Q2/2025	27362670
						○ Matt White	Q2/2025	27362700
300	ShowerTablet 350	1	RainAir	16	1.5	● Matt Black	Q2/2025	27361670
						○ Matt White	Q2/2025	27361700



Pulsify Extensions

Highlights

Special feature



This economical shower consumes up to 60% less water than our conventional model thanks to a flow limiter.



Shower that only uses 8 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



The angle of the overhead shower can be adjusted and the water spray can be individually adapted.



Large-scale distribution of the water in the shower so that the whole body is cocooned in feel-good droplets.



A playful way to control the water flow, shower or spray type at the simple touch of a button.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Powerful, stimulating water spray that washes away tiredness and leaves people feeling fit.



Invigorating, focused and powerful spray for the home spa that allows the day's stresses to simply drain off.

Finish



Brushed Black Chrome
-340




Brushed Bronze
-140



Chrome
-000



Matt Black
-670



Matt White
-700




Polished Gold Optic
-990

Pulsify S / Pulsify E Baton hand showers 1jet


Features of all variants

- spray type: PowderRain
 - QuickClean: Limescale deposits can simply be rubbed off with your finger
- with internal water conduction
 - rinseable sieve insert
 - connection thread: G 1/2
- suitable for continous flow water heaters

round

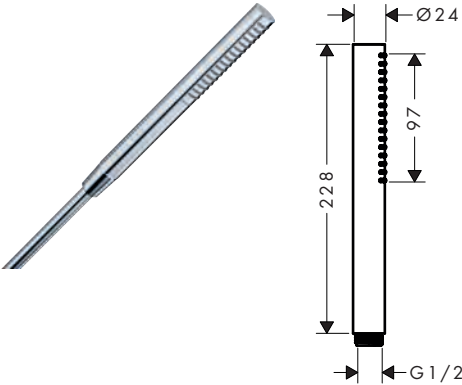

square

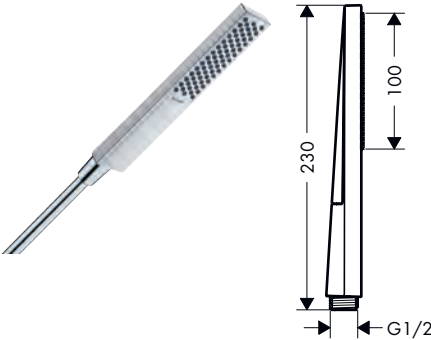

Special feature



Technologies



Spray types



Overview variants

	Shower head size	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Shape	Finish	Available from	Code no.
	100	1	PowderRain	5.4	0.5	round	Brushed Black Chrome	Q1/2025	24126340
							Polished Gold Optic	Q1/2025	24126990
	100	1	PowderRain	7.9	0.5	round	Brushed Black Chrome	Q1/2025	24125340
							Polished Gold Optic	Q1/2025	24125990
	100	1	PowderRain	5	0.9	square	Brushed Black Chrome	Q1/2025	24321340
							Polished Gold Optic	Q1/2025	24321990
	100	1	PowderRain	8	0.8	square	Brushed Black Chrome	Q1/2025	24320340
							Polished Gold Optic	Q1/2025	24320990

Pulsify Select S / Pulsify S Shower holder sets 3jet, 1jet


Features of all variants

- consists of: hand shower, shower holder, shower hose
 - shower head size: 105 mm
- QuickClean: Limescale deposits can simply be rubbed off with your finger
 - pivot connector prevents hose from tangling
- integrated support function
 - wall supports made of plastic
 - rinseable sieve insert

Relaxation



1jet

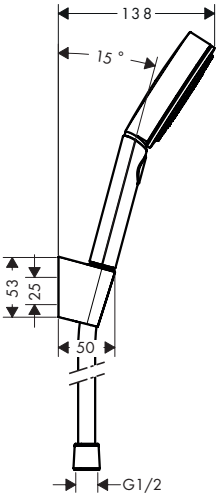

Special feature



Technologies



Spray types




Overview variants

	Shower head size	Shower hose length (mm)	Shower effect	Number of sprays	Spray types	Max. flow rate at 3 bar (l/min)	Min. flow pressure (bar)	Finish	Available from	Code no.
	105	1600	Relaxation	3	PowderRain, IntenseRain, Massage spray	6.9	1.6	Chrome	Q1/2025	24305000
								Matt Black	Q1/2025	24305670
								Matt White	Q1/2025	24305700
	105	1250	Relaxation	3	PowderRain, IntenseRain, Massage spray	6.9	1.6	Chrome	Q1/2025	24306000
								Matt Black	Q1/2025	24306670
								Matt White	Q1/2025	24306700
	105	1250	1jet	1	PowderRain	5.7	1	Chrome	Q1/2025	24307000
								Matt Black	Q1/2025	24307670
								Matt White	Q1/2025	24307700

Pulsify S Overhead shower 105 1jet EcoSmart+

Features

- shower head size: 105 mm
 - spray type: PowderRain
 - function from: 4,8 l/min
 - maximum flow rate at 3 bar: 6 l/min
 - minimum flow pressure: 1 bar
- overhead shower angle adjustable
 - material spray disc: plastic
 - spray disc surface: graphite
 - installation: ceiling or wall
 - connection thread: G 1/2
- connection dimension: DN15
 - suitable for continous flow water heaters
 - EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible



Special feature



Technologies



Spray types



Finish	Available from	Code no.
 Brushed Bronze	Q1/2025	24132140



FixFit Fine | Porter Fine

FixFit Fine S / FixFit Fine E / FixFit Fine Q Wall outlets with non-return valve

Features of all variants

- metal connection angle
 - material escutcheon: metal
- with non-return valve
 - connection type: G 1/2
- slim, minimalist design

round



square



softsquare




Overview variants

Shape	Non-return valve	Finish	Available from	Code no.
round	non-return valve	Chrome	Q2/2025	28882000
		Brushed Bronze	Q2/2025	28882140
		Brushed Black Chrome	Q2/2025	28882340
		Matt Black	Q2/2025	28882670
		Matt White	Q2/2025	28882700
		Polished Gold Optic	Q2/2025	28882990
square	non-return valve	Chrome	Q2/2025	28883000
		Brushed Bronze	Q2/2025	28883140
		Brushed Black Chrome	Q2/2025	28883340
		Matt Black	Q2/2025	28883670
		Matt White	Q2/2025	28883700
		Polished Gold Optic	Q2/2025	28883990
softsquare	non-return valve	Chrome	Q2/2025	28884000
		Brushed Bronze	Q2/2025	28884140
		Brushed Black Chrome	Q2/2025	28884340
		Matt Black	Q2/2025	28884670
		Matt White	Q2/2025	28884700
		Polished Gold Optic	Q2/2025	28884990

Porter Fine Shower holder

Features

- universal design fitting perfectly to FixFit Fine S, E or Q
 - fixed holding position
- for shower hoses with conical nut
 - material: metal
 - dimensions: 52 x 31 x 42 mm (HxWxD)
- diameter drill hole: 23 mm
 - 2 drill holes
 - conical mount



Finish	Available from	Code no.
 Chrome	Q2/2025	28885000
 Brushed Bronze	Q2/2025	28885140
 Brushed Black Chrome	Q2/2025	28885340
 Matt Black	Q2/2025	28885670
 Matt White	Q2/2025	28885700
 Polished Gold Optic	Q2/2025	28885990



Flexaplust | Exafill

Highlights

Technologies



Quick and safe installation - several features ensure easy installation.



Due to its surface texture, this product is easy to clean with a damp cloth.



A touch of a button is all it takes for the water in the bathtub to come out of the bath spout or shower.

Cover finish



Chrome

-XXX



High Gloss White

-XXX



The surfaces marked with XXX are described in the article text and are not recognizable in the article number. The accent surface can be found in the article number at position 6, 7.

Finish



Brushed Black Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670



Matt White

-700



Polished Gold Optic

-990

Frame Finish



Brushed Black Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670



Matt White

-700




Polished Gold Optic

-990

Flexaplus Finish sets waste and overflow set**Features of all variants**

- consists of: finish set overflow , push-open waste set
- suitable for bathtubs made of cast iron, steel and plastic, to fit to both standard and extra-large tubs, bathtubs with waste outlet diameter 52 mm
- push-open waste set
- easy cleaning with access for plumber's snake
- easy waste and overflow installation with included tool
- material waste set: Polypropylene (PP)
- material overflow and filler: ABS, Polypropylene (PP)

**Technologies****Overview variants**

Cover finish	Frame Finish	Available from	Code no.
Chrome	 Chrome	Q3/2025	58188000
High Gloss White	 Chrome	Q3/2025	58187000
	 Brushed Bronze	Q3/2025	58187140
	 Brushed Black Chrome	Q3/2025	58187340
	 Matt Black	Q3/2025	58187670
	 Matt White	Q3/2025	58187700
	 Polished Gold Optic	Q3/2025	58187990

! Required parts:

Tubset universal Basic set for waste and overflow set for bathtubs


Code no.

58152180

Flexaplus Complete set waste and overflow set for bathtub

Features

- consists of: basic set, finish set, odour trap
 - suitable for bathtubs made of cast iron, steel and plastic, to fit to both standard and extra-large tubs, bathtubs with waste outlet diameter 52 mm
 - easy waste and overflow installation with included tool
 - rotatable connection bent, diameter: 40/50 mm
- double-sided seals on outlet and overflow
 - flat version: only 46 mm is needed behind bathtub
 - shortenable and flexible overflow hose
 - rotatable siphon housing
 - easy cleaning with access for plumber's snake
 - connection siphon drain plug: clamp connection
 - pipe outer diameter drain pipe: 50 mm
- drainage capacity accumulation height 300 mm: 64 l/min
 - overflow capacity accumulation height 60 mm above centre of overflow hole: 36 l/min
 - water seal height: 50 mm
 - material waste set: Polypropylene (PP), ABS
 - material overflow: Polypropylene (PP), ABS

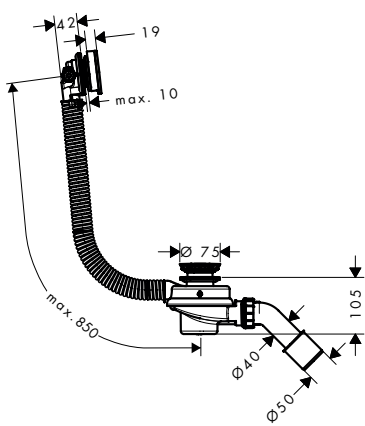

Finish	Available from	Code no.
 Chrome	Q3/2025	58154000

Consisting of:



Tubset universal Basic set for waste and overflow set for bathtubs

Included in	Code no.
58154000	58152180




Flexaplus Finish set chrome waste and overflow set

58154000	58188000
----------	----------

Exafill Finish sets bath filler, waste and overflow set**Features of all variants**

- consists of: finish set overflow with bath filler, push-open waste set
- suitable for bathtubs made of cast iron, steel and plastic, to fit to both standard and extra-large tubs, bathtubs with waste outlet diameter 52 mm
- adjustable water inlet with different spray types
- push-open waste set
- easy cleaning with access for plumber's snake
- easy waste and overflow installation with included tool
- material waste set: Polypropylene (PP)
- material overflow and filler: ABS, Polypropylene (PP)

**Technologies****Overview variants**

Cover finish	Frame Finish	Available from	Code no.
Chrome	Chrome	Q3/2025	58131000
High Gloss White	Chrome	Q3/2025	58119000
	Brushed Bronze	Q3/2025	58119140
	Brushed Black Chrome	Q3/2025	58119340
	Matt Black	Q3/2025	58119670
	Matt White	Q3/2025	58119700
	Polished Gold Optic	Q3/2025	58119990

Required parts:


Tubset universal Basic set for waste and overflow set for bathtubs

Code no.

58152180

Exafill Complete set bath filler, waste and overflow set for bathtub**Features**

- consists of: finish set overflow with bath filler, basic set, waste set, odour trap
- suitable for bathtubs made of cast iron, steel and plastic, to fit to both standard and extra-large tubs, bathtubs with waste outlet diameter 52 mm
- water supply via the overflow
- adjustable water inlet with different spray types
- easy cleaning with access for plumber's snake
- connection inlet mixed water: external thread
- rotatable siphon housing
- clamp connection
- connection dimension entry: G 1/2
- rotatable connection bent, diameter: 40/50 mm
- double-sided seals on outlet and overflow
- flat version: only 46 mm is needed behind bathtub
- easy waste and overflow installation with included tool
- shortenable and flexible overflow hose
- pipe outer diameter drain pipe: 50 mm
- water seal height: 50 mm
- drainage capacity accumulation height 300 mm: 64 l/min
- overflow capacity accumulation height 60 mm above centre of overflow hole: 36 l/min
- material waste set: Polypropylene (PP), ABS
- material overflow and filler: ABS, Polypropylene (PP)

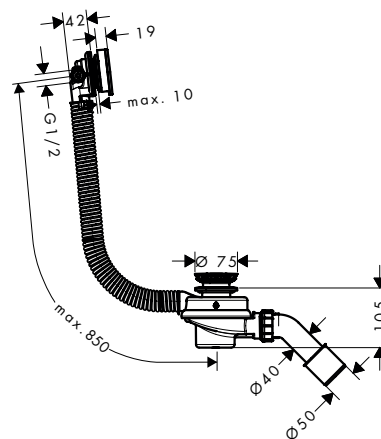

Finish	Available from	Code no.
Chrome	Q3/2025	58130000

For more information about this product, please see the next page.


Exafill Complete set bath filler, waste and overflow set for bathtub

Consisting of:		Included in	Code no.
	Tubset universal Basic set for waste and overflow set for bathtubs	58130000	58152180
	Exafill Finish set chrome bath filler, waste and overflow set	58130000	58131000

Tubset universal Basic set for waste and overflow set for bathtubs

Features

- consists of: basic set, odour trap
- suitable for bathtubs made of cast iron, steel and plastic, to fit to both standard and extra-large tubs, bathtubs with waste outlet diameter 52 mm
- with G 1/2" male thread connection
- rotatable connection bent, diameter: 40/50 mm
- easy waste and overflow installation with included tool
- double-sided seals on outlet and overflow
- flat version: only 46 mm is needed behind bathtub
- easy cleaning with access for plumber's snake
- shortenable and flexible overflow hose
- rotatable siphon housing
- pipe outer diameter drain pipe: 50 mm
- odour trap backwater height is 50 mm
- drainage capacity accumulation height 300 mm: 64 l/min
- overflow capacity accumulation height 60 mm above centre of overflow hole: 36 l/min
- material: Polypropylene (PP)
- material waste set: Polypropylene (PP), ABS

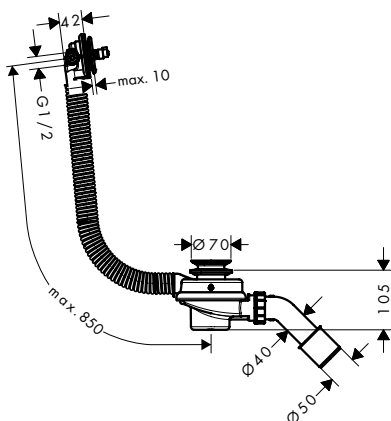

Available from	Code no.
Q3/2025	58152180

Required parts (choose one):

Flexaplust Finish set waste and overflow set



Frame Finish	Code no.
Chrome	58187000
Brushed Bronze	58187140
Brushed Black Chrome	58187340
Matt Black	58187670
Matt White	58187700
Polished Gold Optic	58187990
Chrome	58188000


Flexaplust Finish set chrome waste and overflow set



RainDrain Staro Finish set waste set for shower tray

Features

- suitable for shower trays with Ø 90 mm waste outlet
- not included: basic set
 - easy to clean surface
- material of drain plug: Polypropylene (PP), ABS



Technologies



Finish	Available from	Code no.
Chrome	Q3/2025	60058000
Brushed Bronze	Q3/2025	60058140
Brushed Black Chrome	Q3/2025	60058340
Matt Black	Q3/2025	60058670
Matt White	Q3/2025	60058700
Polished Gold Optic	Q3/2025	60058990

Required parts:



RainDrain Staro Basic set for waste set for shower tray


Code no.

60090180

RainDrain Staro Complete set waste set for shower tray

Features

- consists of: finish set, basic set, odour trap
 - suitable for shower trays with Ø 90 mm waste outlet
 - nominal diameter connection: DN 50
 - screw connection M5x30
 - clamp connection
- rotatable connection
 - waste pipe Ø 50 mm, by shortening also 40 mm possible
 - type of odour seal: fluid
 - drainage capacity 57 l/min
 - installation height: 80 mm
- removable and cleanable water seal
 - water seal height: 50 mm
 - material siphon: Polypropylene (PP)
 - material of drain plug: Polypropylene (PP), ABS
 - easy to clean surface



Technologies



Finish	Available from	Code no.
Chrome	Q3/2025	60057000

Consisting of:



RainDrain Staro Finish set waste set for shower tray

Included in

Code no.

60057000

60058000



RainDrain Staro Basic set for waste set for shower tray


60057000

60090180

RainDrain Staro Basic set for waste set for shower tray

Features

- consists of: odour trap, trap
 - suitable for shower trays with Ø 90 mm waste outlet
 - nominal diameter connection: DN 50
 - screw connection M5x30
- clamp connection
 - rotatable connection
 - waste pipe Ø 50 mm
 - type of odour seal: fluid
 - drainage capacity 57 l/min
- installation height: 80 mm
 - removable and cleanable water seal
 - water seal height: 50 mm
 - material siphon: Polypropylene (PP)
 - not included: finish set



Technologies



	Available from	Code no.
	Q3/2025	60090180



Ecostat Comfort

Highlights

Special feature



Actively regulates water consumption – the amount of water can be adjusted via the control dial.

Technologies



Thermostat with integrated temperature control for constant water temperature.



Safety lock at over 40 °C - temperature limit, which prevents excessively hot water from escaping.

Finish



Brushed Black
Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670



Matt White

-700



Polished Gold
Optic


-990

Ecostat Comfort S Thermostats for concealed installation


Features of all variants

- temperature and water flow control
 - thermostat cartridge
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
 - handles always at the same height regardless of the installation depth of the basic set
 - Safety stop at 40 °C
- temperature limitation adjustable
 - material handles: metal
 - connection type: basic set iBox universal 2 (# 01500180)


1 function

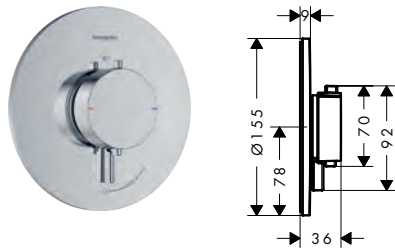

2 functions

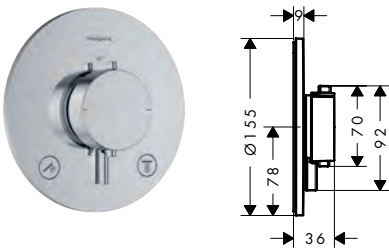

2 functions



Special feature



Technologies



Overview variants


Number of functions	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
1 function	21.3	Chrome	Q2/2025	33714000
		Brushed Bronze	Q2/2025	33714140
		Brushed Black Chrome	Q2/2025	33714340
		Matt Black	Q2/2025	33714670
		Matt White	Q2/2025	33714700
		Polished Gold Optic	Q2/2025	33714990
2 functions	25.7	Chrome	Q2/2025	33715000
		Brushed Bronze	Q2/2025	33715140
		Brushed Black Chrome	Q2/2025	33715340
		Matt Black	Q2/2025	33715670
		Matt White	Q2/2025	33715700
		Polished Gold Optic	Q2/2025	33715990

EcoStat Comfort E Thermostats for concealed installation


Features of all variants

- temperature and water flow control
 - thermostat cartridge
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - escutcheon can be aligned by +/- 3°
- easy installation due to pre-assembled function block
 - handles always at the same height regardless of the installation depth of the basic set
 - Safety stop at 40 °C
- temperature limitation adjustable
 - material handles: metal
 - connection type: basic set iBox universal 2 (# 01500180)


1 function



2 functions



2 functions



Special feature



Technologies






Overview variants

Number of functions	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
1 function	21.3	Chrome	Q2/2025	33710000
		Brushed Bronze	Q2/2025	33710140
		Brushed Black Chrome	Q2/2025	33710340
		Matt Black	Q2/2025	33710670
		Matt White	Q2/2025	33710700
		Polished Gold Optic	Q2/2025	33710990
2 functions	25.7	Chrome	Q2/2025	33711000
		Brushed Bronze	Q2/2025	33711140
		Brushed Black Chrome	Q2/2025	33711340
		Matt Black	Q2/2025	33711670
		Matt White	Q2/2025	33711700
		Polished Gold Optic	Q2/2025	33711990

Ecostat Comfort Q Thermostats for concealed installation**Features of all variants**

- temperature and water flow control
- thermostat cartridge
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- escutcheon can be aligned by $\pm 3^\circ$
- easy installation due to pre-assembled function block
- handles always at the same height regardless of the installation depth of the basic set
- Safety stop at 40°C
- temperature limitation adjustable
- material handles: metal
- connection type: basic set iBox universal 2 (# 01500180)

1 function**2 functions****2 functions****Special feature****Technologies****Overview variants**

Number of functions	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
1 function	21.3	Chrome	Q2/2025	33712000
		Brushed Bronze	Q2/2025	33712140
		Brushed Black Chrome	Q2/2025	33712340
		Matt Black	Q2/2025	33712670
		Matt White	Q2/2025	33712700
		Polished Gold Optic	Q2/2025	33712990
2 functions	25.7	Chrome	Q2/2025	33713000
		Brushed Bronze	Q2/2025	33713140
		Brushed Black Chrome	Q2/2025	33713340
		Matt Black	Q2/2025	33713670
		Matt White	Q2/2025	33713700
		Polished Gold Optic	Q2/2025	33713990



Vivenis

Highlights

Special feature



Faucet that helps save energy by only allowing hot water to flow when the lever is actively moved.



Tap that only uses 5 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.



A touch of a button is all it takes for the water in the bathtub to come out of the bath spout or shower.



Mixes air into the water. For a soft, less splashing water jet and full, light drops.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Focused and extremely gentle spray soothing wellness moments and hydrotherapeutic showering.

Finish



Brushed Black
Chrome
-340




Brushed Bronze
-140



Chrome
-000



Matt Black
-670



Matt White
-700



Polished Gold
Optic
-997

Vivenis Single lever basin mixers

Features of all variants

- handle variant: lever handle
 - spray type: WaterfallStream
 - maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
 - temperature limitation adjustable
 - suitable for continuous flow water heaters
- connection dimension: DN15

110



250





Special feature



Technologies



Certificates/declarations

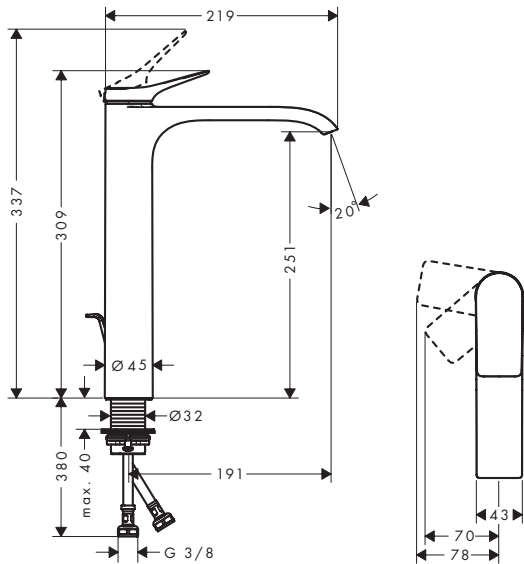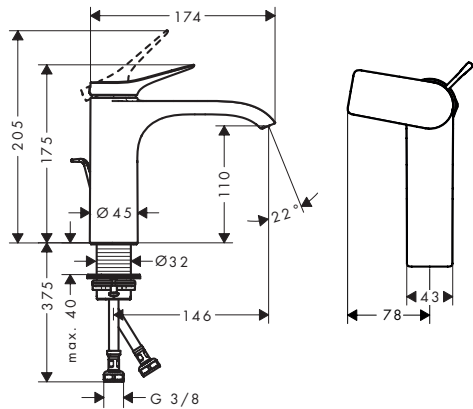

Overview variants

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	Material waste set	CoolStart	For wash bowls	Finish	Available from	Code no.
110	146	110	pop-up	metal	■	—	● Chrome		75023000
							● Brushed Bronze	Q3/2025	75023140
							● Brushed Black Chrome	Q3/2025	75023340
							● Matt Black		75023670
							○ Matt White		75023700
110	146	110	without	-	■	—	● Chrome		75024000
							● Brushed Bronze	Q3/2025	75024140
							● Brushed Black Chrome	Q3/2025	75024340
							● Matt Black		75024670
							○ Matt White		75024700
250	191	251	pop-up	metal	■	■	● Chrome	Q1/2025	75044000
							● Brushed Bronze	Q3/2025	75044140
							● Brushed Black Chrome	Q3/2025	75044340
							● Matt Black	Q1/2025	75044670
							○ Matt White	Q1/2025	75044700

For more information about this product, please see the next page.

Vivenis Single lever basin mixers


Overview variants

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	Material waste set	CoolStart	For wash bowls	Finish	Available from	Code no.
250	191	251	without	-	■	■	Chrome	Q1/2025	75045000
							Brushed Bronze	Q3/2025	75045140
							Brushed Black Chrome	Q3/2025	75045340
							Matt Black	Q1/2025	75045670
							Matt White	Q1/2025	75045700
110	146	110	pop-up	metal	-		Chrome		75020007
							Brushed Bronze		75020147
							Brushed Black Chrome		75020347
							Matt Black		75020677
							Matt White		75020707
250	191	251	push-open	metal	-	■	Polished Gold Optic		75020997
							Chrome		75046007
							Brushed Bronze		75046147
							Brushed Black Chrome		75046347
							Matt Black		75046677
							Matt White		75046707

Vivenis 3-hole basin mixer 90 with pop-up waste set

Features

- consists of: 3-hole basin mixer, waste set
 - ComfortZone: 90
 - projection: 150 mm
 - spout height: 91 mm
 - handle variant: lever handle
- spray type: WaterfallStream
 - maximum flow rate at 3 bar: 5 l/min
 - ceramic valves hot/cold 90°
 - suitable for continuous flow water heaters
 - pop-up waste set G 1¼
- material waste set: metal
 - connection type: G ¾ hose connections
 - connection dimension: DN15
 - EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

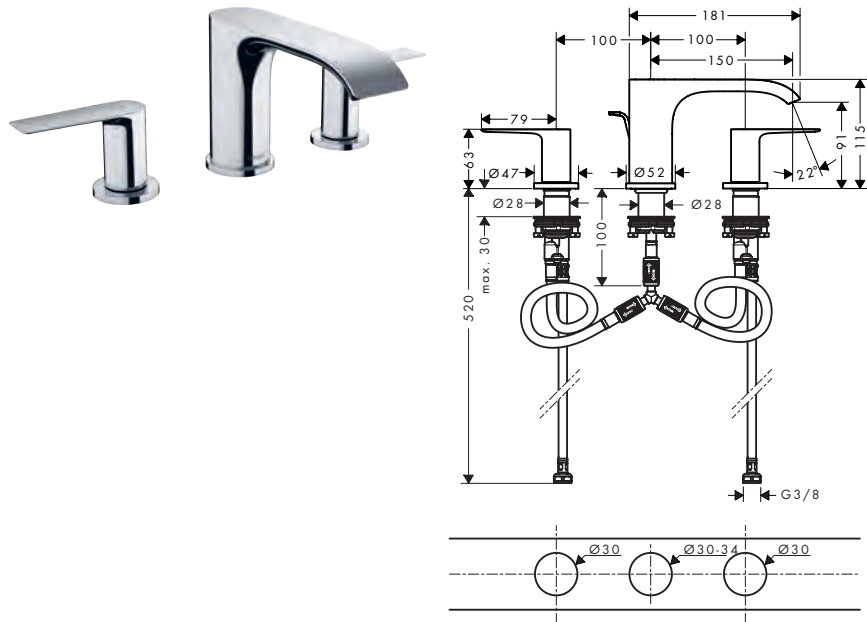

Special feature



Technologies



Certificates/declarations




Finish	Available from	Code no.
Chrome		75033000
Brushed Bronze	Q3/2025	75033140
Brushed Black Chrome	Q3/2025	75033340
Matt Black		75033670
Matt White		75033700

Vivenis Single lever basin mixer for concealed installation wall-mounted with spout 19,2 cm

Features

- consists of: single lever basin mixer for concealed installation wall-mounted, waste set
 - projection: 192 mm
 - handle variant: lever handle
 - spray type: WaterfallStream
- maximum flow rate at 3 bar: 4,6 l/min
 - ceramic cartridge
 - temperature limitation adjustable
 - suitable for continuous flow water heaters
 - non-closing waste set
- material waste set: metal
 - connection type: basic set
 - connection dimension: DN15
 - handle can be positioned on the right or left, depending on the basic set installation

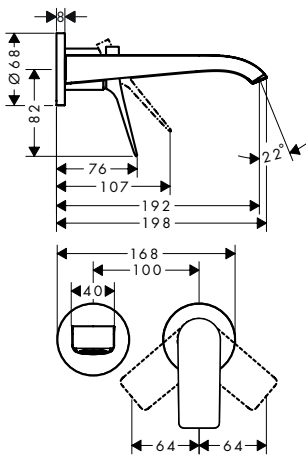

Special feature



Technologies



Finish	Code no.
 Chrome	75050007
 Brushed Bronze	75050147
 Brushed Black Chrome	75050347
 Matt Black	75050677
 Matt White	75050707

Required parts:



Basic set for single lever basin mixer for concealed installation wall-mounted


Code no.

13622180

Vivenis Single lever bath mixer floor-standing

Features

- consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder
 - 2 functions
 - projection: 236 mm
 - spray type mixer: WaterfallStream
 - maximum flow rate at 3 bar: 21,3 l/min
- flow rate for bath spout at 3 bar: 21,3 l/min
 - flow rate of hand shower at 3 bar: 13,4 l/min
 - ceramic cartridge
 - temperature limitation adjustable
 - diverter with automatic resetting
 - non-return valve
- connection dimension: DN15
 - connection type: basic set
 - deck mounted
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - spray type hand shower: Rain, MonoRain

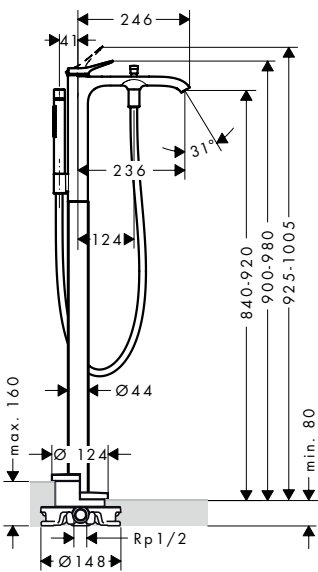

Technologies



Spray types




Certificates/declarations



Finish	Available from	Code no.
Chrome		75445000
Brushed Bronze	Q3/2025	75445140
Brushed Black Chrome	Q3/2025	75445340
Matt Black		75445670
Matt White		75445700

Vivenis Single lever bath mixer Original for exposed installation**Features**


- 2 functions
- projection: 197 mm
- centre distance: 150 ± 12 mm
- spray type mixer: WaterfallStream
- ceramic cartridge
- temperature limitation adjustable
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: S-connections
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

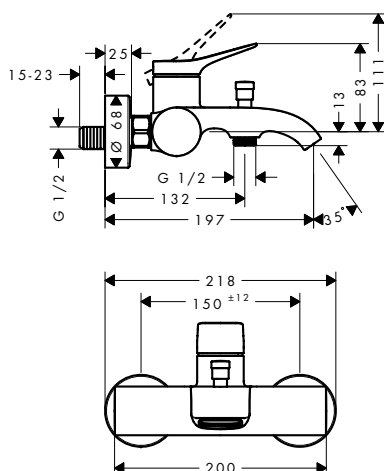**Technologies**

Finish	Available from	Code no.
Chrome	Q3/2025	75423000
Brushed Bronze	Q3/2025	75423140
Brushed Black Chrome	Q3/2025	75423340
Matt Black	Q3/2025	75423670
Matt White	Q3/2025	75423700

Vivenis Single lever bath mixer for exposed installation**Features**

- 2 functions
- projection: 216 mm
- centre distance: 150 ± 12 mm
- spray type mixer: WaterfallStream
- maximum flow rate at 3 bar: 19,4 l/min
- flow rate for bath spout at 3 bar: 19,4 l/min
- ceramic cartridge
- temperature limitation adjustable
- pressure diverter Select with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: S-connections
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

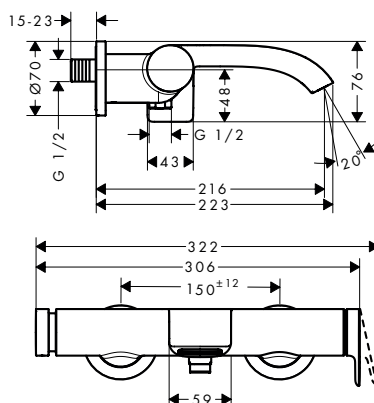
**Technologies****Certificates/declarations**

Finish	Available from	Code no.
Chrome		75420000
Brushed Bronze	Q3/2025	75420140
Brushed Black Chrome	Q3/2025	75420340
Matt Black		75420670
Matt White		75420700

Vivenis Single lever bath mixer for concealed installation for iBox universal

Features

- 2 functions
 - flow rate upper outlet: 21 l/min
 - flow rate lower outlet: 29 l/min
 - maximum flow rate at 3 bar: 29 l/min
 - ceramic cartridge
- temperature limitation adjustable
 - diverter with automatic resetting
 - with silencer
 - suitable for continous flow water heaters
 - connection type: basic set
- wall-mounted
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar



Certificates/declarations




Finish	Available from	Code no.
Chrome		75415000
Brushed Bronze	Q3/2025	75415140
Brushed Black Chrome	Q3/2025	75415340
Matt Black		75415670
Matt White		75415700

! Required parts (choose one):			Code No.
Option 1		iBox universal 2 Basic set 1/2"	01500180
	+ 	Adapter plate for iBox universal 2	13588000
Option 2		iBox universal Basic set 1/2" and 3/4"	01800187

Vivenis Bath spout

Features

- 1 function
 - connection type: G 1/2
 - with escutcheon
- projection: 202 mm
 - wall-mounted
 - maximum flow rate at 3 bar: 24,3 l/min
- spray type: WaterfallStream

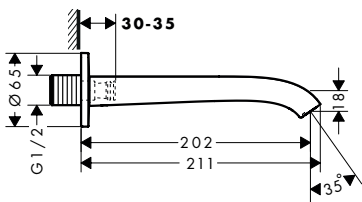

Technologies



Certificates/declarations




Finish	Available from	Code no.
Chrome		75410000
Brushed Bronze	Q3/2025	75410140
Brushed Black Chrome	Q3/2025	75410340
Matt Black		75410670
Matt White		75410700

- consists of: 4-hole rim mounted bath mixer, hand shower, shower hose, shower holder, hose box
- 2 functions
- maximum pull-out length of hand shower: 1,45 m
- sBox for quiet, smooth and protected hose guidance

- maximum flow rate at 3 bar: 23,9 l/min
- flow rate for bath spout at 3 bar: 23,9 l/min
- flow rate of hand shower at 3 bar: 10,5 l/min
- non-return valve
- connection dimension: DN15
- connection type: basic set

- installation on bath rim
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- spray type hand shower: PowderRain

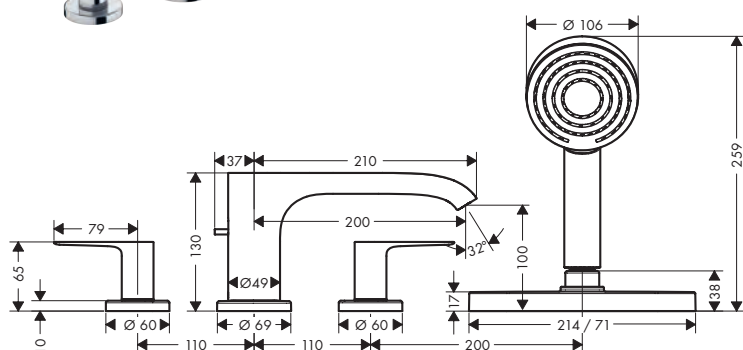

Powder Rain

Certificates/declarations



Finish	Available from	Code no.
 Chrome		75444000
 Brushed Bronze	Q3/2025	75444140
 Brushed Black Chrome	Q3/2025	75444340
 Matt Black		75444670
 Matt White		75444700

Required parts:



Basic set for 4-hole rim mounted bath mixer

Code no.


13440180

Vivenis Single lever shower mixer Original for exposed installation

- 1 function
- centre distance: 150 ± 12 mm
- ceramic cartridge
- temperature limitation adjustable

- non-return valve
- with silencer
- hose connection DN15
- connection dimension: DN15

- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- connection type: S-connections

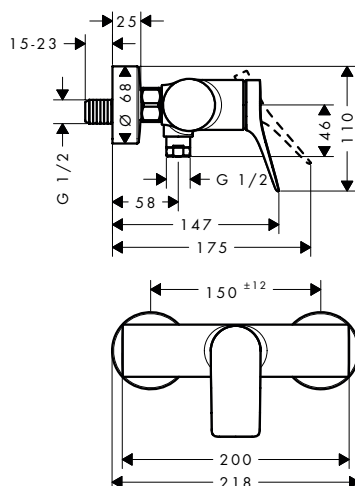


Finish	Available from	Code no.
 Chrome	Q3/2025	75623000
 Brushed Bronze	Q3/2025	75623140
 Brushed Black Chrome	Q3/2025	75623340
 Matt Black	Q3/2025	75623670
 Matt White	Q3/2025	75623700

Vivenis Single lever shower mixer for exposed installation

Features

- 1 function
 - centre distance: 150 ± 12 mm
 - maximum flow rate at 3 bar: 12,3 l/min
 - ceramic cartridge
- temperature limitation adjustable
 - non-return valve
 - with silencer
 - hose connection DN15
- connection dimension: DN15
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - connection type: S-connections



Certificates/declarations




Finish	Available from	Code no.
Chrome		75620000
Brushed Bronze	Q3/2025	75620140
Brushed Black Chrome	Q3/2025	75620340
Matt Black		75620670
Matt White		75620700

Vivenis Single lever shower mixer for concealed installation for iBox universal

Features

- 1 function
 - maximum flow rate at 3 bar: 29,3 l/min
 - maximum flow rate at 1 bar: 15,5 l/min
- ceramic cartridge
 - temperature limitation adjustable
 - with silencer
- min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - connection type: basic set



Certificates/declarations



Finish	Available from	Code no.
Chrome		75615000
Brushed Bronze	Q3/2025	75615140
Brushed Black Chrome	Q3/2025	75615340
Matt Black		75615670
Matt White		75615700

! Required parts (choose one):			Code No.
Option 1		iBox universal 2 Basic set 1/2"	01500180
	+		13588000
Option 2		iBox universal Basic set 1/2" and 3/4"	01800187



Finoris

Highlights

Special feature



Faucet that helps save energy by only allowing hot water to flow when the lever is actively moved.



Tap that only uses 5 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.



Significantly more space to move and maximum flexibility around the wash basin, for example when washing hair.



Limescale deposits and dirt can be simply rubbed off using a finger, creating less of a need to clean.



A touch of a button is all it takes for the water in the bathtub to come out of the bath spout or shower.



Mixes air into the water. For a soft, less splashing water jet and full, light drops.

Spray types



Relaxing, micro-fine droplets that softly and silently cocoon the body. For sensual showering.



Invigorating and energizing showering indulgence with full shower rain designed for everyday shower pleasure.



Focused and extremely gentle spray soothing wellness moments and hydrotherapeutic showering.

Finish



Brushed Black
Chrome

-340



Brushed Bronze

-140




Chrome

-000



Matt Black

-670






Matt White

-700

Finoris Single lever basin mixers**Features of all variants**

- consists of: single lever basin mixer, waste set
- handle variant: lever handle
- spray type: laminar spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- temperature limitation adjustable
- suitable for continuous flow water heaters
- material waste set: metal
- connection type: G 3/8 hose connections
- connection dimension: DN15
- cold water in basic handle position

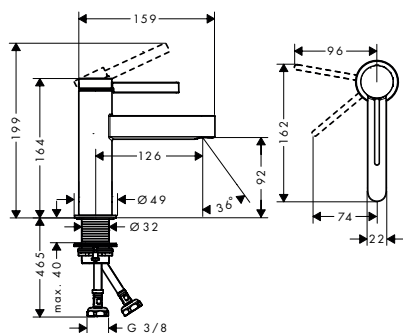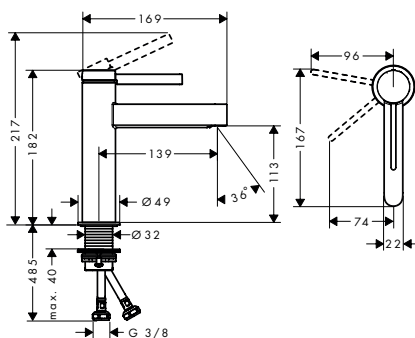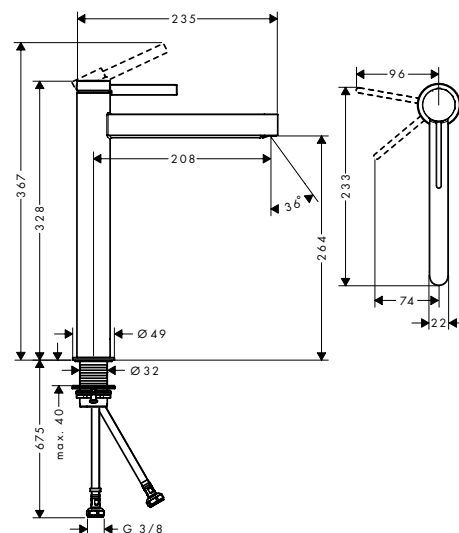100**110****260****Special feature****Technologies****Overview variants**

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	CoolStart	For wash bowls	Finish	Available from	Code no.
100	126	92	push-open	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q2/2025	76012000
110	139	113	push-open	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q3/2025	76012140
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q3/2025	76012340
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q2/2025	76012670
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q2/2025	76012700
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q2/2025	76024000
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q3/2025	76024140
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q3/2025	76024340
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q3/2025	76024670
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q2/2025	76024700
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q2/2025	76025000
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q3/2025	76025140
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q3/2025	76025340
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q2/2025	76025670
110	139	113	pop-up	■	—	● Chrome ● Brushed Bronze ● Brushed Black Chrome ● Matt Black ○ Matt White	Q2/2025	76025700

For more information about this product, please see the next page.

Finoris Single lever basin mixers

Overview variants

ComfortZone	Projection (mm)	Spout height (mm)	Waste set	CoolStart	For wash bowls	Finish	Available from	Code no.
260	208	264	push-open	■	■	● Chrome	Q2/2025	76072000
						● Brushed Bronze	Q3/2025	76072140
						● Brushed Black Chrome	Q3/2025	76072340
						● Matt Black	Q2/2025	76072670
						○ Matt White	Q2/2025	76072700

Finoris Single lever basin mixers with bidette hand shower and shower hose 160 cm

Features of all variants

- consists of: single lever basin mixer, bidette hand shower, shower holder, shower hose, waste set
 - handle variant: lever handle
 - spray type: laminar spray
 - spray type Bidette: shower spray
- maximum flow rate at 3 bar: 5 l/min
 - ceramic cartridge
 - temperature limitation adjustable
 - suitable for continuous flow water heaters
 - push-open waste set G 1 ¼
- material waste set: metal
 - connection type: G ¾ hose connections
 - connection dimension: DN15
 - EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

110



260





Special feature

EcoSmart

Technologies

Comfort Zone

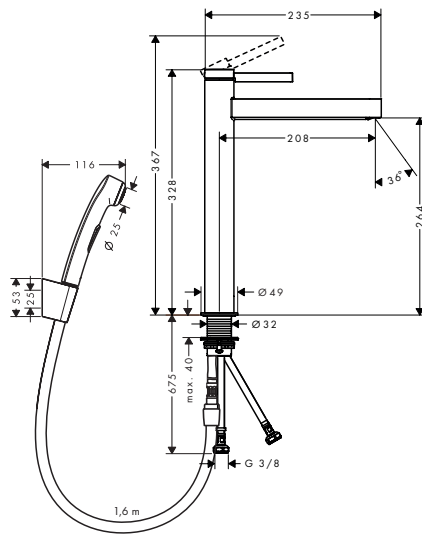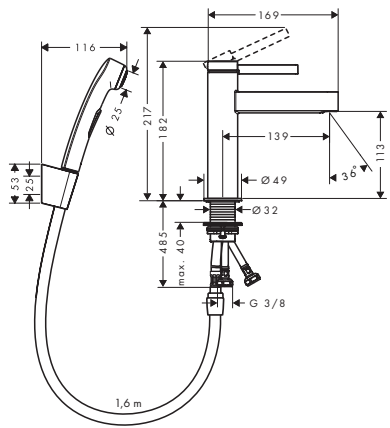


Overview variants

ComfortZone	Projection (mm)	Spout height (mm)	For wash bowls	Finish	Available from	Code no.
110	139	113	—	● Chrome		76210000
				● Brushed Bronze	Q3/2025	76210140
				● Brushed Black Chrome	Q3/2025	76210340
				● Matt Black		76210670
260	208	264	■	● Chrome		76220000
				● Brushed Bronze	Q3/2025	76220140
				● Brushed Black Chrome	Q3/2025	76220340
				● Matt Black		76220670

Finoris Pillar tap 100 with lever handle for cold water or pre-adjusted water without waste set

Features

- ComfortZone: 100
 - projection: 126 mm
 - spout height: 92 mm
 - handle variant: lever handle
- spray type: laminar spray
 - maximum flow rate at 3 bar: 5 l/min
 - ceramic cartridge
 - for cold water connection
- connection type: G 3/8 hose connection
 - connection dimension: DN15
 - EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

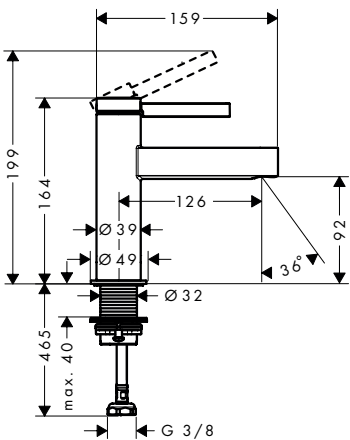

Special feature



Technologies




Finish	Available from	Code no.
Chrome		76013000
Brushed Bronze	Q3/2025	76013140
Brushed Black Chrome	Q3/2025	76013340
Matt Black		76013670
Matt White		76013700

Finoris 3-hole basin mixers


Features of all variants

- consists of: 3-hole basin mixer, waste set
 - projection: 169 mm
 - handle variant: lever handle
 - spray type: laminar spray
 - maximum flow rate at 3 bar: 5 l/min
- ceramic valves hot/cold 90°
 - suitable for continuous flow water heaters
 - push-open waste set G 1 1/4
 - material waste set: metal
 - connection type: G 3/8 hose connection
- connection dimension: DN15
 - EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

110

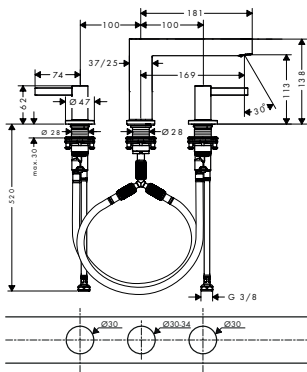

160

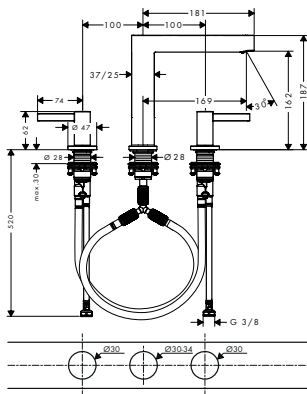

Special feature



Technologies



Overview variants





ComfortZone	Projection (mm)	Spout height (mm)	Finish	Available from	Code no.
110	169	113	Chrome		76033000
			Brushed Bronze	Q3/2025	76033140
			Brushed Black Chrome	Q3/2025	76033340
			Matt Black		76033670
			Matt White		76033700

Finoris 3-hole basin mixers**Overview variants**

ComfortZone	Projection (mm)	Spout height (mm)	Finish	Available from	Code no.
160	169	162	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White		76034000
				Q3/2025	76034140
				Q3/2025	76034340
					76034670
					76034700

Finoris Single lever basin mixers for concealed installation wall-mounted**Features of all variants**

- consists of: single lever basin mixer for concealed installation wall-mounted, waste set
- handle variant: lever handle
- spray type: laminar spray
- maximum flow rate at 3 bar: 5 l/min
- ceramic cartridge
- suitable for continuous flow water heaters
- non-closing waste set
- material waste set: metal
- connection type: basic set
- connection dimension: DN15
- handle can be positioned on the right or left, depending on the basic set installation
- EU taxonomy: max. 6 l/min - Substantial Contribution (SC) possible

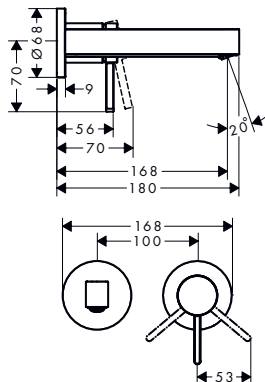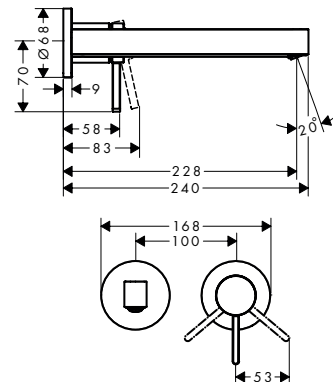168**228****Special feature****Overview variants**

	Projection (mm)	Finish	Available from	Code no.
	168	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White		76051000
			Q3/2025	76051140
			Q3/2025	76051340
				76051670
				76051700
	228	Chrome Brushed Bronze Brushed Black Chrome Matt Black Matt White		76050000
			Q3/2025	76050140
			Q3/2025	76050340
				76050670
				76050700

! Required parts:

Basic set for single lever basin mixer for concealed installation wall-mounted


Code no.

13622180

Finoris Single lever bidet mixer with push-open waste set

Features

- consists of: single lever bidet mixer, waste set
 - projection: 129 mm
 - spout height: 99 mm
 - ball-pivot joint
- spray type: laminar spray
 - maximum flow rate at 3 bar: 7,5 l/min
 - ceramic cartridge
 - suitable for continuous flow water heaters
- push-open waste set G 1 ¼
 - material waste set: metal
 - connection type: G ¾ hose connections
 - connection dimension: DN15

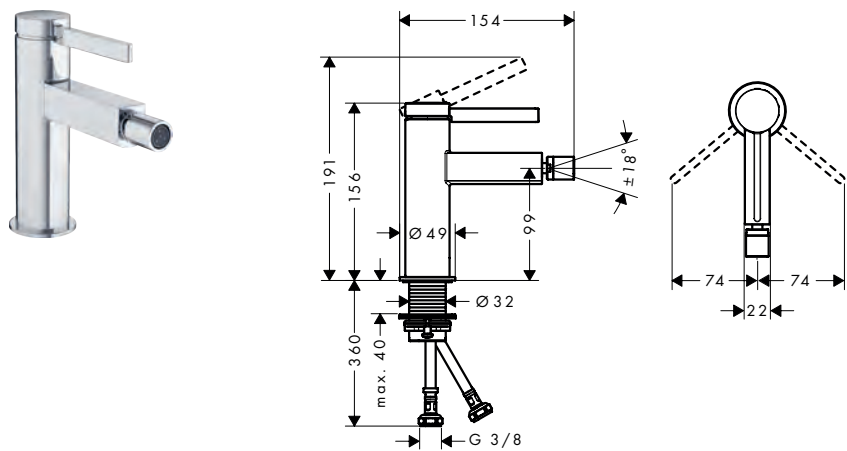


Finish	Available from	Code no.
Chrome		76200000
Brushed Bronze	Q3/2025	76200140
Brushed Black Chrome	Q3/2025	76200340
Matt Black		76200670
Matt White		76200700

Finoris Single lever bath mixer floor-standing

Features

- consists of: single lever bath mixer floor standing, baton hand shower, shower hose
 - 2 functions
 - projection: 210 mm
 - spray type mixer: normal spray
 - maximum flow rate at 3 bar: 20,6 l/min
- flow rate for bath spout at 3 bar: 20,6 l/min
 - flow rate of hand shower at 3 bar: 13,6 l/min
 - ceramic cartridge
 - diverter with automatic resetting
 - non-return valve
 - connection dimension: DN15
- connection type: basic set
 - deck mounted
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - spray type hand shower: Rain, MonoRain

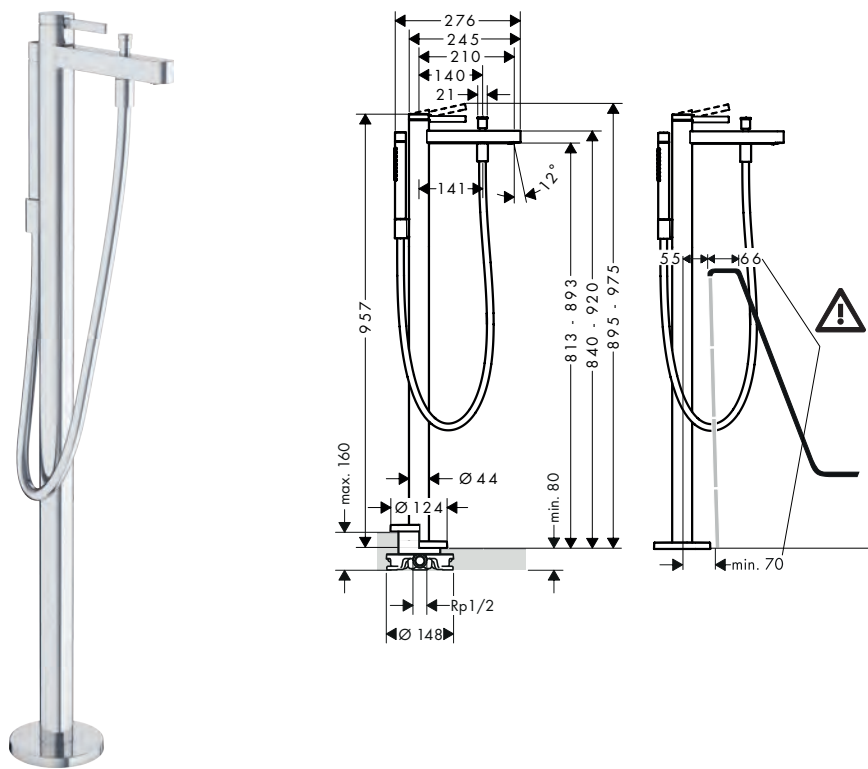

Technologies



Spray types



Finish	Available from	Code no.
Chrome		76445000
Brushed Bronze	Q3/2025	76445140
Brushed Black Chrome	Q3/2025	76445340
Matt Black		76445670
Matt White		76445700


**Required parts:**

Basic set for mixers floor-standing

Code no.
10452180

Finoris Single lever bath mixer for exposed installation**Features**


- 2 functions
- projection: 194 mm
- centre distance: 150 ± 12 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 19 l/min
- flow rate for bath spout at 3 bar: 19 l/min
- flow rate of hand shower at 3 bar: 14,7 l/min
- ceramic cartridge
- pressure diverter Select with automatic resetting
- protected against backflow, according to DIN EN 1717
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: S-connections
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

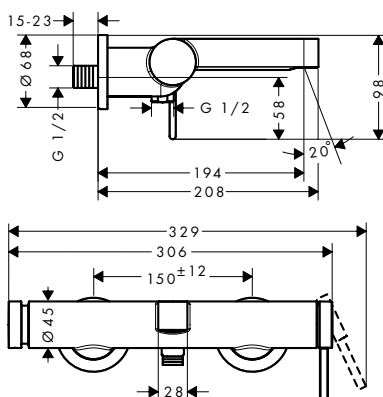**Technologies**

Finish	Available from	Code no.
Chrome		76420000
Brushed Bronze	Q3/2025	76420140
Brushed Black Chrome	Q3/2025	76420340
Matt Black		76420670
Matt White		76420700

Finoris Single lever bath mixer for concealed installation for iBox universal**Features**

- 2 functions
- flow rate upper outlet: 21 l/min
- flow rate lower outlet: 29 l/min
- maximum flow rate at 3 bar: 29 l/min
- temperature limitation adjustable
- diverter with automatic resetting
- with silencer
- suitable for continuous flow water heaters
- connection type: basic set
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar



Finish	Available from	Code no.
Chrome		76415000
Brushed Bronze	Q3/2025	76415140
Brushed Black Chrome	Q3/2025	76415340
Matt Black		76415670
Matt White		76415700


Required parts (choose one):

		Code No.
Option 1	iBox universal 2 Basic set 1/2"	01500180
+	Adapter plate for iBox universal 2	13588000
Option 2	iBox universal Basic set 1/2" and 3/4"	01800187

Finoris Bath spout

Features

- 1 function
 - connection type: G 1/2
 - with escutcheon
- projection: 174 mm
 - wall-mounted
 - maximum flow rate at 3 bar: 20,3 l/min
- spray type: normal spray



Technologies




Finish	Available from	Code no.
Chrome		76410000
Brushed Bronze	Q3/2025	76410140
Brushed Black Chrome	Q3/2025	76410340
Matt Black		76410670
Matt White		76410700

Finoris 4-hole rim mounted bath mixer with sBox

Features

- consists of: 4-hole rim mounted bath mixer, hand shower, shower holder, hose box
 - 2 functions
 - projection: 152 mm
 - spray type mixer: normal spray
 - maximum pull-out length of hand shower: 1,45 m
- maximum flow rate at 3 bar: 23,5 l/min
 - flow rate for bath spout at 3 bar: 23,5 l/min
 - flow rate of hand shower at 3 bar: 10,2 l/min
 - ceramic valves hot/cold 90°
 - non-return valve
 - connection dimension: DN15
- connection type: basic set
 - installation on bath rim
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - spray type hand shower: PowderRain

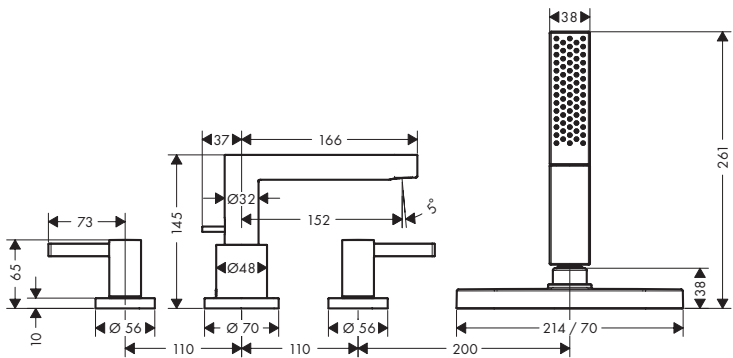

Technologies



Spray types



Finish	Available from	Code no.
Chrome		76444000
Brushed Bronze	Q3/2025	76444140
Brushed Black Chrome	Q3/2025	76444340
Matt Black		76444670
Matt White		76444700

Required parts:



Basic set for 4-hole rim mounted bath mixer


Code no.
13440180

Finoris Single lever shower mixer for exposed installation

Features

- 1 function
 - centre distance: 150 ± 12 mm
 - maximum flow rate at 3 bar: 12,1 l/min
 - flow rate of hand shower at 3 bar: 12,1 l/min
 - ceramic cartridge
- non-return valve
 - with silencer
 - suitable for continous flow water heaters
 - hose connection DN15
 - connection dimension: DN15

- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- connection type: S-connections

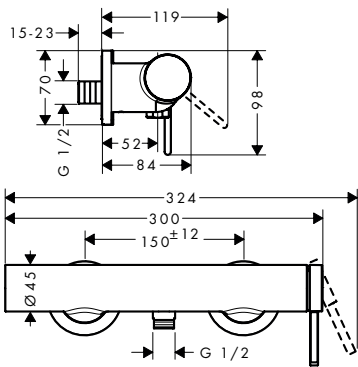


Finish	Available from	Code no.
Chrome		76620000
Brushed Bronze	Q3/2025	76620140
Brushed Black Chrome	Q3/2025	76620340
Matt Black		76620670
Matt White		76620700

Finoris Single lever shower mixer for concealed installation for iBox universal

Features

- 1 function
 - maximum flow rate at 3 bar: 29,3 l/min
 - maximum flow rate at 1 bar: 15,5 l/min
 - ceramic cartridge
- temperature limitation adjustable
 - with silencer
 - suitable for continous flow water heaters
 - min. operating pressure: 1 bar

- max. operating pressure: 10 bar
- connection type: basic set



Finish	Available from	Code no.
Chrome		76615000
Brushed Bronze	Q3/2025	76615140
Brushed Black Chrome	Q3/2025	76615340
Matt Black		76615670
Matt White		76615700

Required parts (choose one):

Option 1		iBox universal 2 Basic set 1/2"	01500180	
	+		Adapter plate for iBox universal 2	13588000
Option 2		iBox universal Basic set 1/2" and 3/4"	01800187	



Zesis

Highlights

Special feature



Faucet that helps save energy by only allowing hot water to flow when the lever is actively moved.



Tap that saves up to 20% more water compared to our conventional models thanks to a flow limiter.



Tap that only uses 5 l/min and thus reduces water thanks to a flow limiter. Eco-friendly and wallet-friendly.

Technologies



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.



Mixes air into the water. For a soft, less splashing water jet and full, light drops.

Finish



Chrome

-000





Matt Black

-670

Zesis S Single lever basin mixers**Features of all variants**

- handle variant: lever handle
- spray type: normal spray
- maximum flow rate at 3 bar: 4 l/min
- ceramic cartridge
- suitable for continuous flow water heaters
- connection type: G 3/8 hose connections
- connection dimension: DN15
- cold water in basic handle position

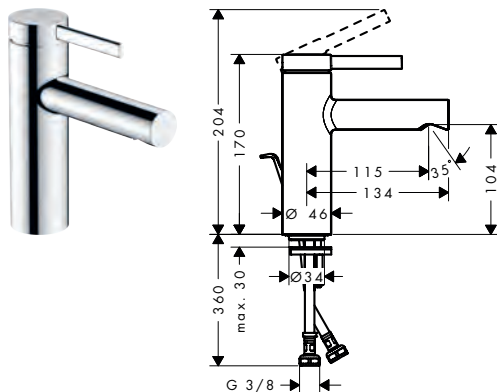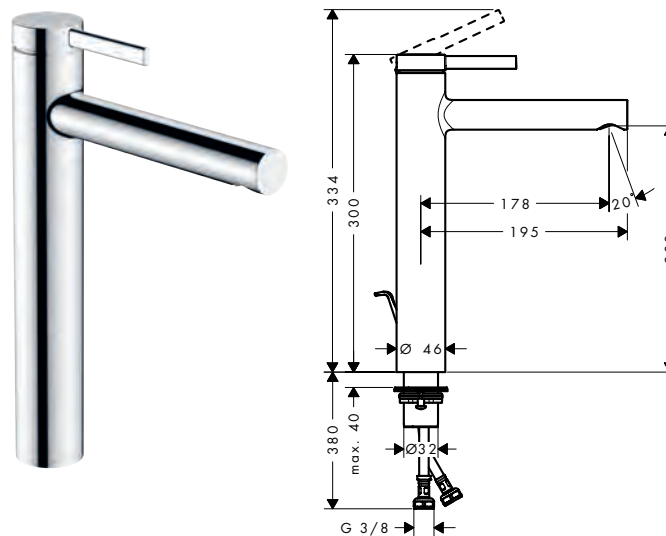100**230****Special feature****Technologies****Overview variants**


	ComfortZone	Projection (mm)	Spout height (mm)	Waste set	Material waste set	CoolStart	For wash bowls	Finish	Available from	Code no.
	100	115	104	pop-up	synthetic	■	–	● Chrome	Q1/2025	74720000
								● Matt Black	Q1/2025	74720670
	100	115	104	push-open	synthetic	■	–	● Chrome	Q1/2025	74724000
	100	115	104	without	–	■	–	● Chrome	Q1/2025	74721000
	230	178	233	pop-up	synthetic	■	■	● Chrome	Q1/2025	74730000
								● Matt Black	Q1/2025	74730670
	230	178	233	push-open	synthetic	■	■	● Chrome	Q1/2025	74732000
	230	178	233	without	–	■	■	● Chrome	Q1/2025	74731000
	100	115	104	pop-up	synthetic	■	–	● Chrome		74720007
								● Matt Black		74720677

Zesis S | 3-hole basin mixer, Single lever basin mixer for concealed installation wall-mounted

Zesis S 3-hole basin mixers

Features of all variants

- consists of: 3-hole basin mixer, waste set
 - ComfortZone: 100
 - projection: 164 mm
 - spout height: 105 mm
- handle variant: lever handle
 - spray type: normal spray
 - ceramic valves hot/cold 90°
 - suitable for continuous flow water heaters
- pop-up waste set G 1 1/4
 - material waste set: synthetic
 - connection type: G 3/8 hose connections
 - connection dimension: DN15

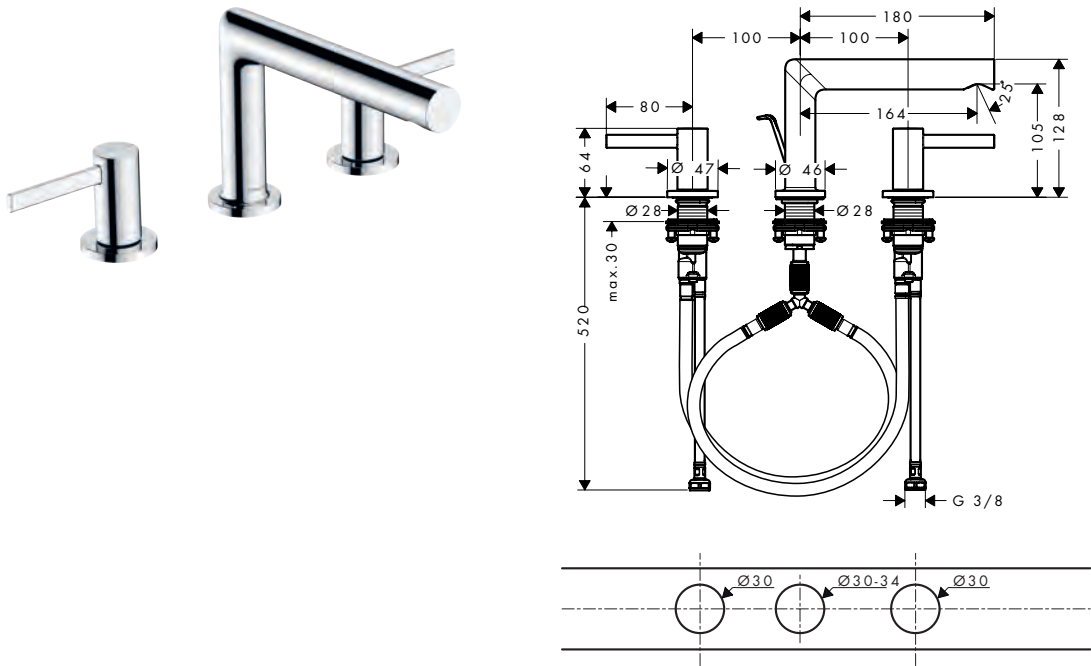


Overview variants

Finish	Available from	Code no.
Chrome	Q1/2025	74733000
Chrome		74733007
Matt Black		74733677

Zesis S Single lever basin mixer for concealed installation wall-mounted with spout 19,5 cm

Features

- projection: 194 mm
 - spout height: 90 mm
 - handle variant: lever handle
 - spray type: normal spray
 - ceramic cartridge
- temperature limitation adjustable
 - suitable for continuous flow water heaters
 - non-closing waste set
 - material waste set: synthetic
 - connection type: basic set
- connection dimension: DN15
 - handle can be positioned on the right or left, depending on the basic set installation

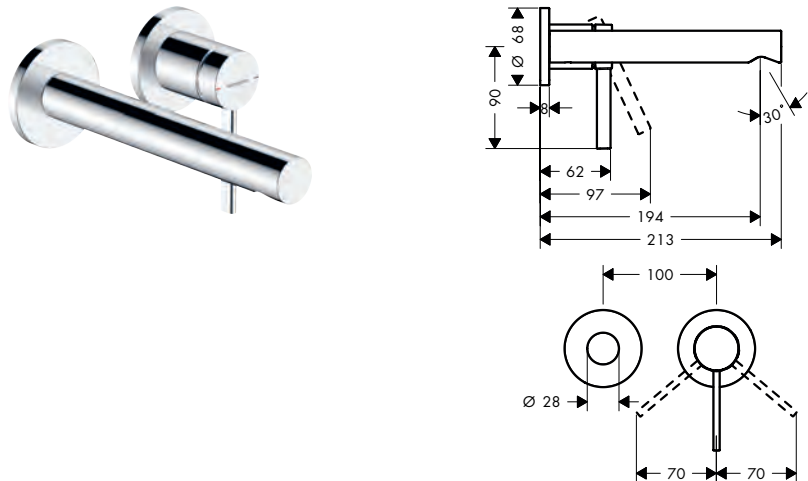


Technologies



Finish	Code no.
Chrome	74750007
Matt Black	74750677

Zesis S Single lever bath mixer floor-standing**Features**


- consists of: single lever bath mixer floor standing, baton hand shower, shower hose, shower holder
- 2 functions
- projection: 208 mm
- spray type mixer: normal spray
- maximum flow rate at 3 bar: 21 l/min
- flow rate for bath spout at 3 bar: 21 l/min
- flow rate of hand shower at 3 bar: 6,7 l/min
- ceramic cartridge
- diverter with automatic resetting
- non-return valve
- connection dimension: DN15
- connection type: basic set
- deck mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar
- spray type hand shower: PowderRain

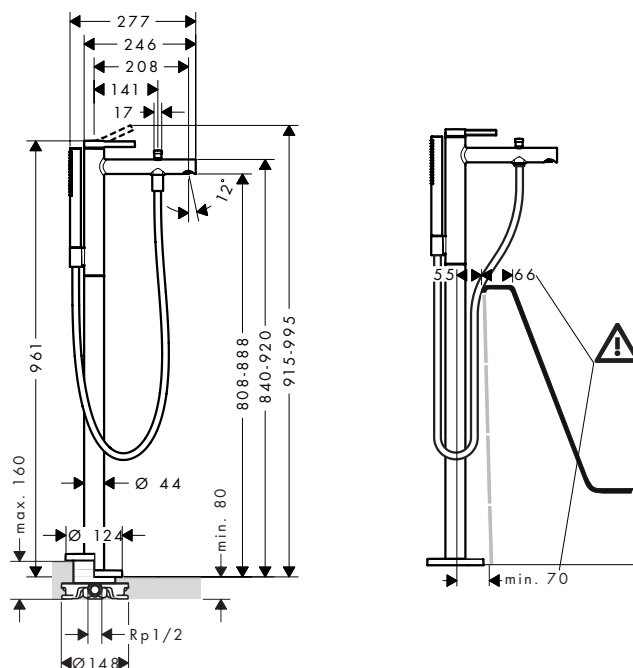**Technologies****Spray types**

Finish	Available from	Code no.
● Chrome	Q3/2025	74445000
● Matt Black	Q3/2025	74445670

Zesis S Single lever bath mixers for exposed installation**Features of all variants**

- 2 functions
- projection: 175 mm
- centre distance: 150 ± 12 mm
- spray type mixer: normal spray
- flow rate of hand shower at 3 bar: 12 l/min
- ceramic cartridge
- temperature limitation adjustable
- diverter with automatic resetting
- non-return valve
- with silencer
- suitable for continuous flow water heaters
- connection dimension: DN15
- connection type: S-connections
- wall-mounted
- min. operating pressure: 1 bar
- max. operating pressure: 10 bar

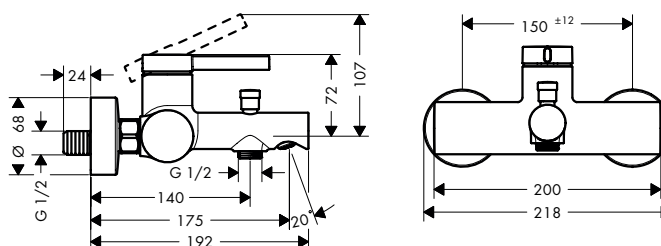
**Technologies****Overview variants**

Centre distance (mm)	Finish	Available from	Code no.
150 ± 12	● Chrome	Q1/2025	74420000
	● Matt Black	Q1/2025	74420670
	● Chrome		74420007
	● Matt Black		74420677

Zesis S Single lever bath mixers for concealed installation for iBox universal

Features of all variants

- 2 functions
 - ceramic cartridge
 - temperature limitation adjustable
- diverter with automatic resetting
 - non-return valve
 - connection type: basic set
- wall-mounted
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar

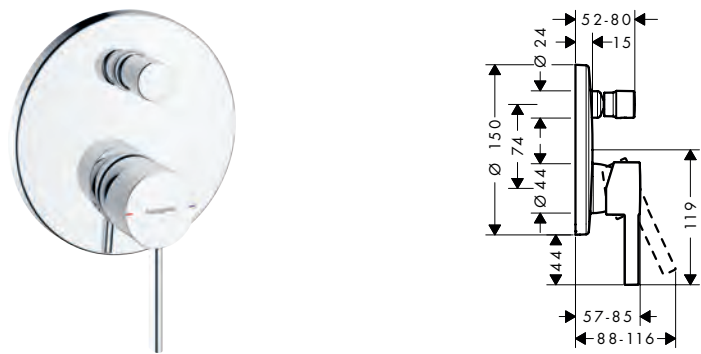

Overview variants


Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
29	Chrome	Q1/2025	74415000
	Matt Black	Q1/2025	74415670
	Chrome		74415007
	Matt Black		74415677

! Required parts (choose one):			Code No.
Option 1		iBox universal 2 Basic set 1/2"	01500180
		Adapter plate for iBox universal 2	13588000
Option 2		iBox universal Basic set 1/2" and 3/4"	01800187

Zesis S Bath spout

Features

- 1 function
 - connection type: G 1/2
 - with escutcheon
- projection: 181 mm
 - wall-mounted
 - maximum flow rate at 3 bar: 22,5 l/min
- connection dimension: DN15
 - spray type: normal spray

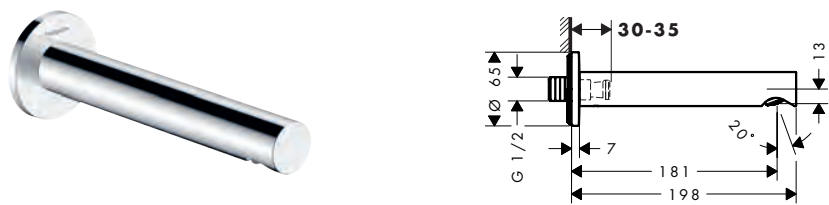

Technologies




Finish	Available from	Code no.
Chrome	Q1/2025	74410000

Zesis S Single lever shower mixers for exposed installation

Features of all variants

- 1 function
 - centre distance: 150 ± 12 mm
 - maximum flow rate at 3 bar: 12 l/min
 - ceramic cartridge
- temperature limitation adjustable
 - non-return valve
 - with silencer
 - hose connection DN15
- connection dimension: DN15
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - connection type: S-connections

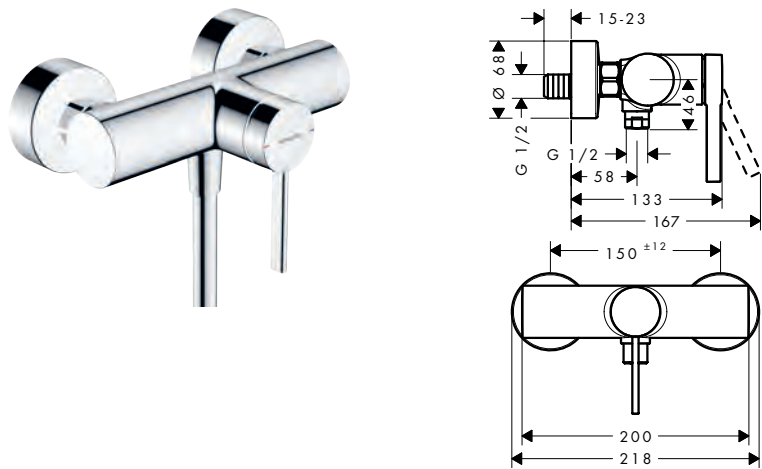

Overview variants


Centre distance (mm)	Max. flow rate at 3 bar (l/min)	Finish	Available from	Code no.
150 ± 12	12	Chrome	Q1/2025	74621000
		Matt Black	Q1/2025	74621670
	12	Chrome		74621007

Zesis S | Single lever shower mixer, Shut-off valve

Zesis S Single lever shower mixer for concealed installation for iBox universal

Features

- 1 function
 - maximum flow rate at 3 bar: 27,9 l/min
 - maximum flow rate at 1 bar: 15,7 l/min
- ceramic cartridge
 - temperature limitation adjustable
 - with silencer
- min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
 - connection type: basic set




Finish	Available from	Code no.
Chrome	Q1/2025	74616000
Matt Black	Q1/2025	74616670

! Required parts (choose one):			Code No.
Option 1		iBox universal 2 Basic set 1/2"	01500180
	+		13588000
Option 2		iBox universal Basic set 1/2" and 3/4"	01800187

Zesis S Single lever shower mixer for concealed installation

Features

- 1 function
 - maximum flow rate at 3 bar: 28,7 l/min
 - maximum flow rate at 1 bar: 16,9 l/min
- temperature limitation adjustable
 - min. operating pressure: 1 bar
 - max. operating pressure: 10 bar
- connection type: basic set




Finish	Code no.
Chrome	74617000
Matt Black	74617670

! Required parts:		Code no.
	Basic set for single lever shower mixer for concealed installation	13620180

Zesis S Shut-off valve for concealed installation

Features

- connection type: DN15/DN20
- noise class: II



Finish	Available from	Code no.
Chrome	Q1/2025	74997000

! Required parts (choose one):			Code no.
	Basic set 40 l/min for shut-off valve for concealed installation ceramic		15974180
	Basic set 52 l/min for shut-off valve for concealed installation spindle		15973180
	Basic set 130 l/min for shut-off valve for concealed installation spindle		15970180



Avalegra

Highlights

Technologies



Thermostat with integrated temperature control for constant water temperature.



Elastic spray nozzles open and close themselves and prevent limescale buildup.



Comfort at all levels – the tap fits in perfectly with the chosen wash basin settings.



Quick and safe installation - several features ensure easy installation.

Installation



For an easy installation, this product comes with a soundproofing mat matched to its shape.

Spray types



Inviting, full jet from below - efficient, invigorating and relaxing at the same time.



Crystal-clear spray for the washbasin with no air mixed in, perfect for quickly filling vessels.

Finish



Brushed Black
Chrome
-340



Brushed Bronze
-140



Chrome
-000



Matt Black
-670




Polished Gold
Optic
-990

Avalegra AquaUnit


Features of all variants

- consists of: wash basin, basin mixer
- basin mixer consists of spout, escutcheon, shower spray
- material: SolidSurface, metal
- degree of gloss: matt
- without overflow
- installation type: built on and wall mounted
- basin inner height: 80 mm
- wall distance drain: 332 mm
- ComfortZone: 220
- projection: 185 mm
- spout height: 224 mm
- with swivel spout
- swivel range: 50°
- spray type: laminar spray, Rain
- QuickClean+: avoid limescale deposits thanks to the elasticity of the nozzles
- thermostat cartridge, shut-off/ diverter valve
- volume control and diverter for 2 functions
- maximum flow rate at 3 bar: 5 l/min
- Made to fit NoiseReduction: customized soundproofing mat included
- connection type: G 3/8 hose connections
- suitable for: Xevolos and Xilesa vanity units
- operating pressure from: 1 bar

580

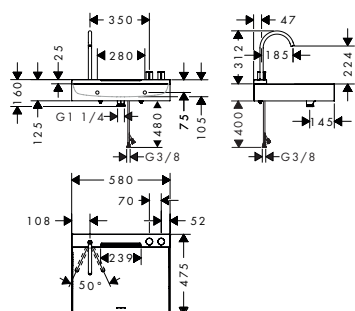

780

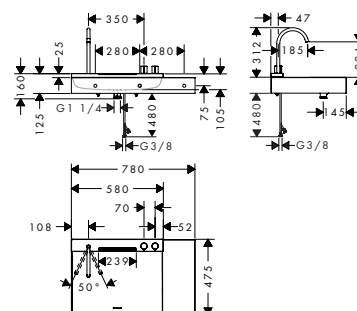

Technologies



Spray types



Installation



Overview variants

Product dimensions (mm)	Shelf	Finish	Code no.
580	without	 Chrome	22472000
		 Brushed Bronze	22472140
		 Brushed Black Chrome	22472340
		 Matt Black	22472670
		 Polished Gold Optic	22472990
780	right	 Chrome	22473000
		 Brushed Bronze	22473140
		 Brushed Black Chrome	22473340
		 Matt Black	22473670
		 Polished Gold Optic	22473990

Optional parts:

Option 1		Design trap Flowstar S	 Chrome	52105000
	+		 Brushed Bronze	52105140
			 Brushed Black Chrome	52105340
			 Matt Black	52105670
			 Polished Gold Optic	52105990
			 Chrome	53493000
Option 2		 Brushed Bronze	53493140	
		 Brushed Black Chrome	53493340	
		 Matt Black	53493670	
		 Polished Gold Optic	53493990	
			54235000	

hansgrohe

Life is waterful.

en-SEA News Product Book 2025
Subject to change in the interest of technical advancement

Hansgrohe Pte Ltd

69 Mohamed Sultan Road
Singapore 239015
Tel. +65 6884 5060
Fax +65 68845071
info@hansgrohe.com.sg
www.hansgrohe-asia.com



Discover hansgrohe online and on social media.
Find out more about the hansgrohe world at pro.hansgrohe-asia.com